



(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:
14.06.2006 Bulletin 2006/24

(51) Int Cl.:
F01L 3/02 ^(1968.09) **C22C 38/00** ^(1974.07)
C22C 38/06 ^(2000.01) **C22C 33/02** ^(1968.09)

(21) Application number: **04788310.3**

(86) International application number:
PCT/JP2004/014244

(22) Date of filing: **29.09.2004**

(87) International publication number:
WO 2005/031125 (07.04.2005 Gazette 2005/14)

(84) Designated Contracting States:
DE FR GB

(30) Priority: 30.09.2003 JP 2003341540

(71) Applicant: **MITSUBISHI MATERIALS CORPORATION**
Chiyoda-ku,
Tokyo 100-8117 (JP)

(72) Inventors:

- **MORIMOTO, Koichiro,**
Mitsubishi Materials PMG Corp.
Niigata-shi,
Niigata 9508640 (JP)

- HANATA, Kunio,
Mitsubishi Materials PMG Corp.
Niigata-shi,
Niigata 9508640 (JP)
- NISHIDA, Takashi,
Mitsubishi Materials PMG Corp.
Niigata-shi,
Niigata 9508640 (JP)
- SAKAI, Tomohiro,
Mitsubishi Materials PMG Corp.
Niigata-shi,
Niigata 9508640 (JP)


(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) VALVE SHEET FOR ENGINE

(57) It is an object to provide a valve seat for an engine which is provided in a seat-mounting portion provided at an inlet or outlet of a cylinder head formed by an aluminum alloy and has resistance to galvanic corrosion.

A Fe-based valve seat 10 that is provided in a seat-mounting portion at an inlet 6 of a cylinder head 2 formed by aluminum alloy is made of a Fe-Al-based material. The Fe-Al-based material contains Al in the range of 15 to 23% by weight. Galvanic corrosion is prevented by decreasing a potential difference between the seat-mounting portion 13 of the cylinder-head 2 and the valve-seat 2 as much as possible.

Fig. 1

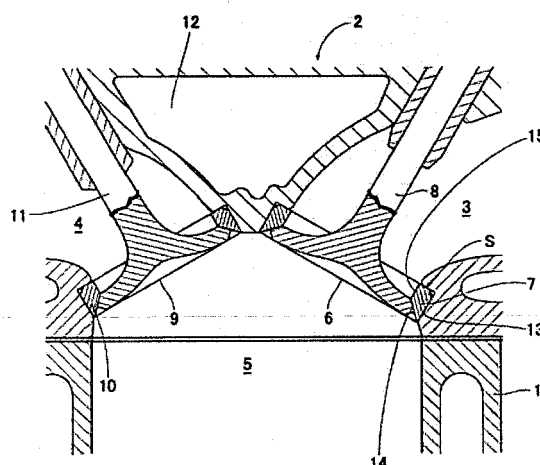

Description

Technical Field

[0001] The present invention relates to a valve seat for an engine.

Background Art

[0002] Conventionally, as a valve seat for an engine, a valve seat made of an iron-based sintered alloy is known in the related art. For example, the valve seat is made of an Fe-based sintered alloy which has an overall composition consisting of, by weight, 0.7 to 1.4% C, 0.2 to 0.9% Si, 15.1 to 26% Co, 6.1 to 11% Mo, 2.6 to 4.7% Cr, 0.5 to 1.2% Ni, 0.2 to 0.7% Nb, and the remaining balance of Fe are inevitable impurities, in which case hard grains of a Co-based alloy consisting of Co-Mo-Cr-based alloy are dispersedly distributed in a ratio of 10 to 24% by area with 5 to 15% porosity when observed on the photograph of a structure under an optical microscope. The valve seat has wear resistance (see JP-A-11-209855 (paragraph 0004)).

Disclosure of the Invention

Problems to be Solved by the Invention

[0003] Recently, there has been supplied an engine fuel mainly containing alcohol so as to exhaust relatively clean gas. The fuel enters a combustion chamber with air through an inlet, and is in turn burned after an intake valve seat provided at the inlet is closed by an intake valve, thereby generating power. An exhaust valve seat provided at an outlet is then opened by an exhaust valve and exhaust gas is discharged.

[0004] Meanwhile, in the engine fuel mainly containing alcohol, the fuel may contain a lot of water, as compared to conventional fuel, such as gasoline and gas oil. For this reason, when the fuel mainly containing alcohol enters a cylinder with air through the inlet having the intake valve seat provided therein, the water may possibly seep through a gap between the intake valve seat and a seat-mounting portion of a cylinder head on which the valve seat is mounted. In this configuration, when the intake valve seat and the seat-mounting portion are made of different metals, for example, when the intake valve seat is made of an iron-based metal and the seat-mounting portion, i.e. the cylinder head is made of an aluminum-based metal, galvanic corrosion may occur due to the remaining water in the gap between the intake valve seat and the seat-mounting portion. In other words, galvanic corrosion means corrosion of a metal which has negative polarity, resulting from generation of electricity when two different metals are in contact with each other due to the existence of water between them. In the case of an aluminum and iron, the aluminum has negative polarity and corrodes. In this regard, a hole from the seat-mounting

portion to the coolant passage may form due to galvanic corrosion.

[0005] Galvanic corrosion may also occur in a seat-mounting portion at an outlet and exhaust valve seat.

[0006] It is an object of the invention to provide a valve seat for an engine which is provided in a seat-mounting portion provided at an inlet or outlet of a cylinder head formed by an aluminum alloy and has resistance to galvanic corrosion.

Means for Solving the Problems

[0007] According to a first aspect of the invention, a valve seat for an engine provided in a seat-mounting portion at an inlet or outlet of a cylinder head formed by an aluminum alloy is made of Fe-Al-based material.

[0008] According to a second aspect of the invention, the Fe-Al-based material is a sintered material.

[0009] According to a third aspect of the invention, the Fe-Al-based material is a sintered material containing Fe-Al alloy powder.

[0010] According to a fourth aspect of the invention, the Fe-Al-based material contains Al in the range of 15 to 26% by weight.

Effects of the Invention

[0011] According to the first aspect of the invention, the potential difference can decrease between the valve seat and the cylinder head formed by an aluminum alloy, therefore, the potential difference through the water between the seat-mounting portion and the cylinder head can decrease and galvanic corrosion can be prevented.

[0012] According to the second aspect of the invention, a variety of Fe-Al-based materials are available for the invention.

[0013] According to the third aspect of the invention, Fe-Al oxidizes at a working temperature of the valve seat and adhesive wear can be prevented, thereby achieving excellent wear resistance.

[0014] According to the fourth aspect of the invention, galvanic corrosion can be prevented by decreasing the potential difference from the cylinder head as much as possible.

Brief Description of the Drawings

[0015]

Fig. 1 is a cross-sectional view according to a first embodiment of the invention,
Fig. 2 is a view showing a metallic structure according to the first embodiment of the invention, and
Fig. 3 is a graph showing a potential difference according to the first embodiment of the invention.

Reference Numerals

[0016]

2 CYLINDER HEAD

6 INLET

• VALVE SEAT

Best Mode for Carrying Out the Invention

[0017] Hereinafter, a preferred embodiment of the present invention will be described with reference to the accompanying drawings. The application of the invention is not limited to the present embodiment. In addition, not all of the following configurations are essential in the invention. For example, even though the following embodiment is applied to an inlet, it is also applicable to a seat-mounting portion at an outlet and exhaust valve seat. First Embodiment

Example 1

[0018] Figs. 1 to 3 show a first embodiment. Made of an aluminum alloy, a cylinder head 2 is fixed onto a cylinder 1 in which a piston (not shown) reciprocates. An intake port 3 and exhaust port 4 are provided to both sides of the cylinder head, respectively. In the intake port 3, an intake valve seat 7 is provided at an inlet 6 communicating with a combustion chamber 5, and is opened and closed by means of an intake valve 8. Similarly, in the exhaust port 4, an exhaust valve seat 10 is provided at an outlet 9 communicating with the combustion chamber 5, and is opened and closed by means of an exhaust valve 11. In addition, the cylinder head 2 is provided with a coolant passage 12 between the exhaust port 3 and the intake port 4.

[0019] A seat-mounting portion 13 for mounting the intake valve seat 7 therein is provided at the inlet 6. The seat-mounting portion 13 is formed in a U-shape having a slightly larger diameter than the intake port 3, and the intake valve seat 7 is fitted into the seat-mounting portion 13. In addition, reference numeral '14' refers to a seat surface coming into contact with and separating from the intake valve 8 when opening and closing, and '15' refers to an inner peripheral surface of the intake valve seat 7.

[0020] The intake valve seat 7 is a ring-shape part made by forming Fe-Al-based powder and sintering it thereafter, of which the inner and outer diameters are the same as the diameters of the seat-mounting portion 13 and the intake port 3, respectively.

[0021] Next, a manufacturing method of the intake valve seat 7 is described. For example, after preparing reducing iron powder of 150 mesh, aluminum powder of 150 mesh containing Fe of 50% by weight, carbon powder(C) having average grain size of 10 μm , and binder, they were blended in a predetermined ratio. The resulting

mixed powder was subjected to a metallic molding under 7 ton/cm² pressure, thereby forming a ring-shaped green compact. The green compact was subjected to a heat-degreasing process in a vacuum, thereafter, sintered at 1200°C for an hour, thereby obtaining a sintered compact. As shown in the metallographic structure of Fig. 2, the size of the Fe-Al alloy was 500 μm or less, preferably 300 μm or less. A valve seat having 36 mm outer diameter, 30 mm inner diameter, 6 mm thickness, and 1.5 mm seat surface width, was formed from the sintered compact.

[0022] The Fe-Al-based material forming the valve seat 7 contains Al in the range of 15 to 23% by weight. As shown in the graph illustrating potential differences depending on Al by weight, in the case of Al ranging from 15 to 26 % by weight, the potential difference may be decreased by means of Fe₃Al generation.

[0023] Hereinafter, the operation according to the above-mentioned configuration will be described. When engine fuel mainly containing alcohol and a relatively large amount of water enters the cylinder 1 with air through the intake port, in the case where water seeps through and remains in a gap s between the intake valve seat 7 and the seat-mounting portion 13, and due to the cylinder head 2 and the intake valve 7 being in contact with through the water, galvanic corrosion may occur because of the different metals contacting each other. The intake valve seat 10, however, is made of a material having slight potential difference from the cylinder head 2 formed of aluminum alloy. Therefore, unlike when different metals are in a contacting state, electricity is not generated between them even if water seeps through the gap, thus preventing galvanic corrosion.

[0024] As described above, in the above embodiment, because the valve seat 10 that is provided in the seat-mounting portion 13 provided at the inlet 6 of the cylinder head 2 formed by aluminum alloy is made of Fe-Al-based material instead of Fe-based, the cylinder head 2 and the valve seat 10 are in a like-metal-contact relationship and the potential difference resulting from different-metal-contact decreases between the seat-mounting portion 13 and the valve seat 10, thus preventing galvanic corrosion.

[0025] Further, since the Fe-Al-based material forming the valve seat 10 contains Fe-Al alloy powder, the Fe-Al alloy powder oxidizes at a working temperature of the valve seat 10, thus preventing adhesion of the valve seat 10 during fuel combustion and achieving improved wear resistance.

[0026] Also, the Fe-Al-based material contains Al in the range of 15 to 26% by weight, therefore, the potential difference is decreased as much as possible due to the generation of Fe₃Al and the potential difference resulting from the different-metal-contact between the seat-mounting portion 13 and the valve seat 10, furthermore, between the cylinder head 2 formed by aluminum alloy and the valve seat 10 decreases as much as possible, as a result, galvanic corrosion may be prevented.

Industrial Applicability

[0027] The valve seat according to the present invention, as describe above, is applicable to the engine fuel containing a relatively large amount of water.

5

Claims

1. A valve seat for an engine, 10
wherein the valve seat that is provided in a seat-mounting portion at an inlet or outlet of a cylinder head formed of an aluminum alloy is made of a Fe-Al-based material. 15
2. The valve seat for an engine according to claim 1, wherein the Fe-Al-based material is a sintered material.
3. The valve seat for an engine according to claim 1 or 2, 20
wherein the Fe-Al-based material is a sintered material containing Fe-Al alloy powder.
4. The valve seat for an engine according to any one of claims 1 to 3, 25
wherein the Fe-Al-based material contains Al in the range of 15 to 23% by weight.

30

35

40

45

50

55

Fig. 1

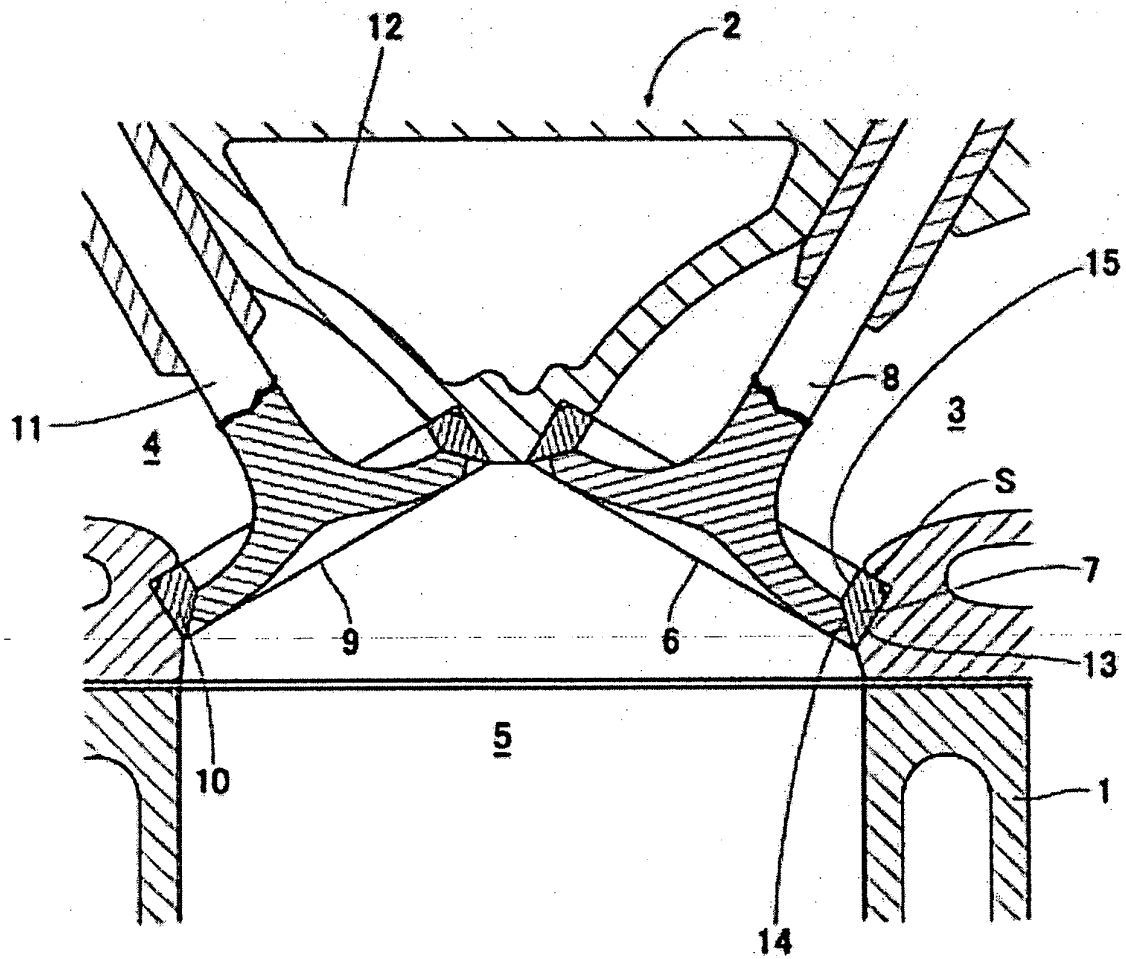


Fig. 2


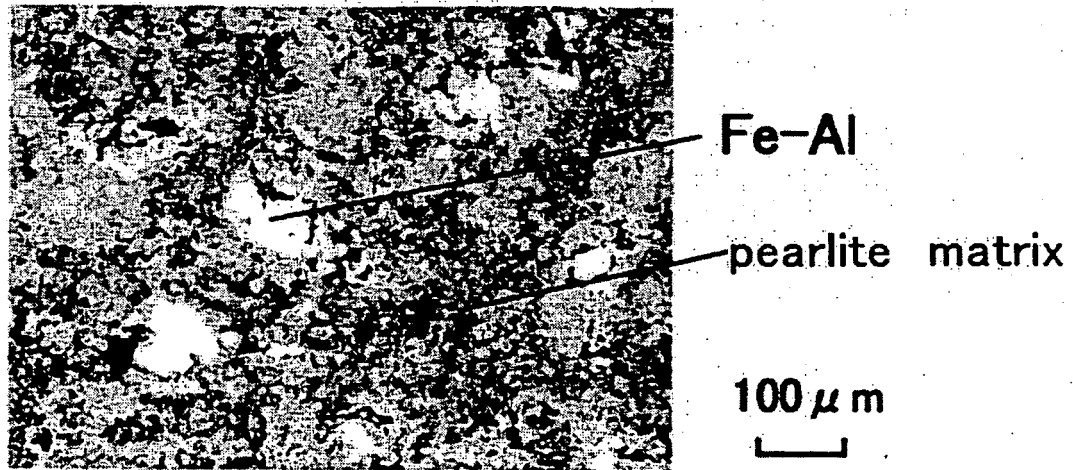


Fig. 3

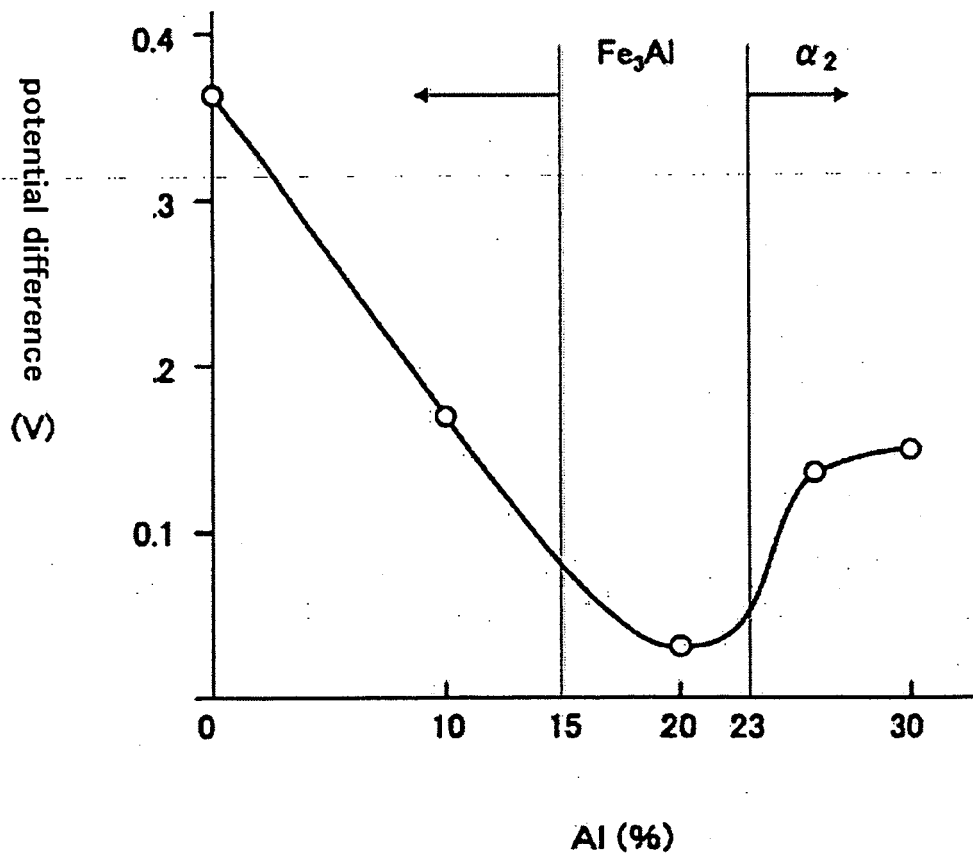

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2004/014244

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl.⁷ F01L3/02, C22C38/00, C22C38/06, C22C33/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.⁷ F01L3/02, C22C38/00, C22C38/06, C22C33/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho	1922-1996	Toroku Jitsuyo Shinan Koho	1994-2004
Kokai Jitsuyo Shinan Koho	1971-2004	Jitsuyo Shinan Toroku Koho	1996-2004

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 10-339118 A (Fuji Oozx Inc.), 22 December, 1998 (22.12.98), Par. Nos. [0002], [0009], [0013]; Figs. 1, 2 (Family: none)	1-4
Y	JP 2003-82442 A (Mitsubishi Materials Corp.), 19 March, 2003 (19.03.03), Par. Nos. [0002], [0005] to [0007] (Family: none)	1-4
A	JP 2002-146496 A (Mitsubishi Materials Corp.), 22 May, 2002 (22.05.02), Par. No. [0004] (Family: none)	4



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
13 December, 2004 (13.12.04)Date of mailing of the international search report
28 December, 2004 (28.12.04)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.