



- (51) **International Patent Classification:**
B23K 9/133 (2006.01) *B23K 9/173* (2006.01)
- (21) **International Application Number:**
PCT/IB2013/000165
- (22) **International Filing Date:**
8 February 2013 (08.02.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/370,652 10 February 2012 (10.02.2012) US
13/760,380 6 February 2013 (06.02.2013) US
- (71) **Applicant:** LINCOLN GLOBAL, INC. [US/US]; 17721 Railroad St., City of Industry, CA 91748 (US).
- (72) **Inventors:** HILLEN, Edward, D.; 5670 Canyon View Drive, Painesville, OH 44077 (US). KEMPERT, David; c/o Lincoln Global, Inc., 17721 Railroad St., City of Industry, CA 91748 (US). DANIEL, Joe; 7946 N. Gannett Rd., Sagamore Hills, OH 44067 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) **Title:** WELDING APPARATUS WITH AUTOMATED WELDING WIRE RETRACTION

(57) **Abstract:** A method providing a welding apparatus (100) configured to supply a welding wire (136) to a welding gun (130) and a welding system implementing the same is described. The welding gun (130) has a trigger (134) and an opening where the welding wire (136) extends when the trigger (134) is activated. The method also has a computer with a user interface (126) that includes an automatic wire retract program, the program dynamically adjusting the amount of welding wire (136) retraction based at least upon one of the following: welding arc current, welding wire size, welding wire speed and burnback time. The program monitors the welding gun (130) and determines when the trigger (134) is disabled.

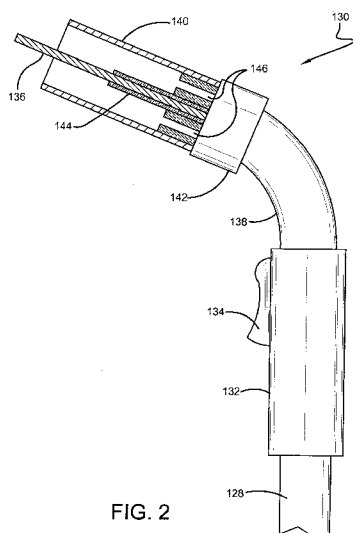


FIG. 2

WELDING APPARATUS WITH AUTOMATED WELDING WIRE RETRACTION

[0001] This application is a continuation-in-part of pending patent application serial no. 13/370,652 filed 10 February 2012, which is a continuation-in-part of pending patent application serial no. 12/967,667 filed 14 December 2010, the patent applications hereinby fully incorporated by reference.

Technical Field of the Invention

[0002] The invention described herein relates generally to an automated wire retract method for a welding apparatus. Additionally, the invention relates to retrofitting or modifying a welding apparatus to include an automatic wire retract method.

Technical Background

[0003] Welding apparatus are configured to be operated by welders and other personnel. Often, this welding equipment includes welding wire feeders that advance welding wire to a welding gun when a welder activates a welding gun trigger (e.g., by squeezing the trigger or by depressing a foot pedal). After welding, a pointed end of the welding wire extends from the tip of the welding gun, possibly exposing welders and other personnel to a potentially unsafe condition.

Summary of the Invention

[0004] In view of the foregoing problems and shortcomings of existing welding apparatus, the present application describes a system and method to overcome these shortcomings.

[0005] The aforementioned problem is solved by an automatic wire retract method according to claim 1, by a method according to claim 6, by a method to improve the safety of a welding operation according to claim 13 a method for a welding opera-

tion according to claim 14 and by a welding system according to the claims 15, 16 and 17. Further embodiments of the invention are subject of the subclaims. In one aspect of the invention, an automatic wire retract method is described comprising at least the following steps: providing a manual welding apparatus having at least a welding power source, a wire feeder configured to supply a welding wire, and a welding gun having a trigger and an opening from which the welding wire extends; providing an automatic wire retract program having a retract delay time; configuring the manual welding apparatus to include the automatic wire retract program; monitoring when the trigger is enabled to extend the welding wire from the wire feeder to the opening, and extending the welding wire out of the opening of the welding gun; determining a first amount of time when the trigger is disabled; determining when the first amount of time is at least equal to the retract delay time, wherein the trigger is disabled during the first amount of time; and at least partially retracting the welding wire into the opening of the welding gun for a retract distance or a retract time, said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire speed and burnback time. The first amount of time, i.e., the delay time is a user defined amount of time based typically upon historical operator welding characteristics, and may be unique for each welding operation. The second amount of time, i.e., the retract time is a dynamically adjusted value based upon the characteristics of the welding operation being employed. The amount of retraction is at least a partial retraction from the contact tip to work distance ("CTWD"), and may result, depending on the characteristics of the welding operation and welding gun configuration, in a complete retraction within the gun tip, or essentially coextensive with the welding gun tip, or even partially extending beyond the welding gun tip, but at a distance which is less than the CTWD during the welding operation.

[0006] It should be recognized that while the term "trigger" is employed in this patent application, it is intended to include foot pedal operations, in which the activating mechanism is not physically present on the welding gun body.

[0007] In another aspect of the invention, a method is described which includes at least the following steps: providing a manual welding apparatus configured to supply a welding wire to a welding gun, wherein the welding gun has a trigger and an opening where the welding wire extends when the trigger is activated; providing a computer with a user interface that includes an automatic wire retract program; monitoring the welding gun; determining when the trigger is in either an enabled or disabled position during said step of monitoring; performing a comparison using the automatic wire retract program to indicate when a first condition is satisfied after determining that said trigger is in a disabled position; and at least partially retracting the welding wire after said comparison, said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire speed and burnback time.

[0008] In still yet another aspect of the invention, a method is described to improve the safety of a welding operation using a welding torch which employs a trigger to advance a welding wire, comprising the steps of: depressing said trigger to advance said welding wire to initiate a welding operation; releasing said trigger to stop said advancement of said welding wire; detecting that said trigger is in a released position; waiting for a first period of time; comparing said first period of time to a predefined waiting time; at least partially retracting said welding wire when said first period of time exceeds said predefined waiting time; and continuing said step of at least partially retracting for a second period of time, said step of continuing said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire speed and burnback time.

[0009] In a further aspect of the invention, a welding system is described which includes at least the following: a welding power source; a wire feeder; a welding gun in operative communication with said wire feeder, said welding gun having a means to control said wire feeder; a wire retract program in operative communication with said wire feeder, said wire retract program comprising: a detection means for determining when said means to control said wire feeder has communicated a signal

to said wire feeder to stop feeding said wire; a comparator for measuring elapsed time between said signal to stop feeding said wire and a present time; and said program operatively communicating a signal to said wire feeder to at least partially retract said wire after said comparator determines that said elapsed time has exceeded a preset time, said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire speed and burnback time.

[0010] In a still further aspect of the invention, a welding system is described which includes at least the following: a welding power source; a wire feeder; a welding gun in operative communication with said wire feeder, said welding gun having a means to control said wire feeder; a wire retract program in operative communication with said wire feeder, said wire retract program comprising: a detection means for determining when said means to control said wire feeder has communicated a signal to said wire feeder to stop feeding said wire; and said program operatively communicating a signal to said wire feeder to at least partially retract said wire after said signal to said wire feeder to stop feeding said wire after a predefined a preset time, said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire speed and burnback time.

[0011] While a welding stoppage delay is typically preferred, it is not always essential and the invention encompasses a process of using a welding torch which employs a trigger to advance a welding wire, comprising the steps of: depressing said trigger to advance said welding wire to initiate a welding operation; releasing said trigger to stop said advancement of said welding wire; detecting that said trigger is in a released position; at least partially retracting said welding wire after detecting that said trigger is in a released position; and said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire feed rate and burnback time.

[0012] In combination with the above, a system is described in which A welding system comprising: a welding power source; a wire feeder; a welding gun in operative communication with said wire feeder, said welding gun having a means to control said wire feeder; a wire retract program in operative communication with said wire feeder, said wire retract program comprising: a detection means for determining when said means to control said wire feeder has communicated a signal to said wire feeder to stop feeding said wire; and said program operatively communicating a signal to said wire feeder to at least partially retract said wire after said wire feeder has stopped feeding said wire, said wire retract program retracting dynamically for a distance which approximates an electrode stick out distance based upon at least one of the following parameters: welding arc current, welding wire size, welding wire feed rate and burnback time.

[0013] Also within the scope of the invention is a method of locating a welding apparatus that does not have an automatic wire retract program and providing a means for modifying the welding apparatus so that the automatic wire retract program is enabled.

[0014] These and other objects of this invention will be evident when viewed in light of the drawings, detailed description and appended claims.

Brief Description of the Drawings

[0015] The invention may take physical form in certain parts and arrangements of parts, a preferred embodiment of which will be described in detail in the specification and illustrated in the accompanying drawings which form a part hereof, and wherein:

[0016] *Fig. 1* is a perspective view of a welding apparatus;

[0017] *Fig. 2* is a side view of a welding gun of *Fig. 1*;

[0018] *Figs. 3a-3c* are enlarged cross sectional views through a nozzle of *Fig. 2*;

[0019] *Figs. 4a-4c* are enlarged cross sectional views of another nozzle embodiment;

[0020] *Figs. 5a-5c* are enlarged cross sectional views of yet another nozzle embodiment;

[0021] *Figs. 6a-6c* are side views of a tip of an alternative welding gun;

[0022] *Fig. 7* is a flow chart illustrating one embodiment of an automatic wire retract method;

[0023] *Fig. 8* is a flow chart illustrating a method for modifying a welding apparatus; and

[0024] *Fig. 9* is an illustration of contact tip to work distance ("CTWD") and electrode stick out ("ESO");

[0025] *Fig. 10* is a graphical depiction of the relationship between wire feed speed (WFS – inches per minute), contact tip to work distance ("CTWD") and welding current.

Detailed Description of the Drawings

[0026] The best mode for carrying out the invention will now be described for the purposes of illustrating the best mode known to the applicant at the time of the filing of this patent application. The examples and figures are illustrative only and not meant to limit the invention, which is measured by the scope and spirit of the claims. As used herein, the following terms will have the following meanings

[0027] The term "contact tip to work distance" or "CTWD" means a distance between the contact tip end e.g., **144a** as illustrated in *Fig. 9* and the horizontal plane of the workpiece at the weld site.

[0028] The term “electrode stick out” or “ESO” means a distance between the contact tip end, e.g., **144a** and the terminal tip of the electrode **136** as illustrated in *Fig. 9*.

[0029] The term “proximate” means a measurement deviation from the horizontal plane of the nozzle end or contact tip end of no more than about 0.125 inches.

[0030] Referring now to the drawings wherein the showings are for purposes of illustrating the preferred embodiment of the invention only and not for purposes of limiting the same, as illustrated in *Fig. 1*, welding apparatus **100** includes welding power source **102**, wire feeder **104**, and gas supply **106**. Welding power source **102** includes power cables **108**, control cable **110**, and power supply cable (not shown). Power cables **108** include a ground wire and clamp **112** connected to a work piece and power cable **114** configured to connect to wire feeder **104**. Control cable **110** may be configured to connect to wire feeder **104**. In another embodiment (not shown), control cable **110** may be configured to be wireless. It is understood that welding power source **102**, power cables **108**, and control cable **110** can have any configuration suitable for supplying power and welding controls to the welding apparatus **100**.

[0031] Further illustrated in *Fig. 1*, gas conduit **116** and regulator **118** are configured to connect gas supply **106** to wire feeder **104**. Gas supply **106** may include inert gases, active gases, or a combination of both, including but not limited to argon, helium, carbon dioxide, argon and helium, argon and hydrogen, and other gas combinations. In another embodiment (not shown), welding apparatus **100** uses welding wire that is coated with a material that forms a gas shield when burned, therefore, a gas supply may not be necessary in all embodiments. It is understood that the gas supply may be any gas or combination of gases configured to shield a weld from the atmosphere.

[0032] As shown in *Fig. 1*, wire feeder **104** may include housing **120**, gear box **122**, wire spool assembly **124**, and user interface **126**. Extending from gear box **122** is hose **128** that is configured to connect to welding gun **130**. Housing **120** may be

connected to user interface **126** and gear box **122**. Further, control cable **110** and power cable **114** extending from welding power source **102** and gas conduit **116** extending from gas supply **106** are configured to connect to housing **120**, gear box **122**, and hose **128**. Gear box **122** includes at least a plurality of rollers (not shown) that advance and retract the welding wire (not shown) and a wire guide (not shown) that controls the path of the welding wire. It is understood that wire feeder **104** may have any configuration suitable for receiving a gas supply, a power supply, and welding controls.

[0033] Extending between gear box **122** and welding gun **130** is hose **128** which operatively connects the welding wire and wire conduit, a gas line (if required), and a welding gun trigger switch connection. In another embodiment (not shown), as discussed above, hose **128** does not include a gas line. In yet another embodiment (not shown), hose **128** may include a control cable configured to connect welding gun **130** to at least one of the following: welding power source **102**, wire feeder **104**, and gas supply **106**. Hose **128** can be any diameter and length configured to contain the welding wire, the gas hose, and the switch connection. Hose **128** is made of any material suitable for welding environments. It is understood that hose **128** and welding gun **130** may have any configuration suitable for supplying welding wire, welding gas, and controls through the hose and to the welding gun.

[0034] In the illustrated embodiment of welding apparatus **100**, user interface **126** includes at least one of the following: a control system, a computer (or optionally at least a CPU) with sufficient processing capabilities to implement and/or run a software program and a setup program. For example, user interface **126** on welding apparatus **100** includes an automatic wire retract program configured to reverse gear box **122** on wire feeder **104** so exposed welding wire (not shown) at least partially retracts from an opening or an end of the welding gun. The automatic wire retract program is designed to prevent a welder from being exposed to a potentially sharp end of the welding wire that may stick out or extend beyond the opening or the end of welding gun **130**. The automatic wire retract program can be password

protected so that supervisors and other management personnel can maintain control of the automatic wire retract program.

[0035] In one initial embodiment of the invention described in the parent application, the automatic wire retract program compared a time delay between a welder discontinuing use of welding apparatus **100** for more than a preset first amount of time and upon either meeting and/or exceeding the preset delay time, the automatic wire retract program at least partially retracted the welding wire from the opening or the end of the welding gun for a second amount of time (reversal time). For example, user interface **126** included a first setting where a retract delay time was set and a second setting where a wire retract time was set. After these settings were made, if a welder discontinues use of the apparatus for an amount of time greater than or equal to the specified first amount of time, the wire feeder retracted the welding wire for the second amount of time (or equivalently distance as illustrated below).

[0036] In another initial embodiment of the invention described in the parent application, the automatic wire retract program was configured to retract the welding wire from the opening or the end of the welding gun for a predetermined and fixed distance when a welder discontinued use of the welding apparatus **100** for more than the first amount of delay time. For example, user interface **126** included a first setting where the retract delay time was set and a second setting where the retract distance was set.

[0037] In yet another initial embodiment of the invention described in the parent application, upon a welder discontinuing use of welding apparatus **100** for more than the first amount of time, the automatic wire retract program was configured to at least partially retract the welding wire from the opening or the end of the welding gun until a sensor system (not shown) indicated that the end of the welding wire is in a safe zone (not shown) within welding gun **130**. For example, automatic wire retract program retracted the welding wire until the sensor was activated, wherein the sensor indicates that the end of the welding wire is contained within the nozzle, the tip (not shown), or both the nozzle and tip. Automatic wire retract methods for

welding apparatuses will be further discussed below. It is understood that the user interface and the automatic wire retract program may be configured in any way so that the end of the welding wire in a welding apparatus at least partially retracts into a portion of the welding gun, e.g., a tip and a nozzle, so a welder is not exposed to a potentially sharp welding wire.

[0038] As shown in *Fig. 2*, hose **128** is configured to connect to welding gun **130** in proximity to welding gun handle **132**. Trigger **134** on handle **132** is configured to advance welding wire **136** from the gear box of the wire feeder (not shown) through hose **128** and handle **132**, and further along neck **138** and nozzle **140**. Nozzle **140** is configured to removably attach to neck **138**. In addition, trigger **134** may be configured to control welding shielding gas. For example, welding wire **136** extends from nozzle **140** and welding shielding gas surrounds welding wire when a welder actuates trigger **134** (i.e., moves the trigger from a default inactive position typically with the trigger fully extended to an activated position typically with the trigger fully, or at least partially, depressed). In another embodiment (not shown), neck **138** may have a longer or shorter length and may bend at a different angle than what is shown in *Fig. 2*. It is understood that welding gun **130** may have any configuration suitable for a welder to control the advancement of the welding wire and the supply of the welding shielding gas.

[0039] As illustrated in *Fig. 2* nozzle **140** include insulating boss **142** in one embodiment, that is configured to prevent heat and electrical contact from transferring from nozzle **140** to at least one of the following: neck **138** and welding gun handle **132**. Inside nozzle **140**, tip **144** is configured to removably attach to neck **138**. Tip **144** is further configured to guide welding wire **136** along a center of nozzle **140** and to allow welding gas to emit from gas passages **146** to shield welding wire **136** from the surrounding environment. In another embodiment (not shown), the welding gun includes handle **132**, trigger **134**, neck **138**, tip **144**, and gas passages **146**. In this configuration, welding gun **130** does not include nozzle **140**. It is understood that nozzle **140** may have any configuration suitable for a welder to control the welding wire and the supply of a welding shielding gas.

[0040] *Figs. 3a-3c* are enlarged cross-sectional views of nozzle **140** of *Fig. 2* where tip **144** is configured to be within end **140a** of nozzle **140**. The series of *Figs. 3a-3c* illustrate an example of how welding apparatus **100** is configured to operate when using the automatic wire retract program. For purposes of this example, *Fig. 3a* shows a cross-section of the nozzle **140** for an initial welding condition before a welder uses the welding apparatus **100**. *Fig. 3a* shows nozzle **140** having welding wire **136** extending from tip **144**, wherein welding wire **136** and tip **144** are completely within end **140a** of nozzle **140**. *Fig. 3b* shows a nozzle cross-section after a welder uses welding apparatus **100**. As shown in *Fig. 3b*, welding wire **136** extends beyond end **140a** of nozzle **140**, potentially exposing the welder to an end of the welding wire **136**. By enabling the automatic wire retract program through the user interface **126**, welding apparatus **100** is configured to automatically retract the end of welding wire **136** within end **140a** of nozzle **140** when a welder stops welding for a specified amount of time, as illustrated in *Fig. 3c*. For example, if a welder stops welding for 20 seconds, the automatic wire retract program would retract the welding wire so it is not exposed to the welder. In another embodiment (not shown), the nozzle and tip can be longer or shorter than what is illustrated in *Figs. 3a-3c*. It is understood that welding apparatus **100** may be configured with the automatic wire retract program so that the welding wire retracts at least within end **140a** of the nozzle **140** when a welder stops welding for a specified amount of time. The times mentioned above are for illustrative purposes only and both larger and shorter periods of time are within the scope of this invention. While a complete retraction of welding wire **136** is illustrated, the invention encompasses embodiments when the welding wire is only partially retracted from its extended state illustrated in *Fig. 3b*. In this aspect of the invention, the welding wire may still extend beyond end **140a**, but not as far as illustrated in *Fig. 3b*.

[0041] *Figs. 4a-4c* are enlarged cross-sectional views of nozzle **140** of *Fig. 2* where tip **144** is configured to extend past end **140a** of nozzle **140**. Similar to the series of *Figs. 3a-3c* above, the series of *Figs. 4a-4c* illustrate an example of how welding apparatus **100** is configured to operate when using the automatic wire retract program. Again, for purposes of this example, *Fig. 4a* shows a cross section of nozzle

140 for an initial welding condition before a welder uses welding apparatus **100**. *Fig. 4a* shows nozzle **140** and tip **144**, wherein welding wire is not extending from tip **144** and tip **144** extends past end **140a** of nozzle **140**. *Fig. 4b* shows a nozzle cross-section after a welder uses welding apparatus **100**. As shown in *Fig. 4b*, welding wire **136** extends from the end of tip **144**, potentially exposing the welder to an end of welding wire **136**. By enabling the automatic wire retract program through user interface **126**, welding apparatus **100** is configured to automatically retract the end of welding wire **136** within the end of tip **144** when a welder stops welding for a specified amount of time, as illustrated in *Fig. 4c*. In another embodiment (not shown), the tip can be longer or shorter than what is illustrated in *Figs. 4a-4c*. In a manner consistent with the description associated with *Figs. 3a-3c*, total retraction of welding wire **136** is not required, but at least a partial retraction from the depiction illustrated in *Fig. 4b* is.

[0042] *Figs. 5a-5c* are enlarged cross-sectional views of another embodiment of nozzle **140** of *Fig. 2* where tip **144** is configured to be within end **140a** of nozzle **140**. Further, the nozzle includes at least one sensor **148** configured to indicate location of welding wire **136**. The at least one sensor can include at least one of the following proximity sensors: mechanical, electrical, optical, laser, ultrasonic, and the like. The series of *Figs. 5a-5c* illustrate an example of how welding apparatus **100** is configured to operate when using the automatic wire retract program with at least one sensor. *Fig. 5a* shows a cross section of nozzle **140** for an initial welding condition before a welder uses welding apparatus **100**. *Fig. 5a* shows nozzle **140** and tip **144**, wherein welding wire is not extending from tip **144** and the at least one sensor **148** does not sense welding wire **136**. *Fig. 5b* shows a nozzle cross-section after a welder uses welding apparatus **100**. As shown in *Fig. 5b*, welding wire **136** extends beyond the end of nozzle **140** and tip **144**, potentially exposing the welder to an end of welding wire **136**. By enabling the automatic wire retract program through user interface **126**, welding apparatus **100** is configured to automatically retract the end of welding wire **136** within end **140a** of nozzle **140** when a welder stops welding. The welding wire will retract until the welding wire activates the at least one sensor **148** indicating that the end of the welding wire is within nozzle **140**.

or within tip **144**, as illustrated in *Fig. 5c*. In another embodiment (not shown), the tip can be longer or shorter than what is illustrated in *Figs. 5a-5c*. In yet another embodiment (not shown), the number of sensors **148** can be a number less than or greater than the number illustrated in *Figs. 5a-5c*. Consistent with the discussions associated with the previous figures, total retraction is not required, but at least a partial retraction from the fully extended position illustrated in *Fig. 5b* is an aspect of the invention.

[0043] *Figs. 6a-6c* are side views of tip **144** of an alternative welding gun where welding gun (not shown) does not include a nozzle so the entire tip **144** is exposed. The series of *Figs 6a-6c* illustrate an example of how welding apparatus **100** is configured to operate when using the automatic wire retract program. *Fig. 6a* shows a side view of tip **144** for an initial welding condition before a welder uses welding apparatus **100**. *Fig. 6a* shows where the welding wire is not extending from exposed tip **144**. *Fig. 6b* shows the side view of tip **144** after a welder uses welding apparatus **100**. As shown in *Fig. 6b*, welding wire **136** extends from the end of tip **144**, potentially exposing the welder to an end of welding wire **136**. By enabling the automatic wire retract program through user interface **126**, welding apparatus **100** is configured to automatically retract the end of welding wire **136** within the end of tip **144** when a welder stops welding for a specified amount of time, as illustrated in *Fig. 6c*. In another embodiment (not shown), the tip can be longer or shorter than what is illustrated in *Figs. 6a-6c* consistent with previous discussions.

[0044] *Fig. 7* is a flow chart illustrating one embodiment of an automatic wire retract method **700** for welding apparatus **100**. As shown in *Fig. 7*, welding apparatus is configured to power up at **702**. At **704**, a computer having an automatic wire retract program determines whether a user is attempting to access the setup menu through the user interface or computer. If the user is attempting to access the setup menu at **704**, the computer determines if the setup menu is locked at optional **706**. If the setup menu is locked at optional **706**, the computer determines if the user enters the correct password at **708**. If the setup menu is locked and the user does not enter the correct password, the computer blocks access to the setup pa-

rameters and returns the user to a previous user interface option at **710**. If the set-up menu is locked and the user does enter the correct password, the computer allows the user access to the setup parameters to enable or disable the automatic wire retract program at **712**. After the user enables or disables the automatic wire retract program and any related parameters, the computer returns the user to a previous user interface option at **714**. For example, the user may adjust at least one of the following parameters, including: a retract delay time, a retract time, a retract distance, and proximity sensor parameters.

[0045] If the user is not attempting to access the setup menu at **704**, the computer determines if the welding gun trigger is enabled at **716**. If the welding gun trigger is not enabled and the welding apparatus has power, the computer waits until the welding gun trigger is enabled or the user attempts to access the setup menu at **718**. If the welding gun trigger is enabled at **716**, the wire feeder starts and the welding power source supplies power at **720**. At **722**, the computer determines if the welding gun trigger is disabled. If the welding gun trigger is not disabled, the computer monitors the welding gun trigger at **724**. When the welding gun trigger is disabled at **722**, the computer determines if the welding arc is extinguished at **726**. If the welding arc is not extinguished at **726**, the computer monitors the welding arc at **728**.

[0046] When the welding arc is extinguished at **726**, the computer tracks a wait time delay and determines if the wait time delay is greater than a retract delay time set in the user interface at **730**. For example, the retract delay time can be any time greater than zero. If the wait time delay is less than the retract delay time set in the user interface, the computer continues to monitor the wait time delay. If the wait time delay is at least equal to the retract delay time set in the user interface, the computer checks to see that the welding gun trigger is enabled at **732**. If the welding gun trigger is enabled at **732**, the wire feeder starts and the welding power source supplies power at **720**. If the welding gun trigger is not enabled at **732** and the wait time delay is at least equal to the retract delay time set in the user interface, the automatic wire retract program retracts the welding wire based on user

interface parameters at **734**. For example, the welding wire may retract for an amount of time or a specific distance. At **736**, the computer determines if the welding gun trigger is enabled. If the welding gun trigger is enabled at **736**, the wire feeder starts and the welding power source supplies power at **720**. If the welding gun trigger is not enabled at **736**, at **738** the computer returns to the beginning of the method at **704**. It is important to note that it is possible to activate trigger during the retract delay time which would restart the welding operation, as if welding gun trigger is employed at **732**. It is not necessary to wait for the full retract delay period before restarting welding.

[0047] In another embodiment of the method, the computer monitors the gear box drive motor on the wire feeder for excess current or torque, wherein the excess current or torque may indicate a problem with the automatic wire retract method. In any case, it must be understood that welding apparatus **100** using automatic wire retract method **700** may be configured so that the welding wire retracts at least within end **140a** of nozzle **140** or tip **144** when a welder stops welding for a specified amount of time.

[0048] In yet another embodiment (not shown) of an automatic wire retract method **700** for welding apparatus **100**, method **700** includes at least one of the following method steps. If a welding gun trigger is enabled, a wire feeder starts and a welding power source supplies power. A computer is configured to determine if the welding gun trigger is disabled. If the welding gun trigger is not disabled, the computer monitors the welding gun trigger. Alternatively, when the welding gun trigger is disabled, the computer determines if a welding arc is extinguished. If the welding arc is not extinguished, the computer monitors the welding arc. Once the welding arc is extinguished, the computer is configured to track a wait time delay and determine if the wait time delay is greater than a retract delay time set in the user interface. If the wait time delay is less than the retract delay time set in the user interface, the computer continues to count the wait time delay. If the wait time delay is at least equal to the retract delay time set in the user interface, the computer checks to see that the welding gun trigger is enabled. If the welding gun trigger is

enabled, the wire feeder starts and the welding power source supplies power. If the welding gun trigger is not enabled and the wait time delay is at least equal to the retract delay time set in the user interface, the automatic wire retract program retracts the welding wire. Similar comments are applicable regarding the ability to restart the welding process during the retract delay time period.

[0049] *Fig. 8* is a flow chart illustrating one embodiment of an automatic wire retract method for a retrofit or modification of a welding apparatus. As shown in *Fig. 8*, a welding apparatus is located that does not have an automatic wire retract program at **802**. At **804**, a welding apparatus that has once been manufactured or sold is retrofit or modified with an automatic wire retract program. For example, at least one of the following is added to or modified in the welding apparatus, including: a software program, hardware, a relay, a printed circuit board, a wire harness, a user interface, and the like.

[0050] A computer or user interface **126** that may include a computer having an automatic wire retract program illustrates one possible hardware configuration to support the systems and methods described herein, including the methods **700** and **800** above. In order to provide additional context for various aspects of the present invention, the following discussion is intended to provide a brief, general description of a suitable computing environment in which the various aspects of the present invention may be implemented. Those skilled in the art will recognize that the invention also may be implemented in combination with other program modules and/or as a combination of hardware and software. Generally, program modules include routines, programs, components, data structures, etc., that perform particular tasks or implement particular abstract data types.

[0051] Moreover, those skilled in the art will appreciate that the inventive methods may be practiced with other computer system configurations, including single-processor or multiprocessor computer systems, minicomputers, mainframe computers, as well as personal computers, hand-held computing devices, microprocessor-based or programmable consumer electronics, and the like, each of which may

be operatively coupled to one or more associated devices. The illustrated aspects of the invention may also be practiced in distributed computing environments where certain tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

[0052] User interface **126** associated with the automatic wire retract program can utilize an exemplary environment for implementing various aspects of the invention including a computer, wherein the computer includes a processing unit, a system memory and a system bus. The system bus couples system components including, but not limited to the system memory to the processing unit. The processing unit may be any of various commercially available processors. Dual microprocessors and other multi-processor architectures also can be employed as the processing unit.

[0053] The system bus can be any of several types of bus structure including a memory bus or memory controller, a peripheral bus and a local bus using any of a variety of commercially available bus architectures. The system memory can include read only memory (ROM) and random access memory (RAM). A basic input/output system (BIOS), containing the basic routines that help to transfer information between elements within the computer, such as during start-up, is stored in the ROM.

[0054] The computer or the user interface **126** that may include a computer having an automatic wire retract program can further include a hard disk drive, a magnetic disk drive, e.g., to read from or write to a removable disk, and an optical disk drive, e.g., for reading a CD-ROM disk or to read from or write to other optical media. The computer or the user interface 126 that may include a computer having an automatic wire retract program can include at least some form of computer readable media. Computer readable media can be any available media that can be accessed by the computer. By way of example, and not limitation, computer readable media may comprise computer storage media and communication media. Computer storage

media includes volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information such as computer readable instructions, data structures, program modules or other data. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by the user interface **126**.

[0055] Communication media typically embodies computer readable instructions, data structures, program modules or other data in a modulated data signal such as a carrier wave or other transport mechanism and includes any information delivery media. The term “modulated data signal” means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media. Combinations of any of the above should also be included within the scope of computer readable media.

[0056] A number of program modules may be stored in the drives and RAM, including an operating system, one or more application programs, other program modules, and program data. The operating system in the computer or the user interface **126** can be any of a number of commercially available operating systems.

[0057] In addition, a user may enter commands and information into the computer through a keyboard and a pointing device, such as a mouse. Other input devices may include a microphone, an IR remote control, a track ball, a pen input device, a joystick, a game pad, a digitizing tablet, a satellite dish, a scanner, or the like. These and other input devices are often connected to the processing unit through a serial port interface that is coupled to the system bus, but may be connected by other interfaces, such as a parallel port, a game port, a universal serial bus (“USB”), an IR interface, and/or various wireless technologies. A monitor or other type of display device, may also be connected to the system bus via an interface, such as

a video adapter. Visual output may also be accomplished through a remote display network protocol such as Remote Desktop Protocol, VNC, X-Window System, etc. In addition to visual output, a computer typically includes other peripheral output devices, such as speakers, printers, etc.

[0058] A display can be employed with user interface **126** to present data that is electronically received from the processing unit. For example, the display can be an LCD, plasma, CRT, etc. monitor that presents data electronically. Alternatively or in addition, the display can present received data in a hard copy format such as a printer, facsimile, plotter etc. The display can present data in any color and can receive data from the user interface 126 via any wireless or hard wire protocol and/or standard.

[0059] The computer can operate in a networked environment using logical and/or physical connections to one or more remote computers, such as a remote computer(s). The remote computer(s) can be a workstation, a server computer, a router, a personal computer, microprocessor based entertainment appliance, a peer device or other common network node, and typically includes many or all of the elements described relative to the computer. The logical connections depicted include a local area network (LAN) and a wide area network (WAN). Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet.

[0060] When used in a LAN networking environment, the computer is connected to the local network through a network interface or adapter. When used in a WAN networking environment, the computer typically includes a modem, or is connected to a communications server on the LAN, or has other means for establishing communications over the WAN, such as the Internet. In a networked environment, program modules depicted relative to the computer, or portions thereof, may be stored in the remote memory storage device. It will be appreciated that network connections described herein are exemplary and other means of establishing a communications link between the computers may be used.

[0061] As discussed hereinabove, the retract time or distance is fixed based upon user input typically through user interface **126** to the software retract program. However, while this represents an advance over the prior art, a dynamic retract time (or dynamic retract distance) based on wire size and/or wire speed and/or average current offers a superior solution. As with the previous solution, the retract time and/or distance does not require the welding wire tip to be fully retracted, but only to retract at least some distance from its fully extended distance upon cessation of a welding operation.

[0062] As illustrated in *Fig. 10*, fixed retract times and/or fixed retract distances do not adapt to changing contact-to-work distance variations. The dynamic solution, which takes into account at least one of the following, namely, arc current, wire size, wire speed, burnback time and/or process tip to determine the amount of wire that is protruding from the opening of the welding gun, (or combinations of at least the above parameters) offer advantages not achievable with a static solution. Regardless of the wire stickout position (ESO) when the welding operation stops, the wire preferably retracts to the point where it is positioned either proximate the welding gun tip or between the tip and the nozzle. If the wire retracts too far, the next weld may be delayed until a proper contact-to-work distance is achieved. If the wire does not retract far enough, the wire will protrude from the gun assembly for a distance which may not achieve all of the safety aspects of this invention. *Fig. 10* further illustrates the interactivity between welding current, and contact-to-work distance for a given diameter welding wire at various wire feed rates. This relationship can be defined for any combination of variables, accounting for the impact of welding material differences. The retraction amount can employ either a mathematical equation based on the curves represented by *Fig. 10*, or by interpolating from data table values or combinations thereof.

[0063] Further using *Fig. 10* as an illustrative non-limiting example, a user welding at an average welding current of 200 amps and using a welding wire feed rate of 300 in/min, would have the software automatically determine that the contact-to-work distance on average would be approximately 1.125" assuming proper welding

procedures were being employed. Therefore, a retraction distance of between approximately 1 – 1.125 inches would be appropriate for the retraction distance, an electrode stick out of approximately 0.125 inches not being sufficient to penetrate a welder's apparel after completion of a welding operation and any subsequent contact with a welding tip.

[0064] While the invention has been described with reference to certain embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from its scope. Therefore, it is intended that the invention not be limited to the particular embodiments disclosed, but that the invention will include all embodiments falling within the scope of the appended claims.

Reference numbers

100	welding apparatus	148	sensor
102	power source	700	method
104	wire feeder	702	step
106	gas supply	704	step
108	power cable	706	step
110	control cable	708	step
112	clamp	710	step
114	power cable	712	step
116	gas conduit	714	step
118	regulator	716	step
120	housing	718	step
122	gear box	720	step
124	spool assembly	722	step
126	user interface	724	step
128	hose	726	step
130	welding gun	728	step
132	welding gun handle	730	step
134	trigger	732	step
136	welding wire	734	step
138	neck	736	step
140	nozzle	738	step
140a	end	800	method
142	boss	802	step
144	tip	804	step
146	gas passage		

What is claimed is:

1. An automatic wire retract method comprising:

providing a manual welding apparatus (100) having at least a welding power source (102), a wire feeder (104) configured to supply a welding wire (136), and a welding gun (130) having a trigger (134) and an opening from which the welding wire (136) extends;

providing an automatic wire retract program having a retract delay time;

configuring the manual welding apparatus (100) to include the automatic wire retract program;

monitoring when the trigger (134) is enabled to extend the welding wire (136) from the wire feeder (104) to the opening, and extending the welding wire (136) out of the opening of the welding gun (130);

determining a first amount of time when the trigger (134) is disabled;

determining when the first amount of time is at least equal to the retract delay time, wherein the trigger (134) is disabled during the first amount of time; and

at least partially retracting the welding wire (136) into the opening of the welding gun (130) for a retract distance or a retract time, said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire feed rate and burnback time.

2. The method of claim 1, wherein

the step of retracting the welding wire (136) into the opening of the welding gun (130) is configured to retract for a retract time or for a retract distance; and wherein

the retract time is dynamically adjusted in the automatic wire retract program, and/or wherein

the retract distance is dynamically adjusted in the automatic wire retract program.

3. The method of claim 1 or 2, wherein

after the step of at least partially retracting into the opening of the welding gun (130) which comprises a nozzle (140) having a nozzle (140a) end and a tip (144), and wherein the welding wire (136) does not extend past the nozzle end (140a), and/or wherein the welding wire (136) retracts inside the nozzle end (140a), and/or wherein the welding wire (136) extends beyond a nozzle end (140a), but less than an electrode stick out distance during welding, and/or wherein the welding wire (136) retracts inside the tip (144), and/or wherein the welding wire (136) extends beyond a tip (144), but less than a contact-to-wire distance during welding.

4. The method of any claims of the 1 to 3, wherein

after the step of at least partially retracting into the opening of the welding gun (130) which comprises a tip (144), the welding wire (136) does not extend past the tip (144).

5. The method of any of the claims 1 to 4, which further comprises the step of

sensing at least one parameter by at least one sensor (148) configured to indicate an end of the welding wire, wherein said at least one sensor parameter and the step of at least partially retracting are configured to determine when the retracting step is complete.

6. A method comprising:

providing a manual welding apparatus (100) configured to supply a welding wire (136) to a welding gun (130), wherein the welding gun (130) has a trig-

ger (134) and an opening where the welding wire (136) extends when the trigger (134) is activated;

providing a computer with a user interface (126) that includes an automatic wire retract program;

monitoring the welding gun (130);

determining when the trigger (134) is in either an enabled or disabled position during said step of monitoring;

performing a comparison using configuring the automatic wire retract program to indicate when a first condition is satisfied after determining that said trigger (134) is in a disabled position; and

at least partially retracting the welding wire (136) after said comparison, said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire feed rate and burnback time.

7. The method of claim 6, wherein

the first condition is a dynamically adjusted retract delay time.

8. The method of claim 6 or 7, further including the steps of

determining a first amount of time when the trigger (134) is disabled, and further

determining when the first amount of time is at least equal to the retract delay time.

9. The method of any of the claims 6 to 8, further comprising

at least one sensor (148) and

configuring the user interface (126) to include the retract delay time and a

dynamic sensor parameter for at least one sensor (148), wherein the at least one sensor (148) is configured to indicate an end of the welding wire (136), wherein the sensor parameter and the step of at least partially retracting are configured to indicate when to stop the retracting step.

10. The method of any of the claims 6 to 9, wherein

the opening of the welding gun (130) comprises a nozzle (140) having a nozzle end (140a) and a tip (144), wherein

the welding wire (136) does not extend past the nozzle end (140a) by the end of the step of at least partially retracting.
11. The method of any of the claims 6 to 10, wherein

the opening of the welding gun (130) comprises a tip (144), wherein

the welding wire (136) retracts inside the tip (144) by the end of the step of at least partially retracting.
12. The method of any of the claims 6 to 11, wherein

the opening of the welding gun (130) comprises a tip (144), wherein

the welding wire (136) retracts to a distance which is less than the contact-tip-to-work distance or electrode stick out distance by the end of the step of at least partially retracting.
13. A method to improve the safety of a welding operation using a welding torch which employs a trigger (134) to advance a welding wire (136), comprising the steps of:

depressing said trigger (134) to advance said welding wire (136) to initiate a welding operation;

releasing said trigger (134) to stop said advancement of said welding wire (136);

detecting that said trigger (134) is in a released position;

waiting for a first period of time;

comparing said first period of time to a predefined waiting time;

at least partially retracting said welding wire (136) when said first period of time exceeds said predefined waiting time; and

continuing said step of at least partially retracting for a second period of time, said step of continuing said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire speed and burnback time.

14. A method for a welding operation using a welding torch which employs a trigger (134) to advance a welding wire (136), comprising the steps of:

depressing said trigger (134) to advance said welding wire (136) to initiate a welding operation;

releasing said trigger (134) to stop said advancement of said welding wire (136);

detecting that said trigger (134) is in a released position;

at least partially retracting said welding wire (136) after detecting that said trigger (134) is in a released position; and

said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire feed rate and burnback time.

15. A welding system comprising:

a welding power source (102);

a wire feeder (104);

a welding gun (130) in operative communication with said wire feeder (104), said welding gun (130) having a means to control said wire feeder (104);

a wire retract program in operative communication with said wire feeder (104), said wire retract program comprising:

a detection means for determining when said means to control said wire feeder (104) has communicated a signal to said wire feeder (104) to stop feeding said wire (136);

a comparator for measuring elapsed time between said signal to stop feeding said wire (136) and a present time; and

said program operatively communicating a signal to said wire feeder (104) to at least partially retract said wire (136) after said comparator determines that said elapsed time has exceeded a preset time, said step of at least partially retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire feed rate and burnback time.

16. A welding system comprising:

a welding power source (102);

a wire feeder (104);

a welding gun (130) in operative communication with said wire feeder (104), said welding gun (130) having a means to control said wire feeder (104);

a wire retract program in operative communication with said wire feeder (104), said wire retract program comprising:

a detection means for determining when said means to control said wire feeder (104) has communicated a signal to said wire feeder (104) to stop feeding said wire (136); and

said program operatively communicating a signal to said wire feeder (104) to at least partially retract said wire (136) after said wire feeder (104) has stopped feeding said wire, said wire (136) retract program retracting dynamically for a distance which approximates an electrode stick out distance based upon at least one of the following parameters: welding arc current, welding wire size, welding wire feed rate and burnback time.

17. A welding system comprising:

a welding power source (102);

a wire feeder (104);

a welding gun (130) in operative communication with said wire feeder (104), said welding gun (130) having a means to control said wire feeder (104);

a wire retract program in operative communication with said wire feeder (104), said wire retract program comprising:

a detection means for determining when said means to control said wire feeder (104) has communicated a signal to said wire feeder (104) to stop feeding said wire (136); and

said program operatively communicating a signal to said wire feeder (104) to at least partially retract said wire (136) after said signal to said wire feeder to stop feeding said wire after a predefined time, said step of at least partially

retracting dynamically based upon at least one of the following parameters: welding arc current, welding wire size, welding wire feed rate and burnback time.

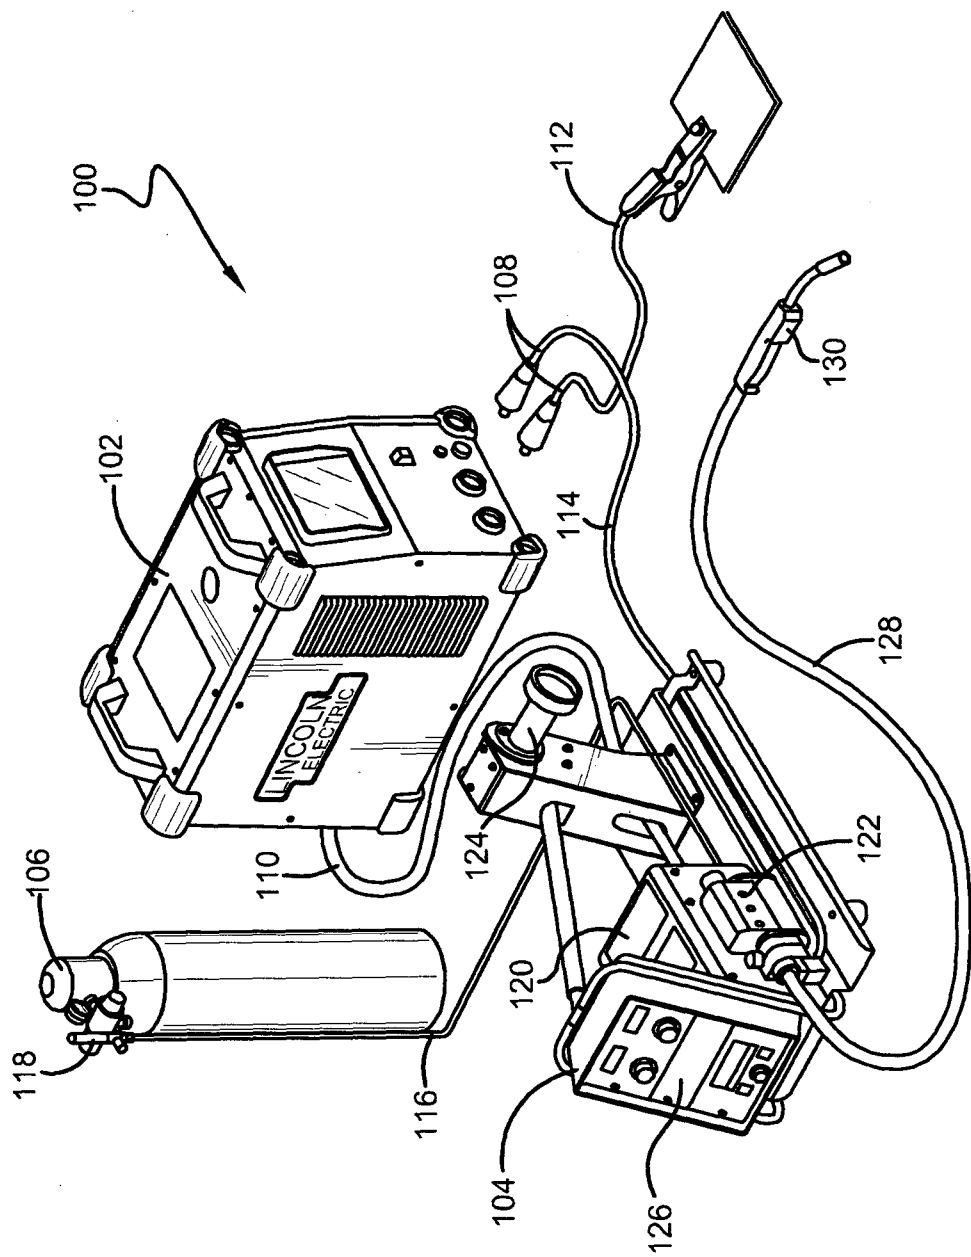


FIG. 1

2/10

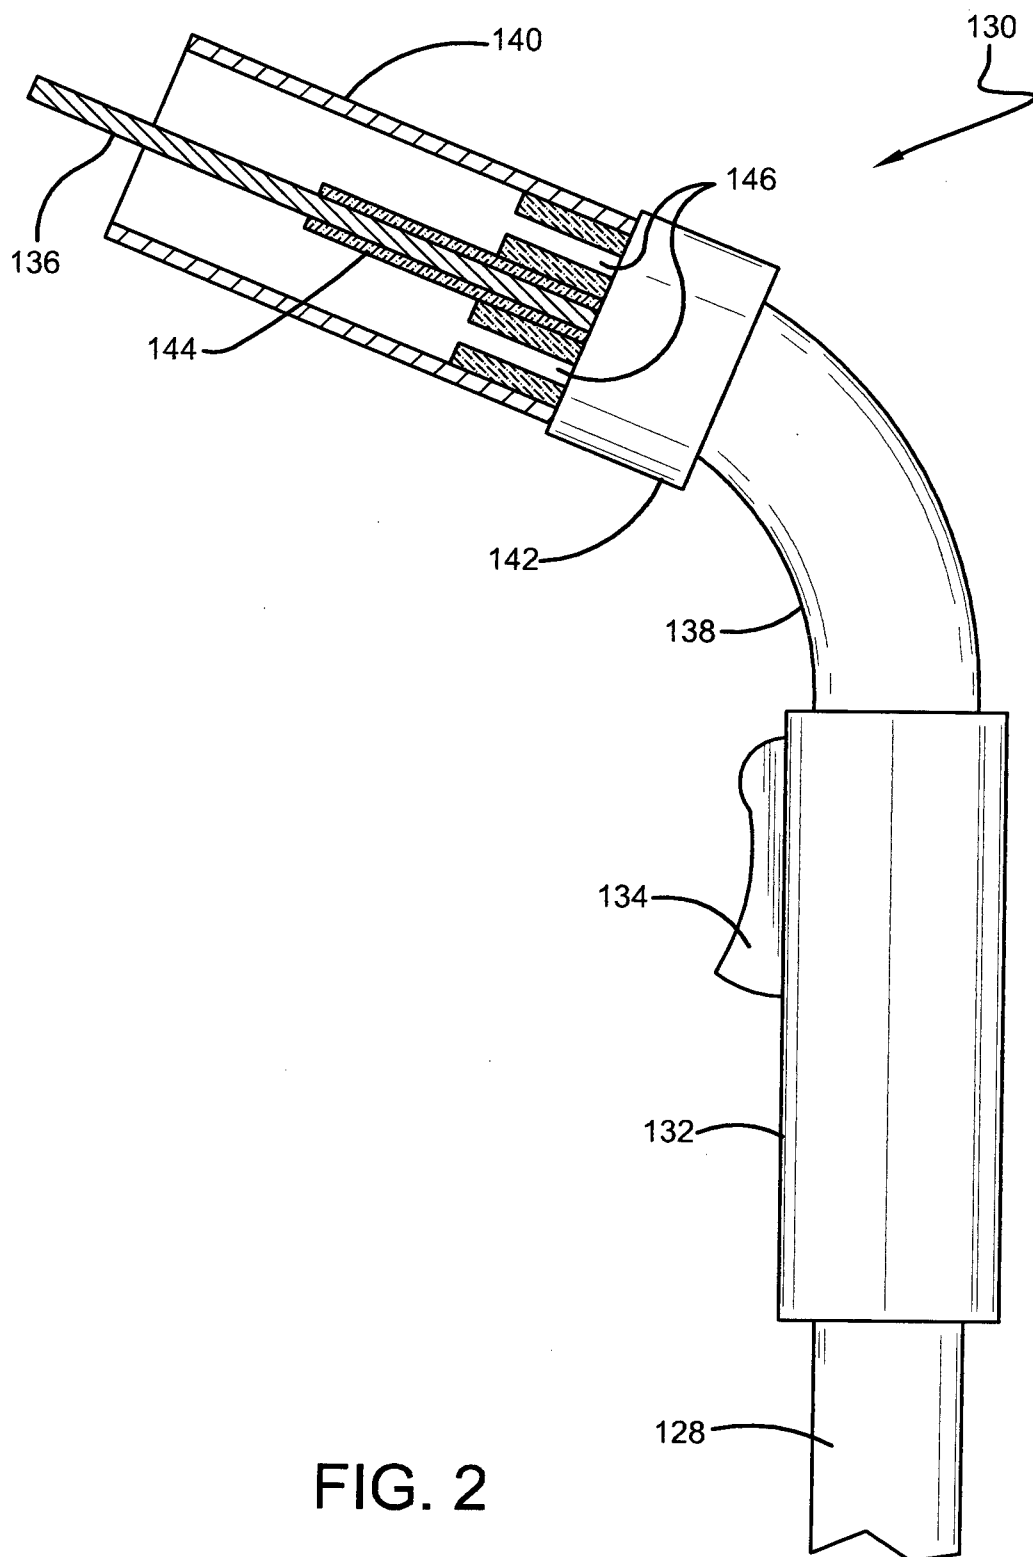


FIG. 2

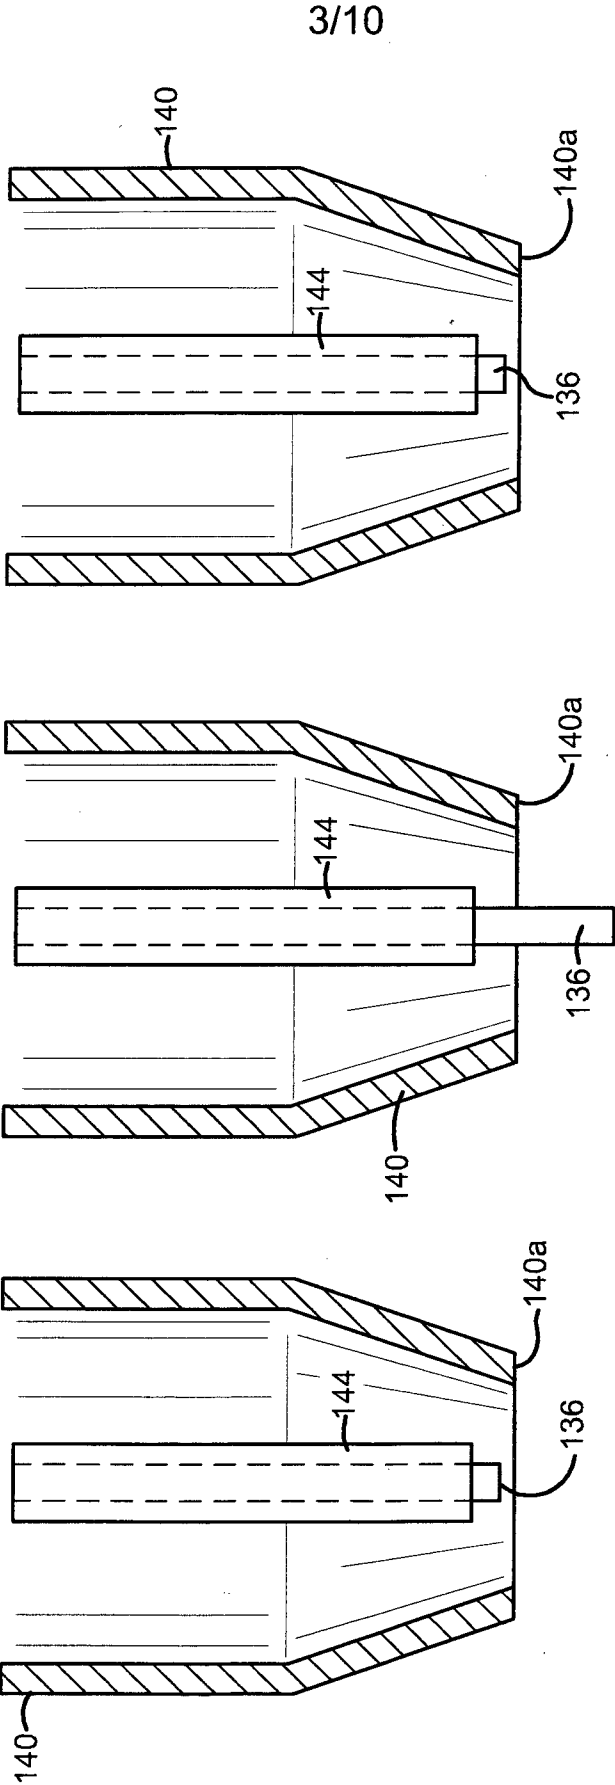


FIG. 3C

FIG. 3B

FIG. 3A

4/10

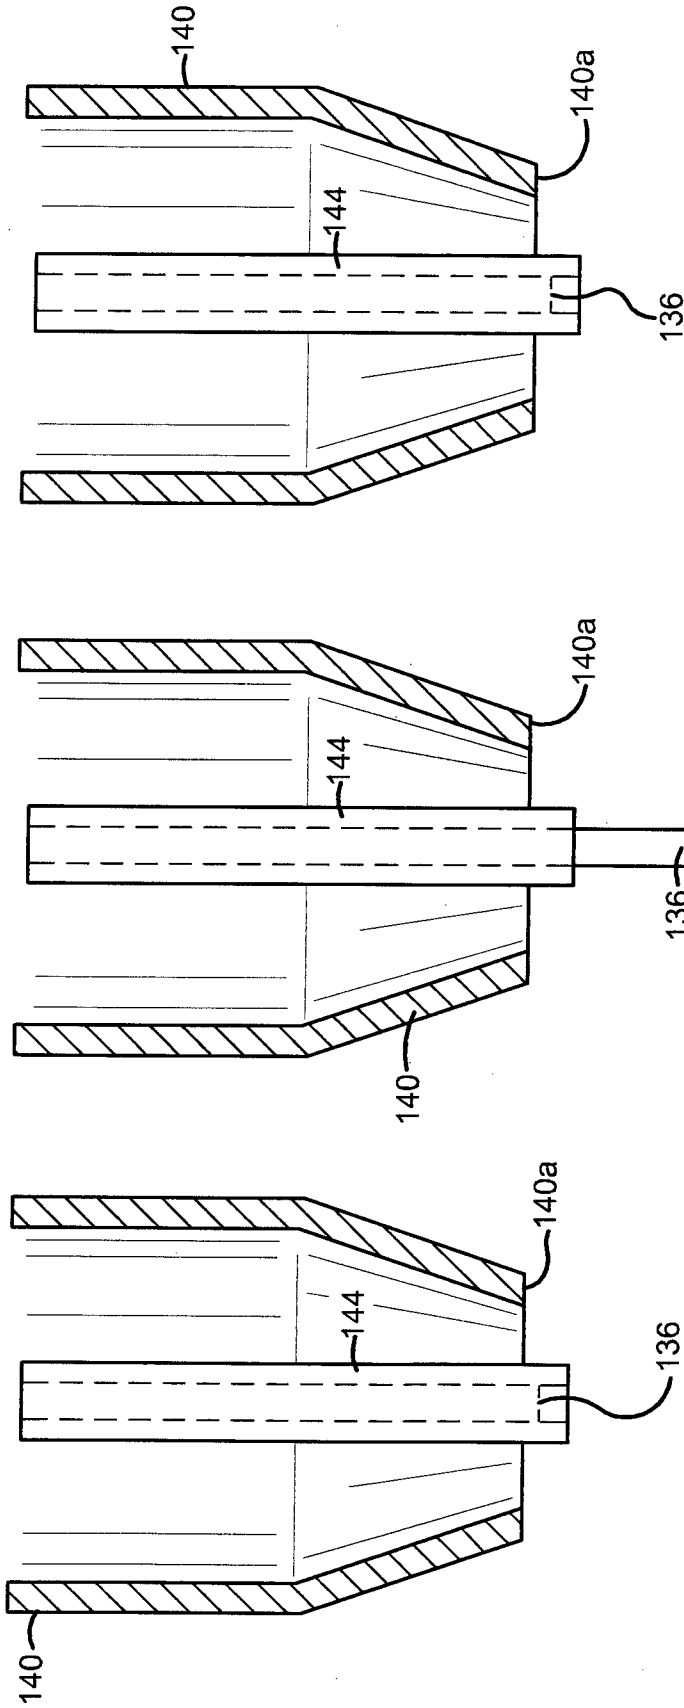


FIG. 4C

FIG. 4B

FIG. 4A

5/10

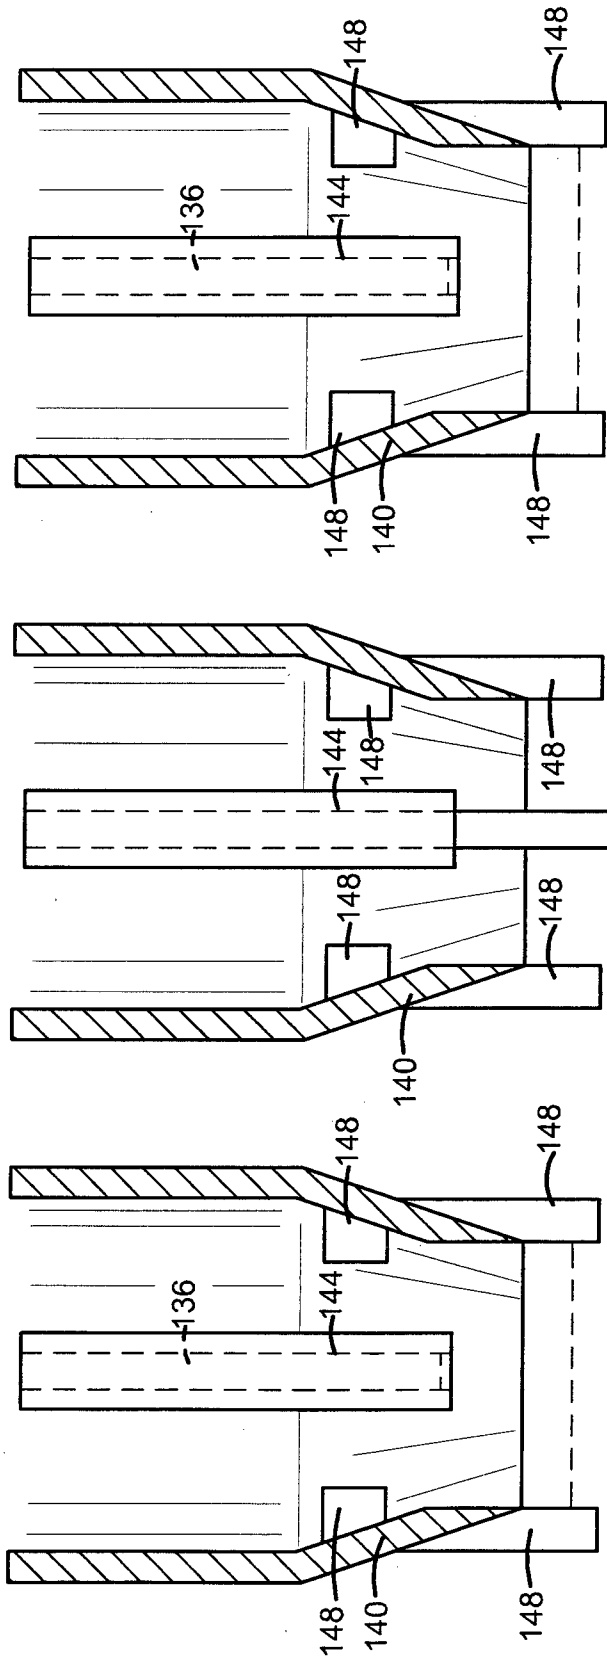


FIG. 5C

FIG. 5B

FIG. 5A

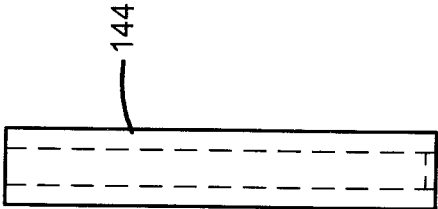


FIG. 6A

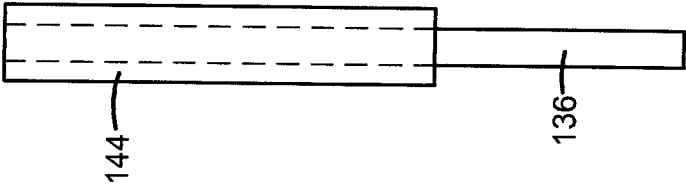


FIG. 6B

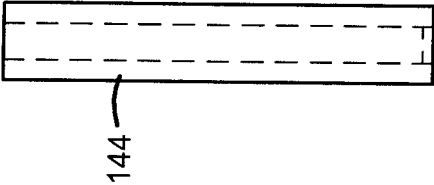


FIG. 6C

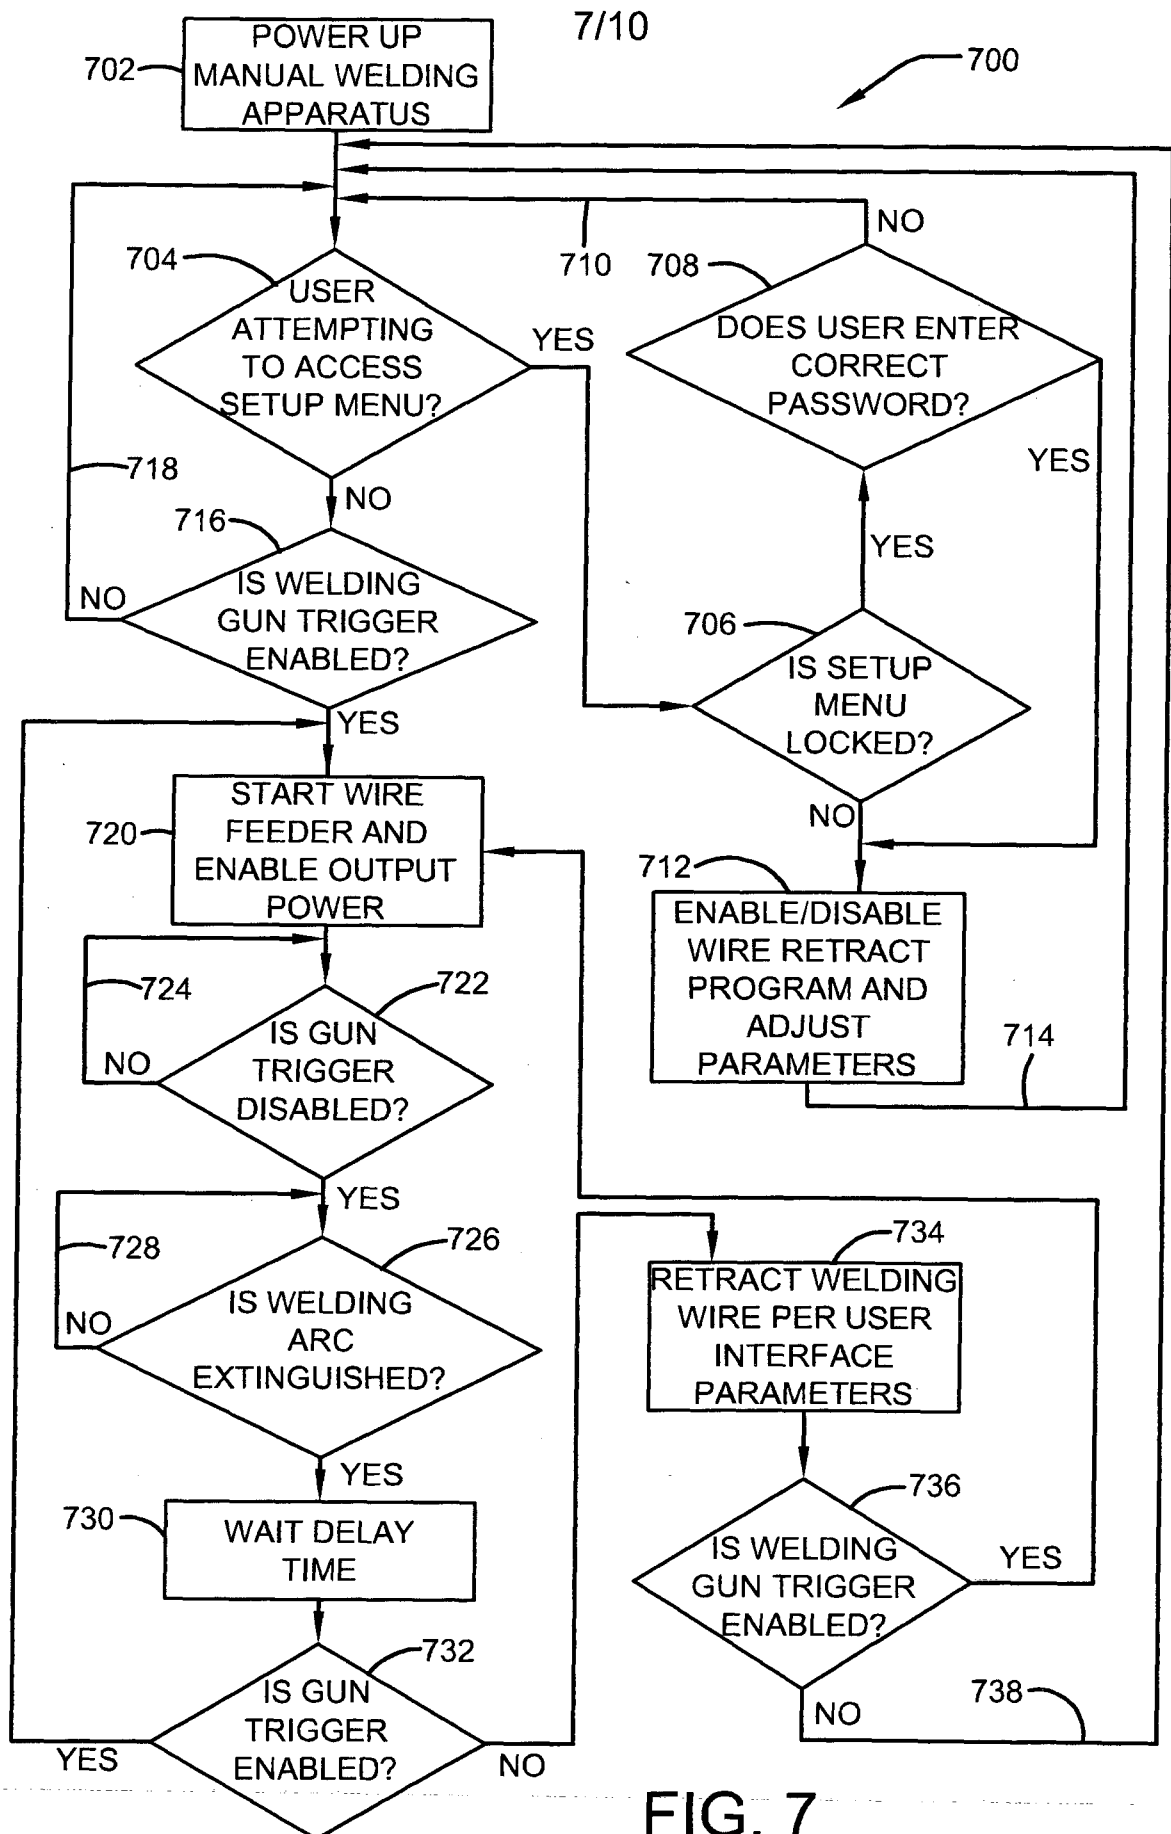


FIG. 7

8/10

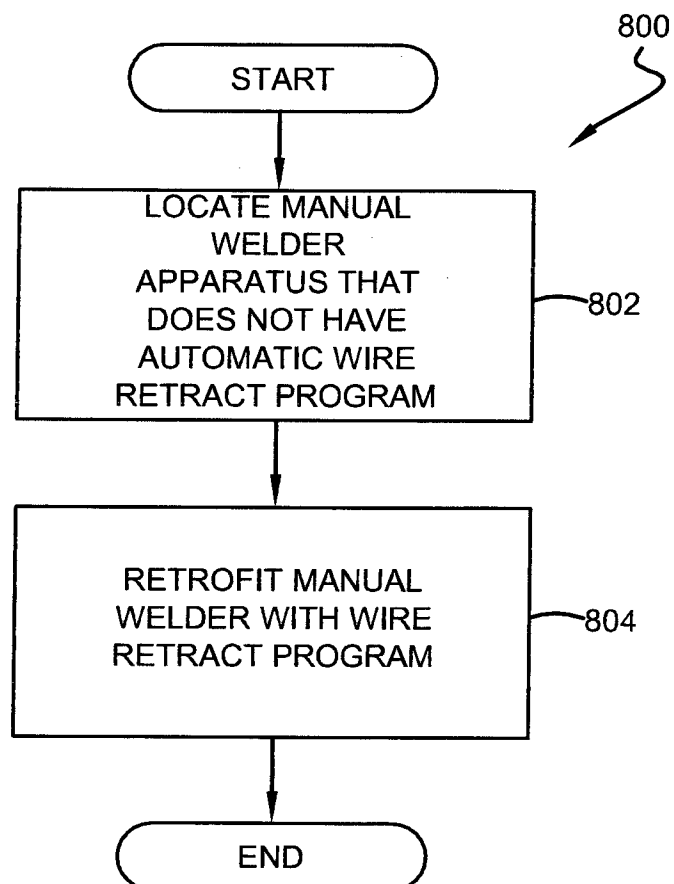


FIG. 8

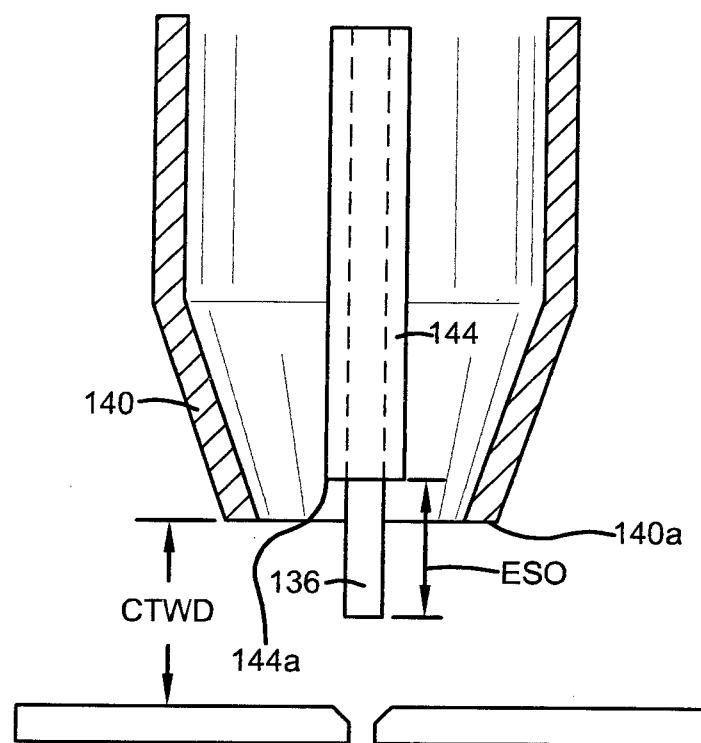


FIG. 9

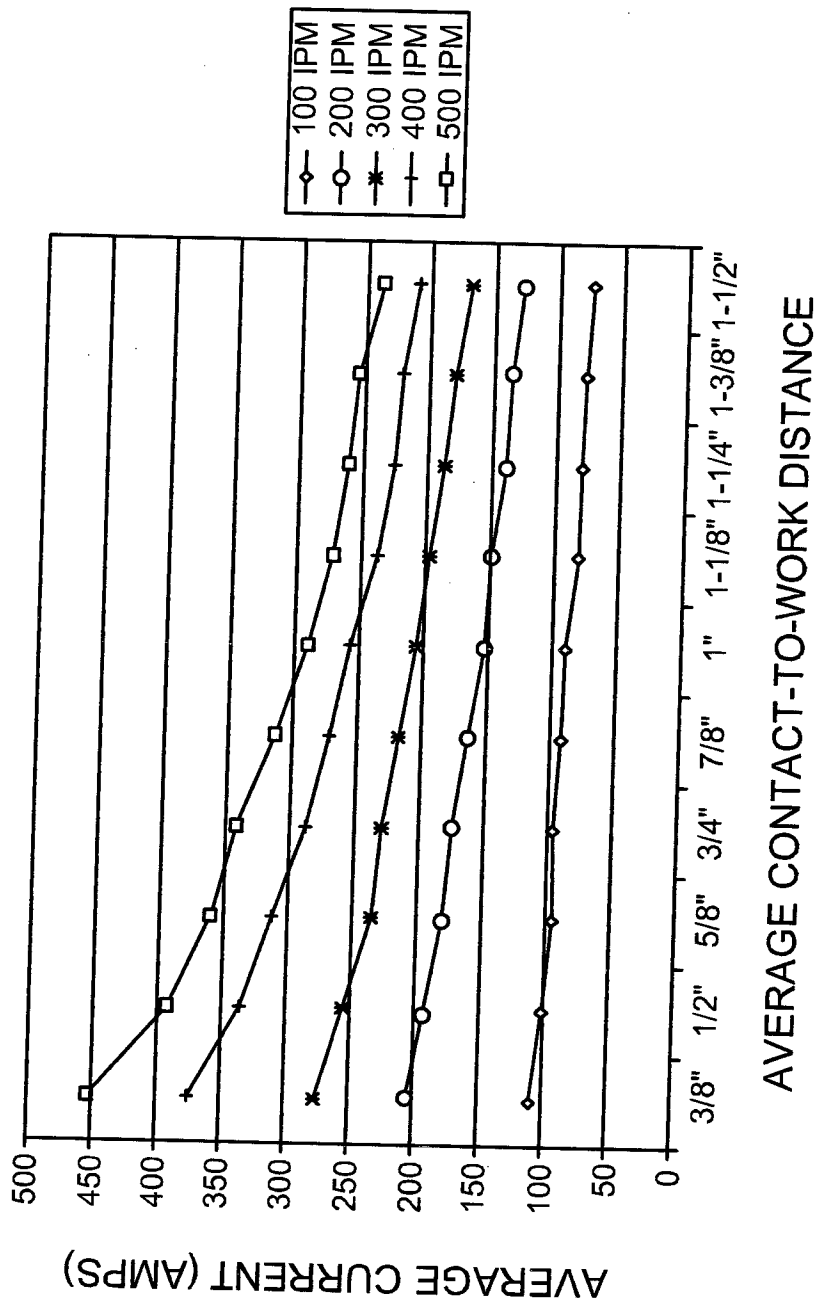


FIG. 10