

March 20, 1928.


1,663,120

C. COSPER

PAD HOLDER

Filed April 15, 1926

2 Sheets-Sheet 1

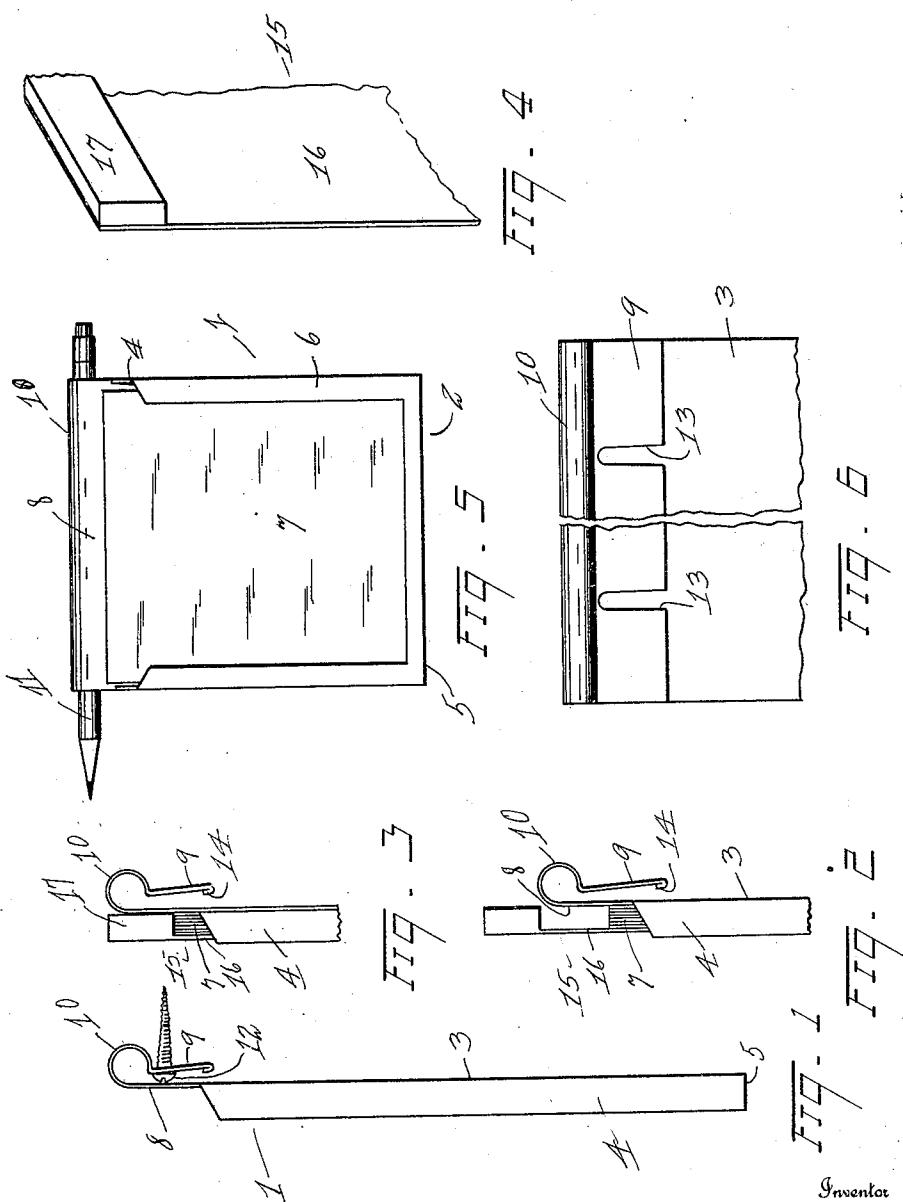

Inventor

Cecil Cosper

By

Elvange

Attorney

March 20, 1928.

1,663,120

C. COSPER

PAD HOLDER

Filed April 15, 1926

2 Sheets-Sheet 2

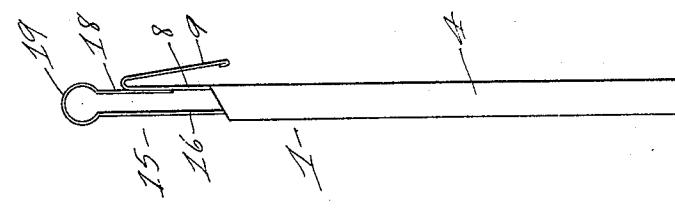


FIG. - 10

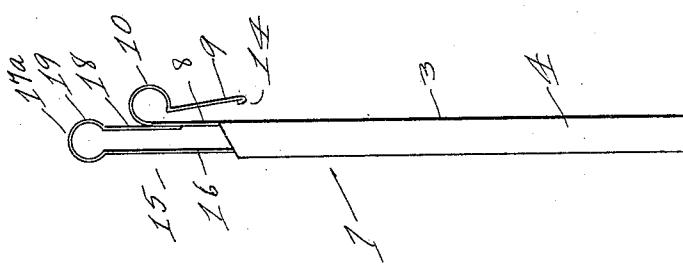


FIG. - 9

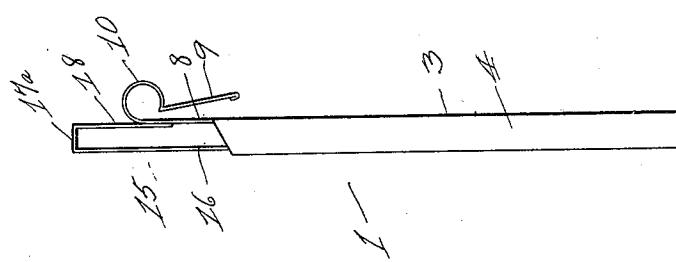


FIG. - 8

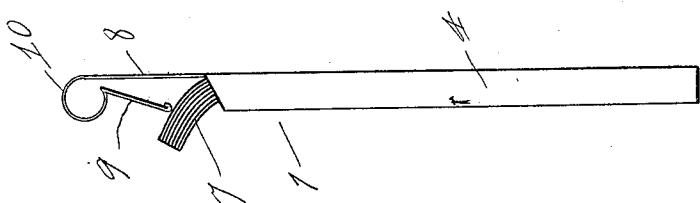


FIG. - 7

INVENTOR

Cecil Cosper
BY
E. George
ATTORNEY

Patented Mar. 20, 1928.

1,663,120

UNITED STATES PATENT OFFICE.

CECIL COSPER, OF WALLA WALLA, WASHINGTON.

PAD HOLDER.

Application filed April 15, 1926. Serial No. 102,155.

This invention relates to pad holders and covers and has as one of its objects to provide a pad holder that is more particularly adapted for auto-logging.

5 Another object of this invention is to provide a pad holder having a novel means of support.

A further object of this invention is to provide a pad holder combining a pencil 10 holder with its supporting means.

A further object of this invention is to provide a pad holder having a cover to protect the contents.

With these and other objects in view reference is now had to the accompanying drawings in which

Fig. 1 is a side elevation of the holder;

Fig. 2 is a side elevation of a fragment of the holder showing the cover partly inserted;

20 Fig. 3 is a side elevation of a fragment of the holder showing the cover fully inserted to place;

Fig. 4 is a perspective view of a fragment of the cover;

25 Fig. 5 is a front elevation of the holder with the cover removed;

Fig. 6 is a rear elevation of a fragment of the holder showing the supporting means: and

30 Figs. 7, 8, 9 and 10, show modified forms of the holder.

Having reference to the drawings like numerals refer to like parts throughout the several views and the numeral 1 refers to 35 the pad holder which consists of a body portion 2, comprising a back 3, sides 4, a bottom 5 and inwardly turned edges 6, the bottom, sides and edges being formed integral with said back and on the three sides respectively, of the body portion 2 in a manner to 40 stiffen the body and to accommodate a pad 7 or other uniformly cut papers.

In continuation of the back and extending upward therefrom is a portion 8, that projects above the sides 4 in a manner to afford thereto a certain flexibility, for a purpose to be explained, and this portion is bent backward upon itself to form a depending apron 9.

50 The bend in the portion 8 may be circular, as at 10, and designed to hold a pencil 11, in which case the circular part will be provided with a slight tension whereby the pencil will be secured against accidental removal, 55 and the apron 9, is bent outward and away from the back, and at a slight angle thereto,

to readily admit of screwheads 12, between the apron and the back and to frictionally secure said screwheads therebetween, slots 13 being provided in the apron for the purpose 60 and to receive the screws and thus support the holder.

The apron may have its lower edge turned inward if desired to form a raised portion 14, and this raised portion may be utilized to 65 act to prevent the apron becoming accidentally disengaged from the screws, by affording a stop against which they will strike even though the vibration of the car move the apron up on the screws against the friction 70 of the apron and the back.

Thus by providing the raised portion 14 on the apron, to form a stop, the stop will engage that part of the screw heads that projects over the edges of the slots, and the yielding nature of the apron will cause it to hug the heads of the screws, and thus direct the screws to contact the stop should a normal upward movement occur.

Hence should the apron assume the upward position (overcoming the resistance due to the yielding pressure of the apron against the screw heads in so doing) until the screws reach the lower extremity of the slots, the stop will interfere and prevent the 80 screw heads passing completely out of the slots, until the securing means thus formed is properly manipulated by sliding the holder upward and at the same time pressing the apron inward, to permit the passage of the 85 heads past the raised portion.

To prevent an undue amount of dust to come in contact with the sheets of the pad 7 a cover 15 is provided.

The cover consists preferably of a face 95 plate 16, designed for sliding reception in the inwardly turned edges 6 of the body, and may carry a block 17, or have a turned edge 17^a as shown in Figs. 8, 9 and 10, on one of its ends to yieldingly contact the portion 100 8 of the body.

While the cover may be constructed of paper, that would require a block 17 to cover the top of the pad as shown, it is obvious that a metal slide may be provided that may 105 be formed to provide a face 18 that is offset from the face plate to engage the portion 8, and in this case the formed portion may be made circular, as at 19, as and for the purpose described for the circle 10.

110 In use screws, or nails, or the like, are inserted in a convenient place to support

the holder, and the holder is then secured thereon by means of the slotted apron.

The pad is now inserted in the inwardly turned edges and the face plate of the cover 5 is inserted between the edges and the pad, and when in the closed position the block will rest against the portion 8, as above explained, and on the top of the pad.

The insertion of a pencil in the circle now 10 completes the assembly.

As the holder is primarily for automobile use, the pad (or sheets) is preferably ruled to provide for a log, and during travel the holder may be readily removed manually 15 from the screws as above explained, when it will form a substantial and convenient article upon which to write a log of travel, the cover obviously being partly removed for accessibility to the pad, and the pencil being 20 readily accessible for use.

As soon as the record is made the cover is replaced and the holder restored to its screws, and in this manner and by this means 25 a complete record may be kept of a trip, and the record maintained free of dust.

The design shown may also be used without a cover, the apron being on the reverse side for the purpose, and to bring the pad

against the side wall upon which it is hung, thereby covering the pad. 30

In this case the pad will be inserted in the manner shown in Fig. 7.

The portions 19 obviously will be used as a handle with which to withdraw the cover.

Having thus described my invention, I 35 claim:

1. In a pad holder, the combination with a body portion, of a back extended upward from the holder, the extended portion being provided with screw engaging slots and bent 40 back upon itself to form an apron, said apron being adapted to provide a yielding securing means for said holder.

2. In a pad holder, the combination with a body portion, and a detachable cover therefor, of a back extended upward from the holder, the extended portion being provided with screw engaging slots, and bent back upon itself to form an apron, an edge turned 45 on said apron and positioned to engage the screws under certain conditions, and said apron being adapted to provide a yielding securing means for said holder.

In testimony whereof I affix my signature.

CECIL COSPER.