

- [54] Title: HIGH CONSISTENCY PRESSURE SCREEN AND METHOD OF SEPARATING ACCEPTS AND REJECTS
- [75] Inventor (s): PETER E. LeBLANC, of Worthington, Massachusetts, U.S.A.
- [73] Assignee (s): BELOIT CORPORATION, of Beloit, Wisconsin, a corporation of Delaware, U. S. A.
- [22] Filed: June 19, 1986
- [21] Application Serial No: 33908

FOREIGN APPLICATION PRIORITY DATA

- [31] Number (s) : 746734
- [32] Date (s) : June 20, 1985
- [33] Country (ies) : U. S. A.
- [52] PH Class 209/273
- [51] Int. Class B01D 29/38
- [58] Field of Search 209/240; 209/273
- [56] Reference (s) Cited and/or Considered:
U. S. Pat. Nos. 4,855,038 8/1989 LeBlanc
4,676,903 6/1987 Lampenius

[57] A B S T R A C T

A high consistency pressure screen comprises a screen including a profiled inner surface and a rotor including a profiled outer surface rotating adjacent and spaced from the profiled screen to produce a positive-negative pulsation cycle of approximately 50% - 50%.

BAD ORIGINAL



26032

HIGH CONSISTENCY PRESSURE SCREEN
AND METHOD OF SEPARATING ACCEPTS
AND REJECTS

ABSTRACT

A high consistency pressure screen comprises a screen including a profiled inner surface and a rotor including a profiled outer surface rotating adjacent and spaced from the profiled screen to produce a positive-negative pulsation cycle of approximately 50% - 50%.

91 OCT 17 P2:25

ORIGINAL DOCUMENT
AND REPRODUCED FROM

26032
BACKGROUND OF THE INVENTION

Received BYE

'91 OCT 17 P2:25

ORIGINAL OF THE INVENTION
AND TECHNOLOGY INSTITUTE

1. Field of the Invention

The present invention relates to a method for separating accepts and rejects from a slurry of paper stock and to a high consistency pressure screen for carrying out the method.

2. Description of the Prior Art

In his U.S. Letters Patent No. 3,363,759

I. J. Clarke-Pounder discloses a screening device which utilizes a screen or basket having a smooth interior surface spaced from a rotor which has dense and/or projections on its outer surface for producing localized changes in volume in the screening zone. In his U.S. Letters Patent No. 3,437,204 Clarke-Pounder discloses a similar device in which the rejects are reduced by introducing dilution liquid into the material as it flows through the screening zone and across the screen.

26032

Jóseph A. Bolton III and Peter E. LeBlanc,
in their U.S. Letters Patent No. 3,726,401 also
disclose the use of a rotor having spaced pro-
jections in the form of bumps for creating a
5 pulsation during screening, namely alternate
positive screening pulses and negative screen-
cleaning pulses.

Ahlstrom Machinery Inc. of Glens Falls,
10 N. Y., produces "profile" screens for use in
pressure screen devices.

SUMMARY OF THE INVENTION

The primary object of the present invention
15 is to provide a method and apparatus for high
consistency pressure screening having low reject
rates and low power consumption with a minimum
fiber classification.

20 The above object is achieved, according to

26032

the present invention, by flowing a slurry of paper stock through a screening zone between a rotor and a screen and creating in the screening zone continuous cyclic positive and negative pulses each of which covers approximately 50% of a pulsation cycle. Typically, in a conventional screen, the pulsation cycle includes a very brief positive pulse, a somewhat longer negative pulse and, during 50% of the cycle, no pulse magnitude. Flowing slurry, now subjected to the 50 - 50 pulsation cycle is subjected to continuous volumetric changes in the screening zone. Screening is advantageously achieved by providing a profile screen and by further providing a rotor having a profiled surface. The profile surface of the rotor comprises a blunt leading surface facing in the direction of rotation of the rotor, followed by an arcuate surface which recedes from the screen and therefore

26032

increases the volume between the rotor and the screen. Advantageously, and as viewed from the end of the rotor, the rotor appears as a double or quadruple cam structure. In addition to creating continuous positive and negative pulses, the cams create great turbulence of the stock along the screen.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and advantages of the invention, its organization, construction and operation will be best understood from the following detailed description, taken in conjunction with the accompanying drawings, on which:

FIGURE 1 is a longitudinal sectional view of a pressure screen constructed in accordance with the present invention;

FIGURE 2 is a sectional view taken substantially along the line II - II of Figure 1;

26032

FIGURE 3 is a fragmentary sectional view particularly illustrating the relationship between the inner surface of the profile screen and the profile surface of the rotor, utilizing a first type of profile screen;

FIGURE 4 is a fragmentary sectional view, similar to that of Figure 3, showing the use of a second type of profile screen;

FIGURE 5 is a graphic representation of the pulsations measured in the pressure screen;

FIGURE 6 is a graphic illustration of the pressure drop verses the accept flow for a pressure screen constructed in accordance with the present invention; and

FIGURE 7 is a graphic illustration of the debris removal verses the percent of rejects by weight for a pressure screen constructed in accordance with the present invention.

26032

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figures 1 - 4, screening apparatus is generally illustrated at 10 as comprising a housing 12, a pair of end walls 14, 16 and an outer, generally cylindrical wall 18. A slurry of paper stock is pumped, under pressure, through an inlet conduit 20 and enters the housing through an opening 22 at one end and flows toward a rejects outlet 24 and an accepts outlet 26.

Mounted within the housing and in the path of the aforementioned flow is a profile screen 28 mounted to the inner surface of the housing by a pair of rings 30 which, with the housing wall 18 and the screen 28, form an accepts chamber 32.

A rotor 34 is mounted on a drive shaft 36 driven by a drive 38. The rotor 34 comprises

26032

a hollow cylinder 40 which is connected to a member 42 keyed to the shaft 36, as indicated at 44. The rotor 34 further comprises end plates 46 connecting an outer wall 48 to the hollow cylinder 40 and sealing the ends of the rotor with respect to the flow of slurry.

As best seen in Figure 2, the rotor 34 comprises a cam-like configuration including a pair of blunt leading edges 50 facing in the direction of rotation 52, respectively followed by arcuate sections 54. In a particular construction, the arcuate sections 54 have the same radius of curvature with the respective centers of the radii diametrically offset with respect to the axis of rotation. Although only two of such semicylindrical structures have been shown, a plurality may be provided for very large pressure screens. As used in the specification and claims hereof, "blunt"

26032

when used in reference to the rotor shall mean a surface so shaped as to be capable of capturing a certain volume of stock and accelerating it up to rotor velocity. Thus, for example, the leading edges 50 could be forwardly inclined with respect to the direction of rotation, or could be concave in shape.

Referring to Figures 3 and 4, two different profiled surfaces are illustrated for the screen, namely the profile 56 in Figure 3 and the profile 58 in Figure 4. Normally, the profile is only provided on the inner surface of the screen, and other profiles than those shown could also be used.

After realizing the pulsation phenomenon set forth above, investigations were undertaken to determine the cause thereof, including the

26032

geometric causes, the dynamic causes and the stock causes. In the area of geometric causes, the sharp positive pressure pulse, the area of negative and positive pressure pulses, the condition of the screen plate surface and the rotor-screen clearance were investigated. As dynamic causes, the surface speed of the rotor, the pulse frequency and the pressure drops over the screen were considered. The stock causes include consistency, temperature and type of fiber.

Investigations were undertaken using milk carton stock at 4.5% consistency. A pump capacity of about 1200 GPM was attained utilizing a 0.078" perforate screen and a 0.055" perforate screen with more than 300 T/D processed using 25 HP. It was determined that at 5.5% rejects by weight, a debris removal of 52% was attached using the 0.078" screen and a

26032

debris removal of 71% with the 0.055" screen.
The inlet to accept freeness dropped an
average of 8 points for the 0.078" screen and
increased by 10 points on the 0.55" screen.
5 The screens were stable on all tests and can
easily screen milk carton stock.

In carrying out the aforementioned test,
milk carton stock was pulped in a 1000#
10 Tridyne with 1.5% sodium hypochlorite for approx-
imately 30 minutes. The stock was extracted
through 1/8" perforations in a pulper grate
at 5.01% consistency. No debris was added to
the stock; however, there were many small
15 flakes and plastics in the pulp. In essence,
this pulp was prescreened by the 1/8" per-
forations in the pulper.

With the rotor shown in Figure 2, the
20 0.078" screen and the 0.055" screen were used

26032

and the rotor was run at a constant 750 RPM.
The screen system was initially filled with
water which diluted the pulp from 5% to 4.5%.
A series of flows were selected so that a
5 pressure drop verses flow curve could be
generated. Reject flow was held to approximately 10% of the accepts for these tests.
Samples of the inlet, accept and reject stock
were taken at nominal mill production rates
10 in one test and at pump capacity in a second
test. In a third test, pump capacity was
also utilized, but at a 5% rejects flow.

The following schedules of Table 1 and 2
15 show the data gathered during the aforementioned
trials.

TABLE I

Basket:		.078 Perf.														
Material:		Milk Carton														
Consistency:		4.4%														
Reject Rate:		10%														
Trial No.	Rotor Speed RPM	Motor Load BHP	Pressure PSI		Δ P	Flow GPM		Consistency %		Throughput T/D		CSF Freeness		% Debris		% Rejects by Weight
			In	Acc		Acc	Rej	In	Acc	Rej	In	Acc	Rej	In	Acc	
1	750	28.6	6.5	4.8	1.7	330	55	385	—	—	104.2	—	—	—	—	—
	750	28.3	8.5	6.5	2	423	49	472	4.51	4.35	4.70	—	—	—	—	—
	750	28.0	11.2	8.7	2.5	540	55	595	—	—	—	127.7	110.4	13.8	1.32	7.85
	750	27.8	13.9	11.1	2.8	625	64	689	—	—	—	161.0	—	—	—	—
	750	27.3	17.2	13.7	3.5	710	73	783	—	—	—	186.4	—	—	—	—
	750	26.6	17.3	13.1	4.2	853	75	925	—	—	—	211.9	—	—	—	—
2	750	26.2	19.6	14.8	4.8	920	90	1010	—	—	250.3	—	—	—	—	—
	750	25.7	22.1	16.7	5.4	1010	97	1107	—	—	273.3	—	—	—	—	—
	750	25.0	26.9	20.3	6.6	1165	109	1274	4.47	4.34	5.34	344.7	303.4	34.9	.68	2.33
3	750	25.0	27.9	21.1	6.8	1148	54	1202	4.45	4.11	5.72	325.3	283.0	18.5	.52	1.79
Debris Removal																
Reject Rate																
Trial 1 = 64.4%																
Trial 2 = 67.6%																
Trial 3 = 51.9%																

26032

26032

Table 1 lists the data for the 0.078" perforate screen. It should be noted that as flow increases, the motor load decreases. This is caused primarily by a higher inlet stock velocity which decreases the relative rotor to stock velocities and requires less power. At the high flows, the power required was about 0.08 HPD/Acc. Ton. A small change is noted in the consistencies at the 10% rejects rate and a larger change at the 5% rejects rate. The freeness change did not appear to be affected by the reject rate and is small although there is a change from the inlet to the accepts.

TABLE 2

Rotor Speed RPM	Motor Load BHP	Pressure PSI		ΔP	Flow GPM		Consistency %			Throughput T/D			CSF Freeness			% Debris		% Rejects by Weight
		In	Acc		Acc	Rej	Inlet	In	Acc	Rej	In	Acc	Rej	In	Acc	In	Acc	
750	29.2	5.0	3.4	1.6	360	53	413	—	—	—	105.3	—	—	—	—	—	—	—
750	28.7	6.9	4.6	2.3	480	53	533	—	—	—	135.9	—	—	—	—	—	—	—
750	28.0	8.8	6.3	2.5	550	55	605	4.25	4.25	2.48	154.3	140.3	8.2	405	415	.62	.18	5.4
750	27.6	10.6	7.7	2.9	632	60	692	—	—	—	176.5	—	—	—	—	—	—	—
750	26.6	14.2	10.5	3.7	750 ^a	76	826	—	—	—	210.6	—	—	—	—	—	—	—
750	25.8	17.0	12.5	4.5	845	82	927	—	—	—	236.4	—	—	—	—	—	—	—
750	25.0	19.6	14.4	5.2	918	85	1004	—	—	—	256.0	—	—	—	—	—	—	—
750	24.2	22.6	16.7	5.9	1006	96	1102	—	—	—	281.0	—	—	—	—	—	—	—
750	23.6	25.1	18.2	6.9	1063	98	1161	—	—	—	296.0	—	—	—	—	—	—	—
750	23.0	26.0	18.0	8.0	1090	90	1180	—	—	—	300.9	—	—	—	—	—	—	—

s Removal

4 = 70.96% @ 5.4% Reject Rate

26032

26032

Table 2 lists the data for the 0.055" perforate screen. The power is essentially the same as above at less than 0.1 HPD/T at high flows. The freeness change with this screen illustrates the accept CFS higher than the feed with the reject CFS lower than the feed. This is normal for smaller perforations, but the effects are magnified by the large plastics in the reject stream, which are sufficiently large to drop the freeness and sufficiently light to change the consistency.

Referring to Figure 6, the pressure drop verses the accept flow is illustrated for both screens. The upper limit on both screens was the pump capacity and not the screen. The 0.055" curve is almost at the maximum while the 0.078" curve shows that additional capacity is available.

26032

Referring to Figure 7, the debris removal for both screens is illustrated with respect to the percent rejects by weight. As shown, the 0.055" screen provided better debris removal than the 0.078" screen. At a reject rate of 5.5% rejects by weight, the debris removal was 52% for the 0.078" screen and was 71% for the 0.055" screen.

The debris content was measured using an image analyzer. Four one gram view sheets were made from each pulp sample. The analyzer was set to count as large a section as possible of the sheet, which amounted to about 80% of the sheet. Sensitivity was set such that the particles which were visible to the eye were counted. The magnification amounted to about 1.4x to achieve the visual to analyzer correlation. The results of these tests are tabulated below in Table 3 showing the debris area measured

26032

for each inlet, accept and reject sample.
The debris removal is calculated from the
equation.

5 % Debris Removal = $1 - \frac{\text{Accept Debris}}{\text{Rejects Debris}} \times 100.$

TABLE 3

10

	Test 1	Test 2	Test 3	Test 4
IN	0.01318	0.00681	0.00512	0.00620
ACC	0.00473	0.00222	0.00251	0.00182
REJ	0.02845	0.02324	0.01786	0.00620
% DR	64.1	67	51	70.6

15

20

From these tests and observations, a
theory has been developed on why the rotor and
screen as described herein operate superiorly to
other screen apparatus known in the art.

26032

Previous lobe screens, foil screens and the like have created positive pulses while moving through the stock without significantly introducing turbulent energy into the stock. There is minimal stock fluidization generated in these designs. The blunt leading edges 50 in the present invention move through the stock, each capturing a certain volume of stock and accelerating it in the tangential direction of the rotor up to rotor speed. At this high velocity, stock moves past the profile screen 28, as significant turbulence is generated along the cylinder surface, highly fluidizing the stock. This high fluidization prevents agglomeration, floccing or matting of the individual fibers in the stock, and enables the screen to function at much higher consistencies than conventional screens. When floccing or agglomeration occurs, the individual fibers cannot pass through the screen

26032

cylinder holes, and for this reason, screening previously has been done at much lower consistencies.

5 As mentioned previously herein, during one cycle approximately 50% of the cycle is a positive pulse, and 50% a negative pulse. This is substantially different from conventional screens which have periods of
10 positive and negative pulse, but also substantial periods of zero pulse. The long duration negative pulse in the present invention creates a back flow or flushing through the screen plate. Because of the
15 design of the profiled screens, it is much more difficult for the fibers to pass in the reverse direction than in the screening direction of the positive pulse. Additionally, on the outside of the screen basket, there is
20 very little turbulence when compared to the

26032

turbulence generated on the inside of the screen cylinder by the blunt leading edge during the positive pulse. Therefore, during the period of negative pulse, the back flow from the accept side to the inlet side of the screen is primarily flow of water only. The stock on the accept side of the screen tends to form a mat on the accept side, and therefore there is merely a dewatering function. This theory has been substantiated by the test findings that the accepts' consistency is generally at least slightly higher than the inlet consistency, and the reject consistency is lower than the inlet consistency. Therefore, the accepts are dewatered to a certain extent, most likely during the negative pulse phase of each cycle. Test have also indicated that the smaller the perforations on the screen, the greater the dewatering phenomenon. This can be explained

26032

by the poor mat formation in the large perforation screens which allow accepts fiber to flow back with the water during the negative pulse.

5

Prior to the present invention, conventional screening was performed at about 2% consistency with some screens, though less efficient, operating at about 4% consistency. The present screen has operated at 4%, 5% and 6% consistency without any decline in the debris removal efficiency and without an increase in the reject rate. In all other known screens as consistency is increased, the debris removal efficiency is decreased and the reject rate increases. In the present screen, increasing consistency has not coincided with decreased efficiency and increased reject rate. This result can be explained in the present screen by the fact that the blunt

10

15

20

26032

leading edge of the rotor creates greater
turbulence and fluidization of the stock
thereby allowing stock to flow through the
plate at high consistency. During the
5 negative pulse phase, the back flush or
dewatering dilutes the stock within the
screen thereby eliminating the normal
thickening of the screen zone stock and the
rejects which occurs in other screens.

10

Yet another advantage achieved by the
present invention is that the rotor can be
operated at greater clearance from the
screen than other blade or foil type screens.
15 Junk or debris contained in the stock will not
wedge between the rotor and screen, which
can be a problem in other types of screens.

Although I have described my invention by
20 reference to particular illustrative embodiments

260 32

thereof and with reference to specific test
results, many changes and modifications of
the invention may become apparent to those
skilled in the art without departing from
5 the spirit and scope of the invention. I
therefore intend to include within the patent
warranted hereon all such changes and
modifications as may reasonably and properly
be included within the scope of my contri-
10 bution to the art.

'91 OCT 17 P2:25

Received By: *[Signature]*

26032

I CLAIM:

1. Pressure screen apparatus comprising:
 - a housing including an inlet for
receiving a slurry of paper stock,
5 an accepts outlet and a rejects
outlet;
 - a hollow cylindrical screen in said
housing including a profiled inner
surface and an outer surface;
 - 10 mounting means mounting said screen
to the interior of said housing
and defining an accepts chamber
between said screen outer surface
and said housing which is in commu-
15 nication with said accepts outlet
and is sealed from said inlet so
that said inlet communicates with
said accepts outlet via said screen
and said accepts chamber;
 - 20 drive means including a rotary output;

260 32

5 a rotor connected to said rotary output
and mounted within and spaced from
said screen between said inlet and
said rejects outlet, said rotor com-
prising outer wall means including
an outer surface shaped to define a
continuously varying space from said
screen inner surface when said rotor
is rotated; and
10 a blunt lead section facing in the
direction of rotation, said blunt
lead section providing a stock
capturing surface for accelerating
a volume of stock substantially to
15 rotor velocity.

2. The pressure screen apparatus of claim 1,
wherein said outer surface of said rotor
comprises:
20 first and second semicylindrical sections

26032

each including an elongate first edge
and an elongate second edge, said
lead section connecting said elongate
first edges; and
5 a second blunt lead section connecting
said elongate second edges.

3. The pressure screen apparatus of claim 2,
wherein said rotor further comprises:
10 a hollow body;
end plates mounting said hollow body within
said outer wall concentric with the axis
of rotation and sealing said outer wall
means;
15 a drive shaft within said hollow body and
extending through one of said end plates;
and
a drive connection connecting said shaft
to said hollow body.

20

26032

4. In a pressure screen of the type in which a slurry of paper stock is fed through an inlet and towards an accepts outlet, through a profile screen and towards a rejects outlet
5 between the screen and a rotor, the improvement wherein said rotor comprises:

an elongate generally cylindrical body including a plurality of arcuate sections radially offset from one
10 another; and

a plurality of members connecting said sections and defining a plurality of blunt lead surfaces with respect to the direction of rotation, said blunt
15 lead surfaces defining means for capturing stock and accelerating it to rotor velocity.

5. Pressure screen apparatus comprising:
20 a housing including an inlet for receiving

26032

a slurry of paper stock, an accepts
outlet, and a rejects outlet;
a hollow cylindrical profile screen
mounted in and sealed to said housing
5 adjacent said accepts outlet between
said inlet and said rejects outlet;
drive means; and
a rotor connected to said drive means
and mounted within said screen spaced
10 from the inner surface of said screen
and including blunt surface means on
the periphery of said rotor facing
in the direction of rotation for
capturing and accelerating stock to
15 rotor velocity and said periphery of
said rotor effective during rotation
to continuously vary the rotor-
screen spacing about the inner surface
of said screen.

20

26032

6. A method for separating accepts and rejects from a slurry of paper stock, comprising the steps of:

5 flowing of slurry of paper stock between
 a rotating rotor and a profiled screen,
 the accepts passing through the screen
 and the rejects passing along the
 screen and rotor; and
10 contemporaneously changing the spacing
 between the outer surface of the
 rotor and the inner surface of the
 screen and increasing the velocity
 of the slurry up to rotor velocity
 to increase turbulence and fluidi-
15 zation of the stock and a high con-
 sistency flow thereof through the
 screen.

20 7. The method of claim 6, wherein the step
 of changing the spacing is further defined as:

26032

1 cyclically changing the spacing between
2 the outer surface of the rotor and
3 the inner surface of the screen over
4 the entire length of the rotor.

* * * * *

PETER E. LeBLANC
Inventor

26032

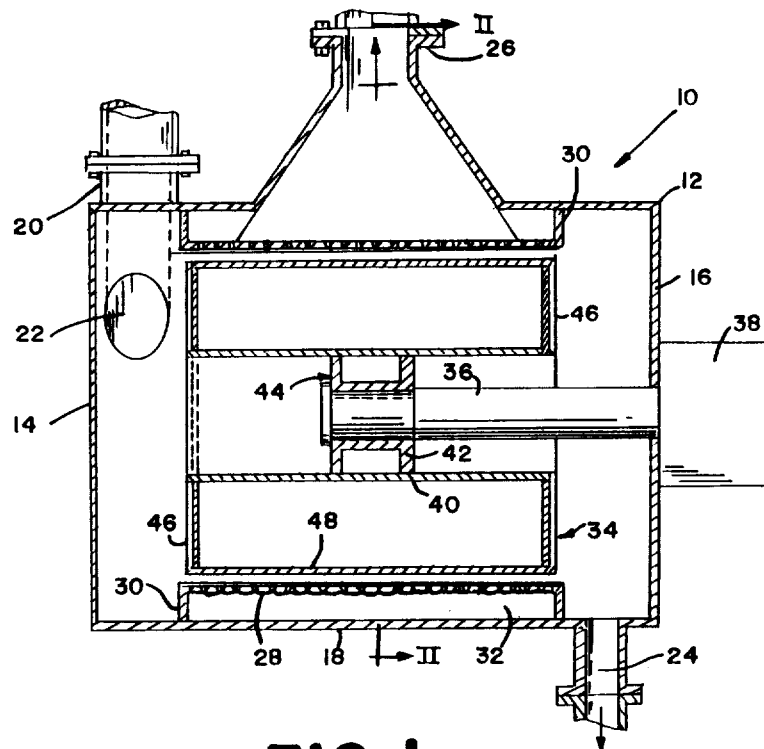


FIG. 1

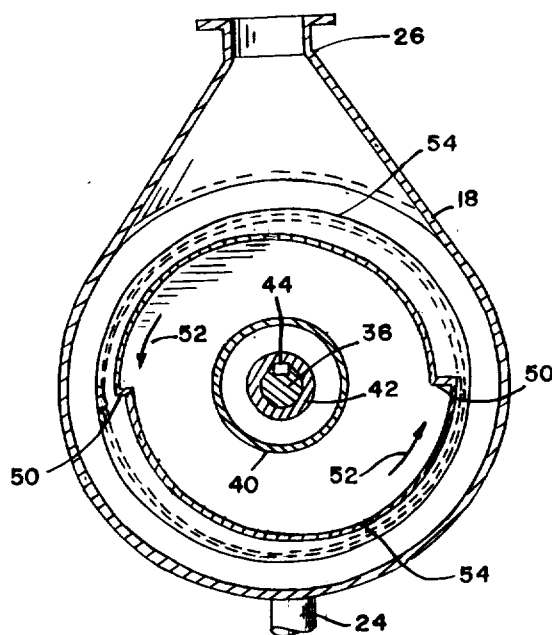


FIG. 2

PETER E. LEBLANC
INVENTOR
POBLADOR & ASSOCIATES
By: *[Signature]*
ATTORNEYS

26032

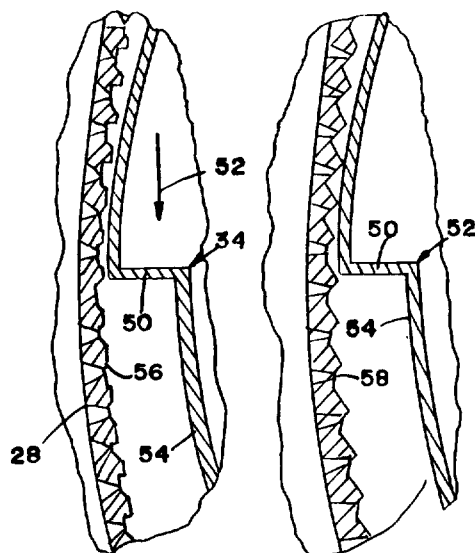


FIG. 3

FIG. 4

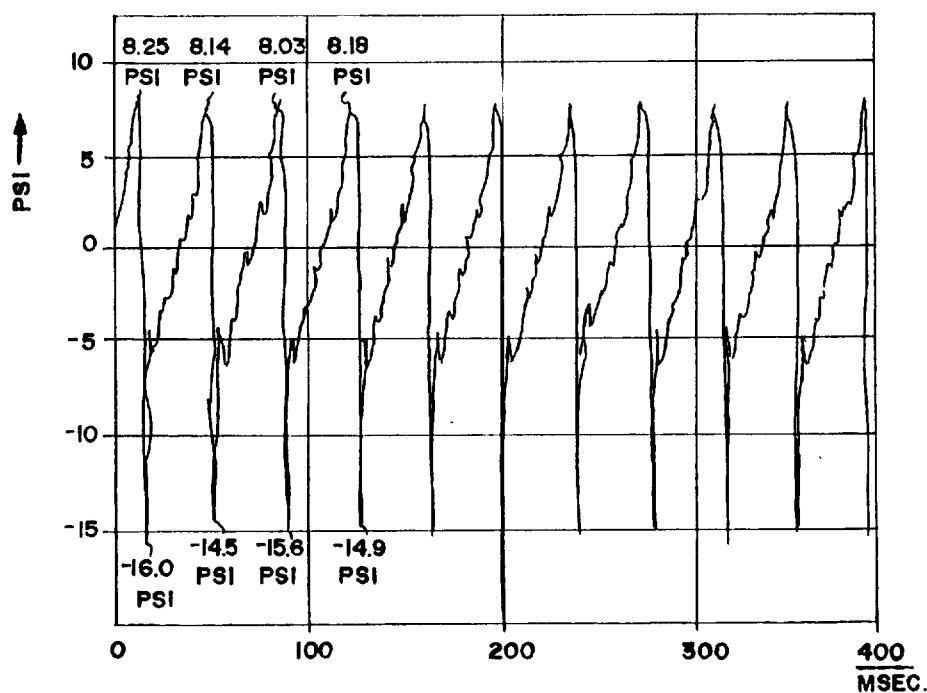



FIG. 5

PETER E. LABLANC
INVENTOR
POBLADOR AZADA & ASSOCIATES
By: 
ATTORNEYS

26032

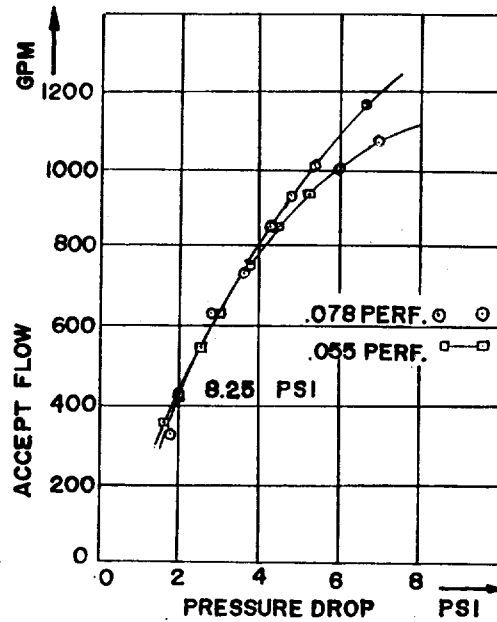


FIG. 6

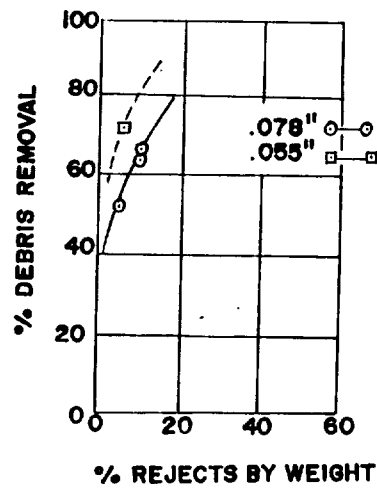


FIG. 7

PETER E. LEBLANC
INVENTOR
POBLADOR AZAM & ASSOCIATES
By: 
ATTORNEYS