



US 20060277860A1

(19) **United States**

(12) **Patent Application Publication**
Spinelli

(10) **Pub. No.: US 2006/0277860 A1**

(43) **Pub. Date: Dec. 14, 2006**

(54) **EXPANDING DEVICES AND STRUCTURES AND METHODS THEREFORE**

Publication Classification

(75) Inventor: **Thomas Spinelli**, East Northport, NY (US)

(51) **Int. Cl.**
E04B 1/00 (2006.01)

(52) **U.S. Cl.** **52/741.1**

Correspondence Address:
Thomas Spinelli
2 Sipala Court
East Northport, NY 11731 (US)


(57) **ABSTRACT**

(73) Assignee: **Omnitek Partners LLC**

A method for forming a structure is provided. The method including: forming at least one expandable member used in constructing the structure. The forming including: expanding a covering to define a cavity; and expanding foam in the cavity in an expansion direction to expand the covering into a predetermined shape.

(21) Appl. No.: **11/150,546**

(22) Filed: **Jun. 11, 2005**

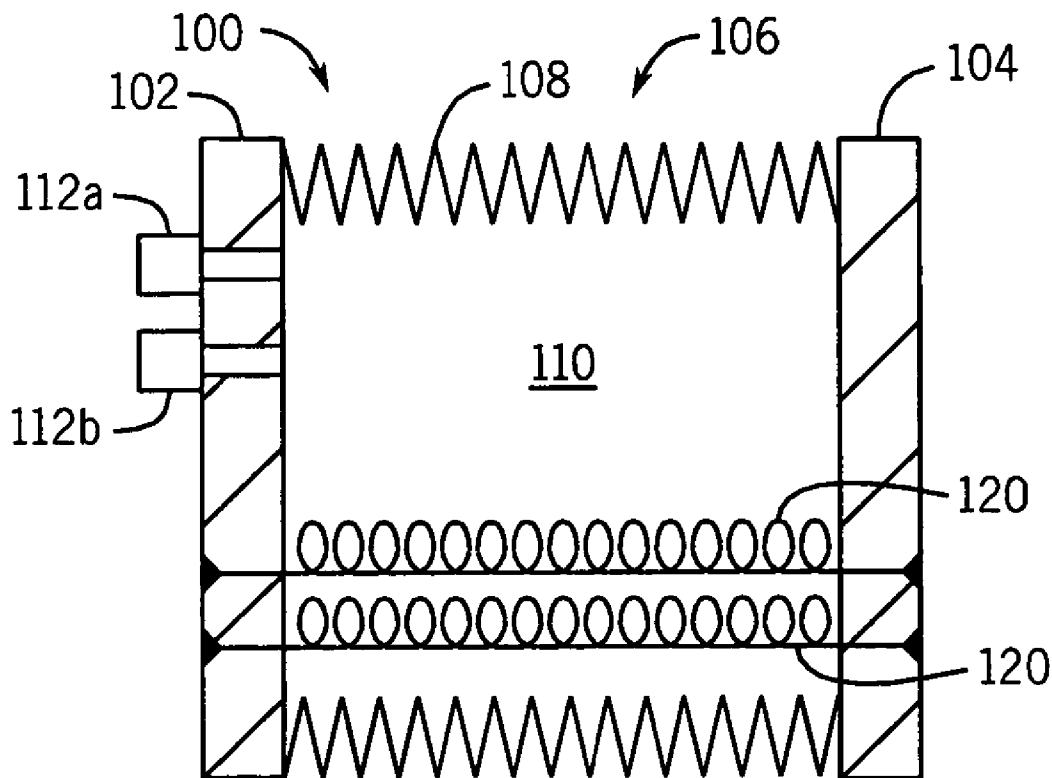

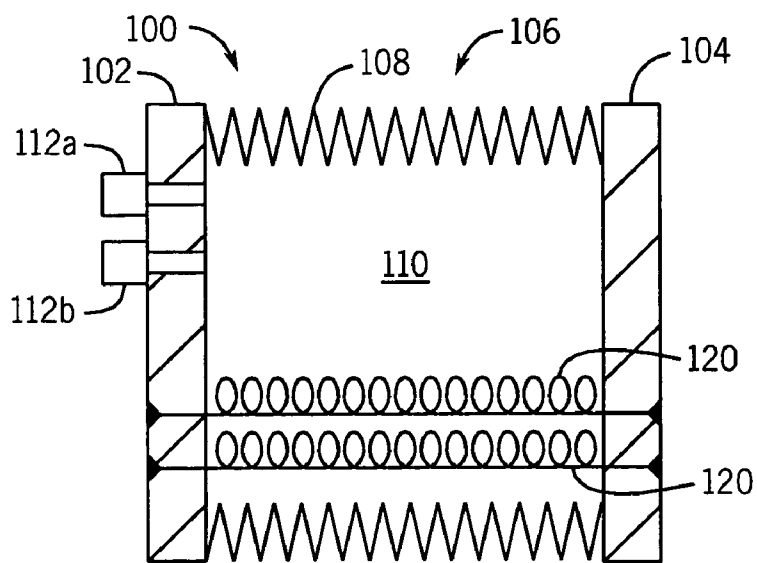


FIG. 1a

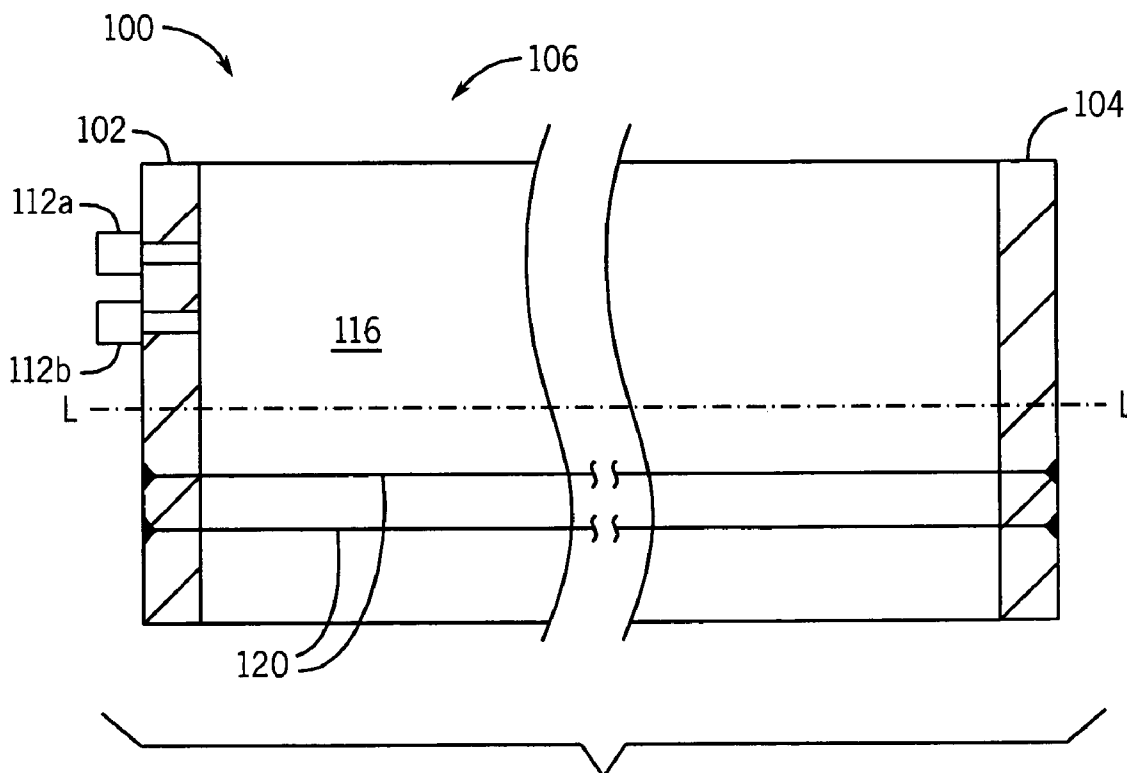


FIG. 1b

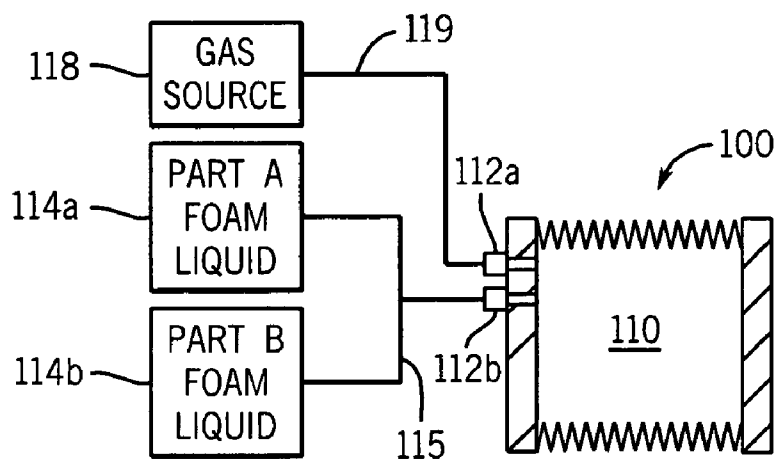


FIG. 2

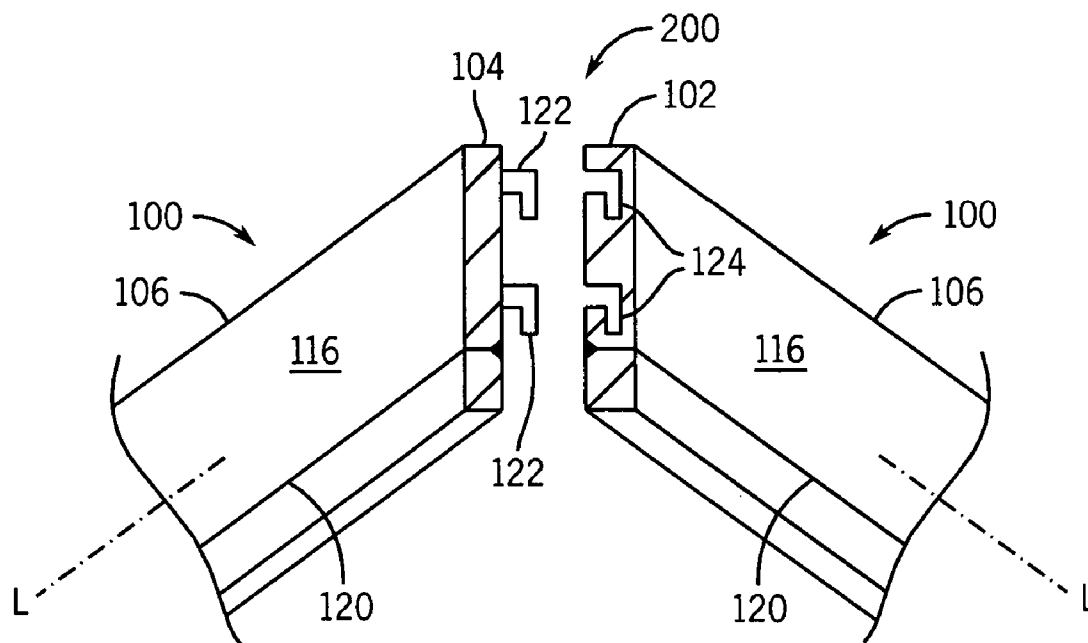


FIG. 3

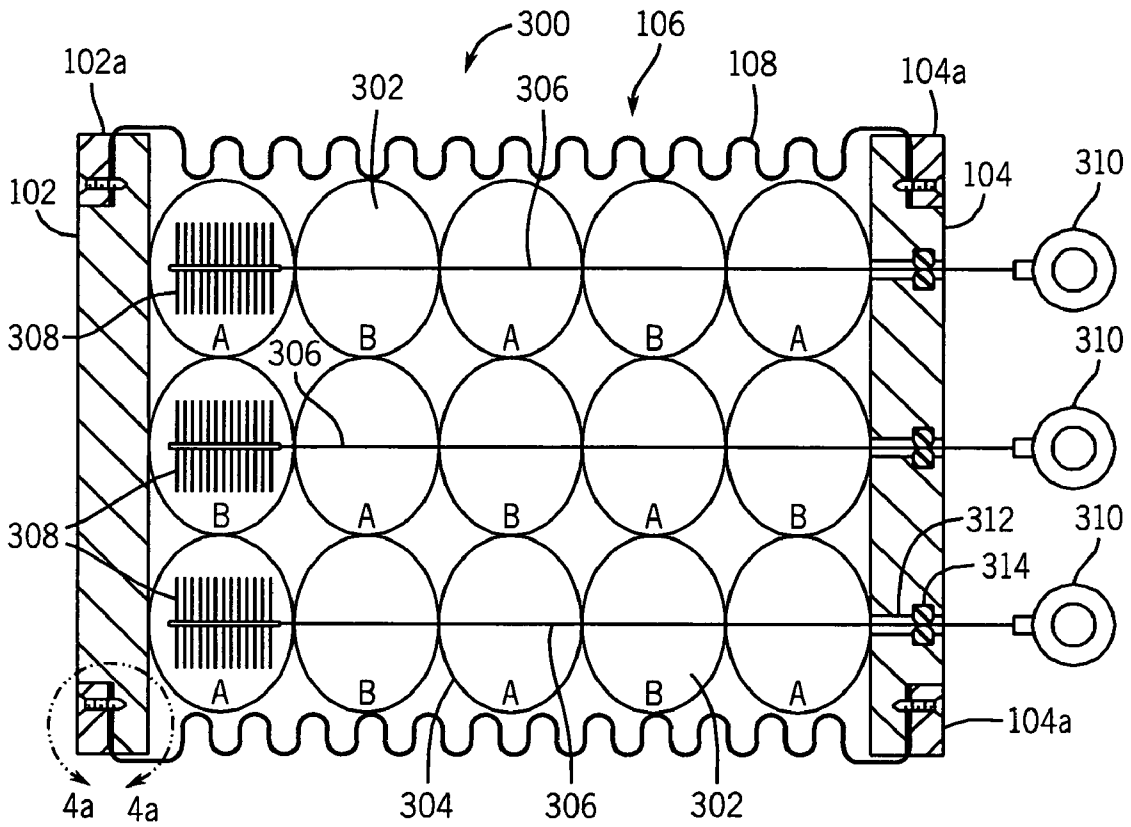


FIG. 4

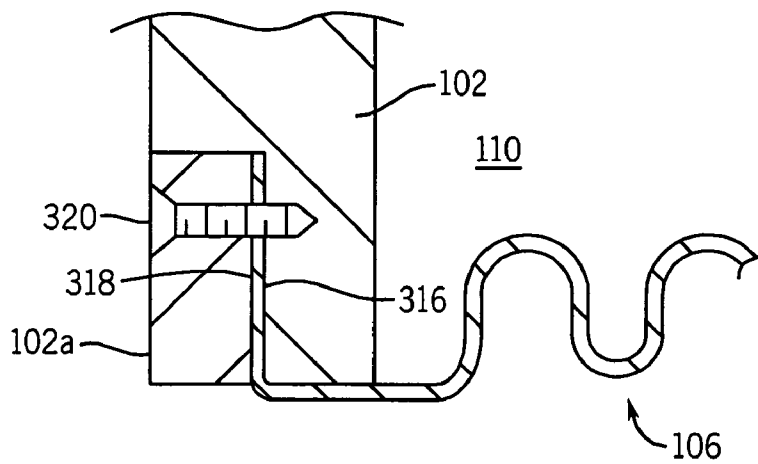


FIG. 4a

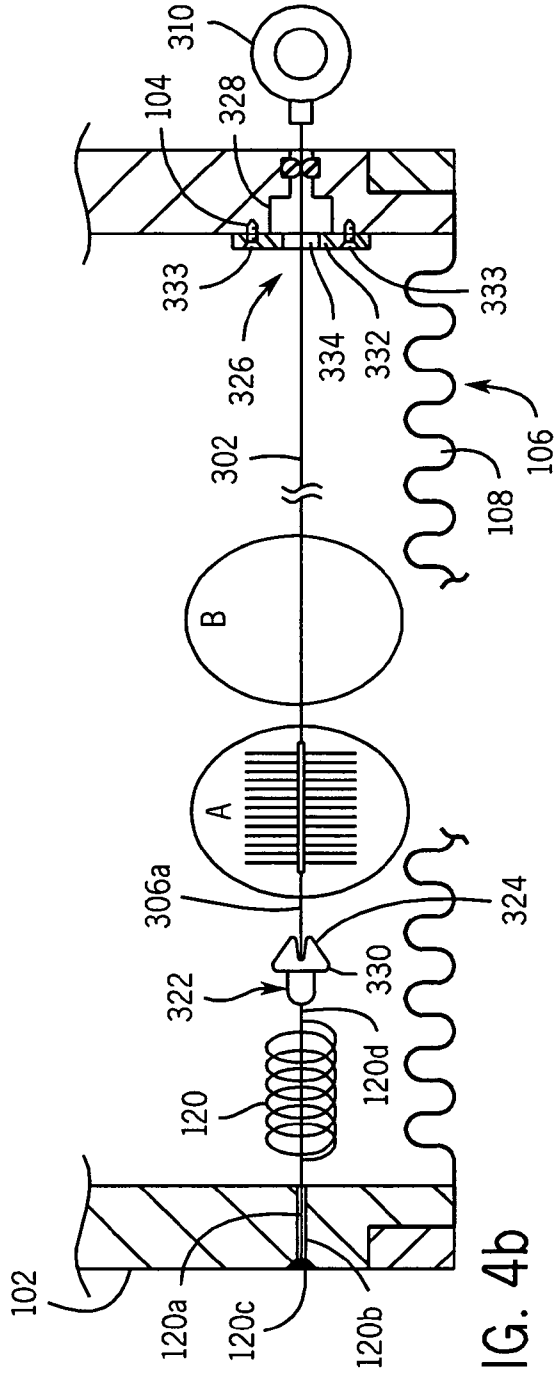


FIG. 4b

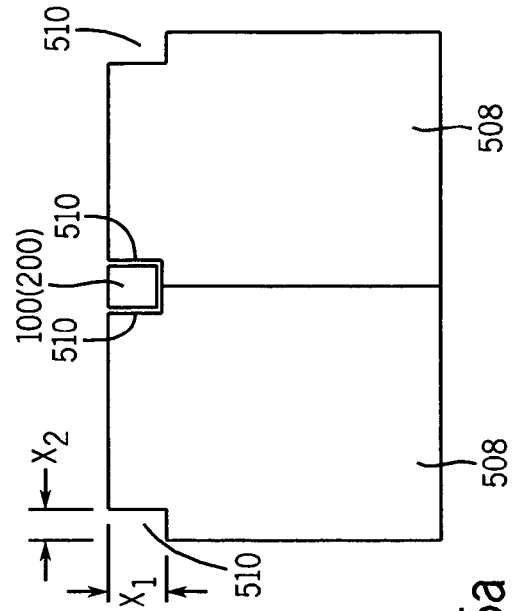


FIG. 5a

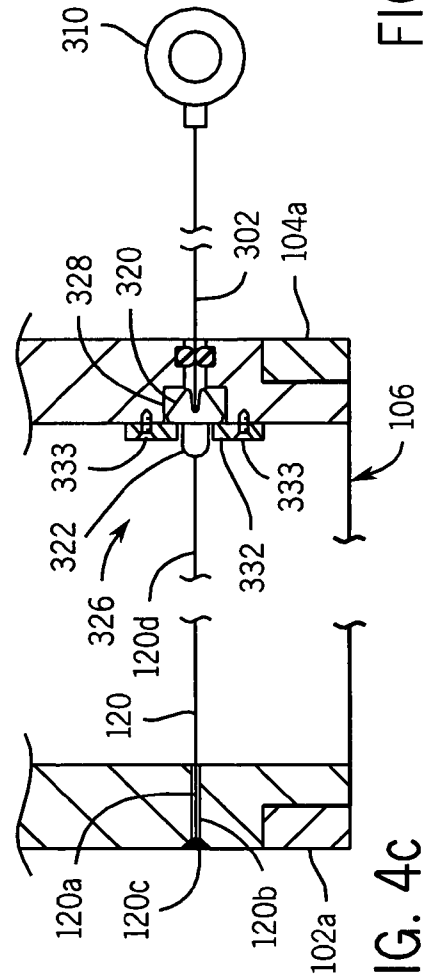


FIG. 4c

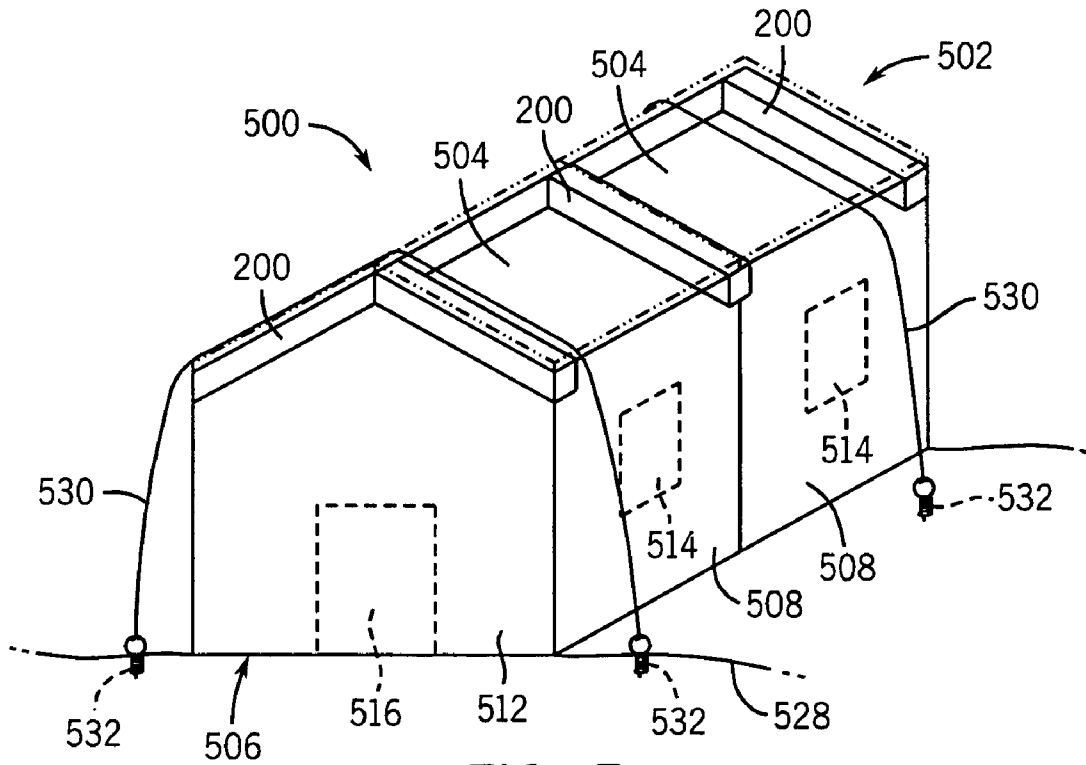


FIG. 5

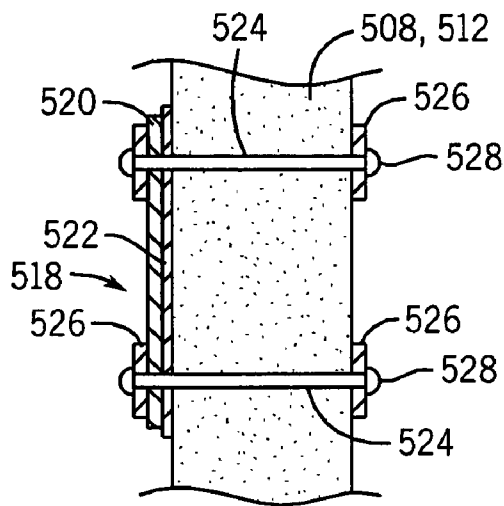


FIG. 5b

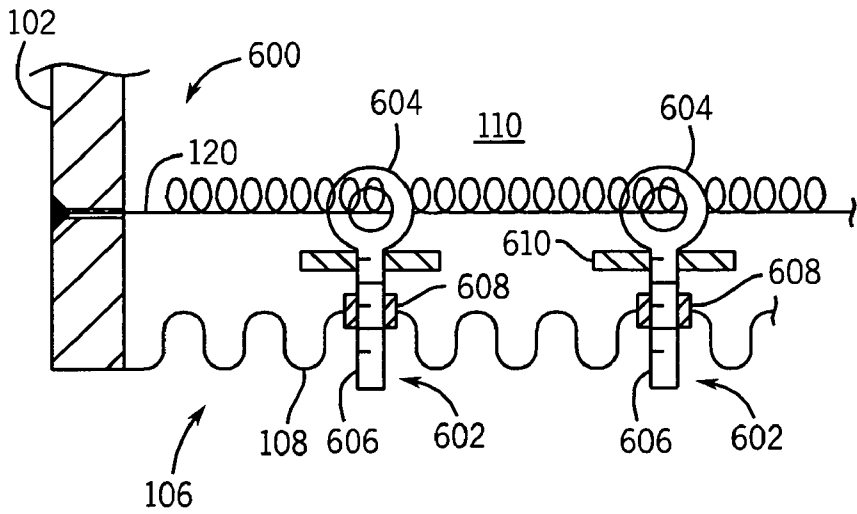


FIG. 5c

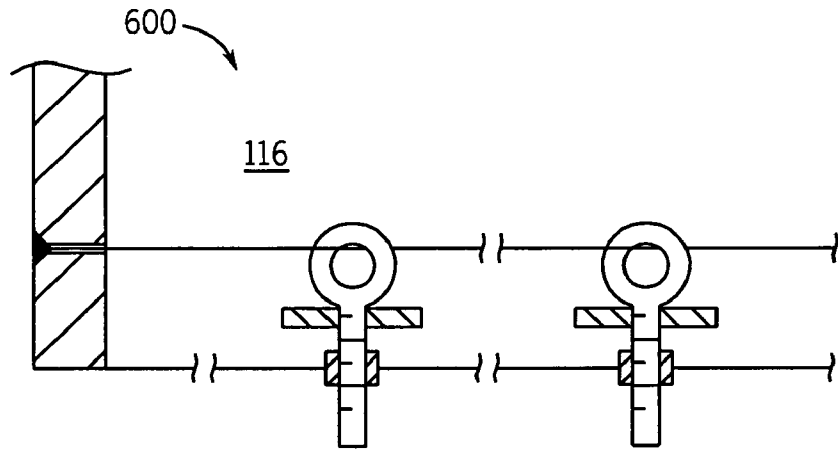


FIG. 5d

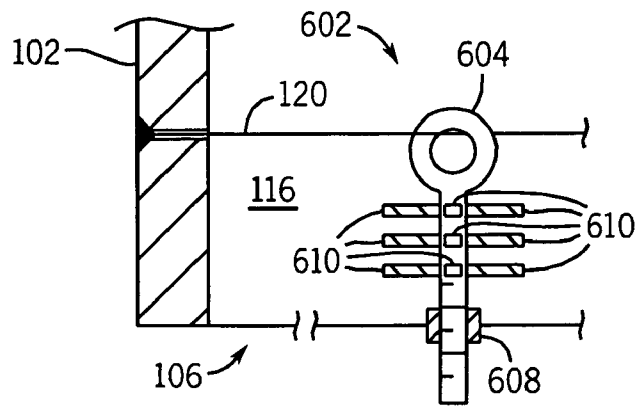


FIG. 5e

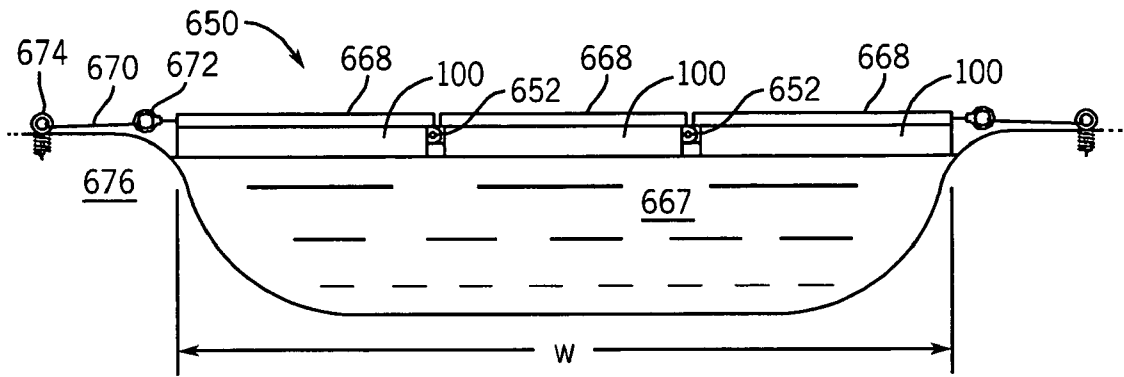


FIG. 6

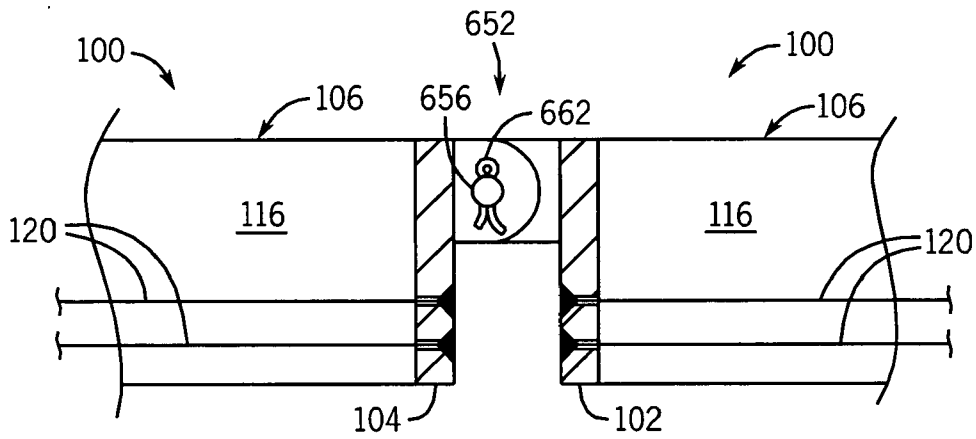


FIG. 6a

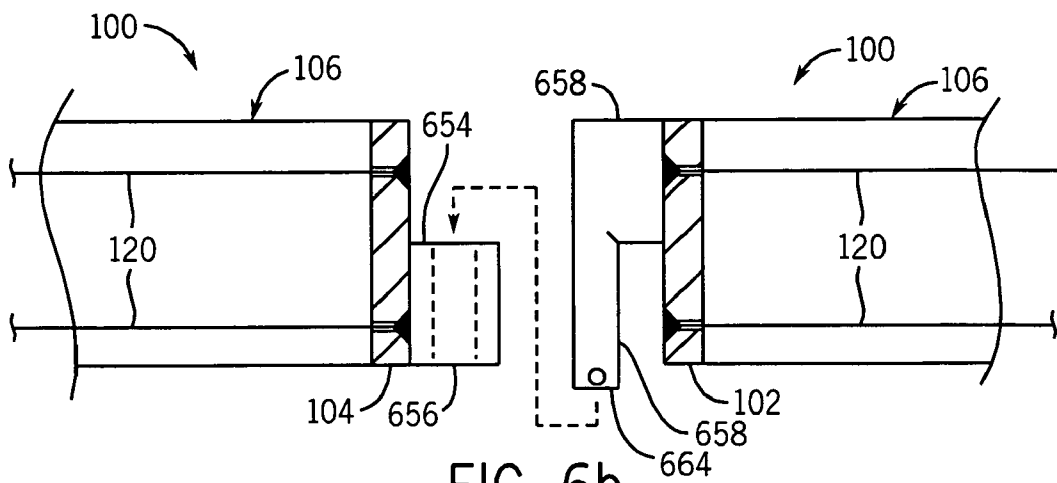


FIG. 6b

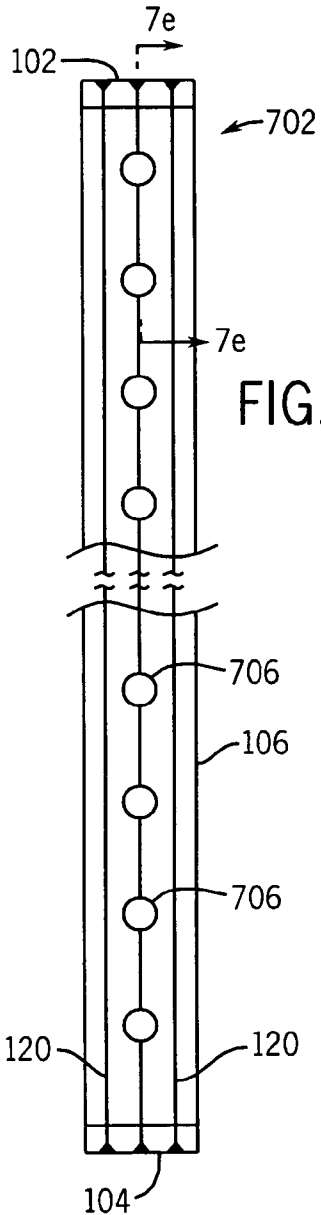


FIG. 7a

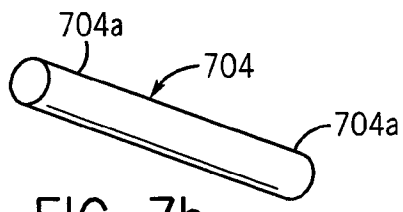


FIG. 7b

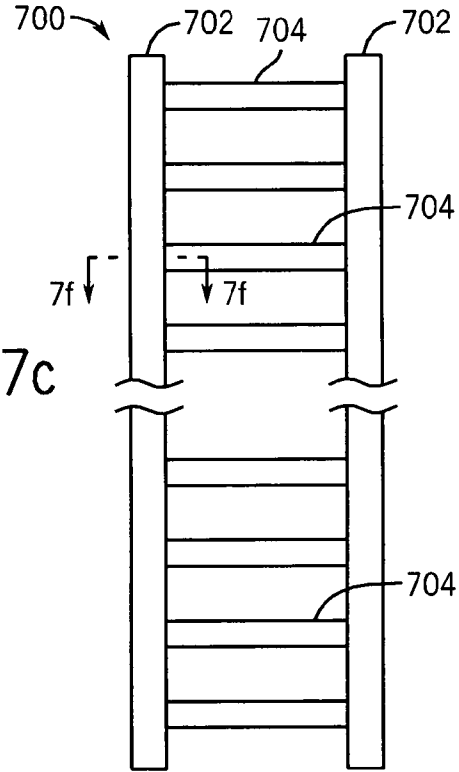


FIG. 7c

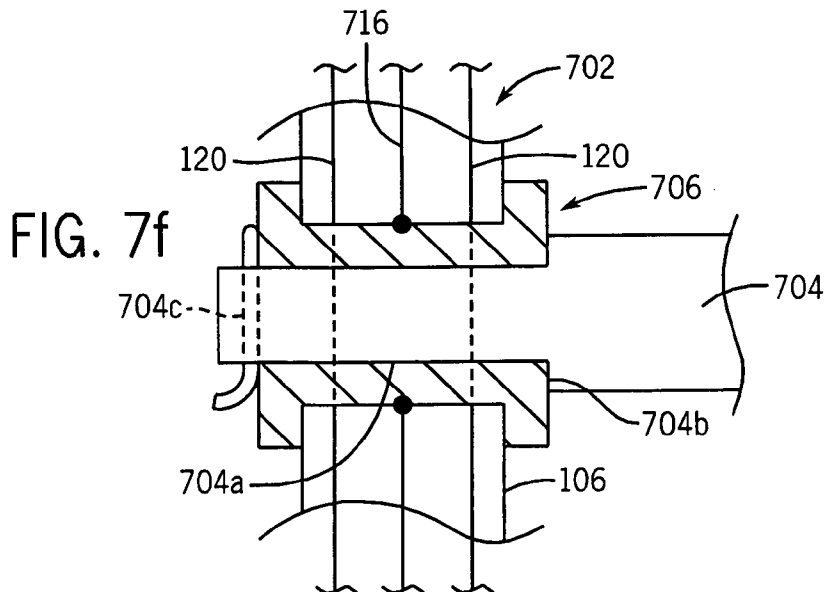


FIG. 7f

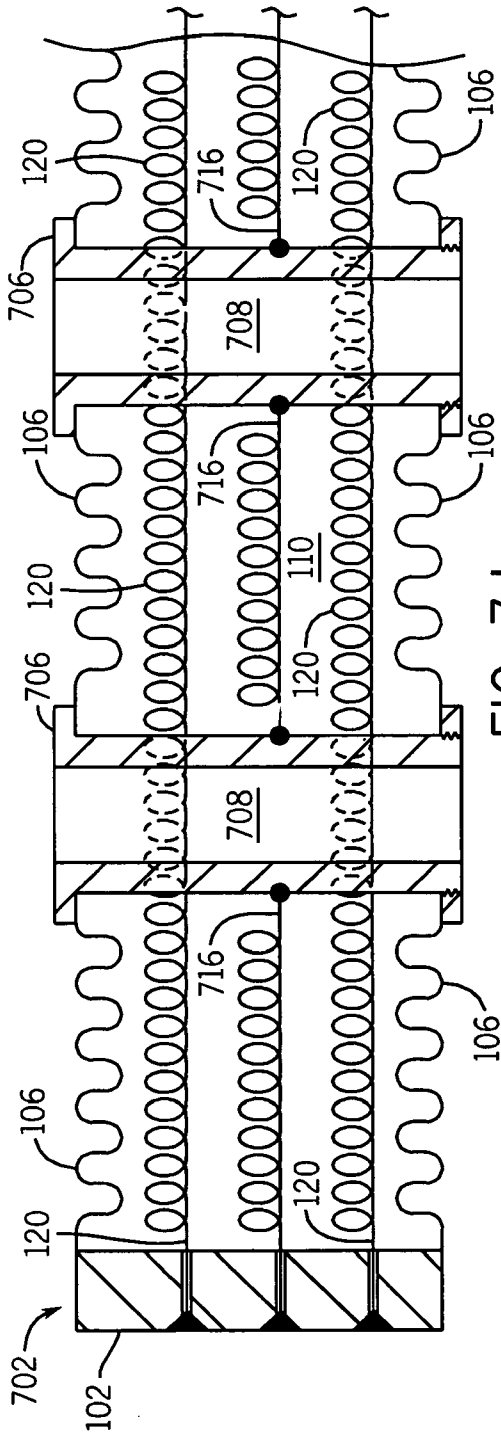


FIG. 7d

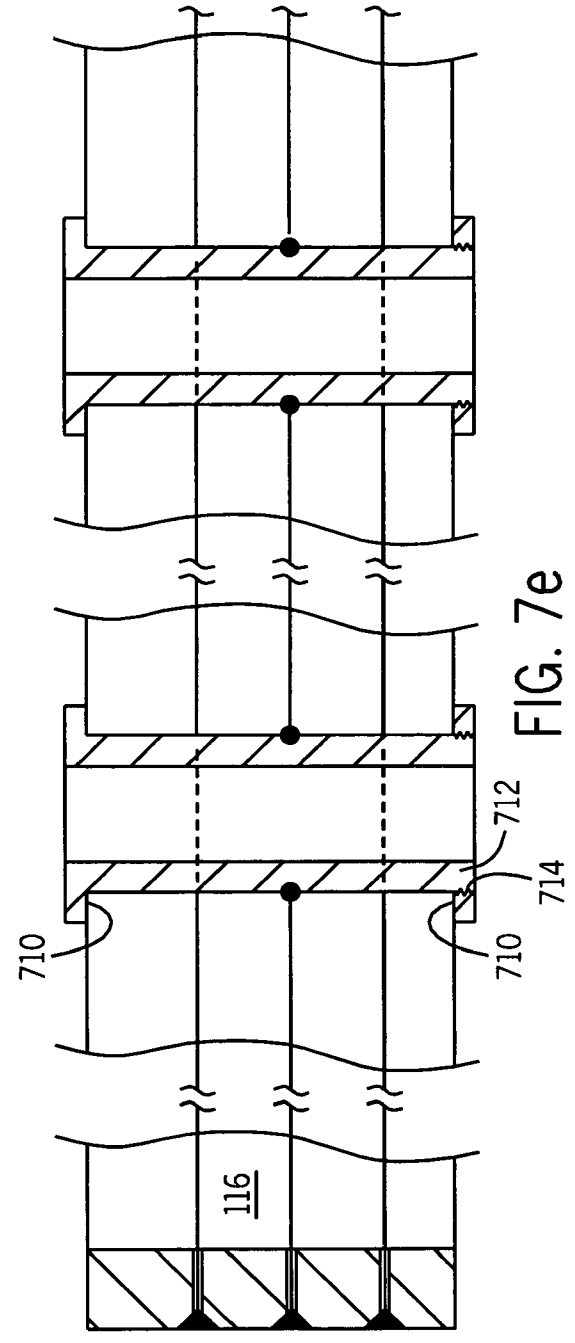


FIG. 7e

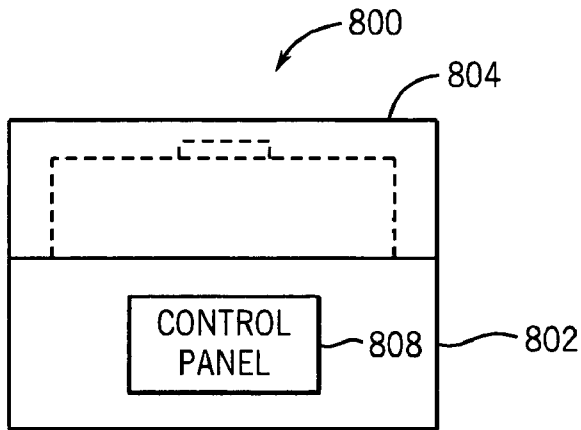


FIG. 8a

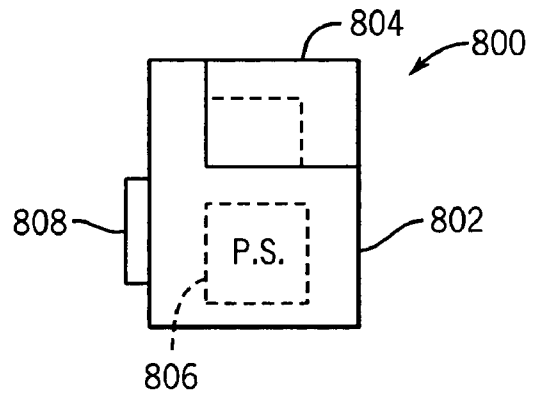


FIG. 8b

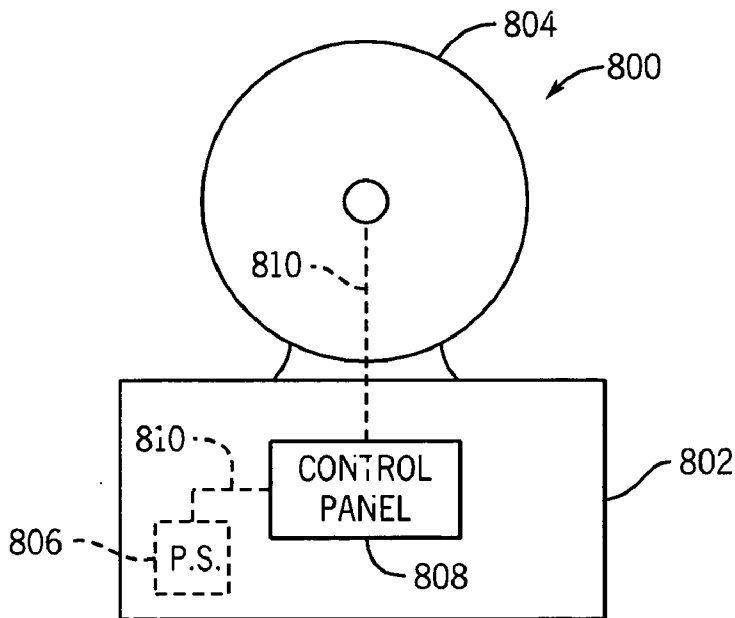


FIG. 8c

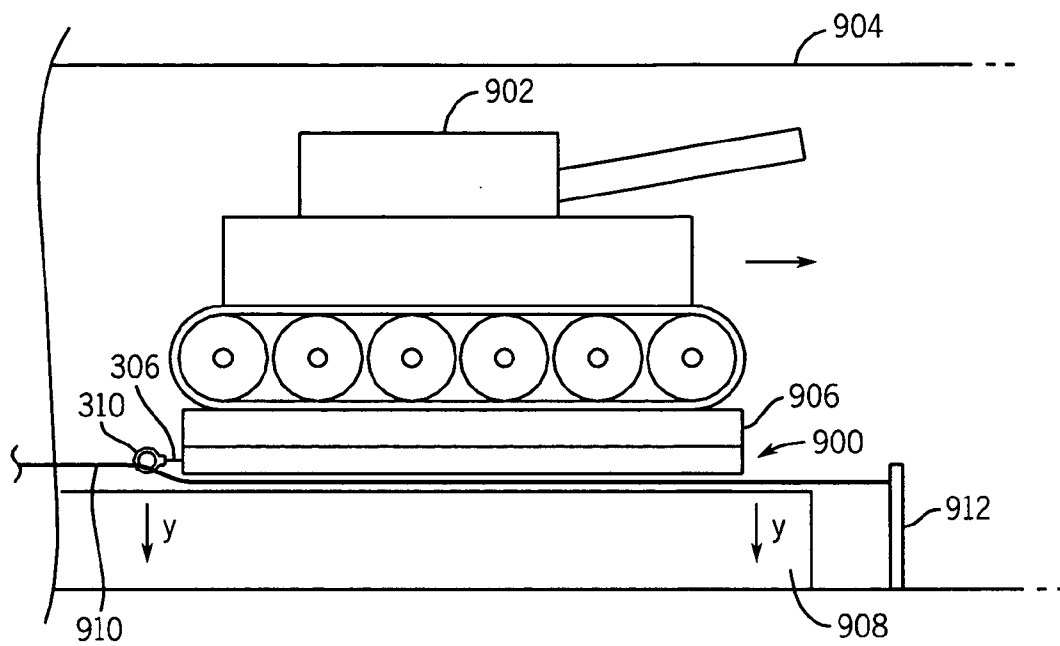


FIG. 9a

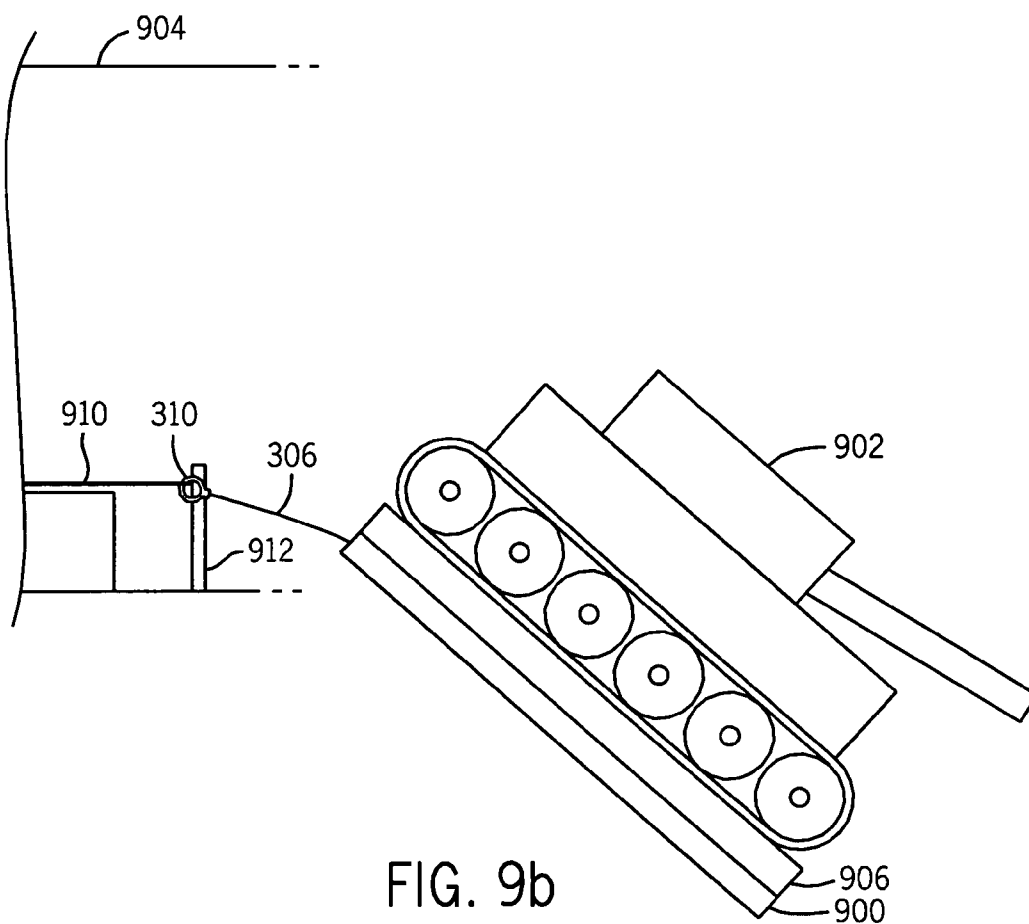


FIG. 9b

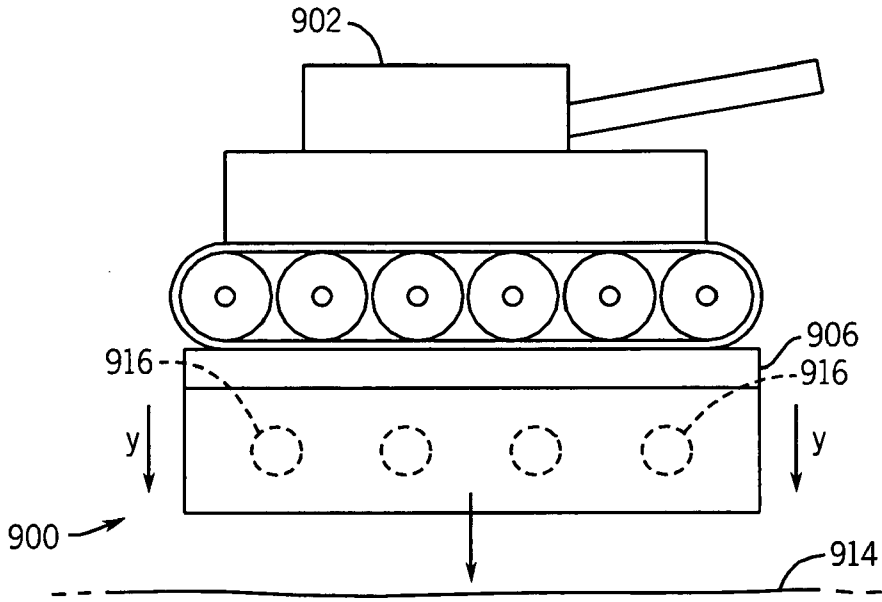


FIG. 9c

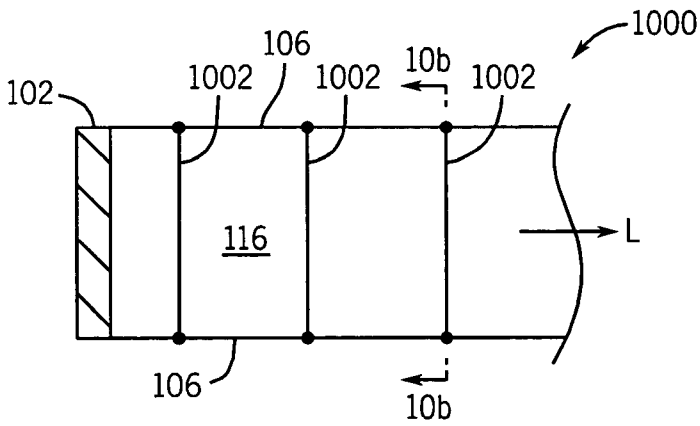


FIG. 10a

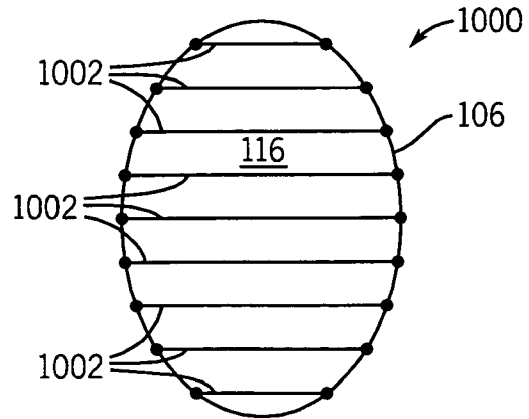


FIG. 10b

EXPANDING DEVICES AND STRUCTURES AND METHODS THEREFORE

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is related to U.S. application Ser. No. 10/_____ (attorney docket number 10041A), filed on the same day herewith, which is incorporated herein by its reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates generally to expandable devices and structures and, more particularly, to devices and structures which expand at least in part due to expandable foam.

[0004] 2. Prior Art

[0005] Collapsible devices are known in the art that generally make use of mechanical linkages or telescoping parts to make a device more compact. However, such linkages and telescoping parts have a limit to which they can compact and/or expand. Furthermore, such devices are not as mechanically stable as devices that do not expand.

[0006] Expandable structures are also known in the art. Such structures generally use air or other gaseous pressure to expand an inflatable member or collection of members. However, such structures suffer from poor structural strength and are easily damaged if the skin of such structures is compromised (e.g., pierced or otherwise compromised). In such a situation, the failure of the structure is often catastrophic.

SUMMARY OF THE INVENTION

[0007] Accordingly, a structure formed from at least one expandable member is provided. The expandable member comprises: a covering capable of expansion, the covering defining a cavity; and expansion means for expanding foam in the cavity in an expansion direction to expand the covering into a predetermined shape.

[0008] The expanded covering can form at least one of a beam, a wall panel, and a roof panel.

[0009] The covering can be pleated when compact.

[0010] The structure can further comprise first and second endplates, the covering being disposed between the first and second endplates. In which case, the expansion means can comprise: a first inlet formed in one of the first and second endplates, the first inlet being in communication with the cavity; and a source in communication with the first inlet for supplying foam in a liquid state to the cavity via the first inlet. The structure can further comprise: a second inlet formed in one of the first and second endplates, the second inlet being in communication with the cavity; and a gas source in communication with the second inlet for supplying gas to the cavity via the second inlet for at least one of pre-expanding the covering and facilitating filling of the cavity with the foam.

[0011] The structure can further comprise bulge prevention means for preventing bulging of the covering in a direction other than the expansion direction.

[0012] The structure can further comprise one or more tensile elements disposed in the cavity for carrying at least a portion of a tensile load on the member.

[0013] The expansion means can comprise: first and second capsules disposed in the cavity, the first capsule having a first liquid therein, the second capsule having a second liquid therein, the first and second liquids when combined reacting to form the foam; and means for mixing the first and second liquids. The means for mixing can comprise: the first and second capsules having a skin encapsulating the first and second liquids, respectively; and a cable having the first and second capsules formed thereon, the cable having a mixing means disposed on the cable, the cable being capable of being withdrawn through the cavity such that the skin is broken and the mixing means facilitates mixing of the first and second liquids. The cable can further comprise: one or more wires for carrying at least a portion of a tensile load on the member, each of the one or more tensile elements being capable of being expanding in the expansion direction and being connected to one of the first and second endplates at a first end and being connected to the cable at a second end; and means for fixing the second end to the other of the first and second endplates upon expansion of the one ore more wires.

[0014] The structure can further comprise one or more fasteners each having a first portion disposed in the cavity and a second portion disposed outside the cavity. The second portion can comprise a thread. The first portion can comprise means for securing the one or more fasteners in the foam after curing of the foam. The covering can have a grommet corresponding to each of the one or more fasteners.

[0015] At least one of the first and second endplates can have an interlocking means for locking a first end of the expandable member to another expandable member.

[0016] The expandable member can comprise two or more expandable members attached together to form a truss.

[0017] The expandable member can comprise a wall panel. The wall panel can have a cutout portion for accommodating a beam.

[0018] The structure can further comprise means for securing the structure to a surface.

[0019] Also provided is a method for forming a structure. The method comprising: forming at least one expandable member used in constructing the structure, the forming comprising: expanding a covering to define a cavity; and expanding foam in the cavity in an expansion direction to expand the covering into a predetermined shape.

[0020] Still further provided is a truss comprising: two or more beams attached together in a predetermined shape, each of the two or more beams comprising: a covering capable of expansion, the covering defining a cavity; and expansion means for expanding foam in the cavity in an expansion direction to expand the covering into a predetermined shape.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] These and other features, aspects, and advantages of the apparatus of the present invention will become better

understood with regard to the following description, appended claims, and accompanying drawings where:

[0022] **FIG. 1a** illustrates an embodiment of an expandable structural member in a compact configuration.

[0023] **FIG. 1b** illustrates the expandable structural member of **FIG. 1a** after expansion.

[0024] **FIG. 2** illustrates a schematic of a system for expanding the structural member of **FIGS. 1a** and **1b**.

[0025] **FIG. 3** illustrates a coupling for connecting structural members.

[0026] **FIG. 4** illustrates an alternative embodiment for expanding the structural member of **FIG. 1a**.

[0027] **FIG. 4a** illustrates an enlarged view of a portion of the structural member of **FIG. 4**.

[0028] **FIG. 4b** illustrates a variation of the embodiment of the structural member of **FIG. 4** in which the structural member is in a compact configuration.

[0029] **FIG. 4c** illustrates the variation of the embodiment of the structural member of **FIG. 4b** in which the structural member is in an expanded or elongated configuration.

[0030] **FIG. 5** illustrates a structure built with expandable structural members and panels.

[0031] **FIG. 5a** illustrates a side view of two wall panels of the structure of **FIG. 5**.

[0032] **FIG. 5b** illustrates a partial sectional view through a wall/end wall panel of the structure of **FIG. 5** proximate an opening.

[0033] **FIG. 5c** illustrates an expandable structural member having bolt fasteners integral therein, the expandable structural member being in a compact configuration.

[0034] **FIG. 5d** illustrates the expandable structural member of **FIG. 5c** after expansion.

[0035] **FIG. 5e** illustrates an alternative embodiment of the bolt fasteners of **FIGS. 5c** and **5d**.

[0036] **FIG. 6** illustrates a bridge structure built with expandable structural members and panels.

[0037] **FIG. 6a** illustrates a side view of two adjacent ends of beams of the bridge structure of **FIG. 6** having a rotatable joint therebetween.

[0038] **FIG. 6b** illustrates a top view of the two adjacent ends of the beams of **FIG. 6a** before assembly thereof.

[0039] **FIG. 7a** illustrates an expandable structural member after expansion where the structural member is in the form of a leg of a ladder.

[0040] **FIG. 7b** illustrates a rung of a ladder.

[0041] **FIG. 7c** illustrates a ladder built with the legs and rungs of **FIGS. 7a** and **7b**, respectively.

[0042] **FIG. 7d** illustrates a partial section of the leg of **FIG. 7c** in a compact configuration as taken along line **7e-7e**.

[0043] **FIG. 7e** illustrates the partial section of the leg of **FIG. 7c** in an elongated configuration.

[0044] **FIG. 7f** is a partial sectional view of the ladder of **FIG. 7c** as taken along line **7f-7f**.

[0045] **FIG. 8a** illustrates a front view of an after expandable electronic device before expansion.

[0046] **FIG. 8b** illustrates a side view of the electronic device of **FIG. 8a** before expansion.

[0047] **FIG. 8c** illustrates the electronic device of **FIGS. 8a** and **8b** after expansion.

[0048] **FIG. 9a** illustrates a tank loaded in a cargo bay of an aircraft having an expandable member at a lower surface thereof.

[0049] **FIG. 9b** illustrates the tank of **FIG. 9a** being deployed from the aircraft.

[0050] **FIG. 9c** illustrates the tank of **FIGS. 9a** and **9b** before it impacts a surface with the expandable member being expanded.

[0051] **FIG. 10a** illustrates a sectional side view of an expanded structural member having shape restraint members for constraining the cross-section of the member to a predetermined shape.

[0052] **FIG. 10b** illustrates a sectional view of the expanded structural member of **FIG. 10a** as taken along line **10b-10b**.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0053] Expandable foams are well known in the art. Typically such foams are made by mixing two liquid parts, which react to form foam. Although, two parts are typical, one part expanding foams are also known in the art. The reaction of the two parts is usually exothermic. The resulting foams expand in volume from up to 30 times the volume of the liquid constituents. The liquids begin foaming almost instantly and can fully cure in a matter of minutes. However, both the beginning of foaming and the curing time can be varied with the addition of additives. Additives can also be added to make the resulting foam fire resistant or retardant. The resulting foams generally have good structural (compressive, tensile, shear, and flexural) strength and are also buoyant. For the most part, the resulting foams are closed cell and will resist absorption of water. Polyurethane is an example of a material of commonly used expanding foams. For example, a 2 lb density (per cubic foot) urethane foam has an expansion rate of 30 times the liquid volume, a buoyancy of 60 lbs per cubic foot, 40 psi parallel compressive strength, 30 psi tensile strength, 30 psi shear strength, and 50 psi flexural strength. A 4 lb density (per cubic foot) urethane foam has an expansion rate of 15 times the liquid volume, a buoyancy of 58 lbs per cubic foot, 90 psi parallel compressive strength, 110 psi tensile strength, 70 psi shear strength, and 120 psi flexural strength. An 8 lb density (per cubic foot) urethane foam has an expansion rate of 8 times the liquid volume, a buoyancy of 54 lbs per cubic foot, 250 psi parallel compressive strength, 225 psi tensile strength, 130 psi shear strength, and 350 psi flexural strength. A 16 lb density (per cubic foot) urethane foam has an expansion rate of 4 times the liquid volume, a buoyancy of 46 lbs per cubic foot, 580 psi parallel compressive strength, 450 psi tensile strength, 230 psi shear strength, and 750 psi flexural strength. The expansion rate and time are dependent upon

the ambient temperature. The rates given above are for optimal conditions of 75-80 degrees F. Lower temperatures will hinder the expansion and time rates of the foam. Other density foams are available and can be tailored to a specific application.

[0054] Referring now to **FIGS. 1a** and **1b**, there is shown a structural member in the form of a beam, generally referred to by reference numeral **100**. The beam **100** is shown in **FIG. 1a** in a compressed or compact form and shown in **FIG. 1b** in an expanded or elongated form. Referring to **FIG. 1a**, the compact beam has first and second endplates **102, 104** which can be formed from rigid or semi-rigid materials, such as plastics and/or metals. The shape of the endplates **102, 104** can be any cross-sectional shape known in the art for use as a beam, such as rectangular or I-beam shapes.

[0055] The beam **100** further has a covering **106** of a material that can be compressed, such as by pleating the same, shown schematically at **108**. The covering **106** can be a woven fabric and/or polymer sheet, and can be bullet proof or resistant, such as ballistic nylon or woven Kevlar. The cover can also be elastic such that it can stretch to accommodate a change in length of the beam **100**. Although the covering **106** is shown bridging the top and bottom of the endplates **102, 104** in the cross-section of **FIG. 1a**, it is assumed to bridge all sides of the endplates **102, 104** to define a cavity **110**. At least one of the endplates **102** can have one or more inlets **112a, 112b** for inputting at least expandable foam liquid(s) and possibly also a gas, such as air. The beam **100** does not need the endplates **102, 104** in which case, the covering may provide a means to close the cavity **110**. Furthermore, the endplates **102, 104** do not have to extend along an entire width of the beam **100** and may be formed of multiple rigid or semi-rigid members, such as a plurality of grommets or washers formed on ends of the covering.

[0056] Referring now also to **FIGS. 1b** and **2**, the expanding foam liquid, which can be any of the two-part polyurethane's described above, is input into one of the inputs **112b** from sources **114a, 114b** (corresponding to each of the two parts (A and B) of the expanding foam) through suitable tubing **115**. The two parts are supplied to the inlet **112b** and mixed to start a reaction therebetween. The mixing can take place at any time or location prior to entering the cavity **110** or at the entrance to the cavity **110**. The mixing of two part expanding foam liquids is well known in the art. The expanding foam **116** fills the cavity **110** and causes the beam **100** to expand as shown in **FIG. 1b**. As discussed above, such expansion can be as much as 30 times the volume of the liquids. A gas, such as air, from a supply **118** can also be introduced into the cavity **110** via suitable tubing **119** through another of the inlets **112a** (or through the same inlet **112b** as the expanding foam liquids). The air can be used to pre-expand the covering **106** such that the foam is free to expand throughout the expanded cavity **110** and/or introduced during the introduction of the expanding foam liquids to propel the same away from the inlets **112a, 112b** so that the foam fully fills the cavity and does not only fill the cavity **110** proximate the inlets **112a, 112b**. The amount of expanding foam liquid introduced into the cavity **110** can be metered so that it does not underfill or overfill the cavity **110** after expansion. Valving and pumps or other delivery devices are not shown in the schematic of **FIG. 2** for

simplification and are assumed to be present to the extent that they are necessary. The covering **106** can have ribs (not shown) to prevent bulging of the cover due to the expansion of the foam. The bulging, if any, can be controlled with mechanical devices, such as forms of a roller for rolling the surface of the cover to spread the uncured foam evenly throughout the cavity.

[0057] After, the expanded foam is cured, the beam **100** can carry structural loads and be used with other structural elements to form a structure. The foam **116**, as discussed above, can be made with any additive known in the art to tailor its properties, curing time, and other characteristics, such as being flame retardant. The resulting beam **100**, as shown in **FIG. 1b** can also have tensile elements integrated therein for aiding in carrying any tensile loads that may be exerted on the beam **100**. Such tensile elements can be wires **120** which are coiled or otherwise compressed (as shown in **FIG. 1a**) when the beam **100** is in its compact form and elongated (as shown in **FIG. 1b**) when the beam is in its expanded form. The wires **120** can be attached to each of the endplates **102, 104** by any means known in the art, such as brazing (as described below) or the like. The wires **120**, in the elongated form, can help carry a tensile load exerted on the beam **100**. Since beams generally are subject to tensile loads on a lower portion, the wires **120** can be provided only at a lower portion of the beam, as shown in **FIGS. 1a** and **1b**. However, the beam must then be correctly oriented when used. Therefore, the beam **100** can also have wires **120** at both the top and bottom portions of the beam **100** such that orientation is not necessary. The wires can be any material that can carry a tensile load, such as metal or fiber. The wires **120** are best for carrying compressive stresses, e.g., on the top surfaces of beams or top panels and on the surfaces of columns when subject to buckling. These "wires"**120** are best to be flat strips, which are best to be oriented with the flat side pointing upwards. Then, as a compressive load is applied, the foam on the flat sides of the strip prevent its buckling, thereby allowing it to support compressive loads.

[0058] The wires **120** can also be a shape memory material that can change its shape upon being heated over a transition temperature. Such shape memory wires **120** can have a compact shape (such as a coil) in the compact configuration of **FIG. 1a** and can take a straight elongated shape upon being heated above its transition temperature. Upon taking the elongated shape, such shape memory wires **120** can exert a force to at least aid the expansion of the covering **106** during the introduction of the expanding foam in the cavity **100**. The exothermic reaction of the foam can be used to heat the wires **120** over their transition temperature and cause the same to take the elongated shape that at least aids the expansion of the covering **106**. The shape memory wires **120** can be used in place of or in addition to the introduction of the air into the cavity **110**.

[0059] Referring now to **FIG. 3**, the same shows end portions of beams **100**. However, such beams **100** have endplates **102, 104** which are non-perpendicular with respect to a long axis L of the beam **100** (unlike the beam of **FIG. 1b** in which the endplates are perpendicular with respect to the long axis L). The beams **100** of **FIG. 3** are useful to form a truss when connected together end-to-end. Each of the beams **100** has an endplate **102** on one end (e.g., the left end) and each has an endplate **104** on the other end (e.g., the right end). The endplates **102, 104** have a means for

interlocking by any means known in the art, such as one endplate **104** having one or more hooks **122** and the other endplate **102** having one or more corresponding latches **124**. When the hooks **122** are engaged with the latches **124** the beams **100** are fastened together to form a truss assembly **200** (see **FIG. 5**). Many types of interlocking means are known in the art and will not be discussed herein for the sake of brevity.

[0060] Referring now to **FIG. 4**, there is illustrated another embodiment of a structural member in the form of a beam, the beam being referred to by reference numeral **300** and being shown in the compact form in **FIG. 4**. The beam **300** of **FIG. 4** is similar to that of **FIGS. 1a** and **1b** except that the inlets **112a**, **112b** for introducing air and/or expanding foam liquid(s) are not necessary. In the embodiment of **FIG. 4**, the cavity **110** is filled with capsules **302** or packets of the expanding foam liquids, (the liquids referred to by reference letters A and B where A is one of the two parts of the expanding foam liquids and B is the other). The capsules **302** can be arranged side-by-side and can alternate horizontally and/or vertically as shown in **FIG. 4**. The capsules **302** have a skin **304** or enclosure for holding the liquids (A and B) therein, such as a thin film of plastic. The volume of the liquids (A and B) in the capsules **302** is that which is necessary to adequately fill the cavity **110** when the covering **106** is expanded. The number of capsules **302** is a tradeoff between the amount of mixing and complexity. The greater the number of capsules **302**, the more likely the two parts (A and B) will sufficiently mix. However, a great number of capsules **302** also adds to the complexity of the beam **300**.

[0061] The beam **300** of **FIG. 4** also comprises a means for mixing the liquids (A and B) in the capsules **302**. Such a means can rupture or otherwise break the skin **304** of the capsules **302** or chemically dissolve the skin or dissolve or otherwise breakdown the skin **304** with the application (or interruption of) of a magnetic field or current. In the latter configuration, the skin **304** may be a thin rheological material that is broken down (or liquefied) upon the removal of an applied magnetic field or current. In the embodiment of **FIG. 4**, the means for mixing the liquids comprises one or more cables **306** which are threaded through the capsules **302** and sealed at the skins **304** to the cable **306**. Preferably, the capsules **302** are formed on the cable **306** as a "necklace" and disposed in the cavity **110**. The cable **306** has a mixing means formed at one end thereof, such as an auger or brush **308** that will facilitate mixing of the liquids (A and B) as it is moved through the capsules **302**. Although each cable **306** is shown with a single brush **308**, two or more may also be provided spaced along the length of the cable **306**. Another end of the cable can have a finger loop **310** or other means for providing a grip of the cable **306**. One of the end plates **104** has through holes **312** corresponding to each of the cables for exposing an end of the cable **306** on an exterior of the endplate **104**. The through holes **312** can have a sealing means, such as an o-ring **314** for preventing leakage of the liquids (A and B) and/or the expanding foam from the cavity **110**. When expansion of the structural member, such as the beam **300** is desired, the one or more cables **306** are grasped, at the finger loops **310** and pulled in the direction of Arrow A to rupture the capsules **302** and to drag the mixing means **308** through the capsules to facilitate the mixing of the liquids (A and B). The mixture of the liquids (A and B) results in an expanding foam and the expansion of the beam **300** into its expanded configuration. After

curing of the foam, the beam **300** can be used alone or in combination with other structural members to form a structure.

[0062] During assembly of such a beam **300**, one endplate **102** and the covering **106** are fastened together by any means known in the art, such as by adhesives or with the use of a securing frame **102a** (shown clearly in **FIG. 4a**). The covering **106** is sandwiched between a surface **316** of the endplate **102** and a surface **318** of the securing frame and secured with a fastener, such as a screw **320**, a solvent, or an adhesive. The cable **306** and capsule **302** "necklaces" are laid in the cavity **110** with the mixing means being proximate to the endplate **102** and without the finger loops **310**. The other endplate **104** is then secured to the covering by any methods known in the art, such as with a securing plate **104a** similarly to that described with respect to endplate **102** and securing plate **102a**. The cable ends are threaded through their corresponding holes **312** upon placement of the endplate **104** and the finger loops **310** are placed on the cable ends by any means known in the art, such as by tightening set screws (not shown) in the body of the finger loops **310** against the cable end. A means can be provided to prevent an accidental pulling of the cables **306** before the beam **300** is desired to be expanded, such as a cover plate or film (not shown) disposed over the endplate **104** and finger loops **310**.

[0063] The structural member **300** of **FIG. 4** can be configured to also have tensile elements integrated therein for aiding in carrying any tensile loads that may be exerted on the beam **300** similarly to that described above with regard to **FIGS. 1a** and **1b**. As shown in **FIG. 4b**, such tensile elements can be wires **120** which are coiled or otherwise compressed when the beam **300** is in its compact form and elongated (as shown in **FIG. 4c**) when the beam **300** is in its expanded form. Although **FIGS. 4b** and **4c** illustrate one such wire **120**, more than one can be provided as discussed above. Furthermore, the wires **120** can be provided at a lower portion of the beam **300**, which is subjected to a tensile load or the wires **120** can be provided at both upper and lower portions of the beam **300** such that orientation of the beam **300** is not necessary. As discussed above, the wires **120**, in the elongated form, can help carry a tensile load exerted on the beam **300**. The wires **120** can be any material that can carry a tensile load, such as metal or fiber, and may be a shape memory material as discussed above. One end **120a** of the wires **120** can be attached to the endplate **102** by any means known in the art, such as by being disposed in a corresponding hole **120b** in the endplate **102** and brazing **120c** or otherwise fastening the wire to the endplate **102**. Another end **120d** of the wire **120** is attached to an end **306a** of a cable **306**. A fitting **322** can be disposed at a transition between the wire **120** and the cable **306**. The fitting **322** is fixed to the cable **306** and/or wire **120** such that its movement along the wire and cable is fixed by any means known in the art. Upon pulling the cable **306**, the cable **306** and mixing means **308** functions as discussed above, and the fitting **322** is pulled towards the other endplate **104** until the fitting **322** locks into the other endplate **104**. The fitting **322** can lock into the other endplate **104** by any means known in the art such as a snap fit. In such a snap fit, the fitting **322** is capable of plastically deforming facilitated by a slit **324** and a corresponding receptacle **326** on the endplate **104**. The receptacle **326** has a large bore **328** that accommodates a tapered nose portion **330** of the fitting **322**. The receptacle **326** also has a cover plate **332** having a smaller diameter

bore 334. The cover plate 332 can be integral with the endplate 104 or separate therefrom and fastened to the endplate 104, such as by screws 333. The fitting 322 is pulled such that the tapered end portion 330 is plastically deformed by the smaller diameter bore 334 until the same passes through the small diameter bore 334 and is disposed in the large bore 328 where it is captured as shown in FIG. 4c. The fitting 322 can be made of any material that is easily deformable yet strong, such as a plastic, however, metals can also be used if the fitting 322 is configured properly to mechanically deform with the use of the slit 324 or with multiple slits. Once the fitting 322 is captured in the receptacle 326, the wire 120 is configured similar to that described in FIGS. 1a and 1b, in that it can elongate along with the expansion of the beam 300 or aid in the expansion of the beam 300 if fabricated from a shape memory material, as described above. The assembly of the beam 300 having the tensile elements integrated therein is similar to that described above with regard to FIG. 4, however, the cable 3062 and capsule 302“necklaces” are formed with the coiled wire 120 and fitting 322 attached thereto. The end 120a of the wire 120 is inserted into corresponding holes 120b in the endplate 102 and fastened thereto by any means known in the art, such as brazing 120c. The other endplate 104 is then connected as discussed above with the receptacle(s) 326 corresponding to the cable(s) 306 having the coiled wire 120 and fitting 322.

[0064] Referring now to FIG. 5 there is shown a structure, generally referred to by reference numeral 500 in which at least one component of which was made from an expanding foam. The structure 500 of FIG. 5 illustrates an enclosed structure that could house people or can be used for storage, however, the same can be open on one or more sides and be used in various other ways, such as an aircraft hanger. Furthermore, although the structure 500 can have a temporary nature, the same can also be converted into a permanent structure, such as by finishing an interior thereof with plumbing, electrical, interior walls and the like and/or an exterior thereof, such as with stucco or siding.

[0065] The structure includes several truss assemblies 200 as shown in FIG. 3 to support a roof 502 (shown in dotted lines) comprised of several roof panels 504. The structure 500 also includes two or more walls 506 supported by the ground or other supporting structure. Each of the side walls can comprise one or more individual wall panels 508. The roof and wall panels 504, 508 can be configured similarly to the structural members of FIGS. 1a, 1b, and 4 except they may have a greater width. For example, such roof and wall panels 504, 508 can have an elongated length of 8 feet and a width of 4 feet to resemble a standard 4x8 panel typically used in construction. The panels can interlock by any means known in the art, such as the hook and latch arrangement described with respect to FIG. 3 and/or any other means such as screw, bolts and/or adhesives. The panels can further have a cut-out 510 in each of its two upper corners for accommodating the individual beams 100 of the truss assemblies 200. The cut-out 510 can be the same depth (X1) of the beam and ½ the width (X2/2) such that when two wall panels 508 are butt together as shown in FIG. 5a, two cut-outs 510 are disposed next to each other to form a channel that is equivalent to the depth (X1) and width (X2) of the beam 100 to accommodate the same within. The beams 100 can be press fit within the cut-outs 510 and/or secured with adhesives, screw, bolts, or any other means

known in the art. End wall panels 512 can be sized to fit within the shape defined by the wall panels 508 and truss assembly 200 using one such shaped panel or several which conform to the shape when assembled. The end-wall panels 512 can be secured to both the adjoining wall panels 508 and truss assemblies by any means known in the art, such as adhesives and/or screws, bolts and the like. The roof panels 504 can also be secured to the truss assemblies 200 by any means known in the art, such as adhesives and/or screws, bolts and the like.

[0066] After assembly, gaps (if any) between components in the structure 500 can be sealed by any means known in the art, such as with caulking or expanding foam. The wall and end wall panels 508, 512 can be provided with window and door openings 514, 516, respectively such that openings for the same are provided in the covering 106. However, such openings can also be easily cut in the wall and end-wall panels 508, 512 after the same have cured with conventional tools such as a hand saw (or an electric carving knife). Conventional windows and doors can then be directly disposed in the openings 514, 516 and secured to the wall and end wall panels 508, 512 by any means known in the art, such as adhesives, screws and/or bolts. Such windows and doors, a portion of which is shown in FIG. 5b and referred to by reference numeral 518, can have a flange 520 that overlaps at least two sides, and preferably each side of the opening 514, 516. An adhesive or caulking 522 is disposed between the flange 520 and the wall/end wall panel 508, 512. Fasteners, such as bolts 524 can then be disposed through the flange 520 and wall/end wall panel 508, 512 with large diameter washers 526 at each end and secured with a mating nut 528. Similar methods can be used to fasten the roof panels 504 to the truss assemblies 200 or any other two components together. The openings 514, 516 can also be trimmed with wood around an interior periphery of the openings 514, 516, which can be fastened by any means known in the art, such as adhesives, screws and the like, and the windows and doors 518 can be fastened to the wood in a conventional manner as is known in the construction arts.

[0067] When assembling a structure 500 with elements, intermediate elements can be assembled first in place, and then pressurized (if applicable) and then the foam can then be released. After the structure is assembled, one may add frames or other sturdy structural elements such as columns or beams (aluminum or steel or the like) to make a much stronger structure. The latter elements may be added at a later time. Then the expandable structure acts mostly as the outer skin of the structure. Alternatively, a basic frame may put up first and then the expandable elements be added to it.

[0068] As discussed above, any of the components discussed above which makes up the structure 500 can be secured to another component by adhesives, screws, bolts, and any other means known in the art, such as the hook/latch mechanism shown in FIG. 3. Referring to FIGS. 5c and 5d, there is shown a structural member, generally referred to by reference numeral 600, which is similar to beam 100, but can be any structural member formed by expanding foam. Such structural member 600 includes bolt fasteners 602, which after expansion of the structural member 600, protrude from a surface thereof and are secured in the foam 116. Although the bolt fasteners 602 are shown on an end surface, they can be positioned on any expanding surface of the structural member 600 and at any location on such surfaces. Further-

more, such an arrangement may be particularly useful on the edges of openings **514**, **516** for attachment of windows and doors and/or on the truss assemblies **200** for fastening the same to the roof panels **504**. The bolt fasteners **602** are typically metal or strong plastic and have a loop **604** on one end thereof through which the wire **120** is threaded. The bolt fasteners **602** have another threaded end **606** which are threaded and protrude from the covering **106** through a grommet **608** for sealing around the bolt fastener **602**. An o-ring or other sealing means may also be disposed in the grommet corresponding to a non-threaded portion of the bolt fastener. As shown in **FIG. 5d**, during elongation of the structural member **600**, the bolt fasteners **602** move with the expansion, guided by both the wire **120** and grommet **608**. After curing, the bolt fasteners **602** are secured in the foam **116** and can be used to secure other components or articles thereto. One or more projections **610** can be added to the bolt fasteners **602** at a location corresponding to the cavity **110** to increase their footprint and ensure that they cannot be easily pulled from the cured foam **116**. Referring now to **FIG. 5e**, there is shown an alternative embodiment of the bolt fastener **602** having a plurality of projections **610**. The projections **610** being paddle shaped and disposed about the bolt fastener **602** to resist pulling of the bolt projection from the cured foam **116**.

[0069] The structure **500** can be secured to the ground **528** or other surface by one or more cables **530** slung over the roof **502** and secured to the ground **528** or other surface, such as by corkscrew stakes **532** as is known in the art. Those skilled in the art will appreciate that such a structure **500** can be assembled in a short time (rapidly deployed), with nothing but the simplest hand tools (with a minimum of labor), and require no maintenance to maintain the stability thereof. The resulting structure **500** can also be lightweight, bullet proof/resistant, fire retardant/resistant, insulated from temperature extremes, and opaque to the sun's ultra-violet exposure. Those skilled in the art will appreciate that the span of the truss assemblies **200** can be very long, making for a spacious interior without the need for posts since they are light weight and strong and they only support light-weight roof panels **504**. Therefore, such a structure can house large objects, such as aircraft without the interference of posts and other support members. If posts are needed to support very long spans, the same can also be expanded using a structure similar to that shown in **FIGS. 1a** and **1b**. Such posts can have any cross-section, such as square or round and do not require wires **120** since they do not carry a tensile load. However, wires **120** may be used where the posts are very long to resist buckling generated tensile loads.

[0070] Referring now to **FIG. 6**, there is shown a side view of an expandable structure in the form of a flotation bridge generally referred to by reference numeral **650**. The flotation bridge (pontoon) is constructed from one or more expandable beams, similar to that shown in **FIGS. 1a** and **1b**. Such beams **100** can be linked together to span longer widths **W**, by any means known in the art, such as the hook and latch arrangement of **FIG. 3**. However, an alternative means to link the individual beams **100** together may include a pivot **652** where one of the endplates **104** has a projection **654** with a bore **656** and the other endplate **102** has a projection **658** with a mating shaft **660**. When linking the beams **100** together, the shaft **660** is disposed in the bore **656** and the shaft is rotatably secured therein by any means known in the art, such as by placing a cotter pin **662** in a hole

664 at the end of the shaft. Such an arrangement will allow for fluctuations in height between beams caused by the water **667** and/or unequal loading of the bridge **650**. The pivot joint can also be used in the configuration of **FIG. 3** to attach the beams **100** together. However, such joint would be positioned on a lower portion of the endplates **102**, **104** such that a load on the truss assembly **200** would tend to close the endplates **102**, **104** together.

[0071] Two or more of such beams **100** are arranged across the width **W** of the water **667** substantially parallel to each other. Panels **668**, similar to those described above with regard to **FIG. 5** (e.g., 4x8 expandable panels) are then laid on top of the beams **100** and can be secured thereto by any means known in the art or described above, such as an adhesive, and/or other fastener such as the bolt fasteners described with regard to **FIGS. 5c** and **5d**. The bridge assembly **650** can then float on the surface of the water due to the exceptional buoyancy of the expanded foam **116** in the cavities **110** of both the beams **100** and panels. Using a buoyancy of 46 pounds per cubic foot (as discussed above) each 4x8 by 1 foot thick panel has a buoyancy of 1,1104 pounds. Therefore, a flotation bridge **650** having several panels **668** and beams can support significant amounts of personnel as well as light machinery. The flotation bridge **650** can be secured with cables **670** secured at one end to an eyehook **672** and at another end to a corkscrew stake **674** secured to the ground **676**. The eyehook **672** can be mounted to either the endplate **102**, **104** of the panels **658** and/or beams **100** such as by providing a threaded hole on the endplates **102**, **104** and a mating threaded stud on the eyehook **672**. Several of such cable arrangements can be provided to secure and stabilize the flotation bridge **650**. Although not shown, ramps having tapered endplates may be provided at each end of the flotation bridge to make for a smooth transition between the ground **676** and the panels **658**. Such tapered ramps may also be constructed similarly to the structural members **100** shown in **FIGS. 1a**, **1b** and **4** in which the same is expanded. Although expandable panels would provide greater buoyancy, the panels can be any conventional materials such as wood, plastics or cement.

[0072] Referring now to **FIGS. 7a**, **7b**, **7c**, **7d**, **7e** and **7f** there is illustrated an expandable structure in the form of a ladder, which is generally referred to by reference numeral **700**. The ladder is comprised of two expandable structural members **702**, which carry rungs **704**. Although the rungs **704** can also be expandable, they are preferably formed out of a solid material, such as wood, plastic or metal, since they are essentially compact in their solid form and can carry a greater load in such form. Although shown having a circular cross section, the rungs can have any other cross section known in the art. The structural members **702** are configured similarly to that of the beams of **FIGS. 1a**, **1b** and **4** with endplates **102**, **104**, covering **106** and possibly wires **120**. The wires **120** are utilized because when placed at an angle against something to be climbed, the portion of the structural members **702** facing the thing to be climbed is in tension and such wires **120** aid in carrying the tensile load therein. The structural members **702** further has grommets **706** disposed in or on the covering **106** and preferably spaced at equal intervals for supporting the rungs **704**.

[0073] Referring now to **FIGS. 7d** and **7e**, the grommets **706** have a bore **708** for accommodating the cross-sectional shape of the rungs (at least at the ends of the rungs which

may differ from the cross-sectional shape of a central portion of the rungs). The bore 708 can be a blind hole or through hole as shown in FIGS. 7d and 7e. The grommets 706 preferably have a flange 710 on each side thereof for overlapping with the cover 106. The cover 106 is preferably attached to the grommet 706 at the flange 710 by any means known in the art, such as by adhesives, heat-sealing, or fasteners. One of the flanges 710 can be separate from a body 712 of the grommet 706 and attached by any means known in the art, such as by mating threads 714 to facilitate assembly of the grommets 706 to the cover 106. In addition to the wires 120 used for carrying at least a portion of any tensile load carried by the structural member 702, wires 716 can also be used between the endplates 102, 104 and adjacent grommets 710 and between adjacent grommets 710. Such wire 716 is useful to assist in carrying a load applied to the rungs 702. After expansion of the structural member 702, the foam 116 will envelope each of the grommets 706 and secure it in place. If not for the wires 716, any load applied to the rungs 704 is carried in compression by the foam between adjacent rungs 704. However, with the addition of the wires 716, a large portion of any load applied to a rung 704 is carried by the wires 716 in tension. The wires 710 can be attached to the endplates as described above and can be attached to the grommet body 712 by any means known in the art such as by brazing. Alternatively, the wire can be one piece and may simply be wound one or more times around each grommet 706.

[0074] After expansion of two structural members 702, which act as legs of the ladder 700, the ends 704a of the rungs are inserted into the bores 708 of the grommets 706 to form the ladder 700. The rung ends 704a may be press fit into the bores 708 or have some type of positive locking means such as that shown in FIG. 7f. FIG. 7f shows the rung end 704a having a step 704b and a hole 704c with a cotter pin 718 being disposed in the hole 718 to positively retain the rung 704 in the bore 708 of the grommet 706. After assembly, the ladder 700 can be used to climb up or down and since the same is buoyant, the ladder 700 can also float on water and support the weight of a person crossing the water. If the ladder is configured similarly to that shown in FIG. 4, the same can be compact enough to be carried in a backpack of a person and can expand up to 30 times the compact size. Although not shown, additional items can be attached to the endplates, such as footings on the bottom endplates or cushions on the top endplates, as is known in the art. Such items can be attached by any means known in the art, such as adhesives, screws or bolt fasteners.

[0075] Referring now to FIGS. 8a, 8b, and 8c, there is shown an electronic/electrical device which can be expanded using the expandable foams discussed above, the device being referred to by reference numeral 800. Although such device 800 is shown and described as a communication device, such is shown by way of example only and those skilled in the art will appreciate that the electrical/electronic devices can take many forms, such as a microwave oven, or scientific equipment. The device 800 is shown in its compact form in FIGS. 8a and 8b in front and side views, respectively, such that it can be easily carried by a person, such as in a backpack. The device can be made to expand similarly to the structural member 100, 300 of FIGS. 1a, and 4, respectively. The device has a body portion 802 and an antenna dish portion 804, which after expansion, unfolds from the body portion 802 as shown in FIG. 8c. The body

portion 802 has embedded or disposed thereon a power supply 806 and electronics used for operation of the device, shown schematically in the form of a control panel 808. The control panel 808 is electrically connected to the power supply 806 and the antenna dish 804 with wiring 810 that can expand with the component portions, such as being coiled. The power supply 806 could be a battery. However since batteries have a limited shelf life, the power supply 806 can also generate power from the environment such as a photovoltaic cell, or thermophotovoltaic cell that can supply power directly to the electrical/electronic components or for storage in a storage device, such as a battery or a capacitor. In the case of a thermophotovoltaic cell, the same can generate power from the exothermic heat from the foam reaction. Such power can be supplemented by other power sources. Other components, if sensitive to heat, can be insulated from the exothermic heat generated by the foam reaction to avoid damaging the same.

[0076] Referring now to FIGS. 9a, 9b, and 9c, there is shown an expanding member for use with dropping machinery for at least partially absorbing an impact of the machinery with a surface, such as the ground (or water), the member being generally referred to by reference numeral 900. Although, the member 900 is shown and described with regard to dropping a tank 902 from the fuselage of an aircraft 904, such is given by way of example only. Those skilled in the art will appreciate that any type of object or machinery can be dropped utilizing member 900 from a height onto a surface. Although not shown, the tank 902 can also have a parachute or like device for decreasing its velocity upon impact with the surface.

[0077] The tank 902 is shown as being secured to a pallet 906 or like article as is known in the art which is movable upon a base 908, such as a rail for guiding the tank 902 towards an open end of the fuselage. The member 900 is attached to the pallet 906 at a lower end thereof, but may also be attached to other surfaces of the pallet 906, such as a side thereof or to the tank itself. The means for attachment can include a flange or adhesive. Attachment of the member 900 to the pallet 906 may also include integrally forming the member 900 with the palette 906. The member 900 can be constructed as shown in FIG. 4 having a plurality of capsules 302, a cable 306 with mixing means 308 and a loop 310. The member may be constructed with or without one or both of the endplates 102, 104. The member 900 is configured such that expansion thereof will occur in the direction indicated by arrows y. The aircraft 904 further has a drop cable 910, which is threaded through the loop 310. The drop cable 910 terminates at a post 912 proximate the opening in the fuselage such that it does not impede the progress of the tank 902 and palette 906 toward the open end or from the open end. Although one member 900 is shown two or more can be disposed on each of the two sides of the palette 906 and/or along a lower surface of the palette 906. In such a configuration, a drop cable 910 can be provided for each member 900 or a single drop cable 910 can be linked to each of the loops 310 corresponding to each member 900.

[0078] Referring now to FIG. 9b, as the tank 902 with attached palette 906 is advanced through the opening in the fuselage, the post 912 and drop cable 910 capture the loop 310 to prevent its forward progress thereby causing a relative movement of the cable 306 and the member 900. The cable 310 can be completely withdrawn from the cavity

110 or the loop **310** can fail and release from the post **912** after the cable **310** is fully withdrawn through the cavity **110**. Such relative movement between the cable **310** and member **900** causes the capsules **302** containing the two parts (A and B) of expanding foam to rupture and mix, initiating the reaction thereof. The initiation of the reaction can be delayed by extending the distance between the loop **310** and the member **900**. As shown in **FIG. 9c**, the member expands in the y direction prior to impact of the tank **902** with the ground **914** or other surface. An additive can be added to the capsules such that the foam **116** in the cavity does not fully cure (and harden) prior to impact. However, the combination of cold temperature at the altitude of the drop along with the expected drop times should not necessitate the addition of such additives. However, such additives may be used to provide maximum expansion without appreciable hardening of the foam. Upon impact, the covering **106** can fail such that the uncured foam can be released from the cavity **110** to absorb the impact. Perforations **916** can be provided in the covering **106** to facilitate and/or control such failure. Relief valves can also be provided in the covering **106** to allow the uncured foam to escape the cavity **110** upon impact in a controlled manner. Such relief valves can be simple spring valves with ball seats that are disposed in the covering similarly to the grommets **608** discussed above. If the surface **914** is water, additives may be added to the capsules to accelerate curing of the foam so that the member is fully buoyant upon impact with the water surface. Alternatively, the tank **902** or other object can be at least partially submerged in the water after impact and can rise to the surface upon full expansion and curing of the foam in the member(s) **900**. Thus, a member useful for reducing the impact with the ground and/or providing buoyancy upon impact with a water surface can be provided which does not occupy additional space in the fuselage of an aircraft.

[0079] Referring now to **FIG. 10a**, there is shown a sectional side view of an expanded structural member generally referred to by reference numeral **1000**. The expanded structural member **100** can have any of the features described above and further has shape restraint members **1002** for constraining a cross-section of the member **1000** to a predetermined shape. As shown in **FIG. 10a**, the shape restraint members **1002** can be spaced along a length L of the expanded structural member **1000**. The shape restraint members **1002** are preferably wires made from any suitable material, such as metal or natural or synthetic fiber and fastened at each end thereof to the covering **106** by any means known in the art. Such as by tying a knot on the exterior of the covering **106**, clips, staples, sewing and the like. As shown in **FIG. 10b**, the shape restraint members **1002** are disposed along the cross section in various lengths to constrain the shape of the cross section. In the embodiment shown in **FIG. 10b**, the cross-section is shown as an oval, however, those skilled in the art will appreciate that any cross sectional shape is possible, such as an I-beam shape, circle, square, rectangle and the like. The shape restraint members **1002** can also be used with the members described above instead of a roller or form.

[0080] As an alternative to the shape restraint members **1002**, frames (not shown) with the desired cross-sectional geometry may be attached at regular intervals along the length L of the beam member inside the covering **106**. As the

expanding foam **116** is released, the above frames would then constrain the beam cross-section to near the desired geometry.

[0081] When the beam member is to be cylindrical with a circular cross-section, the foam material is desired to be formed at the wall surfaces since the foam material positioned near the center of the member carries minimal bending load. Such beam elements are constructed best by sealing their ends (e.g., with end plates **102**, **104**), pressurizing their interior space **110** and then releasing the expanding foam **116** around the interior surfaces. A hollow cross-sectional shape, (e.g., where the foam is concentrated near the walls (covering **106**)) can be readily achieved by having spread the base chemicals (parts A and B) over the interior of the covering and protecting it by a thin membrane (and a membrane between parts A and B). Once the element is pressurized, the membrane separating the chemicals can be released using one of the described techniques.

[0082] Other features may be used with any of the embodiments discussed above, for example, gas generating additives can be added the foam parts (A and B), so that once they are released by the removal or puncturing of a membrane, the foam parts are mixed and blown up by the generated gas. Any fabric made ropes and/or covering material can also soaked in foam and is thereby hardened and capable of taking compressive loads. The covering may contain reinforcing fibers oriented in the direction of maximum stress. The internal sealed volume of a member with non-permeable covering can be pressurized first to subject the longitudinal wires **120** (preferably springs or elastic materials that would significantly stretch during the pressurization press are preferred since a light reduction in length would not significantly reduce the preloading force level) to tensile stress. Since the cross-sectional area of the members is usually large, then one can exert large tensile forces on these elastic elements. Then when the beam (top surfaces) or column element is subjected to compressive loads, the tensile preload has to be overcome before the foam and lining material is subjected to compressive loads (the lining and foam assembly is weakest in compression). One could also use "wires" in the lateral and other general directions so that as a whole, the applied loads are optimally supported.

[0083] While there has been shown and described what is considered to be preferred embodiments of the invention, it will, of course, be understood that various modifications and changes in form or detail could readily be made without departing from the spirit of the invention. It is therefore intended that the invention be not limited to the exact forms described and illustrated, but should be constructed to cover all modifications that may fall within the scope of the appended claims.

What is claimed is:

1. A structure formed from at least one expandable member, wherein the expandable member comprises:

a covering capable of expansion, the covering defining a cavity; and

expansion means for expanding foam in the cavity in an expansion direction to expand the covering into a predetermined shape.

2. The structure of claim 1, wherein the expanded covering forms at least one of a beam, a wall panel, and a roof panel.

3. The structure of claim 1, wherein the covering is pleated when compact.

4. The structure of claim 1, further comprising first and second endplates, the covering being disposed between the first and second endplates.

5. The structure of claim 4, wherein the expansion means comprises:

a first inlet formed in one of the first and second endplates, the first inlet being in communication with the cavity; and

a source in communication with the first inlet for supplying foam in a liquid state to the cavity via the first inlet.

6. The structure of claim 5, further comprising:

a second inlet formed in one of the first and second endplates, the second inlet being in communication with the cavity; and

a gas source in communication with the second inlet for supplying gas to the cavity via the second inlet for at least one of pre-expanding the covering and facilitating filling of the cavity with the foam.

7. The structure of claim 1, further comprising, bulge prevention means for preventing bulging of the covering in a direction other than the expansion direction.

8. The structure of claim 1, further comprising one or more tensile elements disposed in the cavity for carrying at least a portion of a tensile load on the member.

9. The structure of claim 1, wherein the expansion means comprises:

first and second capsules disposed in the cavity, the first capsule having a first liquid therein, the second capsule having a second liquid therein, the first and second liquids when combined reacting to form the foam; and

means for mixing the first and second liquids.

10. The structure of claim 9, wherein the means for mixing comprises:

the first and second capsules having a skin encapsulating the first and second liquids, respectively; and

a cable having the first and second capsules formed thereon, the cable having a mixing means disposed on the cable, the cable being capable of being withdrawn through the cavity such that the skin is broken and the mixing means facilitates mixing of the first and second liquids.

11. The structure of claim 10, wherein the cable further comprises:

one or more wires for carrying at least a portion of a tensile load on the member, each of the one or more tensile elements being capable of being expanding in the expansion direction and being connected to one of the first and second endplates at a first end and being connected to the cable at a second end; and

means for fixing the second end to the other of the first and second endplates upon expansion of the one or more wires.

12. The structure of claim 1, further comprising one or more fasteners each having a first portion disposed in the cavity and a second portion disposed outside the cavity.

13. The structure of claim 12, wherein the second portion comprises a thread.

14. The structure of claim 12, wherein the first portion comprises means for securing the one or more fasteners in the foam after curing of the foam.

15. The structure of claim 12, wherein the covering has a grommet corresponding to each of the one or more fasteners.

16. The structure of claim 4, wherein at least one of the first and second endplates have an interlocking means for locking a first end of the expandable member to another expandable member.

17. The structure of claim 1, wherein the expandable member comprises two or more expandable members attached together to form a truss.

18. The structure of claim 1, wherein the expandable member comprises a wall panel.

19. The structure of claim 18, wherein the wall panel having a cutout portion for accommodating a beam.

20. The structure of claim 1, further comprising means for securing the structure to a surface.

21. A method for forming a structure, the method comprising:

forming at least one expandable member used in constructing the structure, the forming comprising:

expanding a covering to define a cavity; and

expanding foam in the cavity in an expansion direction to expand the covering into a predetermined shape.

22. A truss comprising:

two or more beams attached together in a predetermined shape, each of the two or more beams comprising:

a covering capable of expansion, the covering defining a cavity; and

expansion means for expanding foam in the cavity in an expansion direction to expand the covering into a predetermined shape.

* * * * *