



- (51) International Patent Classification:  
B31F 1/07 (2006.01)
- (21) International Application Number:  
PCT/EP2011/073756
- (22) International Filing Date:  
22 December 2011 (22.12.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10196854.3 23 December 2010 (23.12.2010) EP
- (71) Applicant (for all designated States except US):  
BOEGLI-GRAVURES SA [CH/CH]; Rue de la Gare 24-26, CH-2074 Marin-Epagnier (CH).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BOEGLI, Charles [CH/CH]; Rue de la Gare 24-26, CH-2074 Marin-Epagnier (CH).
- (74) Agent: AMMANN PATENT ATTORNEYS LTD. BERNE; Schwarztorstrasse 31, P.O.Box 5135, CH-3001 Berne (CH).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**


— of inventorship (Rule 4.17(iv))

**Published:**

— with international search report (Art. 21(3))

— with information concerning incorporation by reference of missing parts and/or elements (Rule 20.6)

(54) Title: DEVICE FOR EMBOSsing FOILS

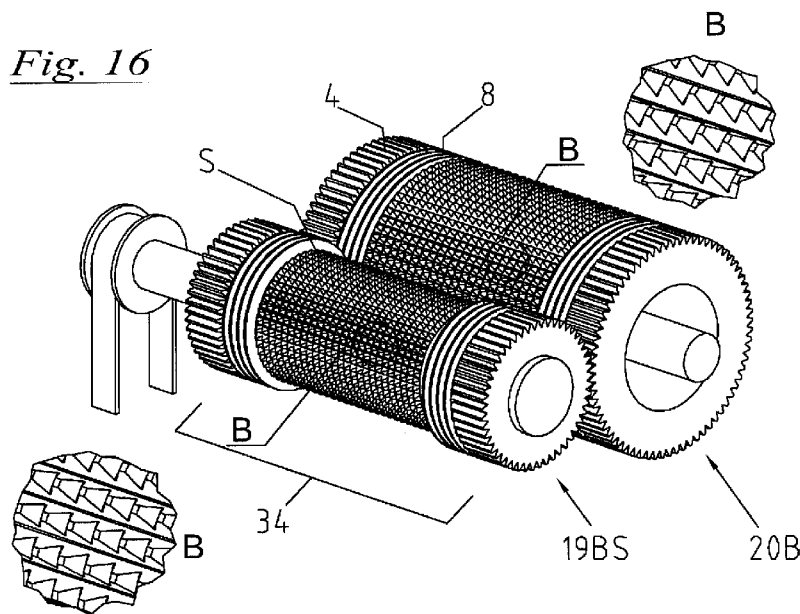

(57) Abstract: The foil embossing device has an embossing unit (34) comprising at least two rollers (40, 41) at least one of which (40) is an embossing roller and is driven by a drive (5), at least the embossing roller having teeth (B) that project from the base cylinder for producing logos on the foil in a logo area (27) with teeth (39) that are different from the regularly arranged teeth (A) in order to produce a variable specific embossing pressure on the foil, the rollers having both axially and radially acting centering elements (4, 8) for centering the embossing roller (40) with respect to the other roller (41). It is thus possible to emboss logos in a substantially greater variety of designs and with higher accuracy than in the prior art and thus to achieve a sophisticated esthetic impression.



- 1 -

### Device For Embossing Foils

The present patent application relates to a device for embossing foils according to the preamble of claim 1 and to  
5 foils produced by means of this device.

The foils to be used may be made of paper or synthetic materials or may be hybrid foils where e.g. a sputter deposited metal layer is enclosed between synthetic and/or  
10 paper layers, or they may consist of metal or be provided with a metal layer. They may be used for so-called innerliners, for cigarette mouthpieces, or for packaging boxes or the like. Hereinafter, for the sake of simplicity, the term "foil" will be used for all these different foil  
15 types.

For embossing logos of any kind on foils according to the pinup-pinup process, i.e. by means of teeth that project from the cylinder circumference of the embossing roller and  
20 projecting teeth on the counter-roller also, there are generally two methods. In the usual method, the logos are produced by removing or modifying the involved teeth on the embossing roller while the remaining teeth serve for satinizing. In a second production process, teeth are only  
25 provided on the embossing roller in those locations where the logos are to be produced. In the remaining areas, teeth may be provided which serve for driving the rollers and for their stability.

30 Both methods have in common that particularly in the case of larger areas without teeth, the foil will not be uniformly embossed over its entire width as the pressure applied to

- 2 -

the foil is not the same whether teeth are interlocking or teeth of one roller face empty areas on the other roller.

Moreover, with regard to embossing techniques, there is a trend towards ever finer teeth and structures. Whereas a tooth spacing or pitch of 0.3 mm was a general standard, spacings down to 0.10 mm have currently become usual. More recent embossing techniques also allow embossing in few locations only while the remaining areas of the roller are so designed that the foil remains unembossed.

In addition to the production of logos by omitting teeth or by providing teeth in the corresponding locations only, or by so-called shadow embossing where logos are produced by modified teeth, manufacturers constantly aim to produce logos having still other structures and/or an increased brilliance.

Accordingly, it is the object of the present invention to provide an embossing device that allows embossing logos or entire foils with a wider range of design possibilities and with substantially increased precision. Such a device is defined in independent claim 1.

The invention will be explained in more detail hereinafter with reference to drawings of exemplary embodiments, all Figures being schematic and some of them perspective views.

Fig. 0 shows the essential parts of a device of the prior art with two rollers having teeth in a pinup-pinup configuration,

- 3 -

- Fig. 1 shows a first exemplary embodiment of a device according to the invention with two rollers having teeth in the pinup-pinup configuration,
- 5 Fig. 2 shows an embodiment variant of the device of Fig. 1 with different teeth,
- Fig. 3 shows another embodiment of the invention with three rollers,
- 10 Fig. 4 shows an embodiment variant of the device of Fig. 3 with different teeth,
- Fig. 5 shows another embodiment variant of the device of Fig. 3 with inner centering rings,
- 15 Fig. 6 shows another exemplary embodiment of the device of the invention according to Fig. 1 with different teeth,
- 20 Fig. 7 shows a variant of the example of Figure 6 with different teeth,
- Fig. 8 shows a variant of the example of Fig. 6 with different teeth,
- 25 Fig. 9 shows a variant of the example of Figure 6 with different centering elements,
- 30 Fig. 10 shows another variant of the device of Fig. 1,
- Fig. 11 shows another variant of Figure 1 with differently arranged teeth,

- 4 -

- Fig. 12 shows an embodiment variant of Fig. 11,
- Fig. 13 shows another exemplary embodiment with teeth in  
5 the pinup-pindown configuration,
- Fig. 14 shows an embodiment variant of the device of  
Fig. 13,
- 10 Fig. 15 shows an embodiment variant of the device of  
Fig. 7,
- Fig. 16 shows an embodiment variant of the device of  
Fig. 4,
- 15 Fig. 17 shows an embodiment variant of the device of  
Fig. 9,
- Figures 18, 19 show as another exemplary embodiment of the  
20 invention two devices for positive embossing,
- Fig. 20 shows as another exemplary embodiment a device  
with two rollers having teeth for producing a  
higher specific embossing pressure,
- 25 Fig. 21 shows an embodiment variant of the device of  
Fig. 20 with different teeth,
- Fig. 22 shows an embodiment variant of the device of  
30 Fig. 17 with still other teeth,
- Figures 23 to 25 each show an embodiment variant of Figures  
20 to 22, and

- 5 -

Figures 26 to 29 show embodiment variants of Figures 6 to 9 with regard to the centering elements.

5 The new structures, either in the logo area or distributed over the entire foil, are produced by varying the specific embossing pressure, i.e. by varying the tooth tips involved in the embossing operation while the total number of teeth remains the same. The increase in specific pressure is  
10 mainly but not exclusively produced by reducing the surface area of the tooth tips involved in the embossing operation. Accordingly, an increased surface area of the tooth tips results in a reduction of the specific embossing pressure.

15 If the number of teeth remains the same, the variation of the specific embossing pressure can be achieved by varying the surface areas of the tooth tips involved in the embossing operation. This means that the pitch, i.e. the periodicity of the teeth, is the same for all teeth in the  
20 axial and circumferential directions, respectively. Alternatively, to achieve an increase of the specific embossing pressure, a local heightening of the teeth would be possible.

25 Such finer and individual tooth structures can no longer be produced with the techniques of the prior art, e.g. according to US-6 176 819 to the applicant of the present invention where the counter-roller(s) is (are) capable of a deviation of a certain amount in all three coordinate  
30 directions, and suitable devices and embossing units, respectively, are described hereinafter.

- 6 -

This applies also for the device according to US 2009/05001 to the same applicant or the US 2008/116610, also to the same applicant.

5 Embossing so-called innerliners for packaging a number of cigarettes, e.g. 20 pieces, by means of an embossing roller arrangement in a so-called pinup-pinup configuration is known from a large number of patents and patent applications to the applicant of the present invention, e.g. from US-  
10 5 007 271, US-6 176 819, or US-7 036 347. In this case, by definition, the teeth project from the base cylinder as defined by the plane formed by the valleys between the teeth.

15 The embossing units of the prior art have in common that they comprise at least one roller pair of which the first roller is driven by a drive 5, e.g. via a belt from the installation or by a separate motor, and this driven roller drives the counter-roller(s) by its teeth via the foil  
20 passing therebetween.

In these devices, the metallized surface of the foil is satinized, i.e. provided with a very large number of small indentations which produce a diffuse reflection of the  
25 impinging light. By omitting or modifying teeth, a logo is created either as part of the non-embossed, shiny foil surface or as embossed foil surface portions producing various optical effects depending on the light incidence.

30 Furthermore, US-7 147 453 or EP-2 027 994 A2 to the applicant of the present invention disclose an embossing unit that is composed of three rollers and where in the case that all three rollers are provided with teeth, the driven

- 7 -

roller drives the two counter-rollers, or the rollers are linked to each other by synchronizing means.

Basically, two methods for embossing logos are known in the art essentially, the term logo encompassing all kinds of signs, words, decorative or reinforcing elements: On one hand, the embossing of logos in an environment that is defined as being satinized and consists of regularly arranged very small indentations, and where due to the removal or modification of teeth either the unembossed foil surface appears or a modified surface is produced in the corresponding locations whose aspect changes depending on the lighting conditions. This can be referred to as negative logo embossing.

15

On the other hand, the logo may be embossed by teeth that are arranged in a toothless, flat surrounding area, which can be referred to as positive logo embossing.

Hereinafter, different tooth types A to D will be depicted which are not meant to be limitative, however, and are representative of a large number of tooth types. The sides of the teeth of types A, B, and C are aligned orthogonally to the roller axis whereas the sides of the teeth of type D include an angle with the longitudinal axis that is equal to 45° in the illustrated examples.

Fig. 0 shows an embossing unit 0 of the prior art that has been successfully used for embossing innerliners with teeth of type C in the so-called pinup-pinup configuration as it is e.g. described in US-6 176 819 where the two rollers 01 and 02 have the same teeth C that project from the surface and where one tooth of one roller engages between four teeth



- 8 -

of the other rollers, whereby a self-synchronization is achieved. First roller 01 is driven by a schematically illustrated drive 5, the drive possibly also being a motor. Teeth C are pyramidal with a square horizontal projection, are regularly arranged, and have a pitch of 0.3 mm here. The self-synchronization requires that counter-roller 02 has an axle 03 that is movable in the three coordinate directions.

As explained above, such a device with a self-synchronizing tooth arrangement reaches its limits when the specific embossing pressure is to be varied locally in that individual teeth or groups of teeth among the regularly arranged teeth have different tooth shapes with smaller or larger effective surface areas whereby the specific pressure applied to the foil is locally varied in order to produce different patterns thereon. The total number of teeth remains the same. It is further contemplated to emboss logos with different specific embossing pressures over large areas of the entire foil.

20

The problem of the counter-rollers that are movable in the three coordinate directions is also encountered when the pitch is reduced to e.g. 0.10 mm or finely structured logos are to be produced which are furthermore arranged in an environment without teeth. However, not only the structures are reduced in size but also the rotational speed of the rollers is strongly increased. If e.g. a roller having a circumference of 250 mm and teeth having a spacing of 0.4 mm is operated at a rotational speed of 200m/min, an interaction time of the teeth of 30 ms results. If the speed is increased to 1000 rpm and the pitch is reduced to 0.2 mm, an interaction time of the teeth of 3 ms results which may

- 9 -

become critical. All these problems can be resolved when the rollers are centered both axially and radially.

The axial centering elements include centering rings which  
5 engage either in the valleys between corresponding rings on  
the other roller or in the valleys between the teeth on the  
other roller. For the circumferential centering,  
interlocking tooth crowns are contemplated which moreover  
provide an improved force transmission. These centering  
10 elements are very precisely machined, the accuracy of the  
centering means being less than 20  $\mu\text{m}$  in the axial direction  
(centering rings) over the entire roller length of e.g. 250  
mm and generally less than 5  $\mu\text{m}$ , preferably less than 2  $\mu\text{m}$   
in the circumferential direction (tooth crowns) over the  
15 circumference of 70 mm. For rollers of different dimensions,  
these requirements with respect to accuracy vary  
accordingly.

The following Figures show different embodiments of the  
20 invention by way of examples.

According to Fig. 1, embossing unit 1 uses two rollers for  
embossing a foil strip 6. In Figure 1, roller 2A driven by  
drive 5 and counter-roller 3A only comprise teeth of type A.  
25 One of the rollers or both rollers comprise a logo area 27  
or a tothing 44, 49 for increasing the specific embossing  
pressure as illustrated and described with reference to  
Figures 20 to 25.

30 The teeth of type A are pyramidal with a rectangular  
horizontal projection and are aligned orthogonally to the  
roller axis, their longitudinal extension being smaller in  
the axial direction than in the circumferential direction

- 10 -

and valleys V1R, measured from the tooth tips, being deeper in the circumferential direction than the valleys V1L in the axial direction. An axial centering of the two rollers is thus achieved.

5

To achieve a circumferential centering and to ensure the required force transmission from the driven roller to the counter-roller, both rollers 2A and 3A are provided with tooth crowns 4 that are arranged outside the foil width and consequently do not serve for embossing.

Embossing unit 7 of Fig. 2 has two rollers 2B and 3B provided with pyramidal teeth of type B having a rectangular horizontal projection, their longitudinal extension being greater in the axial direction than in the circumferential direction and valleys V7L in the axial direction being deeper than the valleys V7R in the circumferential direction. In this manner, both the circumferential centering and the required force transmission may be sufficient. One of the rollers or both rollers have a logo area 27 or a tothing 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

25 To achieve an axial centering, centering rings 8 are arranged on both sides of both rollers outside the foil, the rollers being arranged such that the centering rings of one roller each engage between two respective centering rings of the other roller.

30

Embossing unit 10 according to Fig. 3 has three rollers 2A, 3A, 9A provided with teeth of type A and, as embossing unit 1, with tooth crowns 4, the driven roller 2A driving the

other two rollers. One, two, or all three rollers may have a logo area 27 or a tothing 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

5

Embossing unit 11 of Fig. 4 also comprises three rollers 2B, 3B, 9B provided with teeth of type B and, analogously to embossing unit 7 of Fig. 2, with centering rings 8, one, two, or all three roller(s) having a logo area 27 or a  
10 tothing 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

Embossing unit 12 according to Fig. 5 comprises two rollers  
15 2A and 9A as in Fig. 3 and a centering roller 13 that is provided with centering rings 8 only, rollers 2A and/or 9A having a logo area 27 or a tothing 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

20

Embossing unit 14 according to Fig. 6 comprises two rollers 2C and 3C in analogy to Fig. 2, however with the teeth of type C and thus with tooth crowns 4 and centering rings 8. Also, rollers 2C and/or 3C have a logo area 27 or a tothing  
25 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

According to Fig. 7, embossing unit 15 comprises two rollers  
30 16A and 17A with teeth of type A that are provided with tooth crowns 4 and centering rings 8. Also, rollers 16A and/or 17A have a logo area 27 or a tothing 44, 49 for increasing the specific embossing pressure as illustrated

- 12 -

and described with reference to Figures 20 to 25. In Fig. 7, foil web 6 is depicted.

According to Fig. 8, embossing unit 18 comprises two rollers  
5 19B and 20B with teeth of type B that are provided with tooth crowns 4 and centering rings 8. Also, rollers 19B and/or 20B have a logo area 27 or a tothing 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

10

According to Fig. 9, embossing unit 21 comprises two rollers  
22C and 23C with teeth of type C that are provided with tooth crowns 4 and centering rings 8. In this example, tooth crowns 8L have coarser teeth and the centering rings have a  
15 larger spacing than tooth crowns 4 and centering rings 8, respectively. Also, rollers 22C and/or 23C have a logo area 27 or a tothing 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

20

Embossing unit 24 of Fig. 10 comprises a roller 2C and a roller 24C that has only teeth of type C but neither tooth crowns nor centering rings. Also, rollers 2C and/or 24C have a logo area 27 or a tothing 44, 49 for increasing the  
25 specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

Embossing unit 25 according to Fig. 11 comprises a driven roller 2D and a counter-roller 3D with teeth of type D. As  
30 appears in the enlarged view, the sides of the pyramidal teeth are inclined at an angle to the roller axis that is equal to 45° here. Teeth D and their arrangement as well as centering elements 4L, 8L are the same on both rollers.

- 13 -

Also, rollers 2C and/or 24C may have a logo area 27 or a tothing 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

5

In Fig. 12 an embossing unit 28 comprising a combination of a roller 22C of Fig. 9 and a roller 3D of Fig. 11 is illustrated, i.e. with pyramidal teeth that are arranged orthogonally to the roller axis on roller 22C and at angle thereto on the other roller 3D. Both rollers are provided with the coarser centering elements 4L and 8L, and one or both rollers have a logo area 27 or a tothing 44, 49 for increasing the specific embossing pressure as illustrated and described with reference to Figures 20 to 25.

15

Embossing units 29 and 30 according to Figures 13 and 14 show a so-called pinup-pindown configuration. Embossing unit 29 comprises a driven roller 2C with projecting teeth of type C and a roller 32E having recesses E corresponding to teeth C, see the enlarged views. Such a pinup-pindown unit requires a precise synchronization of the rollers that is ensured by tooth crowns 4 and centering rings 8. Embossing roller 2C has a logo area 27 or a tothing 44, 49 as described with reference to Figures 20 to 25.

25

Embossing unit 30 of Fig. 14 is a variant of embossing unit 29 comprising roller 22C and counter-roller 33E, both with the coarser tooth crowns 4L and centering rings 8L.

30 In the embossing devices according to Figures 1 to 14, the centering elements primarily serve as pre-centering elements up to the moment when the foil to be embossed is introduced. In this operation, two steps can be distinguished:

- 14 -

- a) The rollers are adjusted so that a clearance from 0.5 mm to some mm remains between the rollers to allowing a comfortable threading of the foil, and
- b) The mutual distance of the rollers is reduced, generally pneumatically, until the correct embossing pressure is set which is dependent on various factors.

The interlocking centering elements may further prevent that the pyramid tips may enter into contact in case of a foil rupture. This effect can be enhanced by lowering the tooth surfaces by an amount  $S$  in the order of magnitude of the foil thickness. The depression extends on a length that is slightly greater than the width of the foil. As a result, the overall roller diameter is reduced by  $S = 0.02$  to  $0.2$  mm in the corresponding locations. In addition, this depression  $S$  ensures a more regular embossing across the entire foil width. The depression  $S$  may be provided on one roller, generally the embossing roller, or arranged on two or three rollers.

Figures 15 to 17 show different embodiments of overall depression  $S$ . According to Fig. 15 a depression  $S$  is provided on driven roller 16AS of embossing unit 31. Fig. 16 shows embossing unit 34 with the three-roller system in analogy to the system of Fig. 4, and it is apparent that depression  $S$  is composed of two depressions  $S'$  which together form the depressions  $S$  for pair 19BS', 20BS' or 19BS', 9BS', respectively.

Fig. 17 shows embossing unit 35 with rollers 22CS'' and 23CS''' in analogy to the embossing unit according to Fig. 9 having respective depressions  $S''$ ,  $S'''$  which together form

- 15 -

depression S. The partial depressions may be identical or  
take different values. The rollers according to Figures 15  
to 17 also have logo areas 27 or the tothing 44, 49, either  
on one or on two or three rollers. The rollers are provided  
5 with the centering elements 4, 4L; 8, 8L.

In a satinizing process with simultaneous negative logo  
embossing on innerliners, the metallized surface of the foil  
is being embossed. Mostly only the driven roller is provided  
10 with the logos while the counter-roller(s) are only provided  
with teeth. When logo areas with teeth for producing a  
varying specific embossing pressure are used, either only  
one roller, the driven one, or two or all rollers can be  
provided with the same logo area or with the special  
15 tothing.

For embossing non-metallized foils, however, it is  
advantageous to provide the logos on one of the non-driven  
embossing rollers in order to obtain positive salient logos  
20 on the other side of the foil. To this end, embossing units  
36 and 37 of Figures 18 and 19 comprise a roller 22C and a  
roller 26 or 26S, respectively, both rollers being provided  
with the coarser tooth crowns 4L and centering rings 8L.  
These embossing units are intended for positive embossing of  
25 foils, the driven roller 22C e.g. only having teeth of type  
C in this example while embossing rollers 26 or 26S are only  
provided with the embossing areas 27 which form the word  
LOGO here. Here, centering elements 4L, 8L further prevent a  
pitching movement of the rollers in the toothless portions.

30

In embossing unit 37 according to Fig. 19, overall  
depression S is provided on embossing roller 26S.  
Particularly for rollers having relatively few teeth that



- 16 -

form the logo it is advantageous if the centering elements not only center the rollers but also prevent a pitching movement of the latter.

5 The technique of embossing small indentations or elevations in certain areas in the pinup-pinup constellation according to Fig. 18 or 19 further makes it possible to use relatively thin wrapping foils for packaging boxes for high-grade goods such as electronic parts or watches, or cigarette packets,  
10 expensive pharmaceuticals, or foods such as cheese or chocolate with or without logos in the online process that are provided with reinforcement zones in critical locations, i.e. at the edges where there is a risk that the foil may be torn.

15 In Figures 20 to 25, the concept of a variable embossing pressure is schematically depicted. Figures 23 to 25 correspond to Figures 20 to 22, however with different centering elements. Fig. 23 shows coarser but not less  
20 precise centering elements 4L and 8L of both types, Fig. 24 the coarser centering rings 8L, and Fig. 25 the coarser tooth crowns 4L.

According to Fig. 20 or 23, in the continuum of teeth with  
25 or without logos of the prior art, a logo area 27 is provided that may also comprise several partial areas. The two rollers 40 and 41 of embossing unit 38 or the rollers 40L and 41L of embossing unit 50 are provided with the tooth crowns 4 and 4L, respectively, and with the centering rings  
30 8 and 8L, respectively. The rollers may have teeth of type A to D or any other pyramidal or conical teeth. Alternatively, counter-roller 41 or 41L may be provided with logo area 27 and embossing roller 40, 40L with depression S.

- 17 -

Logo area 27 on roller 40, 40L of embossing unit 38, 50 has teeth 39 which include a sharper angle than the other teeth both in the axial and in the circumferential directions and thus form a wider valley since they have the same pitch as the other teeth. The sharper angle results in a narrower tooth tip and produces an increased specific embossing pressure in the embossed area.

Figures 21, 24 and 22, 25 schematically illustrate an addition to the former embossing technique for packaging foils, more particularly innerliners in that rather than arranging logo areas of variable specific embossing pressure within a satinized environment with or without logos of the prior art, the special logos that may comprise very small areas are provided over the entire width of the foil, producing a variable specific embossing pressure on the foil.

Figs. 21 and 24 show two rollers 42, 42L and 43, 43L of embossing units 45, 51 of which at least one roller 42, 42L has a tothing 44 whose teeth include varying angles both in the axial and in the circumferential direction and thus valleys of varying widths therebetween but all of which have the same pitch in the axial and circumferential directions, respectively.

The varying angles produce a variable specific embossing pressure in the embossed area. Acute angles produce an increased specific pressure and obtuse angles a reduced one. Counter-roller 43, 43L may have teeth of types A, B, C, D with or without tothing 44 and with or without logos of the prior art. Rollers 42L and 43L are both provided with

- 18 -

regular tooth crowns 4 and coarser centering rings 8L.  
Roller 42, 42L may be provided with depression S.

Figs. 22 and 25 are embodiment variants of Figs. 21 and 24,  
5 respectively, where tothing 49 on roller 47, 47L and/or 48,  
48L of embossing units 46, 52 comprises further types of  
teeth whose tips may also have a rounded shape, in which  
case the specific embossing pressure is reduced. Here also,  
the pitch of the entire tothing 49 is the same in the  
10 circumferential and in the axial directions, respectively.  
Rollers 47L and 48L are provided with tooth crowns 8 and  
coarser centering rings 4L. Furthermore, embossing rollers  
47, 47L may be provided with a depression S.

15 Figures 26 to 29 show embodiment variants of the tooth  
crowns for axial and circumferential centering. Fig. 26  
shows an embossing unit 53 comprising driven roller 54C with  
teeth of type C and a counter-roller 55C, also with teeth of  
type C. In contrast to the preceding examples, tooth crowns  
20 4', 4'' have a helical tothing that may e.g. be an involute  
tothing, the direction of the teeth with respect to the  
circumferential direction being different on both sides of  
the rollers and also that of the cooperating tooth crowns.  
Different directions of the helical toothings on a roller  
25 result in a reduced axle load.

In Fig. 27, the teeth of tooth crowns 8', 8'' of rollers 56C  
and 57C of embossing unit 58 have the same direction at both  
ends whereas the directions of the respective cooperating  
30 teeth are different.

Fig. 28 shows an embossing unit 59 comprising rollers 60D  
and 61D with teeth of type D, analogously to the embossing  
unit according to Fig. 11. Tooth crowns 4'L and 4''L

- 19 -

correspond to tooth crowns 4' and 4'' according to Figure 26, however in a coarser embodiment.

Figure 29 corresponds to Fig. 28 while rollers 63D and 64D of embossing unit 62 have even coarser tooth crowns 4'XL and 4''XL that are aligned as previously.

In addition to other advantages that are known *per se*, such helical toothings provide a precise centering both axially and circumferentially. The rollers according to Figures 26 to 29 also have logo areas 27 or the tothing 44, 49, either on one or on both rollers, and may further have a depression S.

According to the present application, the pitch is the same not only on one of the rollers but on all cooperating rollers both in the circumferential and in the axial directions, respectively.

As explained above, the sides of the teeth need not necessarily be orthogonal to the longitudinal axis of the roller and may include any angle between 1° and 89°. The teeth may have a pitch between tips of 0.05 mm to 0.4 mm for a theoretical height without flattened portions of 0.03 mm to 0.3 mm. Finally, the teeth may also have a round cross-section and a conical profile as the rollers are provided with centering and driving means that serve as synchronizing means too.

Also, logo areas 27 or an individual logo area 27 may comprise conventional logos having either been produced by omitting teeth and/or by teeth producing what is called a shadow embossing in the prior art, or such areas may be produced in an environment comprising such logos. Tothing

- 20 -

44, 49 for producing a variable specific embossing pressure may also comprise the aforementioned logos.

In the foregoing description, centering elements 4, 4L, 4',  
5 4'', 4'L, 4''L, 4'XL, 4''XL, 8, 8L have always been  
mentioned in the context of the teeth or patterns for  
producing a variable specific embossing pressure, but these  
centering elements are also advantageous in applications  
beyond these teeth and patterns, e.g. in the case of a very  
10 small pitch or particularly precise patterns.

- - - - -

Claims

1. Device for embossing foils, with an embossing unit (1, 7, 10, 11, 12, 14, 15, 18, 21, 24, 25, 28, 29, 30, 31; 34, 5 35, 36, 37, 38, 45, 46, 50, 51, 52, 53, 58, 59, 62) comprising at least two rollers, at least one of which is an embossing roller and one roller is driven by a drive (5), at least the embossing roller having regularly arranged teeth (A, B, C, D) that project from the base cylinder, 10 characterized in that for producing logos on the foil (6), at least the embossing roller (2A, 2B, 2C, 16A, 19B, 22C, 2D, 32C; 26, 40, 42, 46, 50, 54C, 56C, 60D, 63D) has a logo area (27) with teeth (39) or a tothing (44, 49) that are different from the regularly arranged teeth (A to D), all 15 teeth having the same periodicity of the tothing (pitch) respectively in the circumferential and axial directions, in order to produce a variable specific embossing pressure on the foil, at least one of the rollers having both axially and radially acting centering elements (4, 4L; 4', 4'', 4'L, 20 4''L, 4'XL, 4''XL; 8, 8L) cooperating with at least one other roller for centering the embossing roller with respect to this at least one other roller.

2. Device according to claim 1, characterized in that in 25 order to vary the embossing pressure, the teeth (39) or the tothing (44, 49) of at least the embossing roller have differently embossing tip surfaces with varying angles of the sides and/or smaller horizontal projections and/or rounded surfaces, but always the same pitch.

30

3. Device according to claim 1 or 2, characterized in that the centering elements include centering rings (8, 8L) on both sides of and outside the embossing zone which either

- 22 -

engage between centering rings or teeth of the other roller so as to prevent an axial displacement, and/or tooth crowns (4, 4L, 4', 4'', 4'L, 4''L, 4'XL, 4''XL) which prevent circumferential slippage and improve the force transmission and provide the synchronization.

4. Device according to claim 3, characterized in that the dimensional accuracy of the centering rings (8, 8L), for a tooth pitch of 0.3 mm and a roller length of 250 mm, is smaller than 20  $\mu\text{m}$ .

5. Device according to claim 3 or 4, characterized in that the dimensional accuracy of the teeth of the tooth crowns (4, 4L, 4', 4'', 4'L, 4''L, 4'XL, 4''XL), for a circumference of 70 mm, is smaller than 5  $\mu\text{m}$ , preferably smaller than 3  $\mu\text{m}$ .

6. Device according to any one of claims 3 to 5, characterized in that the tooth crowns (4', 4'', 4'L, 4''L, 4'XL, 4''XL) are designed as helical toothings, the directions of the teeth at both ends of a roller being either opposed to each other or the same, however opposed to the cooperating teeth of the other roller.

7. Device according to any one of claims 1 to 6, characterized in that over a length that is slightly greater than the foil width, the sum of the diameters of the two rollers (16AS, 17A; 19BS', 20BS'; 19BS'', 9BS''; 22CS'', 23CS''') which cooperate in the embossing operation of the foil (6) is 0.02 to 0.2 smaller than the sum of the diameters of the remaining parts of these rollers.

- 23 -

8. Device according to any one of claims 1 to 7,  
characterized in that the teeth of the embossing roller for  
embossing logos are pyramidal with a rectangular or square  
horizontal projection or conical with a round cross-section  
5 and the edges of the pyramidal teeth are arranged either  
orthogonally to the longitudinal axis of the roller or at an  
angle of between 1° and 89° thereto.

9. Device according to any one of claims 1 to 8,  
10 characterized in that individual teeth of the embossing  
roller are modified in height or shape in order to produce  
embossed signs whose appearance varies depending on the  
lighting conditions and the viewing angle, the so-called  
shadow embossing.

15

10. Device according to any one of claims 1 to 9,  
characterized in that the embossing roller (26, 26S) has  
teeth in those locations (A-D, 39, 44, 49) that are intended  
for embossing logos only.

20

11. Device according to any one of claims 1 to 10,  
characterized in that logos produced by omitting teeth or by  
teeth modified so as to produce the shadow embossing are  
present in the logo area (27) and/or outside the logo area,  
25 and/or the logo area is surrounded by a satinized  
environment.

12. Packaging foil produced by means of a device according  
to any one of claims 1 to 11, characterized in that it  
30 comprises at least one logo area whose embossing patterns  
comprise signs produced by varying specific embossing  
pressures and thus exhibit varying impression depths and  
shapes in order to create an esthetic appearance.



13. Packaging foil according to claim 12, characterized in that the embossing patterns extend over the entire foil.

Fig. 0

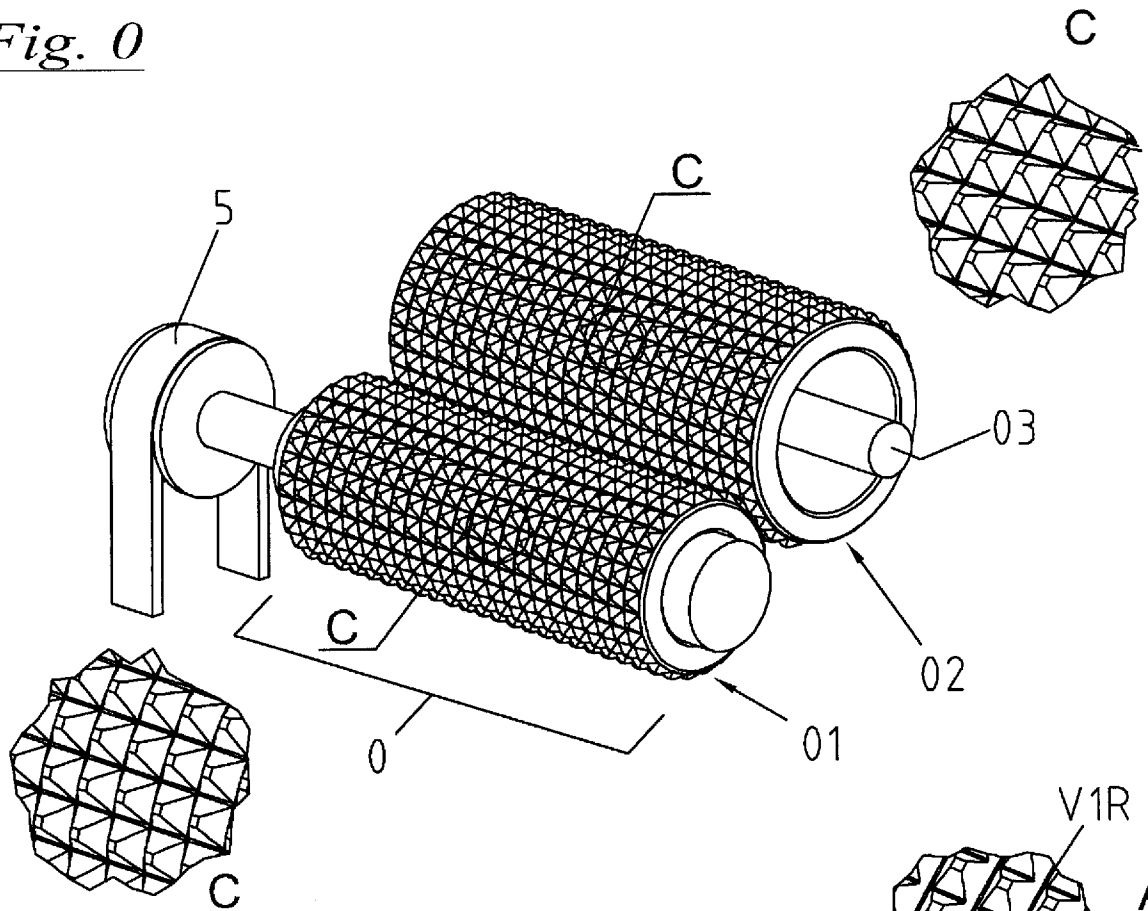


Fig. 1

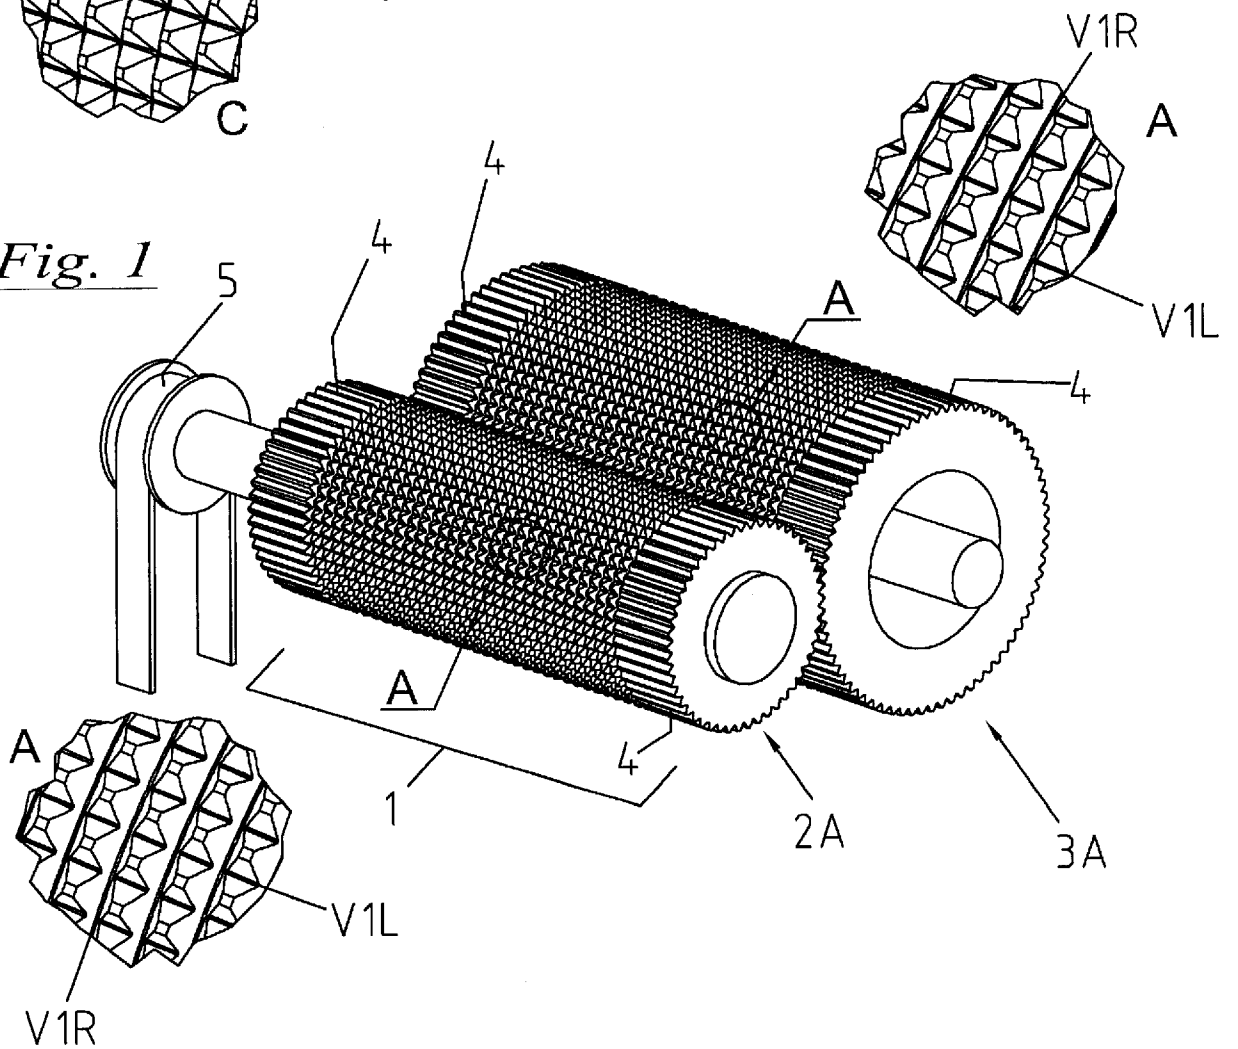


Fig. 2



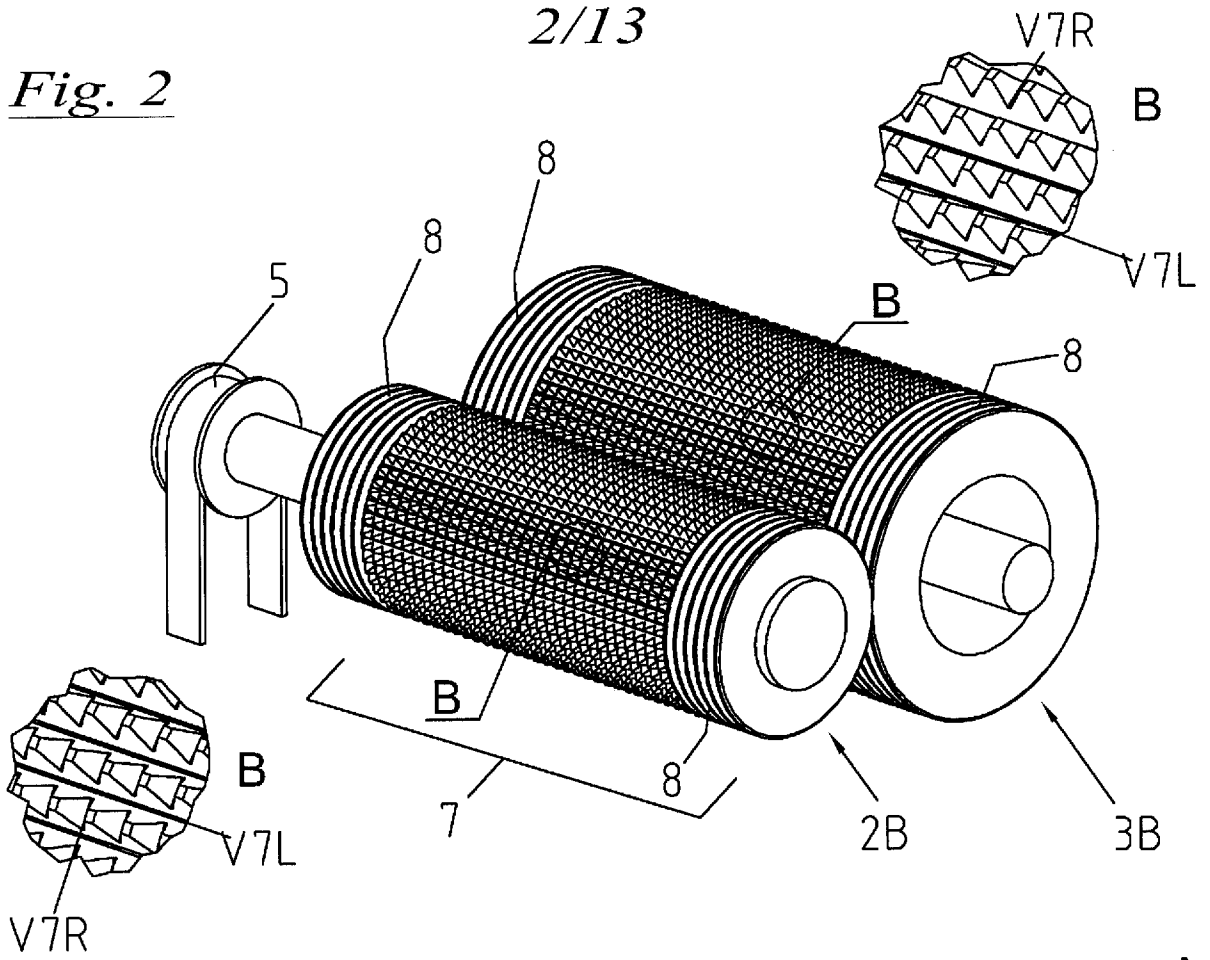


Fig. 3

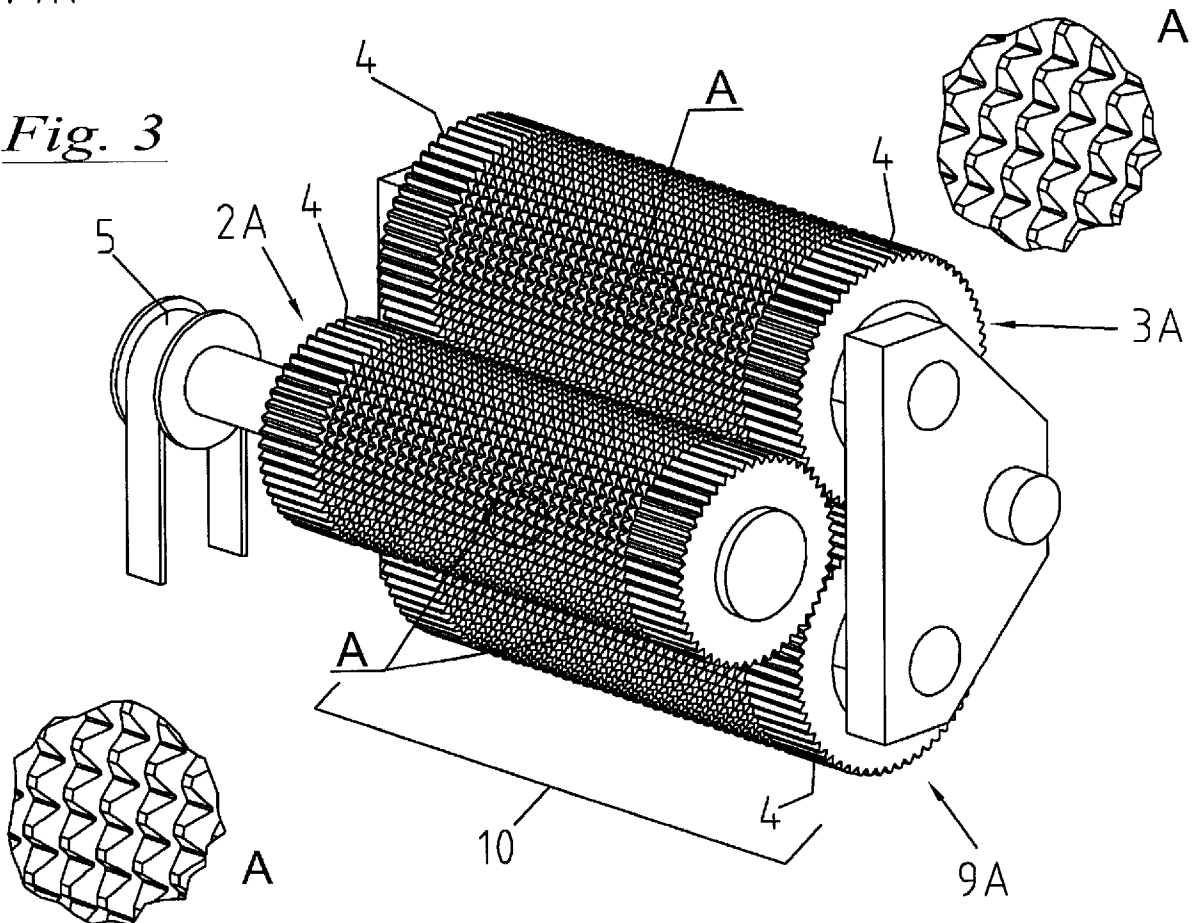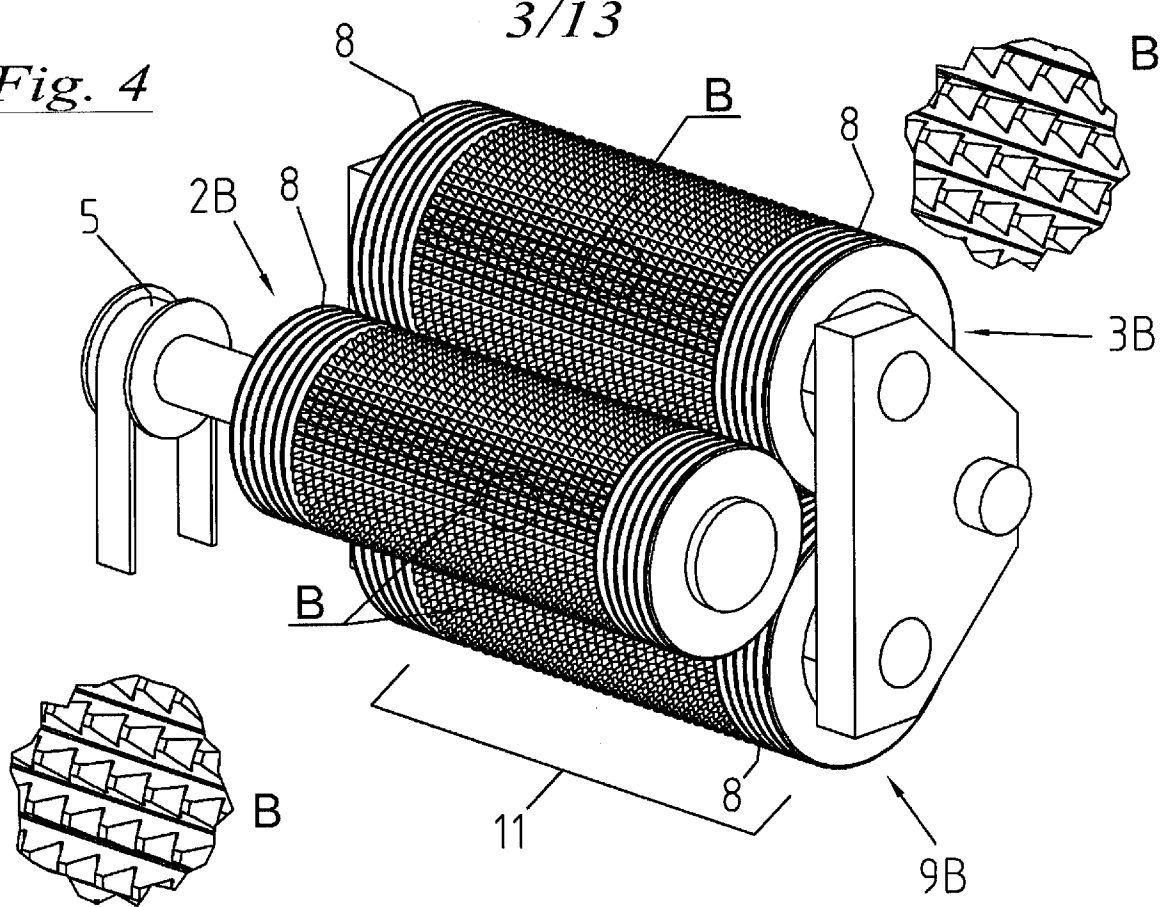

3/13

*Fig. 4*



*Fig. 5*

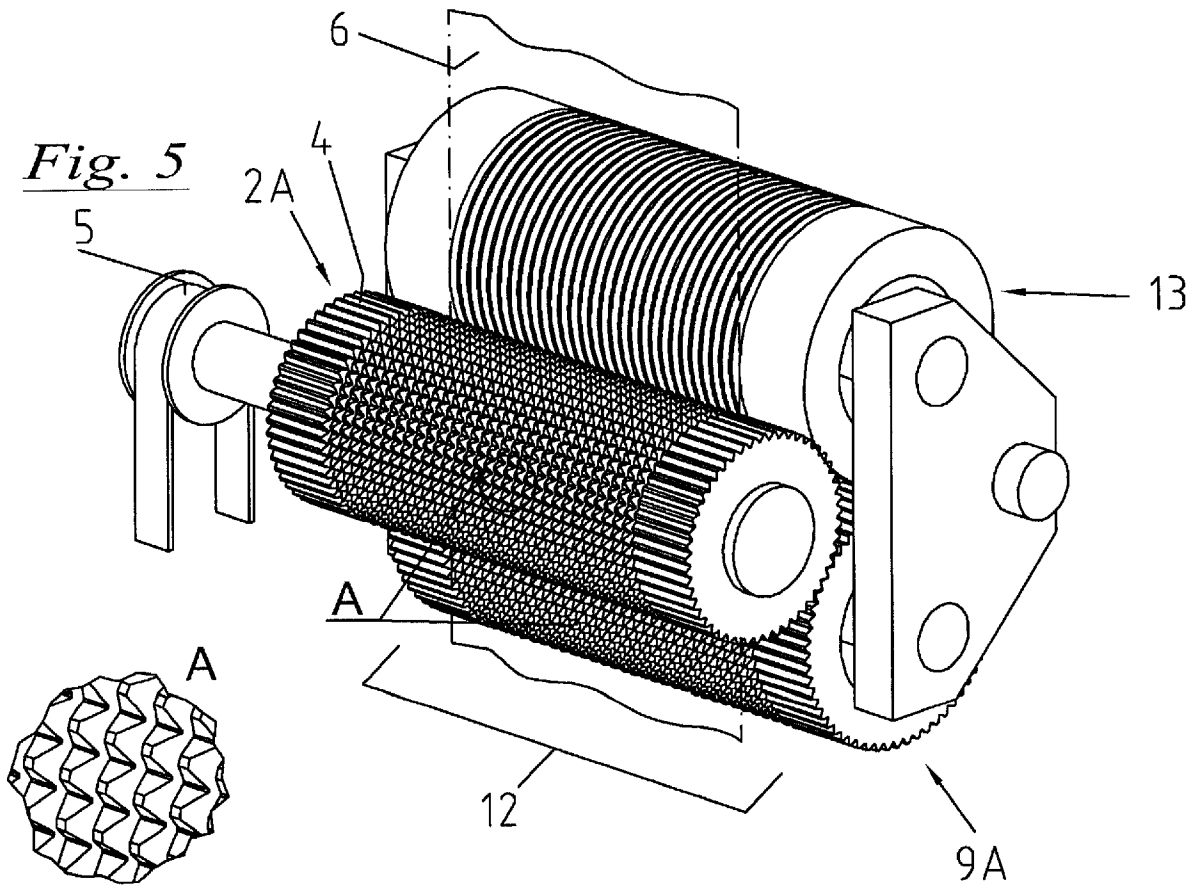


Fig. 6

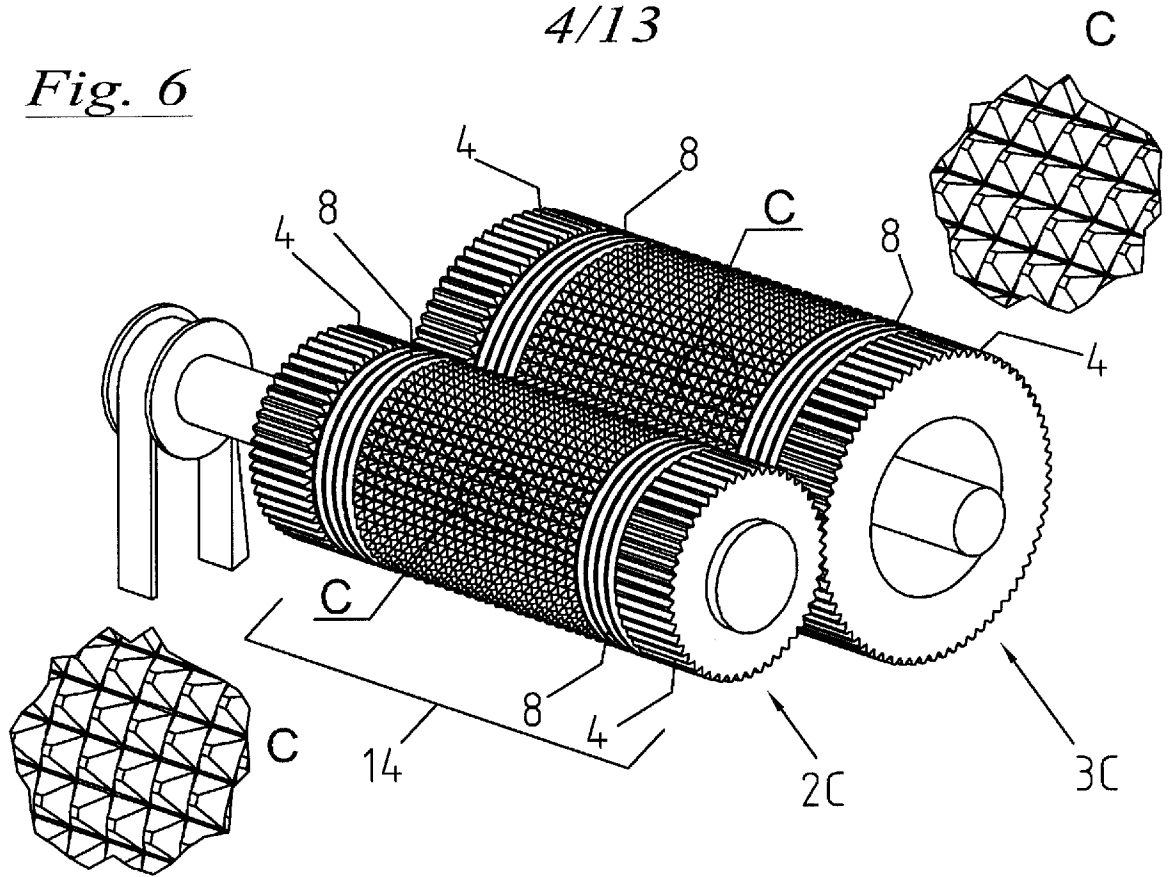


Fig. 7

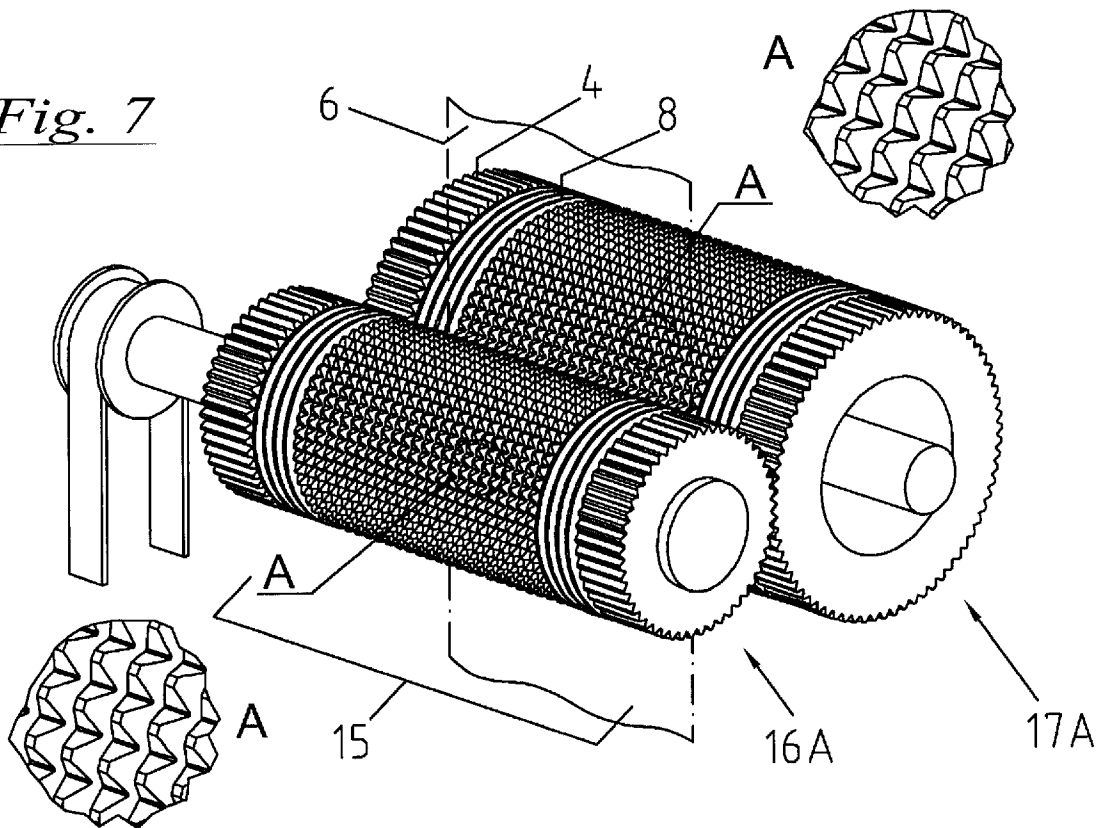


Fig. 8

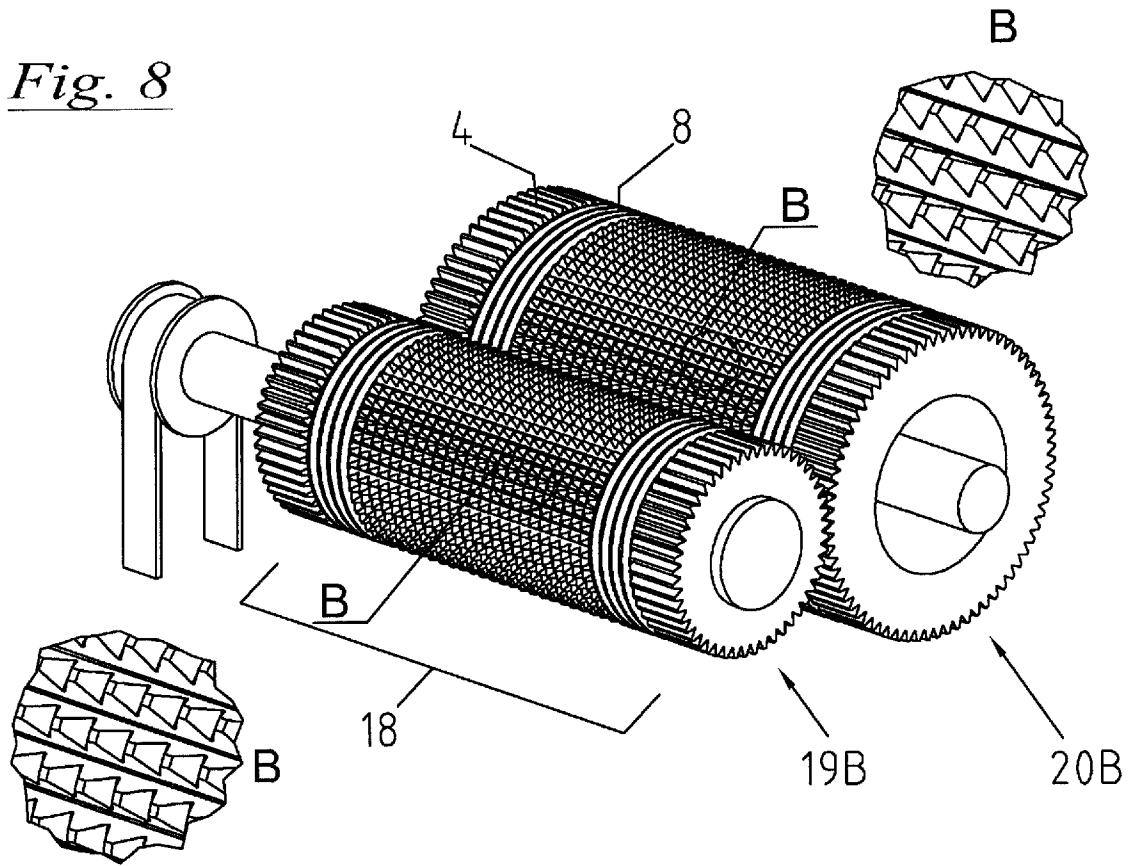


Fig. 9

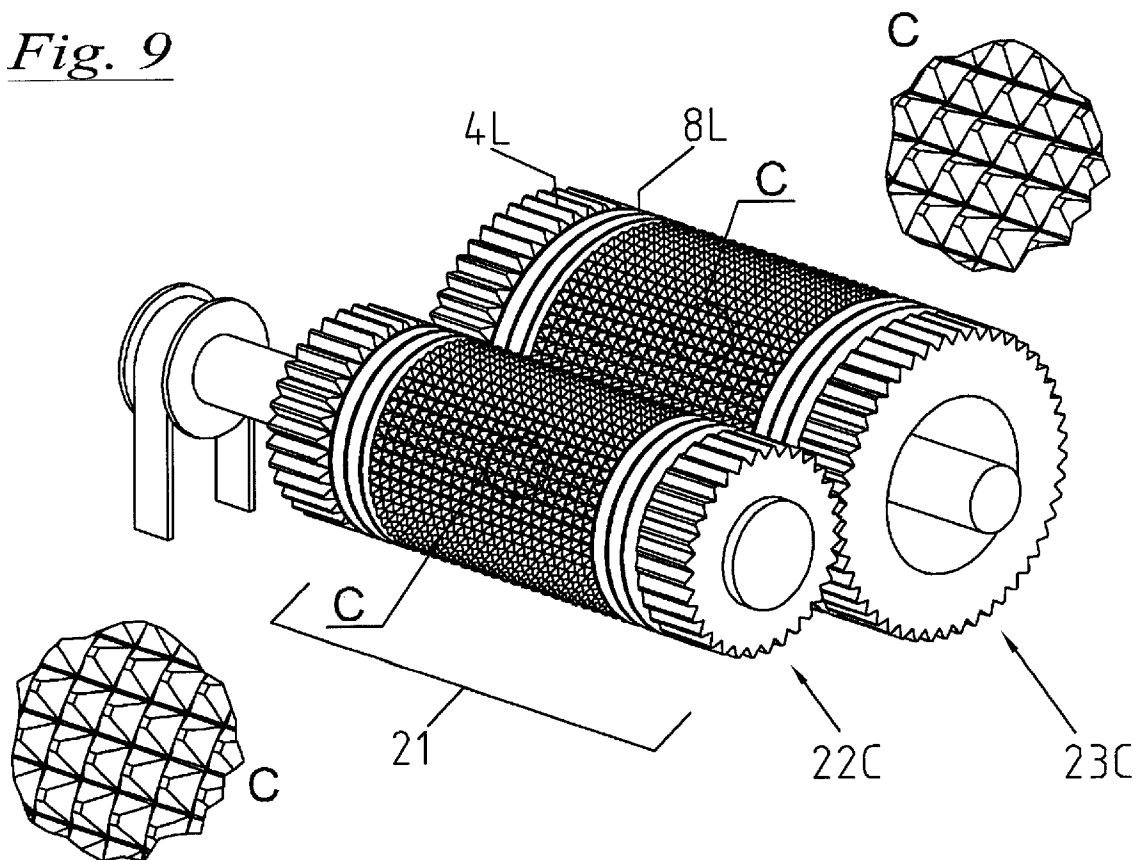


Fig. 10

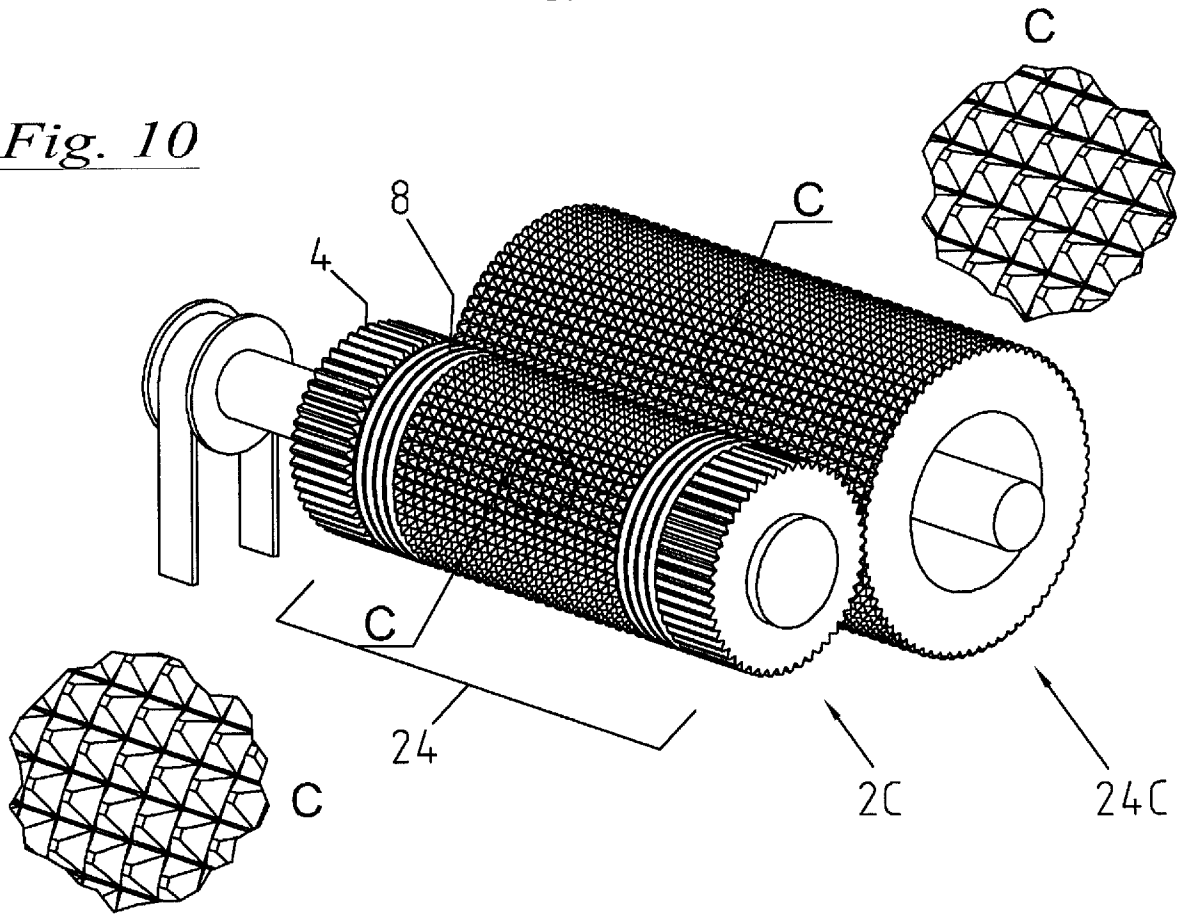


Fig. 11

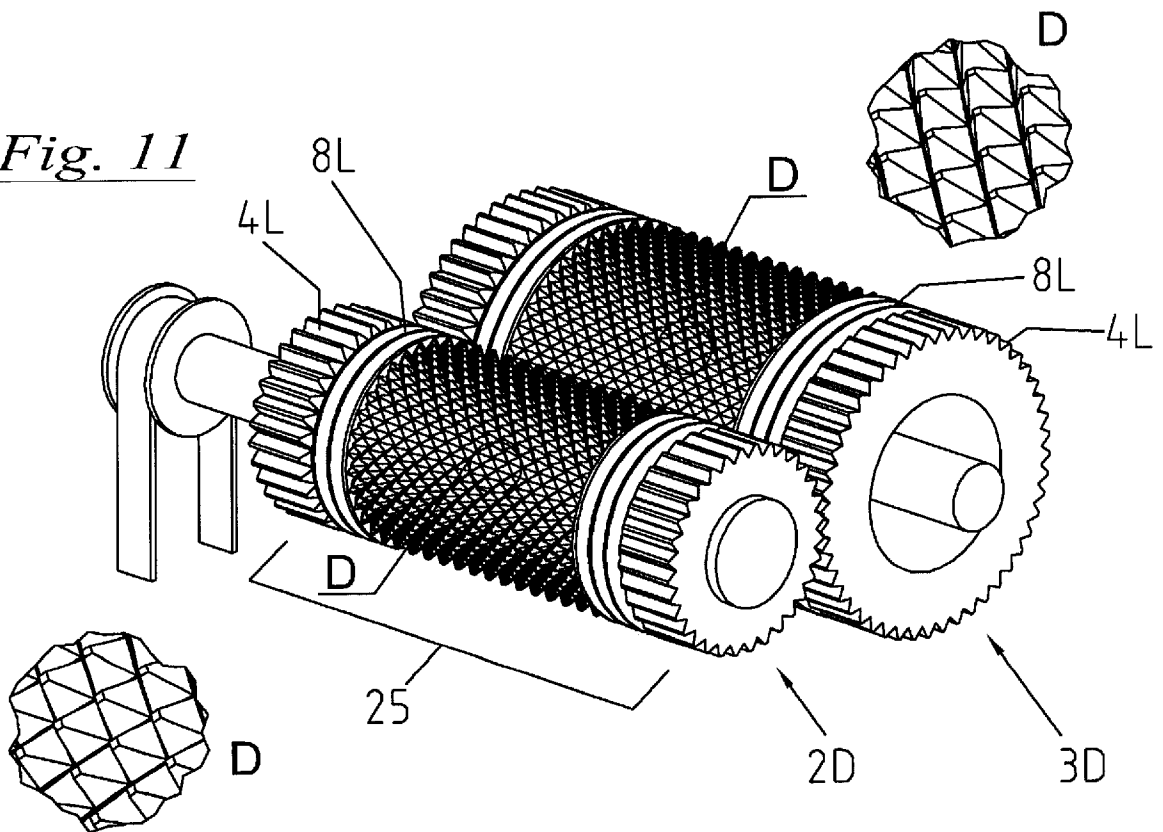


Fig. 12

7/13


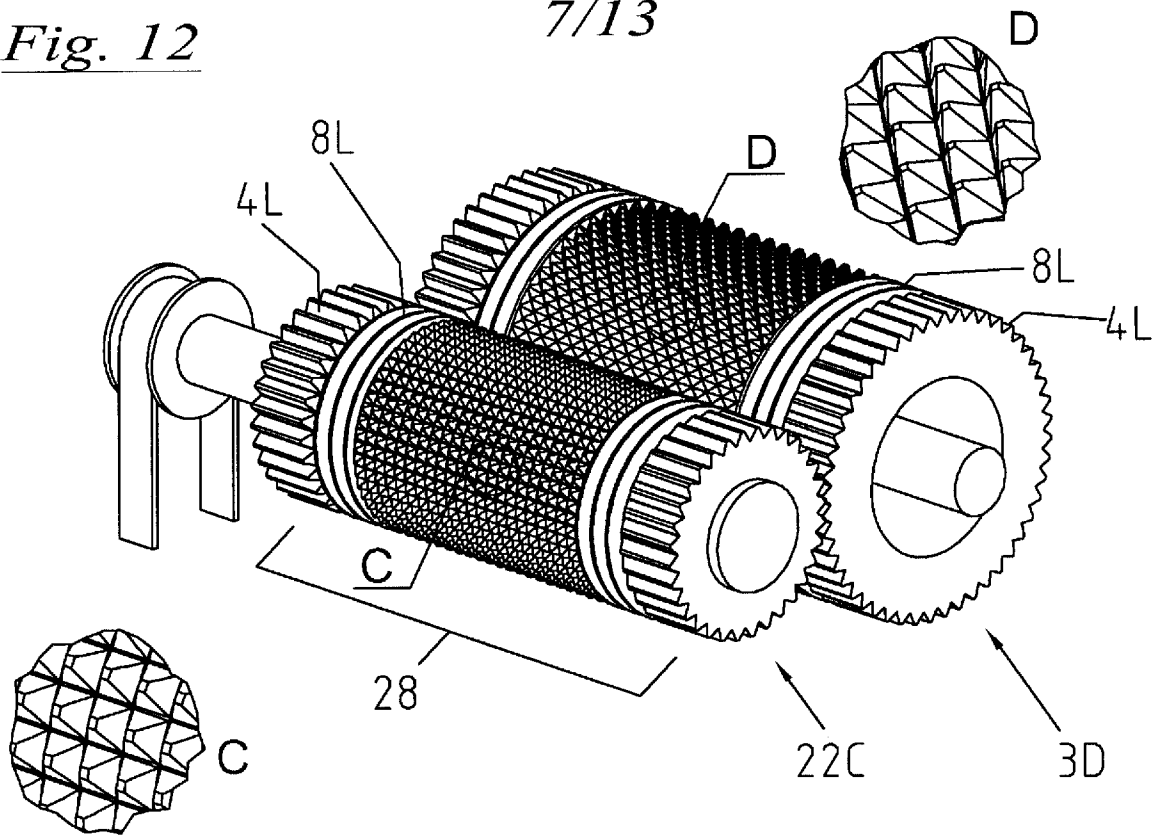


Fig. 13



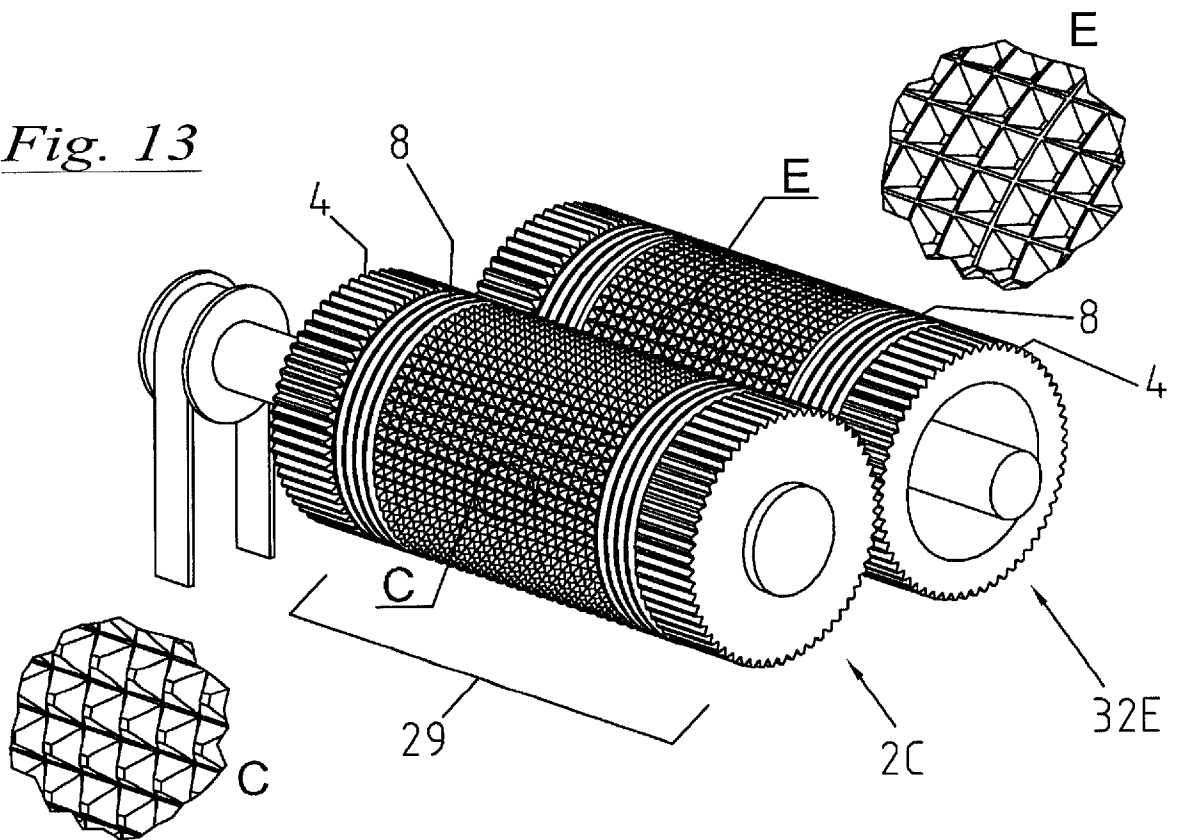

8/13

Fig. 14

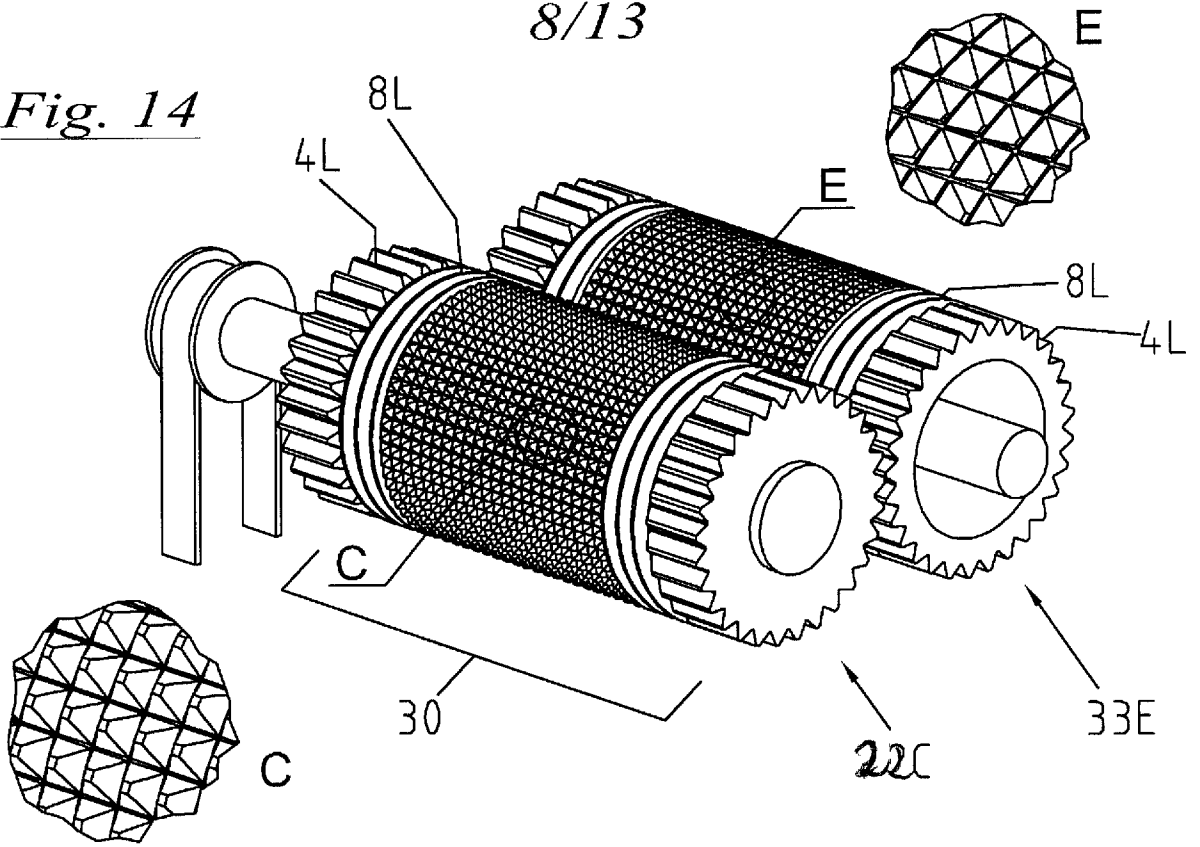
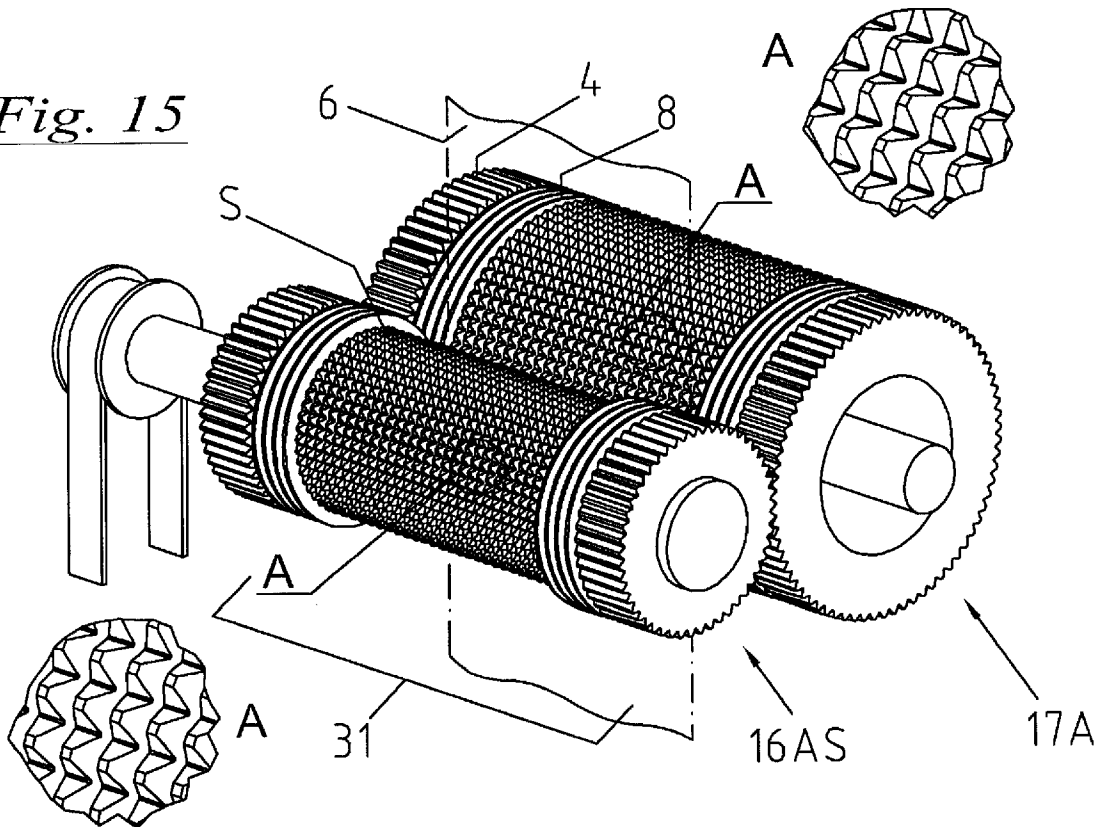
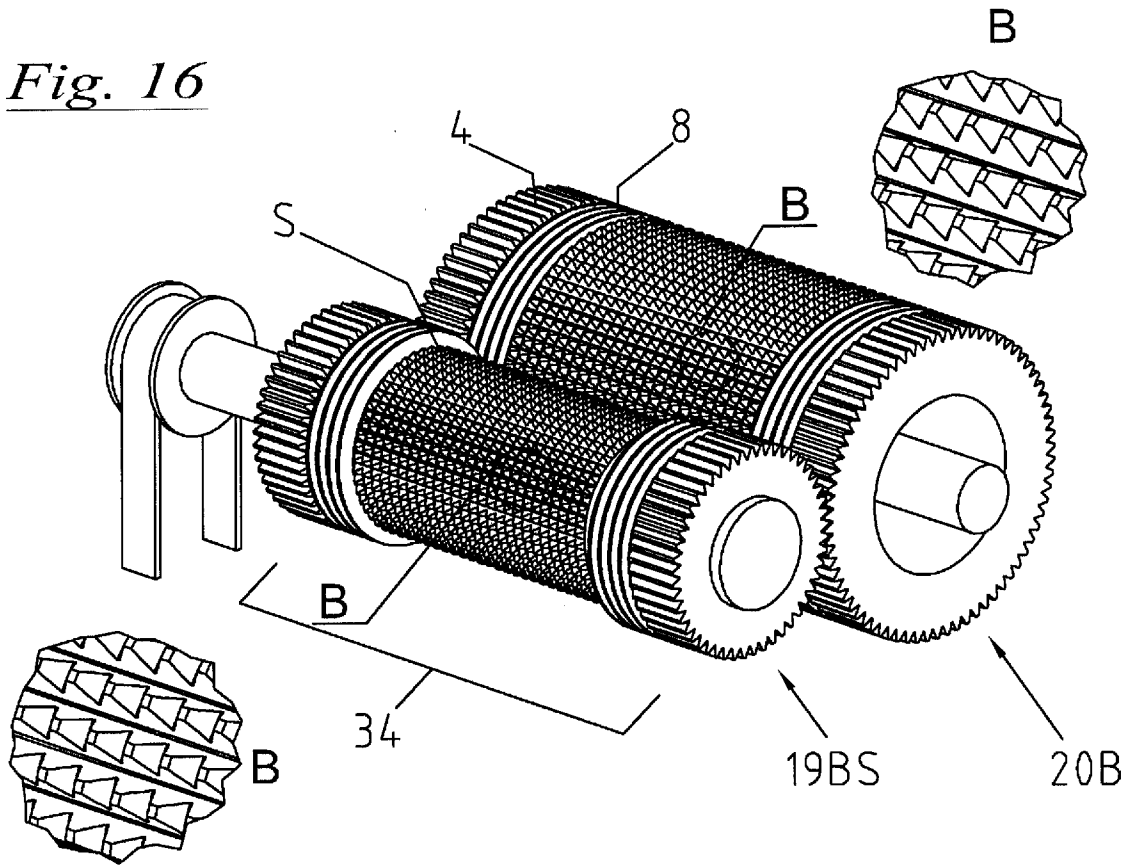


Fig. 15



*Fig. 16*



*Fig. 17*

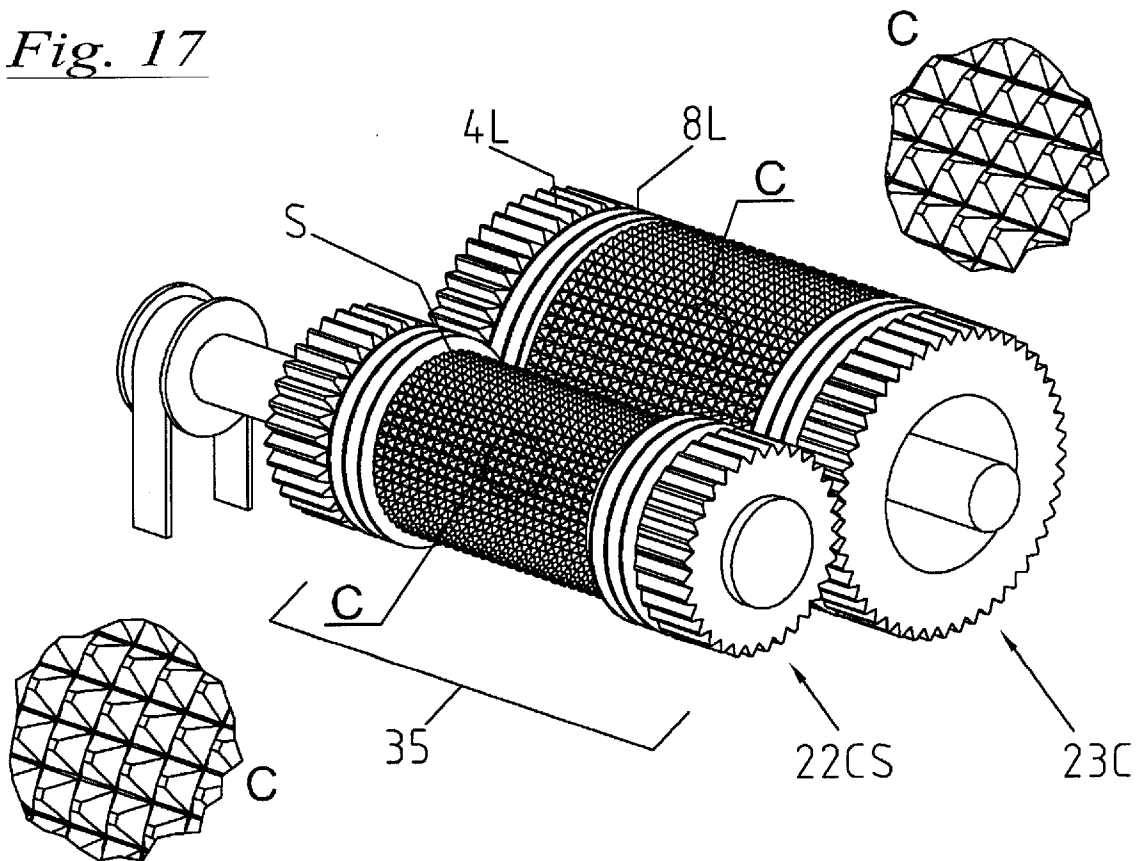


Fig. 18

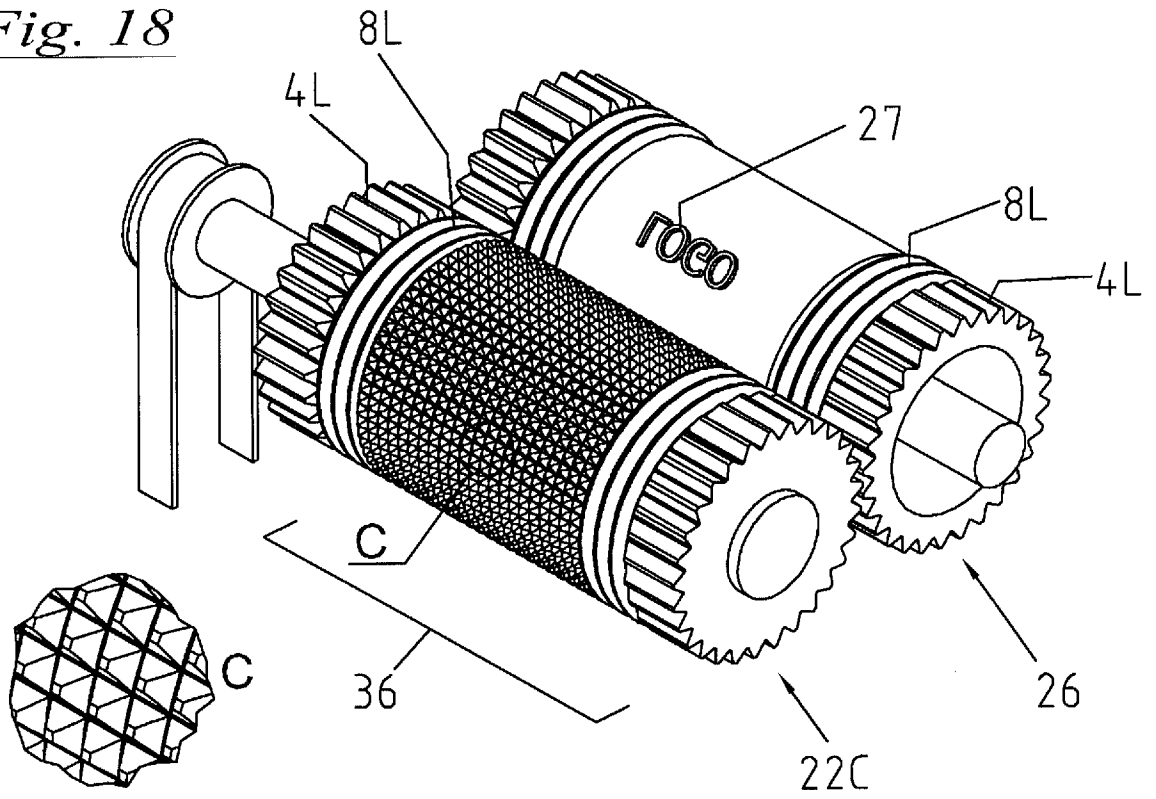
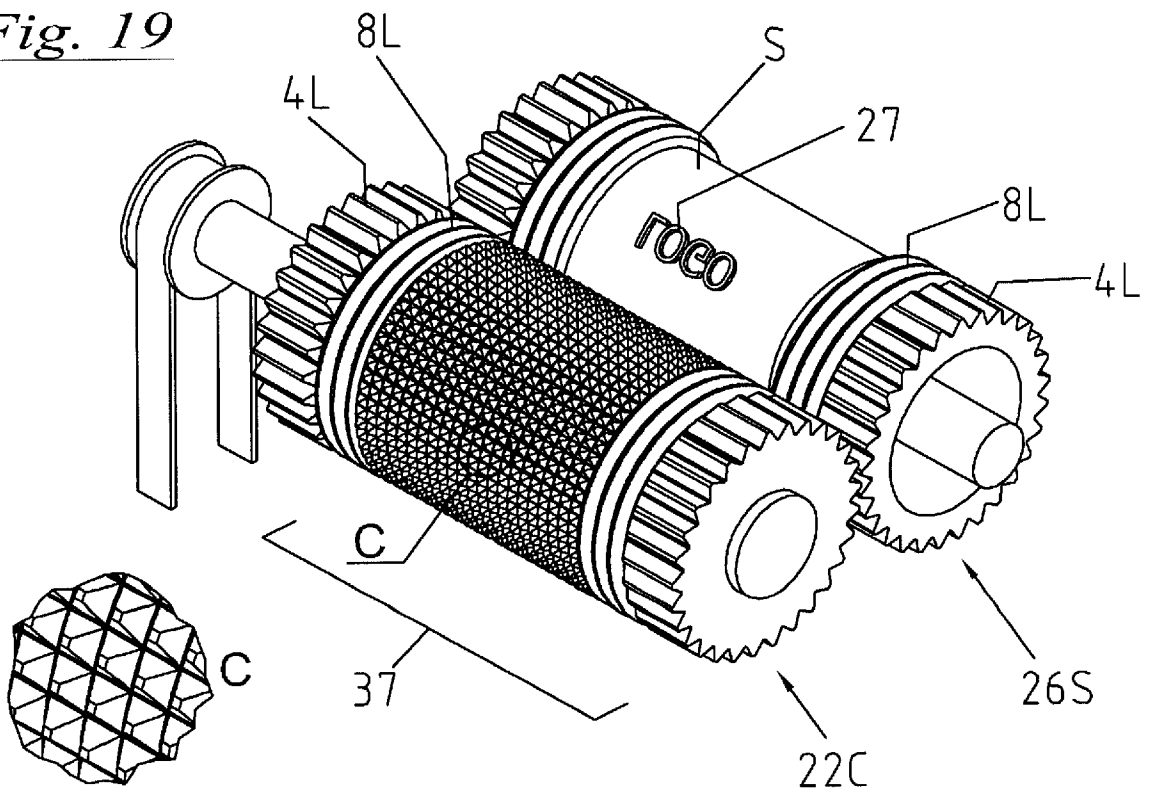
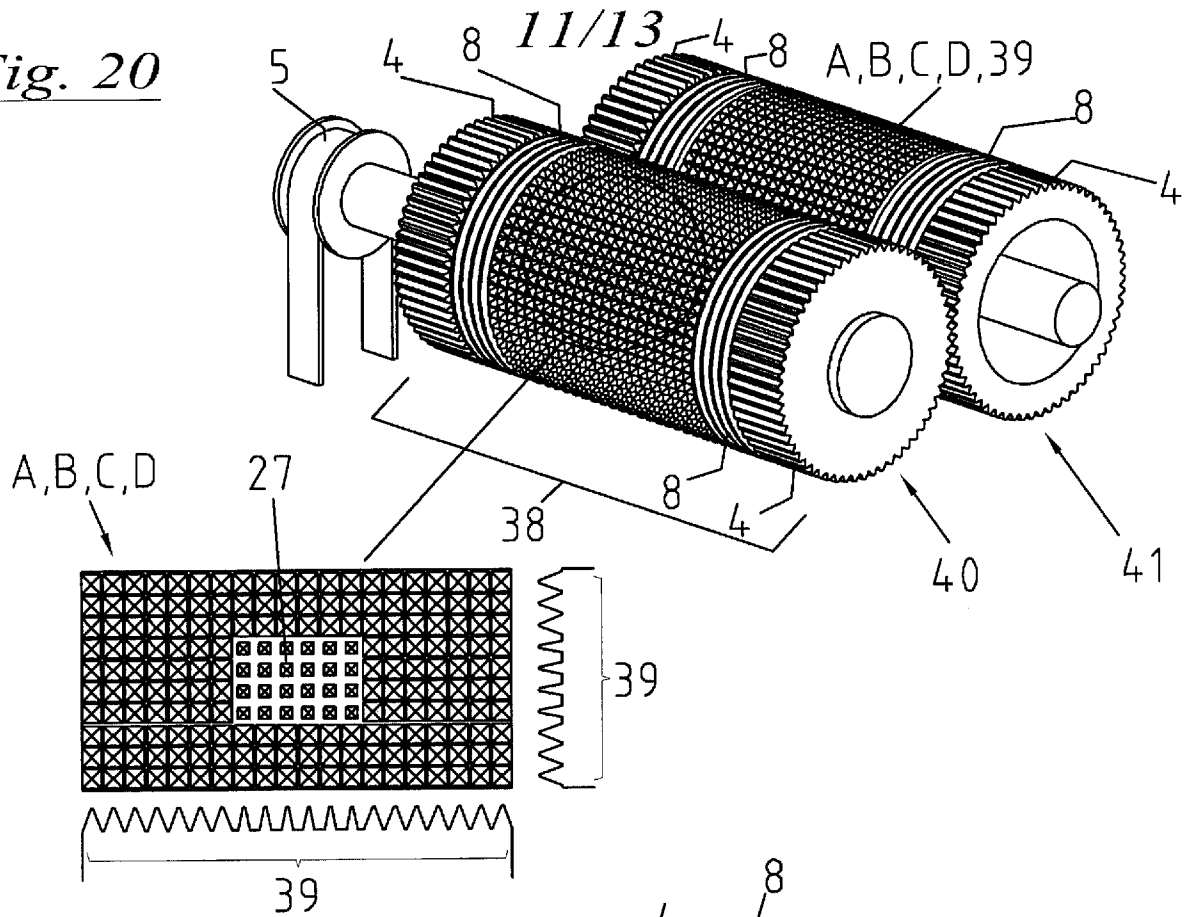



Fig. 19





*Fig. 20*



*Fig. 21*

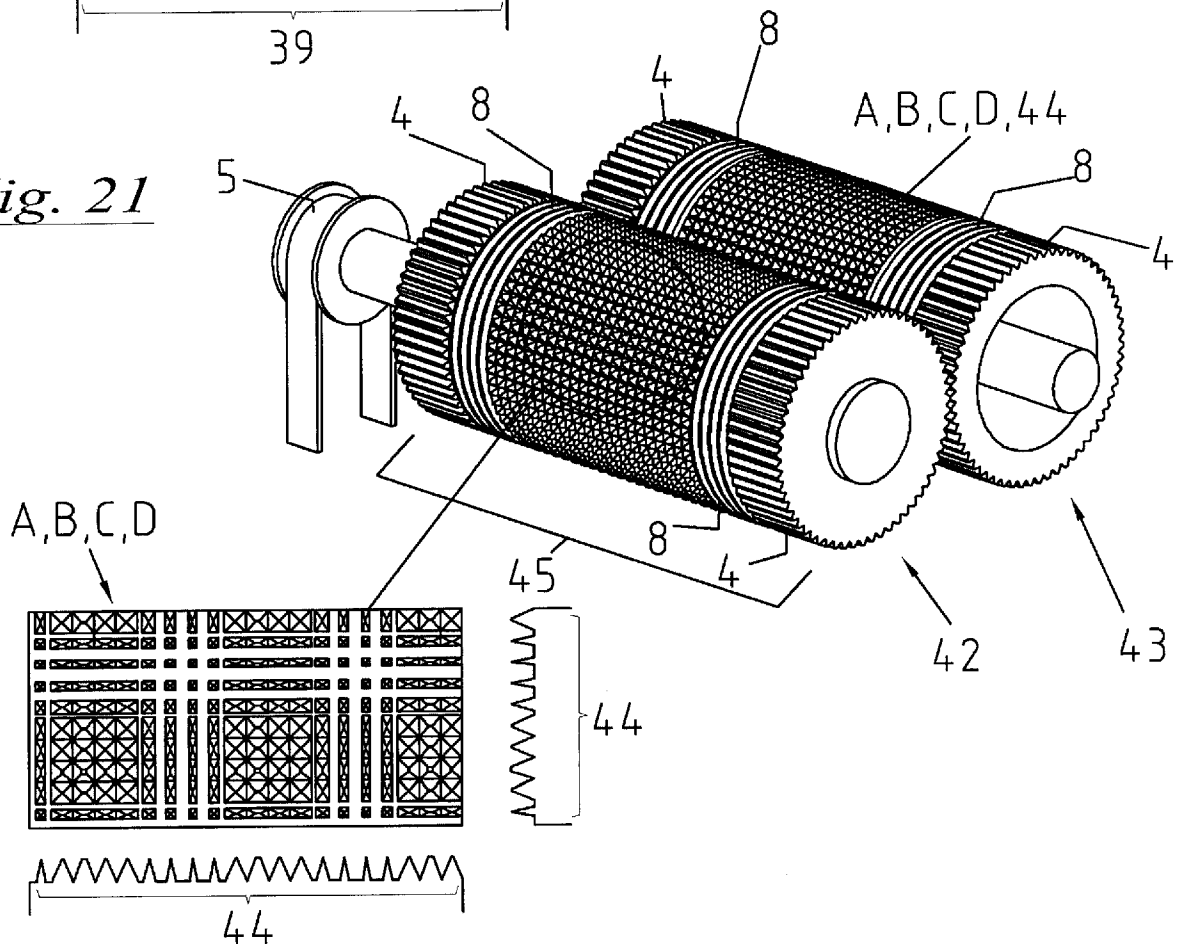

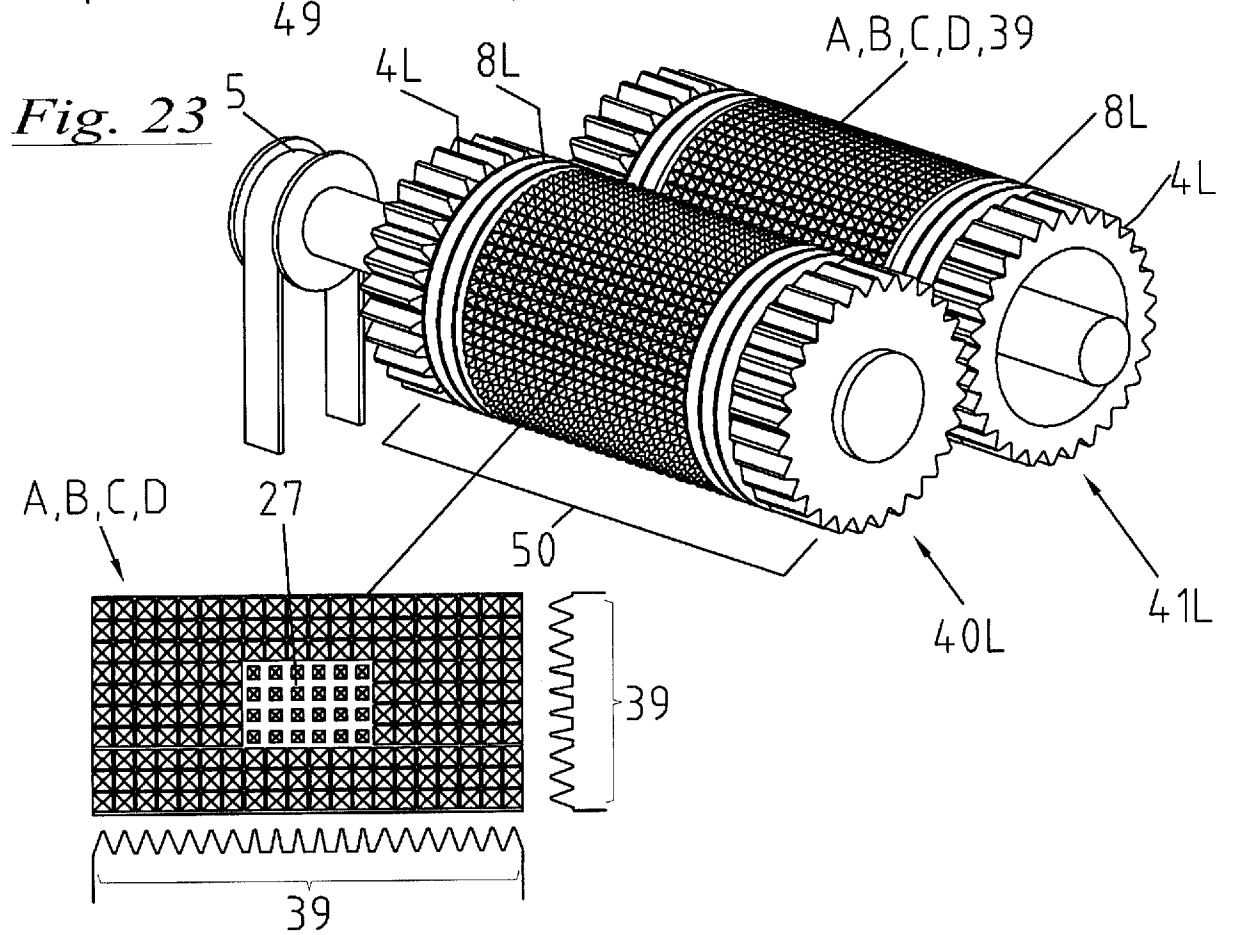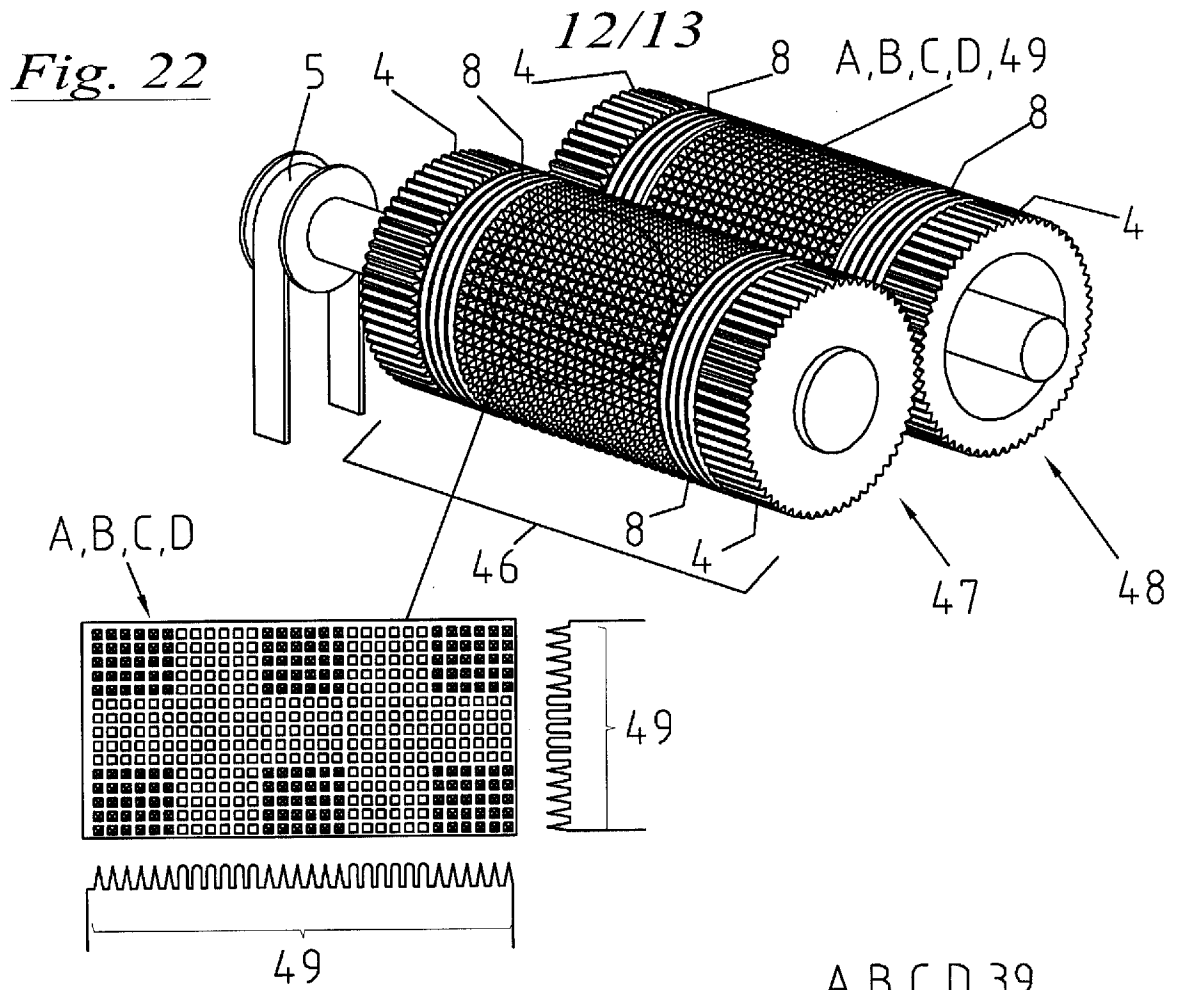

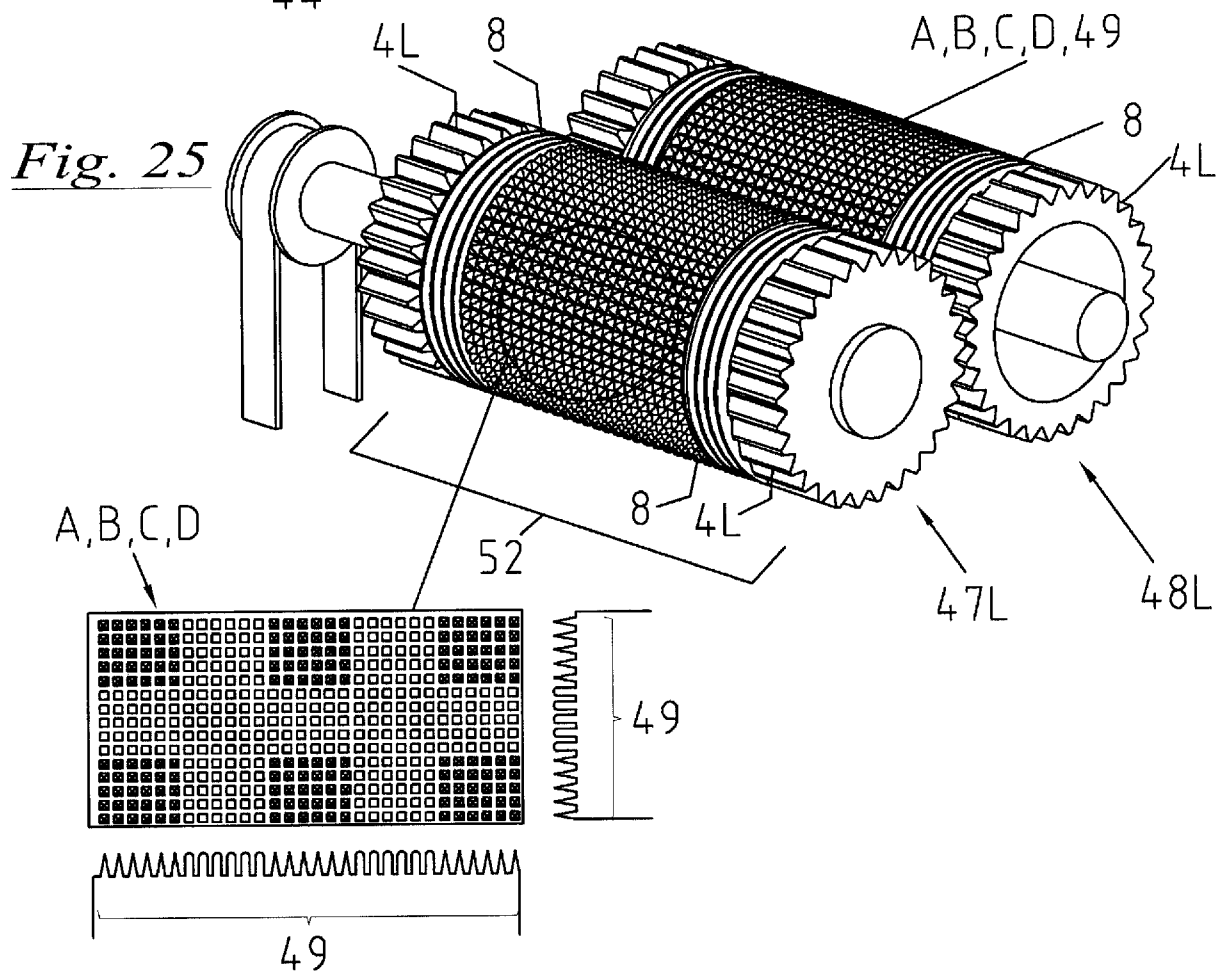
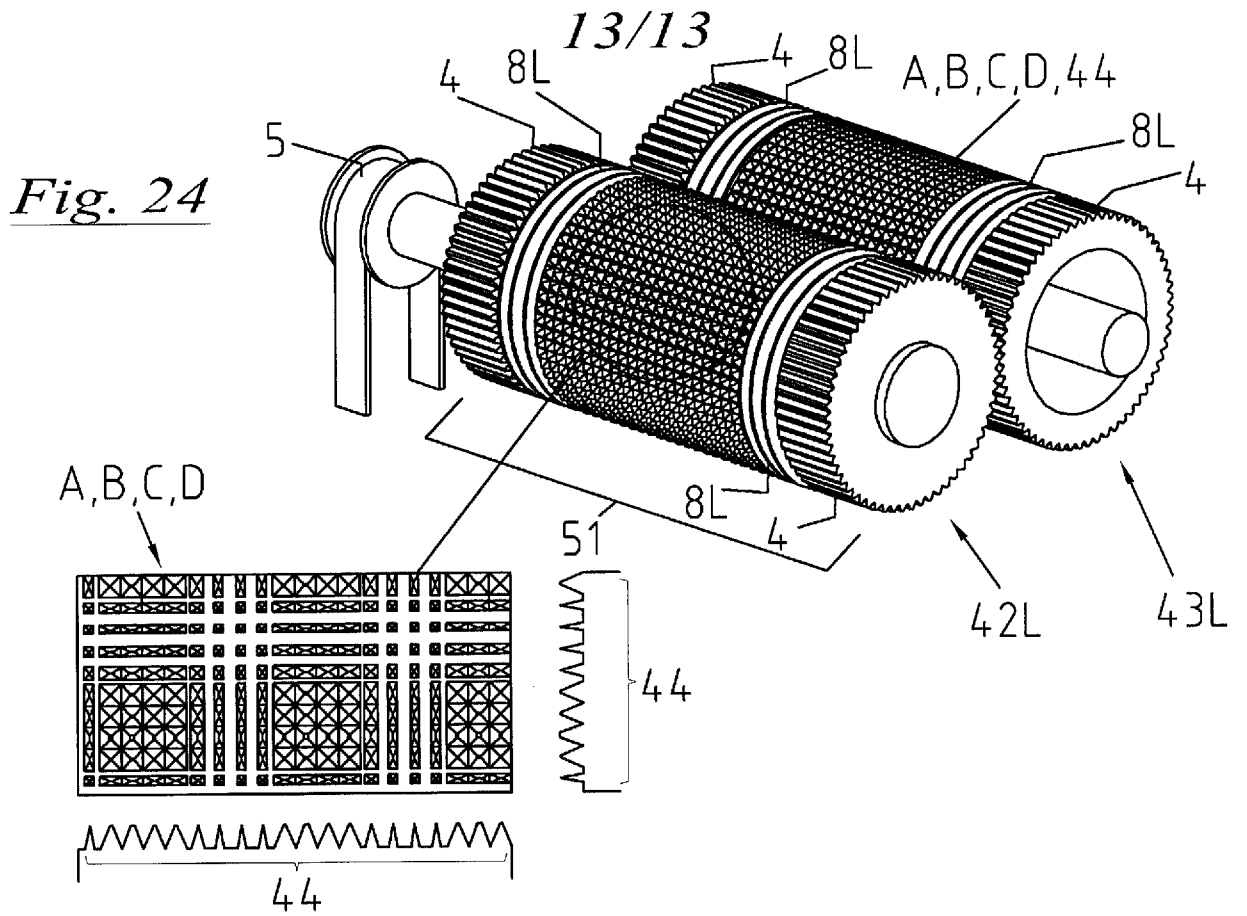


Fig. 26


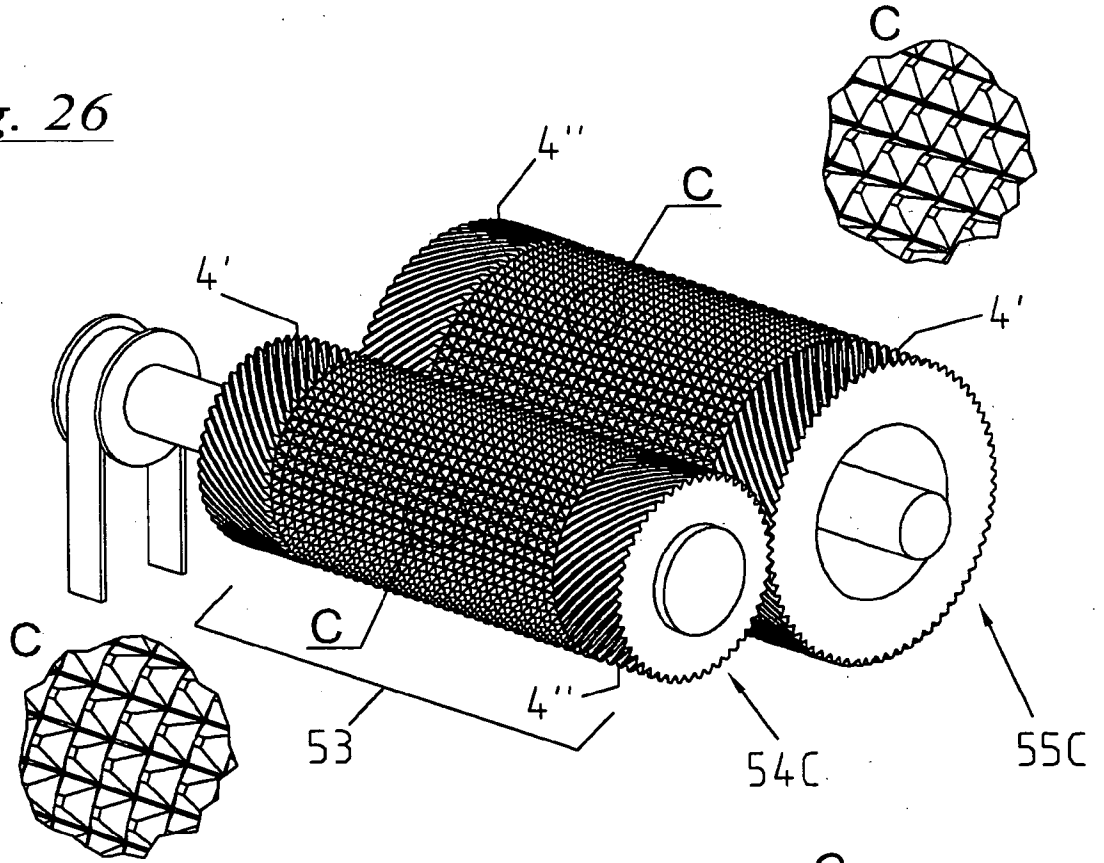


Fig. 27

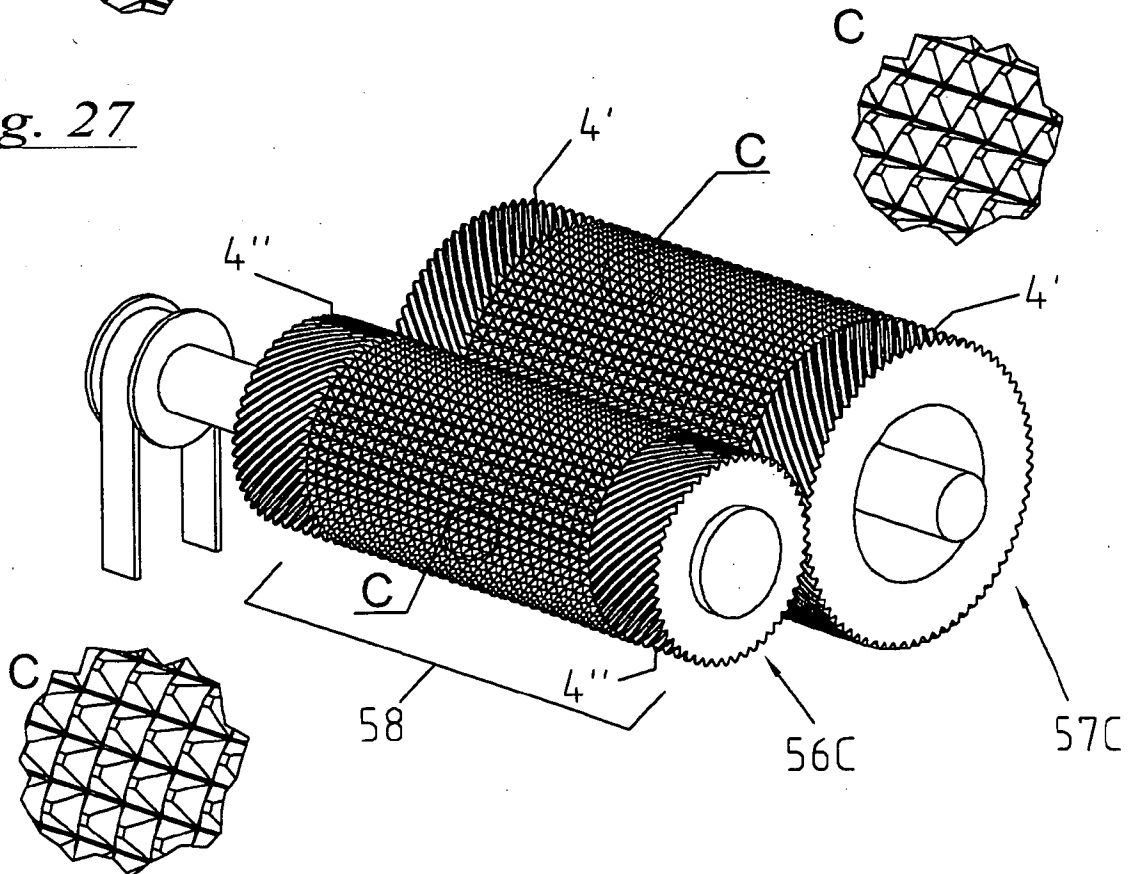

15/15

Fig. 28


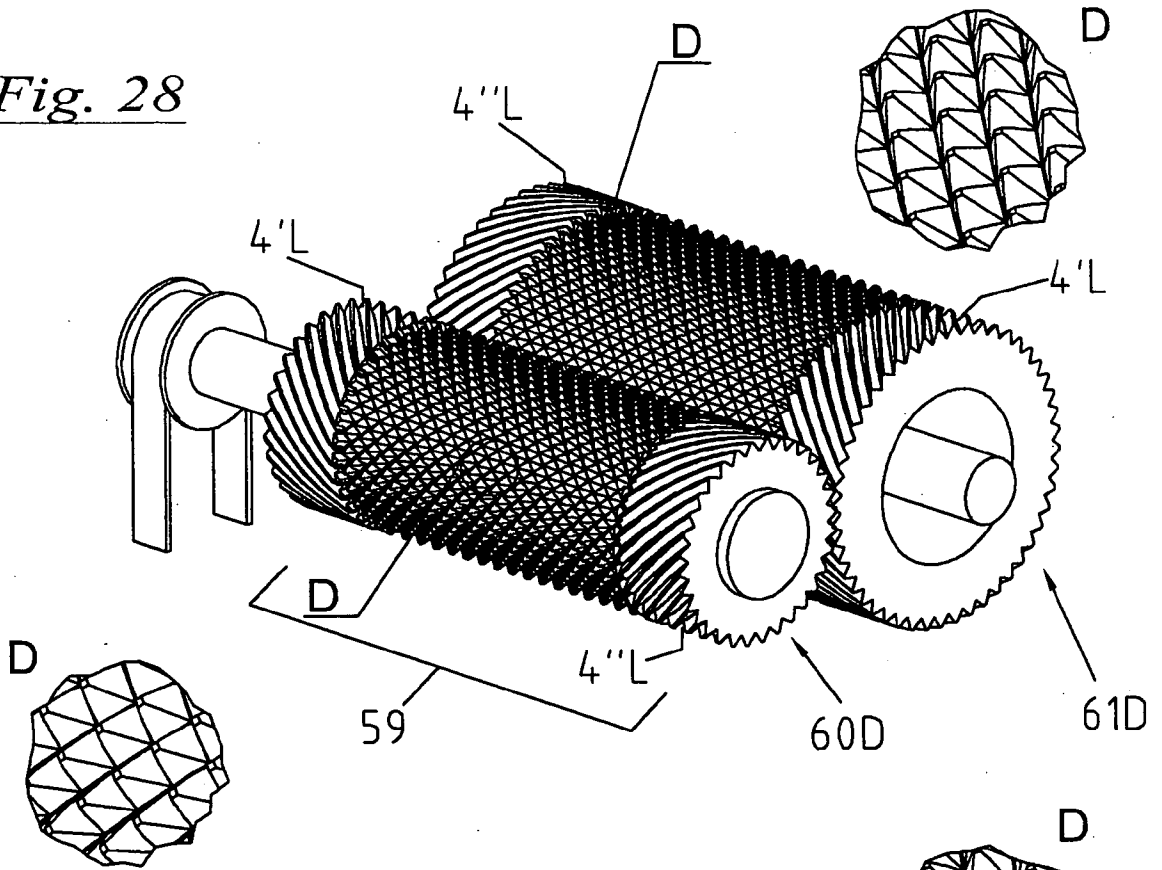


Fig. 29



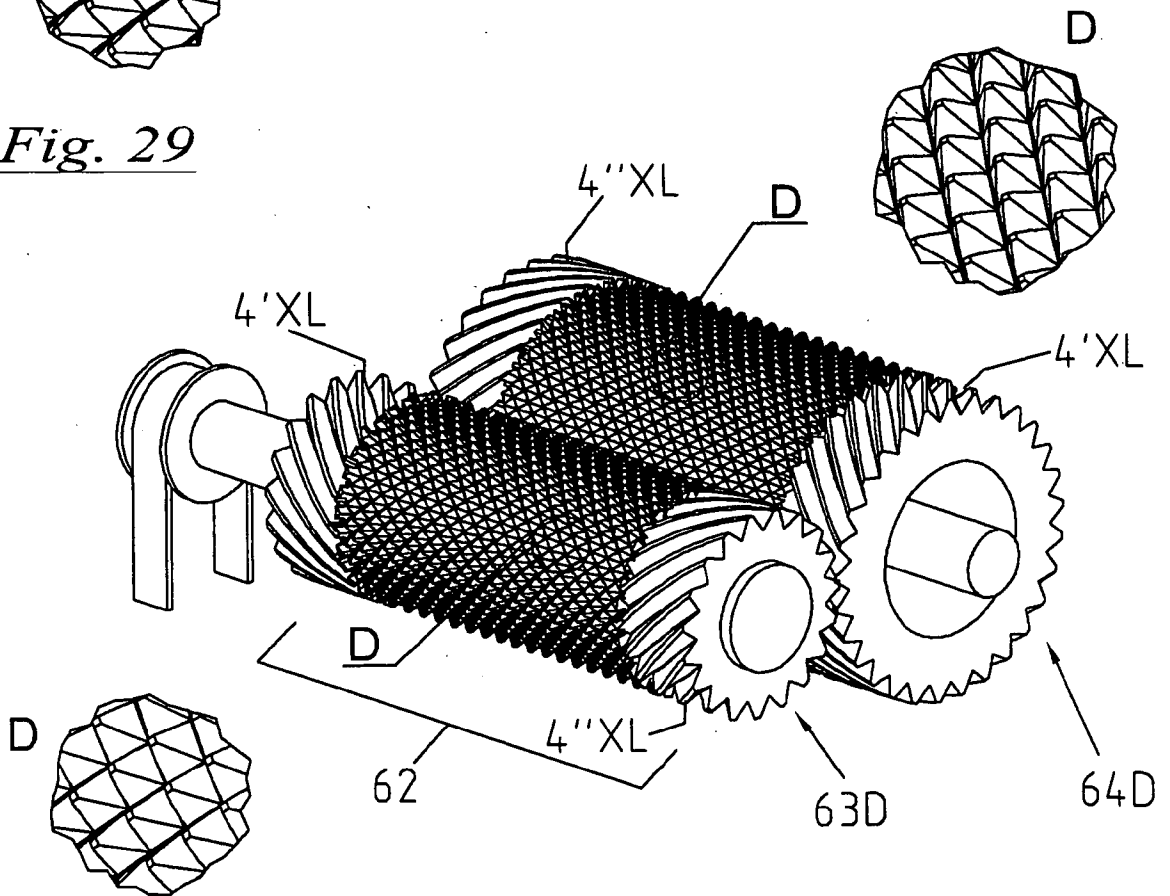

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/EP2011/073756

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. B31F1/07  
ADD.  
  
According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
Minimum documentation searched (classification system followed by classification symbols)  
B31B B31F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|-----------|---|-----------------------|
| X,P       | EP 2 353 858 A1 (BOEGLI GRAVURES SA [CH])<br>10 August 2011 (2011-08-10)<br>paragraph [0057] - paragraph [0058];<br>figures 37,38 | 1-13                  |
| X         | EP 2 027 994 A2 (BOEGLI GRAVURES SA [CH])<br>25 February 2009 (2009-02-25)<br>paragraph [0023]; figure 1                          | 12,13                 |
| Y         | EP 1 925 443 A1 (BOEGLI GRAVURES SA [CH])<br>28 May 2008 (2008-05-28)<br>page 6, line 7 - page 10, line 23; figures<br>7-12       | 1-11                  |
| Y         | EP 1 925 443 A1 (BOEGLI GRAVURES SA [CH])<br>28 May 2008 (2008-05-28)<br>page 6, line 7 - page 10, line 23; figures<br>7-12       | 1-11                  |
| A         | WO 2010/010580 A2 (NANJUNDIAH RAKESH [IN])<br>28 January 2010 (2010-01-28)<br>page 5, line 29 - page 12, line 29;<br>figures 1-12 | 1-11                  |

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

|  |  |
|--|--|
| Date of the actual completion of the international search<br><br>26 March 2012 | Date of mailing of the international search report<br><br>10/04/2012 |
|--|--|

|  |   |
|--|---|
| Name and mailing address of the ISA/<br>European Patent Office, P.B. 5818 Patentlaan 2<br>NL - 2280 HV Rijswijk<br>Tel. (+31-70) 340-2040,<br>Fax: (+31-70) 340-3016 | Authorized officer<br><br>Farizon, Pascal |
|--|---|

# INTERNATIONAL SEARCH REPORT

Information on patent family members

|   |
|---|
| International application No<br>PCT/EP2011/073756 |
|---|

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|--|------------------|-------------------------|------------------|
| EP 2353858                             | A1               | 10-08-2011              | EP 2353858 A1    |
|  |                  |                         | WO 2011098376 A1 |
| -----                                  |                  |                         |                  |
| EP 2027994                             | A2               | 25-02-2009              | BR PI0803355 A2  |
|  |                  |                         | CN 101372158 A   |
|  |                  |                         | EP 2027993 A1    |
|  |                  |                         | EP 2027994 A2    |
|  |                  |                         | JP 2009051214 A  |
|  |                  |                         | US 2009050001 A1 |
| -----                                  |                  |                         |                  |
| EP 1925443                             | A1               | 28-05-2008              | BR PI0704244 A   |
|  |                  |                         | CA 2610176 A1    |
|  |                  |                         | CN 101186125 A   |
|  |                  |                         | EP 1925443 A1    |
|  |                  |                         | JP 2008126669 A  |
|  |                  |                         | US 2008116610 A1 |
|  |                  |                         | ZA 200709348 A   |
| -----                                  |                  |                         |                  |
| WO 2010010580                          | A2               | 28-01-2010              | NONE             |
| -----                                  |                  |                         |                  |