



(22) Date de dépôt/Filing Date: 2001/07/30

(41) Mise à la disp. pub./Open to Public Insp.: 2003/01/30

(45) Date de délivrance/Issue Date: 2008/09/23

(51) Cl.Int./Int.Cl. *A61M 39/08* (2006.01),
A61M 25/02 (2006.01), *A61M 39/10* (2006.01),
A61M 5/14 (2006.01)


(72) Inventeur/Inventor:
REILLY, WILLIAM K., CA

(73) Propriétaire/Owner:
REILLY, WILLIAM K., CA

(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : STABILISATEUR DE TUBES MEDICAUX

(54) Title: MEDICAL LINE STABILIZER

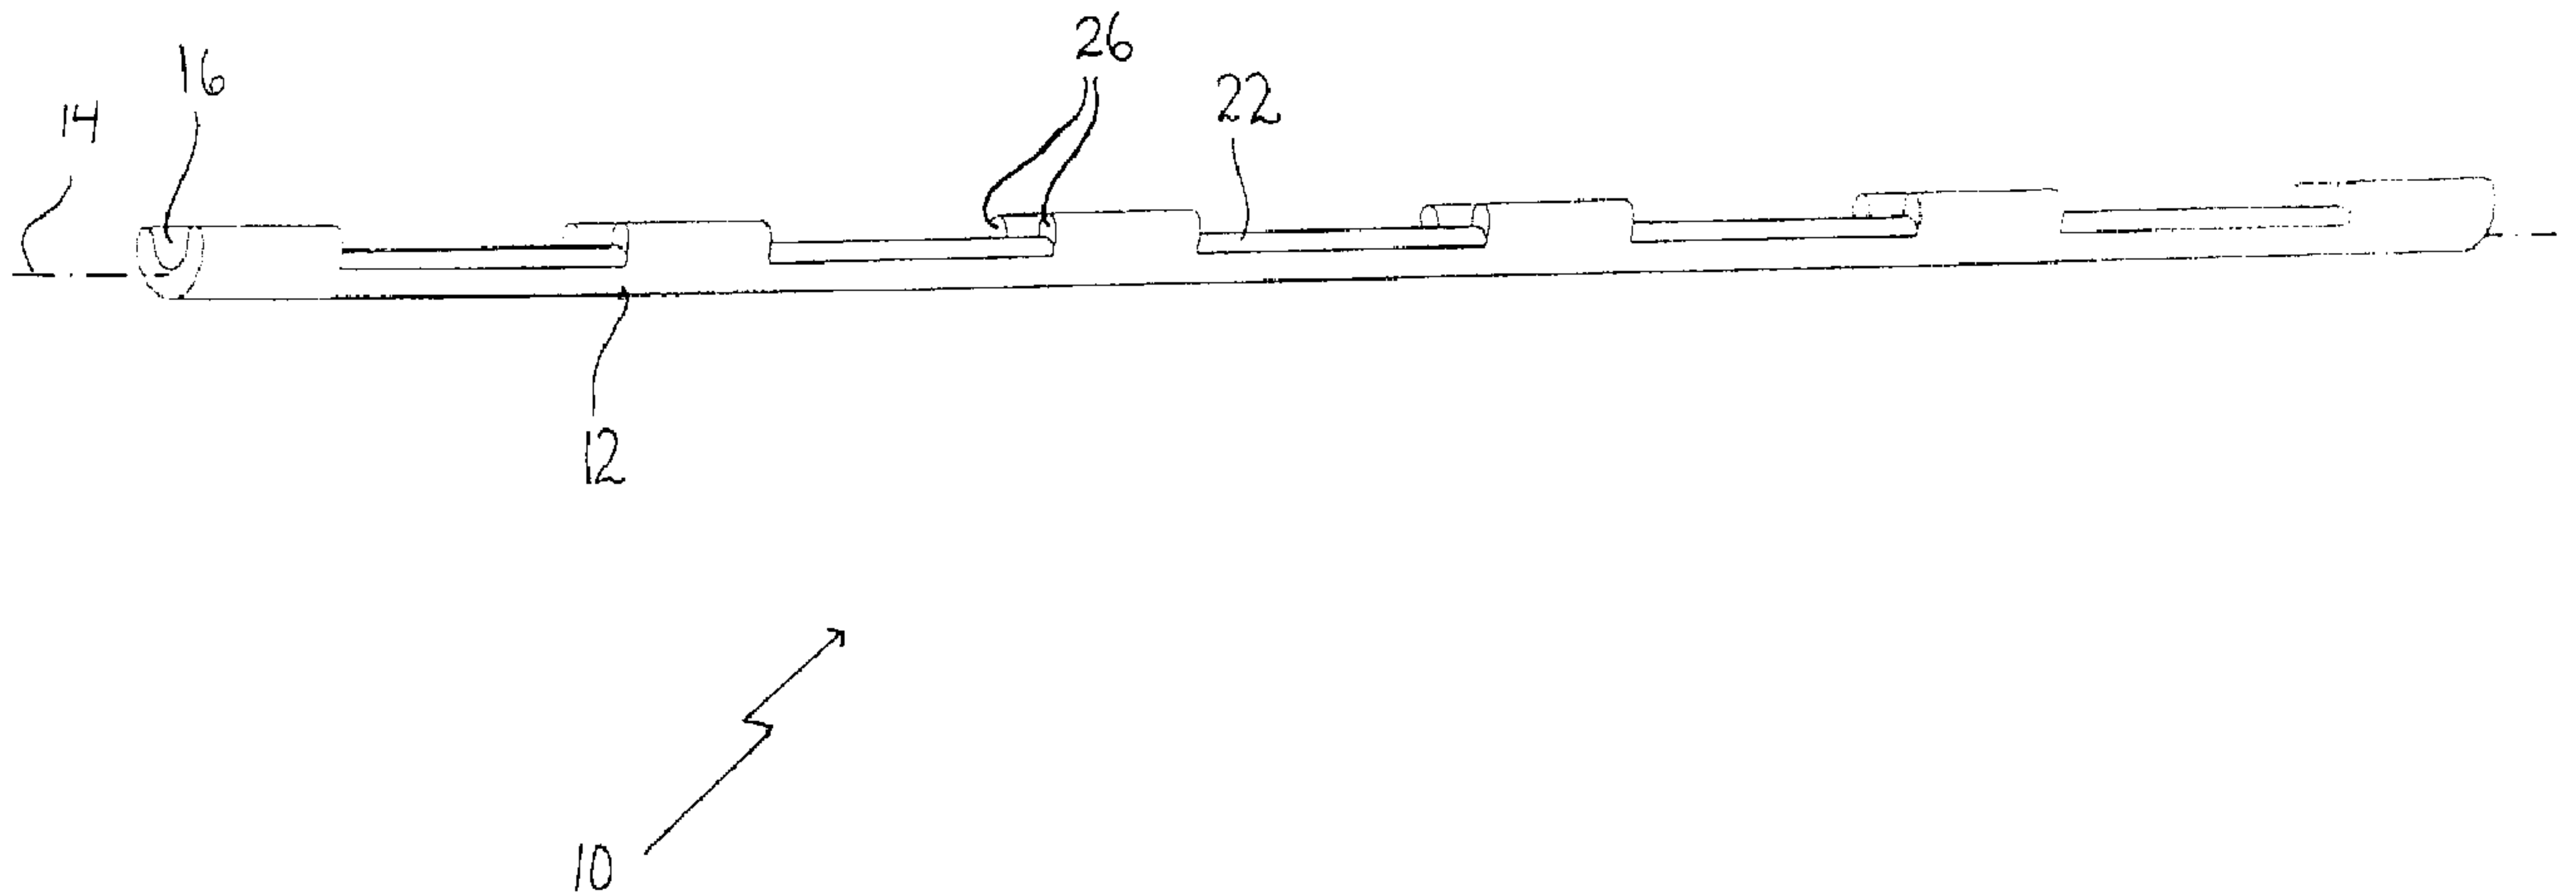

(57) Abrégé/Abstract:

A medical line stabilizer includes an elongate rigidifying body having an axis. An open channel extends parallel to the axis which is adapted to receive a medical line, such as intravenous tubing. The medical line stabilizer is secured to the medical line with tape to prevent the medical line from kinking or tangling.



ABSTRACT OF THE DISCLOSURE

A medical line stabilizer includes an elongate rigidifying body having an axis. An open channel extends parallel to the axis which is adapted to receive a medical
5 line, such as intravenous tubing. The medical line stabilizer is secured to the medical line with tape to prevent the medical line from kinking or tangling.

TITLE OF THE INVENTION:

Medical Line Stabilizer

FIELD OF THE INVENTION

5 The present invention relates to a medical line stabilizer that serves to stabilize various types of medical lines and, in particular, intravenous tubing.

BACKGROUND OF THE INVENTION

10 It is common for hospitalized patients to be fitted with medical lines. In some cases, patients receive medication or blood products through intravenous tubing (commonly referred to as an "IV"). In other cases, patients may require N/G, O/G, broviac, oxygen, external pacing or monitor wiring, or
15 some other type or form of medical line. Without constant monitoring from a health care provider, these lines can kink; thereby disrupting the flow of blood product, medication or oxygen to the patient. In some cases, these lines can entangle the patient creating a hazard. There have been documented
20 cases of patients being strangled after becoming entangled in medical lines. An example is the death of Carter Tapp of Edmonton, Alberta. Carter strangled to death after becoming entangled in his own IV tubing.

25 SUMMARY OF THE INVENTION

What is required is a medical line stabilizer that will reduce the incidence of kinking and tangling.

According to the present invention there is provided a
30 medical line stabilizer which includes an elongate rigidifying body having an axis. An open channel extends parallel to the axis which is adapted to receive a medical line.

The medical line stabilizer, as described, is secured to
35 intravenous tubing with tape to prevent the intravenous tubing from kinking or tangling.

Health care professionals need to ensure that the medical line is free of kinks and that fluid is flowing properly through the intravenous tubing. A check must be performed periodically to ensure that no air bubbles have gotten into the
5 medical line. Even more beneficial results may be obtained when viewing windows are positioned along the length of the body to facilitate visual inspection of intravenous tubing positioned in the channel. Alternatively, if the stabilizer body is transparent, fluids may be seen through the entire
10 length of the medical line stabilizer.

Although beneficial results may be obtained through the use of the medical line stabilizer, as described above, infants have a tendency to place objects in their mouths. Even more
15 beneficial results may, therefore, be obtained when the body is made from food grade polymer plastic that will not harm the infant if portions of the body should be ingested.

Although beneficial results may be obtained through the
20 use of the medical line stabilizer, as described above, frequently patients require multiple IVs, each for a different purpose. When this occurs the mass of intravenous tubing can be confusing. Even more beneficial results may, therefore, be obtained when the body is colour coded to give a visual
25 indication of the type of fluid passing through the intravenous tubing.

It desired, the body can be made with integral closures positioned at spaced intervals that prevent accidental removal
30 of intravenous tubing from the channel.

Although beneficial results may be obtained through the use of the medical line stabilizer, as described above, often lengths of tubing are connected in end to end relation by
35 connectors. An axial force exerted upon the tubing, however, can result in lengths of tubing separating at the connectors. Should the connectors separate there is a danger of an air

embolism, cross-contamination, or a back flow of body fluid. An example of such an air embolism is the death of Andrina Hansen at Mt. Sinai Hospital in 1991. An IV line disconnected at a connection fitting between IV "end to end" connectors, resulting in an air embolism entering into Andrina's catheter and travelled to her brain, causing brain damage. Even more beneficial results may, therefore, be obtained when the channel has at least one connector receiving cavity adapted to receive an intravenous tubing connector. The cavity has opposed contact shoulders which limit axial movement of the connector. In the event an axial force is exerted upon the intravenous tubing, the force is transmitted via one of the shoulders to the body of the medical line stabilizer which prevents the connector from separating.

Certain exemplary embodiments may provide a medical line stabilizer assembly comprising: an intravenous tube extending between medication or blood products and a patient, wherein the intravenous tubing comprises pairs of intravenous tubing connectors, and wherein each connector of the pairs of intravenous connectors is associated with a length of the intravenous tubing; and an elongate cylindrical rigid body comprising: a semi-circular open channel formed along the length of the elongate cylindrical rigid body which receives the intravenous tubing; and a plurality of connector receiving cavities evenly spaced along the elongate cylindrical rigid body, wherein each of the plurality of connector receiving cavities receives a corresponding one of the pairs of intravenous tubing connectors, and wherein each of the plurality of connector receiving cavities comprises opposed contact shoulders formed from diametrically opposed recesses in the circumference of the semi-circular open channel which prevent separation of the pairs of intravenous tubing

3a

connectors, wherein the elongate cylindrical rigid body has at least two integral closures, at spaced intervals, thereby preventing accidental removal of the intravenous tubing from the semi-circular open channel, each of the at
5 least two integral closures comprising a female receptacle positioned on one side of the semi-circular open channel which receives a flexible, uniformly shaped male tab which extends from an opposed side of the semi-circular open channel, the female receptacle comprising a longitudinal
10 cavity formed in an external bump-like protrusion from the semi-circular open channel.

Certain other exemplary embodiments may provide a method of stabilizing intravenous tubing comprising the steps of: providing a medical line stabilizer assembly
15 comprising: an intravenous tube extending between medication or blood products and a patient, wherein the intravenous tubing comprises pairs of intravenous tubing connectors, and wherein each connector of the pairs of intravenous connectors is associated with a length of the
20 intravenous tubing; and an elongate cylindrical rigid body comprising: a semi-circular open channel formed along the length of the elongate cylindrical rigid body which receives the intravenous tubing; and a plurality of connector receiving cavities evenly spaced along the
25 elongate cylindrical rigid body, wherein each of the plurality of connector receiving cavities receives a corresponding one of the pairs of intravenous tubing connectors, and wherein each of the plurality of connector receiving cavities comprises opposed contact shoulders
30 formed from diametrically opposed recesses in the circumference of the semi-circular open channel which prevent separation of the pairs of intravenous tubing connectors; and securing the intravenous tubing to the elongate cylindrical rigid body, the pairs of intravenous

3b

tubing connectors being received between the opposed contact shoulders, wherein the elongate cylindrical rigid body has at least two integral closures, at spaced intervals, thereby preventing accidental removal of the
5 intravenous tubing from the semi-circular open channel, each of the at least two integral closures comprising a female receptacle positioned on one side of the semi-circular open channel which receives a flexible, uniformly shaped male tab which extends from an opposed side of the
10 semi-circular open channel, the female receptacle comprising a longitudinal cavity formed in an external bump-like protrusion from the semi-circular open channel.

BRIEF DESCRIPTION OF THE DRAWINGS

15 These and other features of the invention will become more apparent from the following description in which reference is made to the appended drawings, the drawings are for the purpose of illustration only and are not intended to in any way limit the scope of the invention to the particular embodiment or
20 embodiments shown, wherein:

FIGURE 1 is perspective view of a preferred embodiment of medical line stabilizer constructed in accordance with the teachings of the present invention.

FIGURE 2 is a side elevation view of the medical line stabilizer illustrated in **FIGURE 1**, showing the positioning of
25 intravenous tubing with connector.

FIGURE 3 is an end elevation view of the medical line stabilizer illustrated in **FIGURE 1**.

FIGURE 4 is perspective view of an alternative embodiment of medical line stabilizer constructed in accordance with the teachings of the present invention.

30 **FIGURE 5** is an end elevation view of the medical line stabilizer illustrated in **FIGURE 4**.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Two embodiments of medical line stabilizer will now be described. A preferred embodiment of medical line stabilizer, 5 generally identified by reference numeral 10, will be described with reference to FIGURES 1 through 3. An alternative embodiment of medical line stabilizer, generally identified by reference numeral 100, will be described with reference to FIGURES 4 and 5.

Structure and Relationship of Parts:

Referring to **FIGURE 1**, there is provided a medical line stabilizer 10, which includes an elongate cylindrical rigid body 12 of food grade polymer plastic with an axis 14. A semi-circular open channel 16 extends parallel to axis 14. Referring to **FIGURES 2 and 3**, semi-circular open channel 16 is adapted to receive a medical line, such as intravenous tubing 18. Intravenous tubing 18 is secured in place within semi-circular open channel 16 by tape 20. Referring to **FIGURE 1**, semi-circular open channel 16 has a plurality of connector receiving cavities 22 evenly spaced along the elongate cylindrical rigid body 12. Referring to **FIGURE 2**, each connector receiving cavity 22 is adapted to receive a pair of intravenous tubing connectors 24, each intravenous tubing connector 24 associated with a length of intravenous tubing 18. Referring to **FIGURES 2 and 3**, each connector receiving cavity 22 has opposed contact shoulders 26 formed from diametrically opposed recesses in the circumference of the semi-circular open channel which limit axial movement of connectors 24.

Referring to **FIGURE 1**, in the illustrated embodiment, body 12 of medical line stabilizer 10 is transparent, thereby facilitating visual inspection of intravenous tubing 18 that is positioned in channel 16, however it will be appreciated that body 12 could also be colour coded to give a visual indication of the type of fluid passing through intravenous tubing 18.

Operation:

The use and operation of medical line stabilizer 10 will now be described with reference to **FIGURES 1 through 3**. Referring to **FIGURE 2**, during hospitalization, when a patient is fitted with intravenous tubing 18, medical line stabilizer 10 is secured to intravenous tubing 18 with tape 20. medical

line stabilizer 10 serves to prevent intravenous tubing 18 from kinking or tangling. Although medical line stabilizer 10 is sufficiently rigid so as to prevent kinking or tangling of IV tubing 18, medical line stabilizer 10 has some moderate
5 flexibility allowing it to bow or bend slightly, such that a patient will not be injured if they roll onto it or inadvertently poke themselves with it.

Once intravenous tubing 18 is secured in channel 16 of
10 body 12, nursing staff are able to view intravenous tubing 18 by looking at open channel 16 or through transparent body 12 of medical line stabilizer 10 to monitor the flow of fluids through intravenous tubing 18. In situations where multiple intravenous tubes 18 are used, body 12 of medical line
15 stabilizer 10 can be colour coded to give a visual indication of the type of fluid passing through each intravenous tube 18. When medical line stabilizer 10 is being used with infants, it is preferred that body 12 be made from food grade polymer plastic so that it will not harm a patient if portion of body
20 12 is inadvertently ingested. This can be of particular concern where the patient is an infant as infants have a tendency to put things in their mouths.

Often lengths of tubing 18 are connected in end to end
25 relation by connectors 24. If an axial force is exerted on intravenous tubing 18, lengths of intravenous tubing 18 can separate. When intravenous tubing connectors 24 separate there is a danger that an air embolism may occur which could pose a potential health risk to the patient. To prevent separation,
30 channels 16 have connector receiving cavities 22 which are adapted to receive intravenous tubing connectors 24. Each cavity 22 has opposed contact shoulders 26 which limit axial movement of connectors 24. If a force is exerted upon intravenous tubing 18, it will tend to slide along channel 16.
35 The movement of intravenous tubing 18 is halted when one of connectors 24 engages one of shoulders 26. When further axial force is exerted on intravenous tubing 18, the force is

transmitted via one of shoulders 26 to body 12 of medical line stabilizer 10 which prevents connectors 24 from separating.

5 Variations and Alternative Embodiments:

 An alternative embodiment of a medical line stabilizer 100 will now be described with reference to **FIGURES 4** through **5**. Referring to **FIGURE 4**, there is provided medical line stabilizer 100 which includes an elongate rigidifying
10 body 112 of food grade polymer plastic with an axis 114. Referring to **FIGURES 4** and **5**, an open channel 116 extends parallel to axis 114 which is adapted to receive a medical line, such as intravenous tubing 118. Viewing windows 120 are positioned along the length of body 112, thereby
15 facilitating visual inspection of intravenous tubing 118 positioned in channel 116. Integral closures 122 are provided at spaced intervals along body 112 thereby preventing accidental removal of intravenous tubing 118 from channel 116. In the illustrated embodiment, each
20 integral closure 122 includes a female receptacle 124 positioned on one side 126 of channel 116 which is adapted to receive a flexible, uniformly shaped male tab 128 which extends from an opposed side 130 of channel 116, the female receptacle comprising a longitudinal cavity formed in an
25 external bump-like protrusion from the semi-circular open channel. It will be appreciated that there are other configurations of integral closures 122 that can also be used to secure intravenous tubing 118 in channel 116.

30 Operation:

 The use and operation of alternative embodiment of medical line stabilizer 100 will now be described with

6a

reference to **FIGURES 4** through **5**. Referring to **FIGURES 4**
and **5**, during hospitalization, when a patient is fitted
with intravenous tubing 118, medical line stabilizer 100 is
secured to intravenous tubing 118 with using integral
5 closures 122. Male tab 128 of each integral closure is
inserted into corresponding female receptacle 124 to secure
intravenous tubing 118 in channel 116. Viewing windows 120
that are positioned along the length of body 112 allow for
nursing personnel to visually inspect intravenous tubing
10 118 to ensure the proper flow of fluids through intravenous
tubing 118.

There should be no sharp edges on body 12 or body 112 that could potentially cause abrasions or cuts to the patient. All edges should be made smooth.

5

In this patent document, the word "comprising" is used in its non-limiting sense to mean that items following the word are included, but items not specifically mentioned are not excluded. A reference to an element by the indefinite article
10 "a" does not exclude the possibility that more than one of the element is present, unless the context clearly requires that there be one and only one of the elements.

15 It will be apparent to one skilled in the art that modifications may be made to the illustrated embodiment without departing from the spirit and scope of the invention as hereinafter defined in the Claims.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A medical line stabilizer assembly comprising:

5 an intravenous tube extending between medication or blood products and a patient, wherein the intravenous tubing comprises pairs of intravenous tubing connectors, and wherein each connector of the pairs of intravenous connectors is associated with a length of the intravenous
10 tubing; and

an elongate cylindrical rigid body comprising:

a semi-circular open channel formed along the length of the elongate cylindrical rigid body which receives the intravenous tubing; and

15 a plurality of connector receiving cavities evenly spaced along the elongate cylindrical rigid body, wherein each of the plurality of connector receiving cavities receives a corresponding one of the pairs of intravenous
20 tubing connectors, and wherein each of the plurality of connector receiving cavities comprises opposed contact shoulders formed from diametrically opposed recesses in the circumference of the semi-circular open channel
25 which prevent separation of the pairs of intravenous tubing connectors,

wherein the elongate cylindrical rigid body has at least two integral closures, at spaced intervals, thereby preventing accidental removal of the

intravenous tubing from said semi-circular open channel, each of the at least two integral closures comprising a female receptacle positioned on one side of the semi-circular open channel which receives a flexible, uniformly shaped male tab which extends from an opposed side of the semi-circular open channel, the female receptacle comprising a longitudinal cavity formed in an external bump-like protrusion from the semi-circular open channel.

5

2. The medical line stabilizer assembly as defined in Claim 1, wherein viewing windows are positioned along the length of the elongate cylindrical rigid body, thereby facilitating visual inspection of the intravenous tubing positioned in the semi-circular open channel.

10

3. The medical line stabilizer assembly as defined in Claim 1, wherein the elongate cylindrical rigid body is made from a food grade polymer plastic.

15

4. The medical line stabilizer assembly as defined in Claim 1, wherein the elongate cylindrical rigid body is transparent, thereby facilitating visual inspection of the intravenous tubing positioned in the semi-circular open channel.

20

5. The medical line stabilizer assembly as defined in Claim 1, wherein the elongate cylindrical rigid body is color coded to give a visual indication of the type of the intravenous tubing.

25

6. A method of stabilizing intravenous tubing comprising the steps of:

providing a medical line stabilizer assembly comprising:

5 an intravenous tube extending between medication or blood products and a patient, wherein the intravenous tubing comprises pairs of intravenous tubing connectors, and wherein each connector of the pairs of intravenous connectors is associated
10 with a length of the intravenous tubing; and

an elongate cylindrical rigid body comprising:

a semi-circular open channel formed along the length of the elongate cylindrical rigid body which receives the intravenous tubing;
15 and

a plurality of connector receiving cavities evenly spaced along the elongate cylindrical rigid body, wherein each of the plurality of connector receiving cavities receives a
20 corresponding one of the pairs of intravenous tubing connectors, and wherein each of the plurality of connector receiving cavities comprises opposed contact shoulders formed from diametrically opposed recesses
25 in the circumference of the semi-circular open channel which prevent separation of the pairs of intravenous tubing connectors; and

securing the intravenous tubing to the elongate cylindrical rigid body, the pairs of intravenous

tubing connectors being received between the opposed contact shoulders,


wherein the elongate cylindrical rigid body has at least two integral closures, at spaced intervals, thereby preventing accidental removal of the intravenous tubing from said semi-circular open channel, each of the at least two integral closures comprising a female receptacle positioned on one side of the semi-circular open channel which receives a flexible, uniformly shaped male tab which extends from an opposed side of the semi-circular open channel, the female receptacle comprising a longitudinal cavity formed in an external bump-like protrusion from the semi-circular open channel.

7. The method as defined in Claim 6, further comprising the step of visually inspecting the intravenous tubing through viewing windows positioned along the length of the elongate cylindrical rigid body.

8. The method as defined in Claim 6, wherein the elongate cylindrical rigid body is transparent, and wherein the method further comprises the step visually inspecting the intravenous tubing through the transparent elongate cylindrical rigid body.

9. The method as defined in Claim 6 wherein the elongate cylindrical rigid body is secured to the intravenous tubing with tape.

10. Use of a medical line stabilizer assembly as defined in Claim 1 for stabilizing intravenous tubing fitted to a patient.

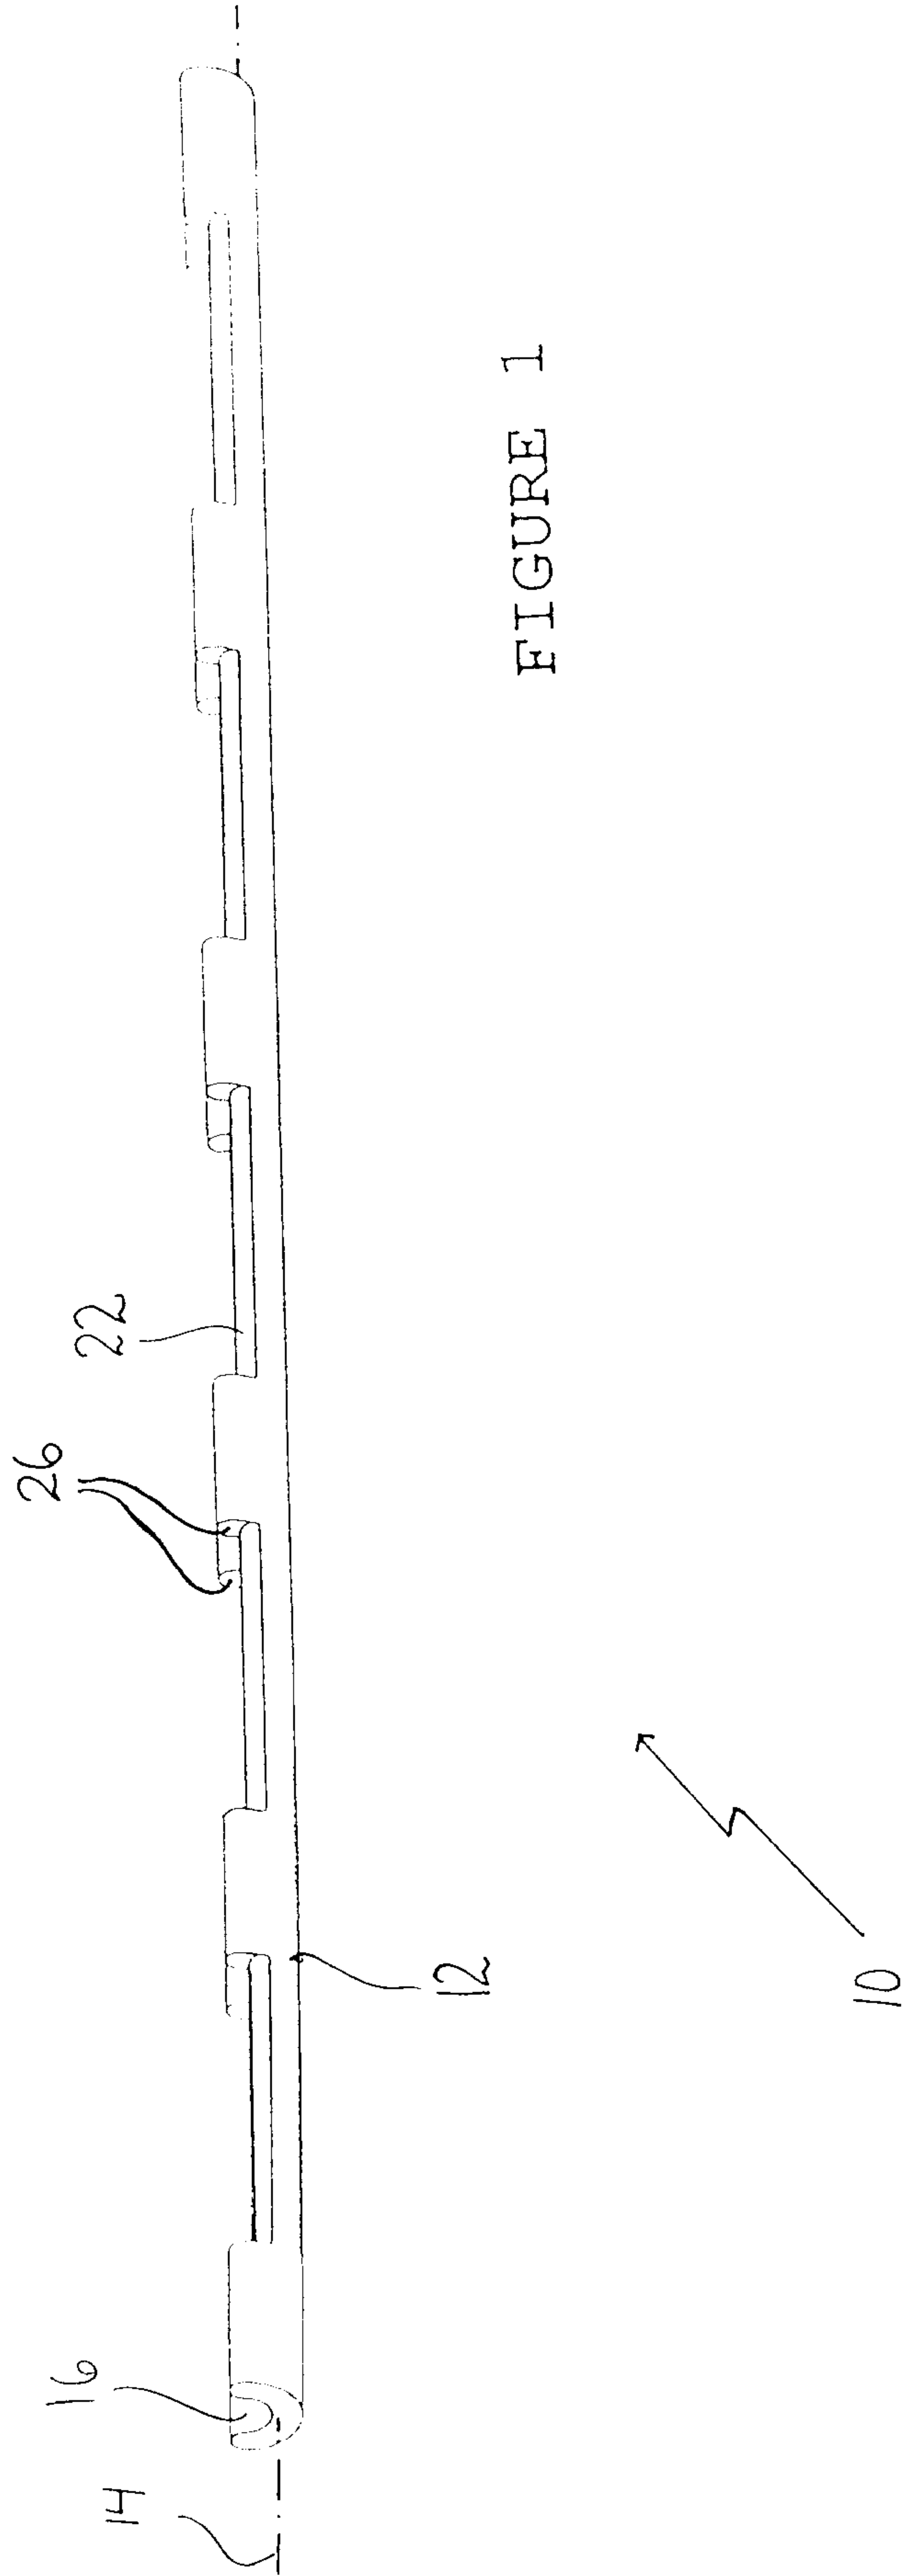

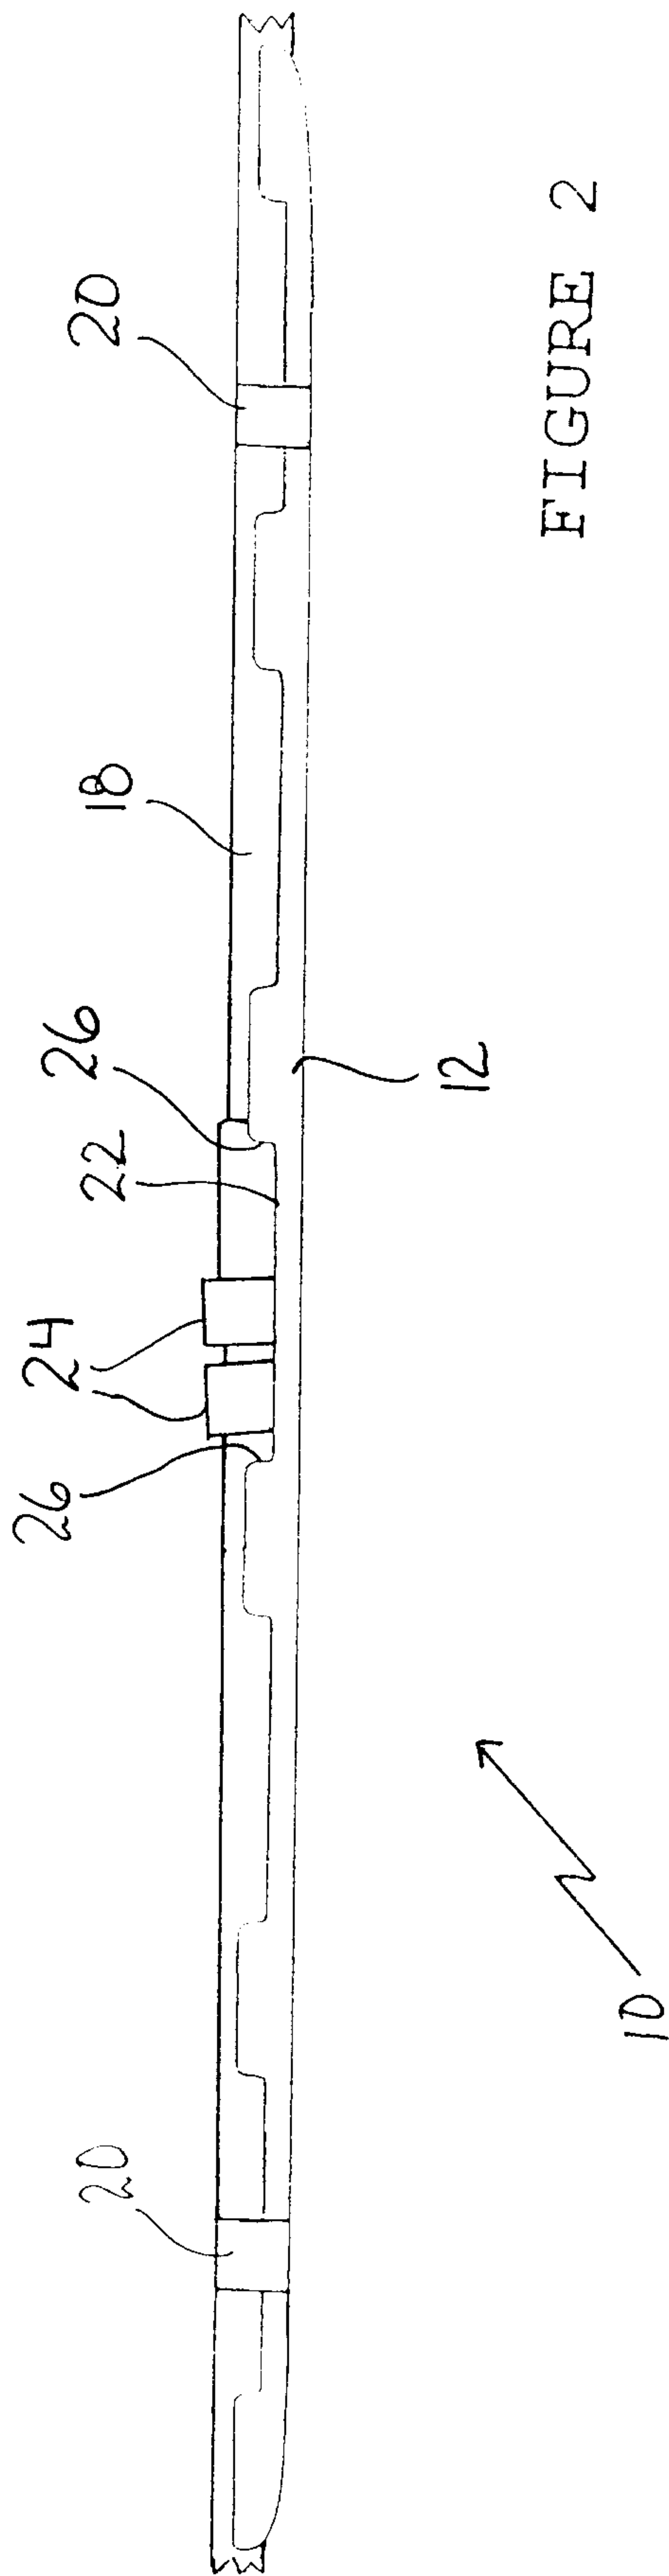


FIGURE 2

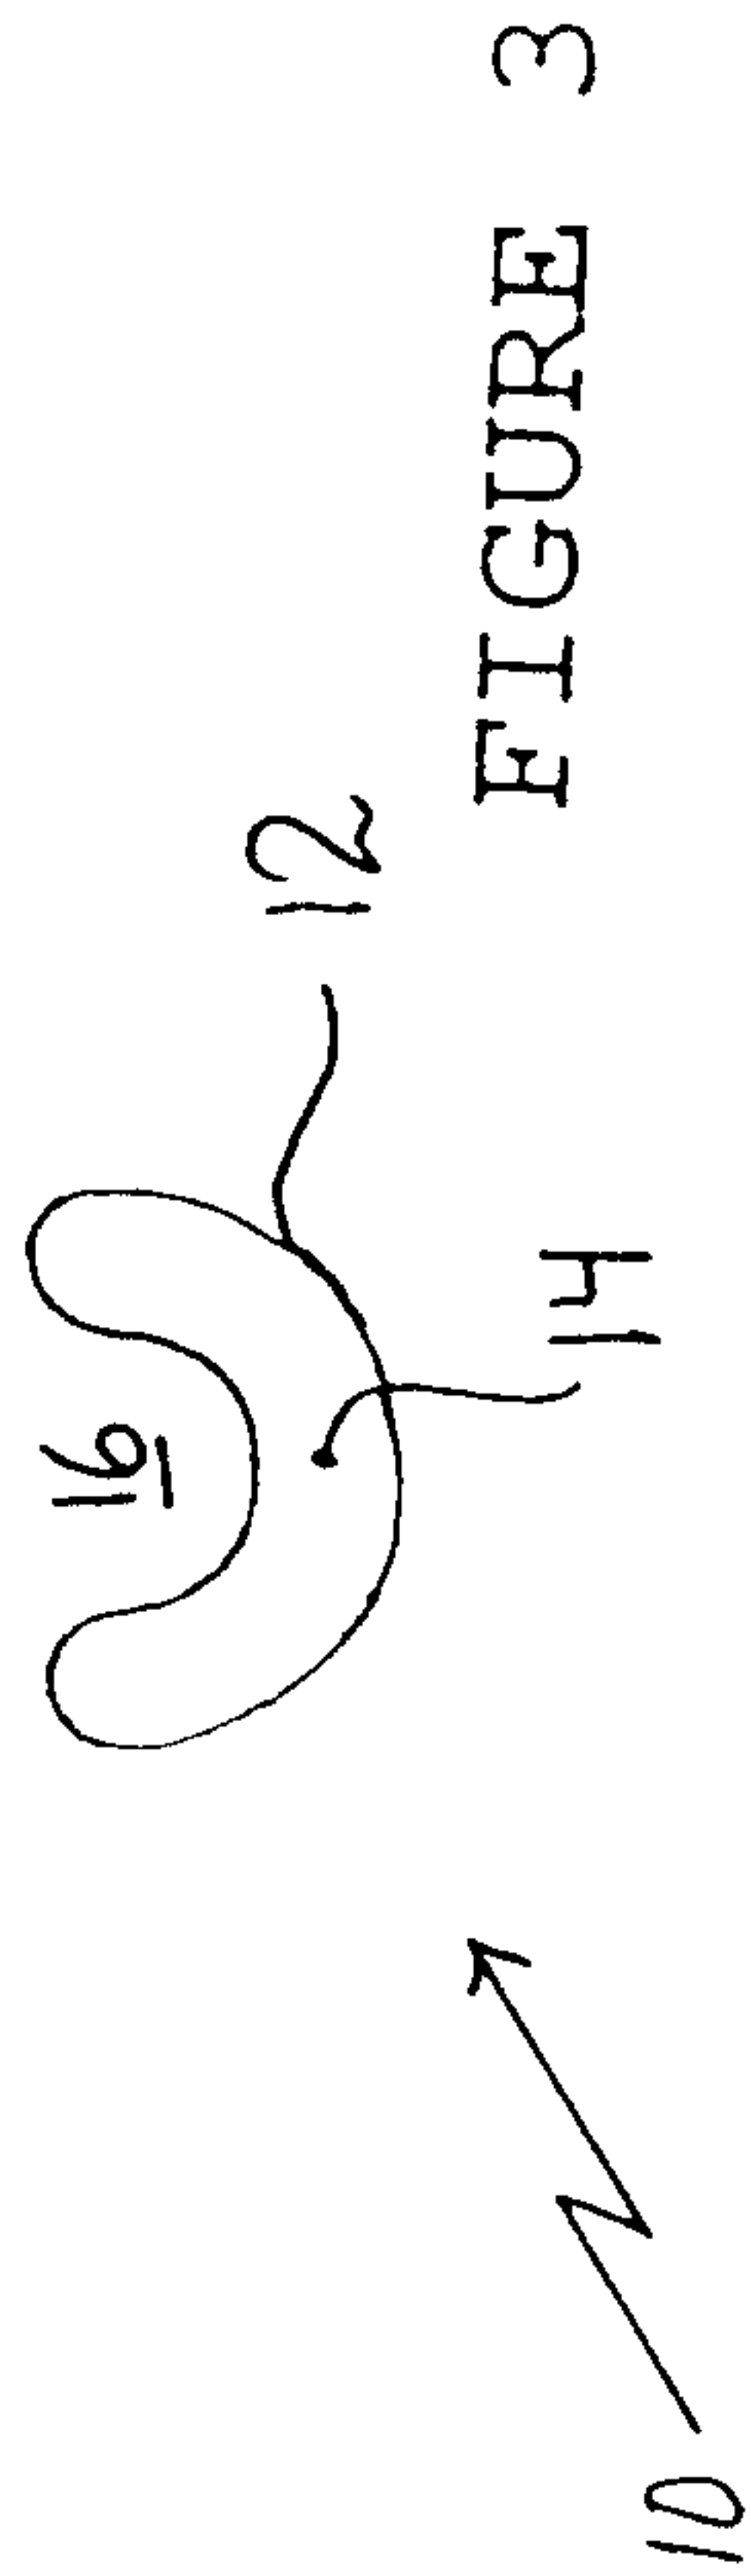


FIGURE 3

