




(86) Date de dépôt PCT/PCT Filing Date: 2002/07/19
(87) Date publication PCT/PCT Publication Date: 2003/03/06
(45) Date de délivrance/Issue Date: 2010/06/01
(85) Entrée phase nationale/National Entry: 2004/01/29
(86) N° demande PCT/PCT Application No.: US 2002/023212
(87) N° publication PCT/PCT Publication No.: 2003/019894
(30) Priorité/Priority: 2001/08/23 (US09/938,006)

(51) Cl.Int./Int.Cl. *H04L 29/12* (2006.01),
H04B 7/185 (2006.01), *H04L 29/06* (2006.01),
H04L 12/28 (2006.01)
(72) Inventeurs/Inventors:
D'ANNUNZIO, MICHAEL A., US;
SKAHAN, VINCENT D., JR., US
(73) Propriétaire/Owner:
THE BOEING COMPANY, US
(74) Agent: SMART & BIGGAR

(54) Titre : RESEAU PROTOCOLE INTERNET DE BORD POUR AVION
(54) Title: AIRBORNE INTERNET PROTOCOL NETWORK

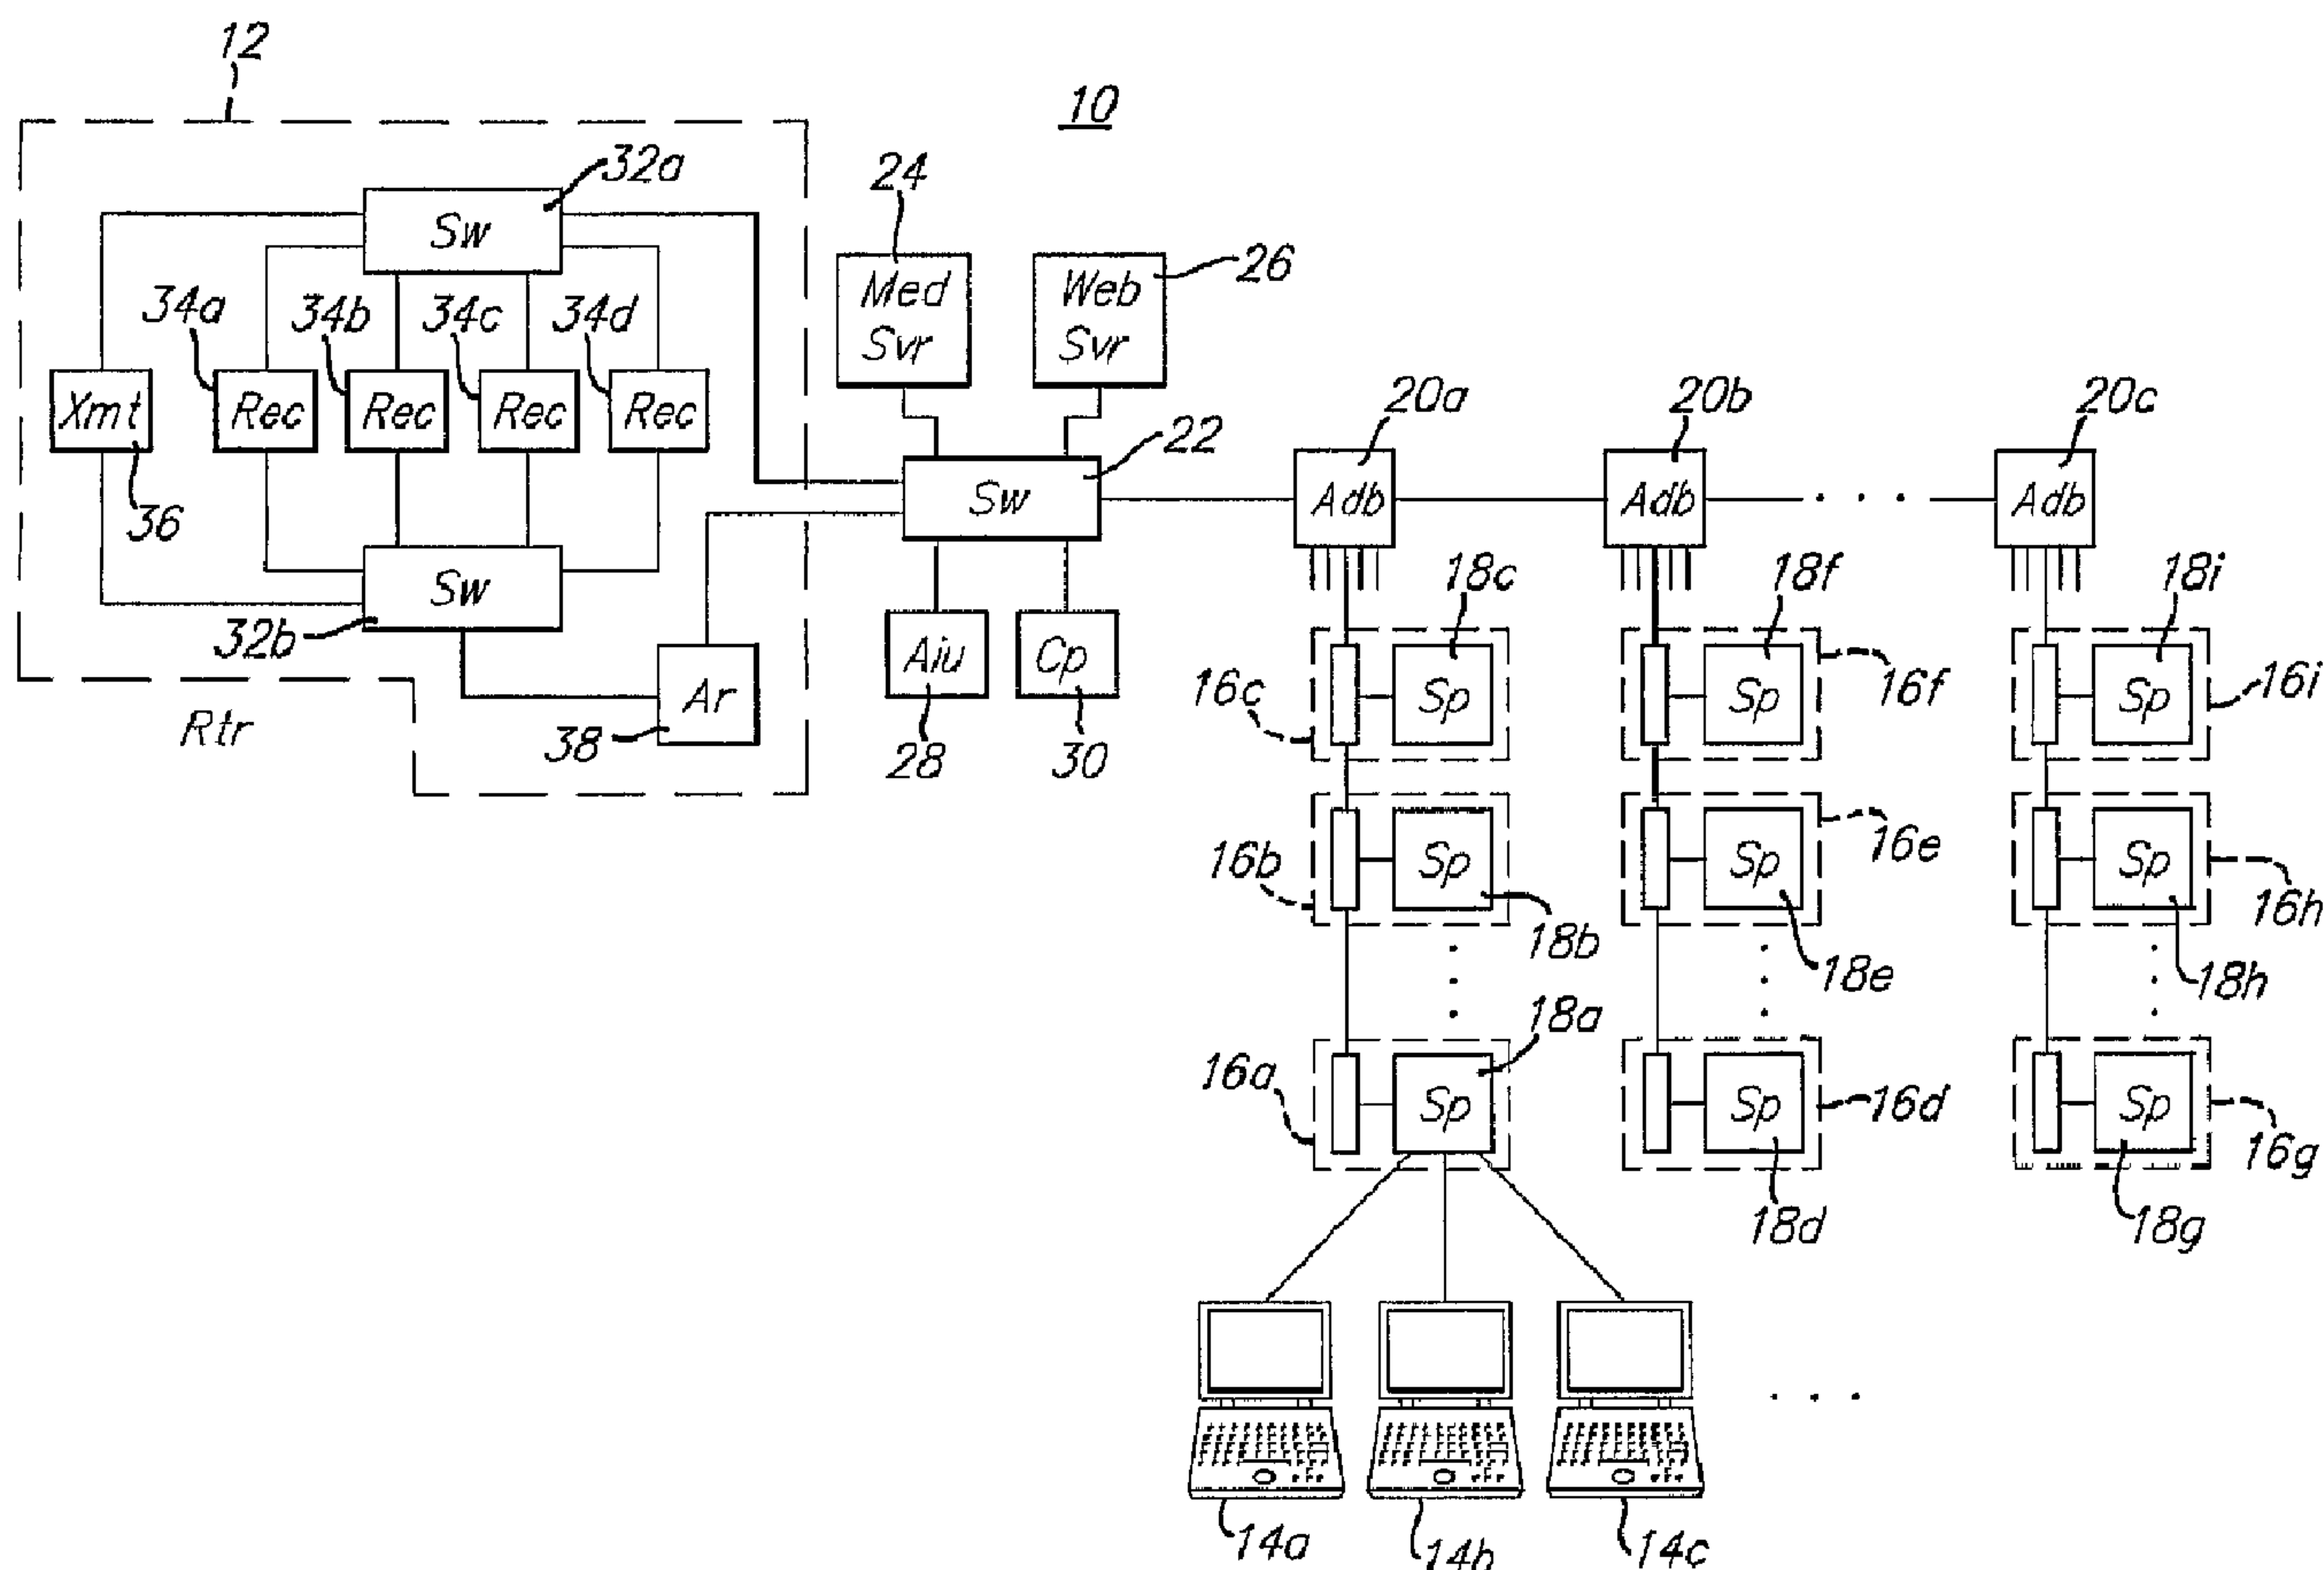

(57) Abrégé/Abstract:

An Internet protocol (IP) networking architecture includes a command and control sub-network (CCN) interconnecting a plurality of control interfaces wherein each control interface has a corresponding logical CCN address. A passenger services sub-network

(57) **Abrégé(suite)/Abstract(continued):**

(PSN) interconnects a plurality of passenger interfaces wherein each passenger interface has a corresponding logical PSN address. The architecture further includes an air-to-ground sub-network (AGN) providing Internet access to the passenger interfaces via one or more isolation systems having corresponding logical CCN address and corresponding logical PSN address. By providing the isolation systems with multiple logical addresses, devices communicating on the AGN and PSN can be blocked from accessing the CCN addresses.



PCT

(10) International Publication Number
WO 03/019894 A3

[Continued on next page]

(57) Abstract: An Internet protocol (IP) networking architecture includes a command and control sub-network (CCN) interconnecting a plurality of control interfaces wherein each control interface has a corresponding logical CCN address. A passenger services sub-network (PSN) interconnects a plurality of passenger interfaces wherein each passenger interface has a corresponding logical PSN address. The architecture further includes an air-to-ground sub-network (AGN) providing Internet access to the passenger interfaces via one or more isolation systems having corresponding logical CCN address and corresponding logical PSN address. By providing the isolation systems with multiple logical addresses, devices communicating on the AGN and PSN can be blocked from accessing the CCN addresses.

WO 03/019894 A3



(88) Date of publication of the international search report:
15 May 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AIRBORNE INTERNET PROTOCOL NETWORK

BACKGROUND OF THE INVENTION

Technical Field

[0001] The present invention generally relates to aircraft networking. More particularly, the invention relates to an internet protocol (IP) networking architecture and method for structuring IP addresses within an aircraft that simplifies routing and enhances security.

Discussion

[0002] In the aviation industry, the development of aircraft technologies has commonly centered around enhancing safety, reducing costs and improving the services available to onboard passengers. With regard to passenger services, the primary focus of most technologies has been communication and entertainment options available to passengers. In particular, passenger services such as media servers (e.g., movie delivery), on-board telephones and seat terminals have all evolved in recent years.

[0003] With the increasing popularity of the Internet, certain shortcomings associated with conventional seat terminals have become apparent. For example, the traditional seat terminal has a processor and a seat back display mounted in each seat, and the passengers do not have the option of supplying their own devices. With the widespread popularity of laptops, palm-held computers, etc., it is easy to understand that such a limitation is significant. This is particularly true considering the desirability of accessing the Internet from these devices. In fact, it is well known that conventional seat terminals lack the ability to provide off-board communications to the passenger altogether (with the exception of telephone service).

[0004] Another concern associated with providing Internet access to passengers is aircraft security. For example, it is critical that passengers not be able to access certain command and control interfaces within the aircraft while at the time being able to send and receive IP packets to interfaces throughout the world. It is also important to note that devices out on the network must be similarly blocked from accessing these confidential interfaces. The consequences of failing to adequately isolate command and control interfaces are dire. It should be noted that achieving such a level of security is particularly difficult considering the fact that certain crew interfaces might also desire access to the Internet.

[0005] An additional concern relates to IP routing. Specifically, the routing tables used by ground routers contain route entries for destination IP addresses in order to accurately route packages to their final destinations on the aircraft. It will be appreciated, therefore, that requiring a route entry for each seat of each aircraft on the network would result in prohibitively large routing tables on the ground. The same concerns are true for the airborne router located on the aircraft. In fact, it is easy to envision an airborne router routing table having on the order of five hundred route entries for the various interfaces disposed throughout the aircraft. It is therefore desirable to provide an IP networking architecture that enables the use of passenger-supplied computing devices, blocks passenger access to command and control interfaces, and simplifies routing tables.

SUMMARY OF THE INVENTION

[0006] In accordance with one aspect of the invention there is provided an Internet protocol (IP) networking architecture for a mobile platform. The architecture includes a command and control sub-network (CCN) interconnecting a plurality of

control interfaces wherein each control interface has a corresponding logical CCN address, and a passenger services sub-network (PSN) interconnecting a plurality of passenger interfaces wherein each the passenger interface has a corresponding logical PSN address. The architecture also includes an air-to-ground sub-network (AGN) providing Internet access to the passenger interfaces via at least one isolation system having corresponding logical CCN addresses and corresponding logical PSN addresses such that devices communicating on the AGN and the PSN are blocked from accessing the CCN addresses by the one isolation system. A seat electronics box is defined as one of the passenger interfaces, the logical PSN address of the seat electronics box acting as a proxy address for devices coupled to the seat electronics box, the seat electronics box having a seat processor for translating PSN addresses into AGN addresses.

[0007] The at least one isolation system may have a logical AGN address corresponding to a mobile platform identifier such that the mobile platform has a unique subnet address.

[0008] A router may include the at least one isolation system, and the router may have a device identifier such that the mobile platform identifier and the device identifier define the logical AGN address for the router.

[0008a] A web server may include the at least one isolation system, and the web server may have a device identifier such that the mobile platform identifier and the device identifier define the logical AGN address for the web server.

[0008b] A port may be defined as one of the passenger interfaces, and the port may have a logical PSN address for which the logical PSN address of the seat electronics box serves as a proxy address.

[0008c] A passenger-supplied computing device may include one of the passenger interfaces, and the passenger-supplied computing device may have a logical

PSN address for which the logical PSN address of the seat electronics box serves as a proxy address.

[0008d] One or more seat electronics boxes may be defined as being control interfaces such that the seat electronics boxes have corresponding logical CCN addresses.

[0008e] One or more area distribution boxes may be defined as being control interfaces such that the area distribution boxes have corresponding logical CCN addresses, and the area distribution boxes may serve as hubs for the seat electronics boxes.

[0008f] The AGN may further provide access via a wide area network to a plurality of crew interfaces. Each crew interface may have a corresponding logical AGN address.

[0008g] A mobile platform interface unit may include one of the crew interfaces such that the mobile platform interface unit has a corresponding logical AGN address.

[0008h] A control panel may be defined as one of the crew interfaces such that the control panel has a corresponding logical AGN address.

[0008i] A media server may be defined as one of the crew interfaces such that the media server has a corresponding logical AGN address.

[0008j] In accordance with another aspect of the invention, there is provided an IP networking architecture for a mobile platform. The architecture includes a command and control sub-network (CCN) interconnecting a plurality of seat electronics boxes and area distribution boxes, the seat electronics boxes and area distribution boxes being defined as control interfaces such that each control interface has a corresponding logical CCN address. The architecture also includes the area distribution boxes serving

as hubs for the seat electronics boxes, a passenger services sub-network (PSN) interconnecting a plurality of passenger interfaces wherein each the passenger interface has a corresponding logical PSN address, and the seat electronics boxes being further defined as passenger interfaces such that the seat electronics boxes have
5 corresponding logical PSN addresses acting as a proxy address for devices coupled to the seat electronics box. The architecture further includes an air-to-ground sub-network (AGN) providing Internet access to the passenger interfaces via at least one isolation system having corresponding logical CCN addresses and corresponding logical PSN addresses such that devices communicating on the AGN and the PSN are
10 blocked from accessing the CCN addresses by the one isolation system, the seat electronics box having a seat processor for translating PSN addresses into AGN addresses, and the AGN further providing Internet access to a plurality of crew interfaces wherein each crew interface has a corresponding logical AGN address.

[0008k] The at least one isolation system may have a logical AGN address
15 corresponding to a mobile platform identifier such that the mobile platform has a unique subnet address.

[0008l] In accordance with another aspect of the invention, there is provided a method for structuring Internet protocol (IP) addresses within a mobile platform. The method involves assigning logical command and control sub-network
20 (CCN) addresses to a plurality of control interfaces, assigning logical passenger services sub-network (PSN) addresses to a plurality of passenger interfaces, and assigning a logical CCN address, a logical PSN address, and a logical air-to-ground sub-network (AGN) address to at least one isolation system such that devices communicating on the AGN and the PSN are blocked from accessing the CCN
25 addresses by the one isolation system. The method also involves using a seat

electronics box as one of the passenger interfaces, using the logical PSN address of the seat electronics box to act as a proxy address for devices coupled to the seat electronics box, and using the seat electronics box to translate PSN addresses into AGN addresses.

5 **[0008m]** The method may further involve assigning a mobile platform identifier to the logical AGN address of the one isolation system such that the mobile platform has a unique subnet address.

[0008n] The method may further involve using a router as the one isolation system, the router having a device identifier such that the mobile platform identifier
10 and the device identifier define the logical AGN address for the router.

[0008o] The method may further involve using a web server as the one isolation system, and the web server may have a device identifier such that the mobile platform identifier and the device identifier define the logical AGN address for the web server.

15 **[0009]** It is to be understood that both the foregoing general description and the following detailed description are merely exemplary of the invention, and are intended to provide an overview or framework for understanding the nature and character of the invention as it is claimed. The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and
20 constitute part of this specification. The drawings illustrate various features and embodiments of the invention, and together with the description serve to explain the principles and operation of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[00010] The various advantages of the present invention will become apparent to one skilled in the art by reading the following specification and sub-joined claims and by referencing the following drawings, in which:

5 [00011] FIG. 1 is a block diagram of an aircraft electronics network model in accordance with the principles of the present invention;

[00012] FIG. 2 is a diagram of an IP networking architecture for an aircraft in accordance with the principles of the present invention; and

[00013] FIG. 3 is a diagram demonstrating a seat electronics box having an address resolution protocol (ARP) proxy.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[00014] The following description of the preferred embodiment(s) is merely exemplary in nature and is in no way intended to limit the invention, its application, or uses.

[00015] Turning now to FIG. 1, a model of an aircraft electronics network **10** is shown. Generally, it can be seen that a data transceiver and router (DTR) **12** provides passenger-supplied computing devices **14** with the ability to send and receive packetized data via the widely known Internet protocol (IP). Specifically, the computing devices **14** can connect (via ethernet, USB, firewire, etc.) to a seat electronics box (SEB) **16**, wherein each SEB **16** has a seat processor **18** for “routing” packets to and from the computing devices **14**. The addressing scheme for this function is described in greater detail below. One or more area distribution boxes **20** serve as hubs for the SEBs **16**.

[00016] An ethernet switch **22** manages traffic between the area distribution boxes **20**, a media server **24**, a web server **26**, an aircraft interface unit **28**, a control panel **30**, and the RTR **12**. The DTR **12** preferably has a plurality of ethernet switches **32** for managing traffic between receiving modules **34**, a transmit module **36**, and an airborne router **38**.

[00017] Turning now to FIG. 2, it can be seen that the IP networking architecture **40** of the present invention defines multiple sub-networks, wherein each

network has a specific primary function. Since many of the onboard systems are members of more than one of these sub-networks, the sub-networks can be viewed as subnet overlays. Specifically, it can be seen that the architecture **40** has a command and control sub-network (CCN) **42**, a passenger services sub-network (PSN) **44**, and an air-to-ground sub-network (AGN) **46**.

[00018] It can be seen that IP aliasing allows multiple IP addresses to be configured on a single physical network interface. For example, the web server **26** has a physical network interface that has an IP address for all three of the sub-networks. It will be appreciated that only the airborne router **38** can forward traffic between subnets. This feature simplifies router and host-based packet filtering to control inter-subnet access. IP aliasing also allows access to critical application ports to be restricted to specific subnets. For example, simple network management protocol (SNMP) ports can only be accessed from the CCN. Furthermore, the above approach allows maximum use of private address ranges and reuse of address ranges between aircraft. As will be discussed in greater detail below, the number of subnets that must be advertised to the ground is also minimized to one (namely the AGN).

[00019] Thus, the present invention provides isolation because packets cannot pass between addressed subnets unless they pass through an isolation system such as the airborne router **38**. Furthermore, segregating packets by address range facilitates packet filtering. Filtering is facilitated by the fact that the packets are easily classified (according to source and destination address). Additionally, simple policies such as “if source address = PSN and destination address = CCN, then reject packet” can be readily defined and enforced.

[00020] Thus, it will be appreciated that the CCN **42** interconnects a plurality of control interfaces wherein each control interface has a corresponding logical CCN

address. FIG. 2 illustrates that the control interfaces include the web server **26**, the address distribution boxes **20**, the SEBs **16**, and the airborne router **38**. The PSN **44** interconnects a plurality of passenger interfaces, wherein each passenger interface has a corresponding PSN address. It can be seen that the passenger interfaces include the web server **26**, the computing devices **14**, the SEBs **16**, and the airborne router **38**.

[00021] The AGN provides Internet access to the passenger interfaces via one or more isolation systems such as the web server **26** and the airborne router **38**. The isolation systems have corresponding logical CCN addresses and corresponding logical PSN addresses such that devices communicating on the AGN and the PSN are blocked from accessing the CCN addresses. The various sub-networks will be described in greater detail below.

Air-to-Ground Sub-Network (AGN)

[00022] It will be appreciated that only onboard devices that are directly managed or controlled from the network operations center (NOC) will be assigned addresses from the AGN subnet range. All SNMP traffic, RTS control, content pushed from the ground to the aircraft, billing information, and port address translation (PAT) of passenger addresses for off-board Internet connectivity will be performed on this network. It will be appreciated that each airborne network is uniquely identified within a given domain and that the AGN is the only subnet advertised to the ground. Subnetting is therefore used to distinguish between airborne and ground subnets and to create unique aircraft identifiers (ACID).

[00023] It is preferred that the AGN uses private class A subnet: **10.0.0.0/22**. A **22**-bit subnet mask is defined that borrows **14** bits from the host part (**14** bits for subnets and **10** bits for hosts). The **14**-bit ACID therefore supports **16,382** unique

airborne networks. The **10-bit** field [d...d] is used to identify hosts. This field therefore supports up to **1,022** hosts or other devices. Thus,

ACID Device
[10.] [aaaaaaaaaaaa] [dddddddddd]
10.aaaaaaaa.aaaaaadd.dddddddd/22

[00024] The device number field ranges can be defined as follows.

[00025] Table 1

DTR	1-6
Port Address Translation	7-8
Area Distribution Boxes	9-24
Seat Electronic Boxes	25-424
Web/Media/Other Services	425-432
Crew Information System Services	433-442
Aircraft Interface Unit	443
Control Panel	444-450
Laptop Power Controllers	954-969
Expanded Services Devices	970-989
HCA	990-1005
Business Jet Receivers	1006-1009
ASPAC	1010

It can be seen in Table 1 that all network address translations by convention use a device field having a value of **7** or **8**. Since only passenger-sourced traffic is translated by the NAT gateway, this convention allows ground-based security systems to easily identify passenger traffic. Traffic to/from onboard systems such as the web portal **26** or media server **24**, and all SNMP traffic can be easily identified and isolated from passenger traffic. It will therefore be appreciated that the above-described isolation systems have logical AGN addresses corresponding to an ACID such that the aircraft has a unique subnet address. The airborne router **38** can be defined as one of the isolation systems, where the airborne router has a device identifier such that the ACID and the device identifier define the logical AGN address for the airborne router. Similarly, the web server **26** can be defined as one of the isolation systems, where the web server **26** has a device identifier such that the ACID and the device identifier

define the logical AGN address for the web server. Table 1 illustrates that various crew interfaces are provided with internet access by the AGN, wherein each crew interface has a corresponding logical AGN address.

Command and Control Sub-Network (CCN)

[00026] It will be appreciated that the CCN supports local command and control functions such as built-in test (BIT), configuration, initialization, data load, etc. The CCN excludes passengers devices by not assigning computing devices 14 addresses from the CCN address space. It is preferred that the class B private address range **172.16.0.0/16** is used for the CCN and is reused on each aircraft. It is important to note that CCN devices do not communicate directly to the ground using CCN addresses. Furthermore, the CCN is not advertised to the ground and CCN addresses are not translated (i.e., no NAT). The device field is used not for routing, but rather for address administration and can be defined as follows:

[172.16] [x – LLL – DDDDDDDDDDDDDDDDD]
16-Bits 1-Bit 3-Bits 12-Bits

where

LLLL = (**100**=Seatbox, **010**=Server, **011**=Network Element
X = not currently used (always set to “0”)

Thus, an SEB address in the CCN address space would be as follows:

[172.16] [x – LLL – DDD – CCC – BBBB]
16-Bits 1-Bit 3-Bits 4-Bits 3-Bits 5-Bits
[172.16] [0 – 100 – 0010 – 100 – 01000]
[172.16] [01000010.10001000]
172 . 16 . 66 . 136

Where,

LLL = **100** = Seatbox

D = Area Distribution Box (2)

C = Column (4)

B = Seatbox (16)

X = not used (always set to “0”)

[00027] It will therefore be appreciated that the SEBs **16** can be defined as being control interfaces such that the SEBs **16** have corresponding logical CCN addresses. Furthermore, the area distribution boxes **20** can be defined as being control interfaces such that the area distribution boxes **20** have logical CCN addresses.

Passenger Services Sub-Network (PSN)

[00028] As already discussed, the PSN is the onboard network that provides direct services to passengers. Thus, passengers boarding with computing devices **14** are assigned PSN addresses. Furthermore, all onboard devices that provide direct user services are assigned PSN addresses. Thus, the web server **26**, media server **24**, airborne router **38**, and SEBs **16** can all be defined as passenger interfaces having corresponding logical PSN addresses.

[00029] It is preferred that the PSN addresses include two class B addresses supernetted together, wherein the first **15** bits make up the prefix. As in the case of the CCN addresses, the address range of the PSN addresses is reused on each aircraft. It will further be appreciated that the PSN addresses are translated by a NAT function for off-board access. Thus, PSN addresses are translated into an AGN address from the NAT address pool.

[00030] An exemplary PSN address for an SEB is as follows.

[172.18] [DDDD – CCC – BBBB – U - PPP]
15-Bits 4-Bits 3-Bits 5-Bits 1-Bit 4-Bits
[172 .] [0001001D . DDDCCBB . BBBUPPP]

Where,

D = Area Distribution Box

C = Column

B = Seatbox

U = User (**0** indicates seatbox address, **1** indicates passenger address)

P = Port

[00031] Turning now to FIG. 3, it can be seen that the seat processor 18a functions in accordance with an address resolution protocol (ARP). Specifically, the seat processor performs a proxy ARP function which makes the addresses assigned to the user devices appear to be on the SEB network. Without proxy ARP, each user would appear to be attached to the seat processor through a separate subnet requiring a routing table entry in the airborne router. Thus, using an ARP proxy enables a reduction in address requirements and a reduction in the size of the routing table used by the airborne router. The ports 48 can therefore be defined as being one of the passenger interfaces wherein the ports 48 have logical PSN addresses for which the logical PSN address of the SEB 16a serves as a proxy. Furthermore, the passenger-supplied computing devices 14 can be defined as being one of the passenger interfaces, wherein the computing devices 14 have logical PSN addresses for which the logical PSN address of the SEB 16a serves as a proxy.

[00032] Those skilled in the art can now appreciate from the foregoing description that the broad teachings of the present invention can be implemented in a variety of forms. Therefore, while this invention can be described in connection with particular examples thereof, the true scope of the invention should not be so limited since other modifications will become apparent to the skilled practitioner upon a study of the drawings, specification and following claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. An Internet protocol (IP) networking architecture for a mobile platform, the architecture comprising:
 - a command and control sub-network (CCN) interconnecting a plurality of control interfaces wherein each control interface has a corresponding logical CCN address;
 - a passenger services sub-network (PSN) interconnecting a plurality of passenger interfaces wherein each said passenger interface has a corresponding logical PSN address; and
 - an air-to-ground sub-network (AGN) providing Internet access to the passenger interfaces via at least one isolation system having corresponding logical CCN addresses and corresponding logical PSN addresses such that devices communicating on the AGN and the PSN are blocked from accessing the CCN addresses by the one isolation system;
 - wherein a seat electronics box is defined as one of the passenger interfaces, the logical PSN address of the seat electronics box acting as a proxy address for devices coupled to the seat electronics box, the seat electronics box having a seat processor for translating PSN addresses into AGN addresses.
2. The architecture of claim 1, wherein the at least one isolation system has a logical AGN address corresponding to a mobile platform identifier such that the mobile platform has a unique subnet address.
3. The architecture of claim 2, wherein a router comprises the at least one isolation system, the router having a device identifier such that the mobile platform identifier and the device identifier define the logical AGN address for the router.

4. The architecture of claim 2, wherein a web server comprises the at least one isolation system, the web server having a device identifier such that the mobile platform identifier and the device identifier define the logical AGN address for the web server.
5. The architecture of claim 1 wherein a port is defined as one of the passenger interfaces, the port having a logical PSN address for which the logical PSN address of the seat electronics box serves as a proxy address.
6. The architecture of claim 1, wherein a passenger-supplied computing device comprises one of the passenger interfaces, the passenger-supplied computing device having a logical PSN address for which the logical PSN address of the seat electronics box serves as a proxy address.
7. The architecture of claim 1 wherein one or more seat electronics boxes are defined as being control interfaces such that the seat electronics boxes have corresponding logical CCN addresses.
8. The architecture of claim 7 wherein one or more area distribution boxes are defined as being control interfaces such that the area distribution boxes have corresponding logical CCN addresses, the area distribution boxes serving as hubs for the seat electronics boxes.
9. The architecture of claim 1 wherein the AGN further provides access via a wide area network to a plurality of crew interfaces, wherein each said crew interface has a corresponding logical AGN address.
10. The architecture of claim 9 wherein a mobile platform interface unit comprises one of the crew interfaces such that the mobile platform interface unit has a corresponding logical AGN address.
11. The architecture of claim 9 wherein a control panel is defined as one of the crew interfaces such that the control panel has a corresponding logical AGN address.
12. The architecture of claim 9 wherein a media server is defined as one of the crew interfaces such that the media server has a corresponding logical AGN address.

13. An IP networking architecture for a mobile platform, the architecture comprising:

a command and control sub-network (CCN) interconnecting a plurality of seat electronics boxes and area distribution boxes, the seat electronics boxes and area distribution boxes being defined as control interfaces such that each control interface has a corresponding logical CCN address;

said area distribution boxes serving as hubs for the seat electronics boxes;

a passenger services sub-network (PSN) interconnecting a plurality of passenger interfaces wherein each said passenger interface has a corresponding logical PSN address;

said seat electronics boxes being further defined as passenger interfaces such that the seat electronics boxes have corresponding logical PSN addresses acting as a proxy address for devices coupled to the seat electronics box; and

an air-to-ground sub-network (AGN) providing Internet access to the passenger interfaces via at least one isolation system having corresponding logical CCN addresses and corresponding logical PSN addresses such that devices communicating on the AGN and the PSN are blocked from accessing the CCN addresses by the one isolation system;

the seat electronics box having a seat processor for translating PSN addresses into AGN addresses;

said AGN further providing Internet access to a plurality of crew interfaces wherein each crew interface has a corresponding logical AGN address.

14. The architecture of claim 13 wherein the at least one isolation system has a logical AGN address corresponding to a mobile platform identifier such that the mobile platform has a unique subnet address.

- 15.** A method for structuring Internet protocol (IP) addresses within a mobile platform, the method comprising:
- assigning logical command and control sub-network (CCN) addresses to a plurality of control interfaces;
 - assigning logical passenger services sub-network (PSN) addresses to a plurality of passenger interfaces;
 - assigning a logical CCN address, a logical PSN address and a logical air-to-ground sub-network (AGN) address to at least one isolation system such that devices communicating on the AGN and the PSN are blocked from accessing the CCN addresses by the one isolation system;
 - using a seat electronics box as one of the passenger interfaces;
 - using the logical PSN address of the seat electronics box to act as a proxy address for devices coupled to the seat electronics box; and
 - using the seat electronics box to translate PSN addresses into AGN addresses.
- 16.** The method of claim **15** further including assigning a mobile platform identifier to the logical AGN address of the one isolation system such that the mobile platform has a unique subnet address.
- 17.** The method of claim **16** further including using a router as the one isolation system, the router having a device identifier such that the mobile platform identifier and the device identifier define the logical AGN address for the router.
- 18.** The method of claim **16** further including using a web server as the one isolation system, the web server having a device identifier such that the mobile platform identifier and the device identifier define the logical AGN address for the web server.

