



HU000033760T2

(19) **HU****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**(11) Lajstromszám: **E 033 760**(13) **T2**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 13 801872**(22) A bejelentés napja: **2013. 11. 08.**(51) Int. Cl.: **A24B 3/12** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20130801872

(86) A nemzetközi (PCT) bejelentési szám:

PCT/NL 13/050795

(97) Az európai bejelentés közzétételi adatai:

EP 2919597 A1 **2014. 05. 22.**

(87) A nemzetközi közzétételi szám:

WO 14077679

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2919597 B1 **2017. 01. 25.**

(30) Elsőbbségi adatok:

2009809**2012. 11. 14.****NL**

(73) Jogosult(ak):

Sluis Cigar Machinery B.V., 8263 BC Kampen (NL)

(72) Feltaláló(k):

SLURINK, Oscar, 8141 AJ Heino (NL)**SLOBBE, Jeroen Aart Jan, 8162 PP Epe (NL)**

(74) Képviselő:

SBGK Szabadalmi Ügyvivői Iroda, Budapest

(54)

Dohánykezelő rendszer

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 919 597 B8**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Bibliography INID code(s) 73

(51) Int Cl.:
A24B 3/12 (2006.01)

(86) International application number:
PCT/NL2013/050795

(48) Corrigendum issued on:
22.03.2017 Bulletin 2017/12

(87) International publication number:
WO 2014/077679 (22.05.2014 Gazette 2014/21)

(45) Date of publication and mention
of the grant of the patent:
25.01.2017 Bulletin 2017/04

(21) Application number: **13801872.6**

(22) Date of filing: **08.11.2013**

(54) **TOBACCO PROCESSING SYSTEM**

TABAK VERARBEITENDES SYSTEM

SYSTEME DE TRAITEMENT DE TABAC

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **14.11.2012 NL 2009809**

(43) Date of publication of application:
23.09.2015 Bulletin 2015/39

(73) Proprietor: **Sluis Cigar Machinery B.V.**
8263 BC Kampen (NL)

(72) Inventors:
• **SLURINK, Oscar**
8141 AJ Heino (NL)
• **SLOBBE, Jeroen Aart Jan**
8162 PP Epe (NL)

(74) Representative: **EP&C**
P.O. Box 3241
2280 GE Rijswijk (NL)

(56) References cited:
EP-A1- 0 273 596 WO-A1-2012/123289
FR-A5- 2 179 294 US-A- 5 676 164

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

(19)



(11)

EP 2 919 597 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

25.01.2017 Bulletin 2017/04

(51) Int Cl.:

A24B 3/12 (2006.01)

(86) International application number:

PCT/NL2013/050795

(21) Application number: **13801872.6**

(22) Date of filing: **08.11.2013**

(87) International publication number:

WO 2014/077679 (22.05.2014 Gazette 2014/21)

(54) **TOBACCO PROCESSING SYSTEM**

TABAK VERARBEITENDES SYSTEM

SYSTEME DE TRAITEMENT DE TABAC

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **14.11.2012 NL 2009809**

(43) Date of publication of application:

23.09.2015 Bulletin 2015/39

(73) Proprietor: **Sluis Cigar Machinery B.V.**

8261 AB Kampen (NL)

(72) Inventors:

- **SLURINK, Oscar**
8141 AJ Heino (NL)
- **SLOBBE, Jeroen Aart Jan**
8162 PP Epe (NL)

(74) Representative: **EP&C**

P.O. Box 3241
2280 GE Rijswijk (NL)

(56) References cited:

EP-A1- 0 273 596 WO-A1-2012/123289
FR-A5- 2 179 294 US-A- 5 676 164

EP 2 919 597 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a tobacco processing system for processing tobacco, wherein an additive is mixed in the tobacco. In the known devices it tends to be difficult to obtain a sufficient degree of mixing of the tobacco and additive.

[0002] Tobacco processing systems are disclosed in WO2012/123289, US5676164, and EP0273596.

[0003] It is an object to provide an improved, or at least alternative, tobacco processing system. This object is achieved with the tobacco processing system according to the invention, which processing system comprises;

- a tobacco mixing device for mixing an additive in the tobacco,
- a tobacco supplier for supplying the tobacco to the mixing device, and
- an additive supplier for supplying the additive to the mixing device, wherein

the mixing device comprises a mixing housing which encloses the tobacco additive to form a mixing chamber in which the tobacco and additive are mixed and a gas stream unit which is operatively connected to the mixing housing and configured to provide a gas stream which moves the tobacco and the additive through the mixing chamber, and characterized in that;

- the mixing housing is formed by a holding member for holding the tobacco and a closing member placed in a closing position in which the tobacco is enclosed by the holding member and the closing member,
- the processing system comprises a dosing device for forming doses of tobacco and a transport device for transporting the doses of tobacco in tobacco holders through at least part of the processing system, and
- the holding member is formed by one of the tobacco holders.

[0004] With the tobacco processing system according to the invention, an efficient way of mixing the tobacco and additive is achieved.

[0005] In an embodiment of the tobacco processing system, the mixing device is configured to lift the tobacco inside the mixing chamber via the gas stream. This way an even more efficient way of mixing the tobacco and additive is achieved.

[0006] In an embodiment of the tobacco processing system, the gas stream unit comprises a controller to control the gas stream in the mixing chamber such that a pulsating gas stream is provided.

[0007] In an embodiment of the tobacco processing system, the pulsating gas stream has between 2 and 5 gas stream pulses per second.

[0008] In an embodiment of the tobacco processing system, the mixing housing comprises at least one gas

opening which is operatively connected with the gas stream unit.

[0009] In an embodiment of the tobacco processing system, the at least one gas opening is positioned to create a circulating gas stream in the mixing chamber.

[0010] In an embodiment of the tobacco processing system, the mixing housing comprises inner housing walls which define the mixing chamber and are formed to facilitate the circulating flow of the gas stream.

[0011] In an embodiment of the tobacco processing system, the at least one gas opening is positioned to create a vortex-like gas stream in the mixing chamber.

[0012] In an embodiment of the tobacco processing system, the mixing housing comprises inner housing walls which define the mixing chamber and are formed to facilitate the vortex-like flow of the gas stream.

[0013] In an embodiment of the tobacco processing system, the mixing housing comprises multiple gas openings, a length direction and a width direction, and the gas openings are located at a distance from each other in the length direction or the width direction.

[0014] In an embodiment of the tobacco processing system, the mixing housing comprises multiple gas openings, a longitudinal axis and the gas openings surround the longitudinal axis.

[0015] In an embodiment of the tobacco processing system, the mixing housing comprises at least one further gas opening which is operatively connected to the gas stream unit and positioned to provide a further gas stream in a direction transverse to the gas stream.

[0016] In an embodiment of the tobacco processing system, the gas stream unit comprises a further controller which is configured to control the further gas stream in the mixing chamber such that a pulsating further gas stream is provided.

[0017] In an embodiment of the tobacco processing system, the pulsating further gas stream has between 5 and 15 gas stream pulses per second.

[0018] In an embodiment of the tobacco processing system, the mixing device is configured to provide the gas stream in the mixing chamber while the closing member is located in the closing position.

[0019] In an embodiment of the tobacco processing system, the holding member comprises a first inner space wherein the tobacco is positioned, the closing member comprises a second inner space, the mixing chamber is formed by the first inner space and second inner space and the mixing device is configured to lift the tobacco from the first inner space into the second inner space via the gas stream.

[0020] In an embodiment of the tobacco processing system, the mixing device is configured to provide the gas stream in the mixing chamber while the closing member is located in the closing position and moved along with the tobacco holder.

[0021] In an embodiment of the tobacco processing system, the mixing device comprises a member mover to place the closing member in the closing position on

one of the moving tobacco holders while moving the closing member along with the tobacco holder over a predetermined distance.

[0022] In an embodiment of the tobacco processing system, the member mover moves the closing member along an endless path in which, after being moved along with the tobacco holder while being in the closing position, the closing member is moved back in the opposite direction of the movement of the tobacco holders while being located at a distance from the tobacco holders in order to be placed in the closing position on a further one of the tobacco holders and to repeat the cycle.

[0023] In an embodiment of the tobacco processing system, the mixing device comprises multiple closing members and the member mover is configured to move the closing members synchronously in the same direction such that the closing members together with several of the tobacco holders form multiple mixing chambers.

[0024] In an embodiment of the tobacco processing system, the transport device is a tray transporter and the tobacco holders are trays moved by the tray transporter through at least part of the processing system.

[0025] In an embodiment of the tobacco processing system, the transport device is a package transporter and the tobacco holders are tobacco packages moved by the package transporter through at least part of the processing system.

[0026] In an embodiment of the tobacco processing system, the tobacco packages are tobacco bins.

[0027] In an embodiment of the tobacco processing system, the tobacco bin comprises a bin wall defining a bin opening and the closing member in the closing position is placed on or in the bin opening.

[0028] In an embodiment of the tobacco processing system, the additive supplier is configured to add the additive to the tobacco when the tobacco is located in the holding member.

[0029] In an embodiment of the tobacco processing system, the additive supplier is configured to add the additive to the tobacco when the tobacco is located in the mixing chamber.

[0030] In an embodiment of the tobacco processing system, the additive supplier is configured to add the additive to the tobacco when the tobacco is located in the tobacco holder. This way, the part of the tobacco processing system located upstream of the tobacco holders will not be contaminated with the additive.

[0031] In an embodiment of the tobacco processing system, the additive supplier is configured to add the additive to the tobacco when the tobacco is located in the tray.

[0032] In an embodiment of the tobacco processing system, the additive supplier is configured to add the additive to the tobacco when the tobacco is located in the tobacco package. This way, only the tobacco package will be contaminated with the additive.

[0033] In an embodiment of the tobacco processing system, the additive supplier is configured to add the ad-

ditive to the tobacco when the tobacco is located in the tobacco bin.

[0034] In an embodiment of the tobacco processing system, the additive is added to the tobacco in the mixing chamber via the gas stream.

[0035] In an embodiment of the tobacco processing system, the additive is added to the tobacco in the mixing chamber via the further gas stream.

[0036] In an embodiment of the tobacco processing system, the volume of the mixing chamber is at least 1,5 times larger than the volume of the tobacco and additive placed in the mixing chamber.

[0037] In an embodiment of the tobacco processing system, the volume of the mixing chamber is at most 10 times larger than the volume of the tobacco and additive placed in the mixing chamber.

[0038] In an embodiment of the tobacco processing system, the gas stream provided by the gas stream unit is an air stream.

[0039] In an embodiment of the tobacco processing system, the gas stream has a velocity of between 20 m/s and 200 m/s when leaving the at least one gas opening.

[0040] In an embodiment of the tobacco processing system, the gas stream has a velocity of between 50 m/s and 150 m/s when leaving the at least one gas opening.

[0041] In an embodiment of the tobacco processing system, the further gas stream has a velocity of between 20 m/s and 200 m/s when leaving the at least one further gas opening.

[0042] In an embodiment of the tobacco processing system, the further gas stream has a velocity of between 50 m/s and 150 m/s when leaving the at least one further gas opening.

[0043] Any combination can be made of the features of two or more of the above mentioned embodiments of the tobacco processing system.

[0044] The invention further relates to a method of processing tobacco comprising the steps of;

- providing a tobacco processing system according to the invention,
- supplying tobacco into the mixing chamber of the mixing device,
- supplying an additive into the mixing chamber of the mixing device,
- providing a gas stream in the mixing chamber with the gas stream unit to move the tobacco and the additive through the mixing chamber.

[0045] In an embodiment of the method, the tobacco is lifted inside the mixing chamber via the gas stream.

[0046] In an embodiment of the method, the method comprises enclosing the tobacco with the mixing housing formed by the holding member for holding the tobacco and the closing member placed in a closing position in contact with the holding member to enclose the tobacco.

[0047] In an embodiment of the method, the method comprises transporting doses of tobacco in the tobacco

holders through at least part of the processing system with the transport device and forming the holder member with one of the tobacco holders.

[0048] In an embodiment of the method, the method comprises mixing the tobacco and additive while one of the trays forms the holder member.

[0049] In an embodiment of the method, the method comprises mixing the tobacco and additive while one of the tobacco packages forms the holder member.

[0050] In an embodiment of the method, the method comprise mixing the tobacco and additive while one of the tobacco bins forms the holder member.

[0051] Any combination can be made of the features of two or more of the above mentioned embodiments of the method.

[0052] Embodiments of the tobacco processing system and method according to the invention will be described by way of example only, with reference to the accompanying schematic drawings in which corresponding reference symbols indicate corresponding parts, and in which:

Figure 1 schematically shows an embodiment of the tobacco processing system according to the invention,

Figure 2 schematically shows a view in perspective of the additive supply unit, transport device and mixing device of a further embodiment of the tobacco processing system according to the invention, the Figures 3 and 4a-d schematically show the transport device and mixing device of fig. 2,

Figure 5 schematically shows a view in cross section of the mixing housing of the processing system of fig. 2,

Figure 6 schematically shows a view in cross section of the mixing housing of a further embodiment of the processing system according to the invention,

Figure 7 schematically shows a view in cross section of the mixing housing of a further embodiment of the processing system according to the invention, the Figures 8 and 9 schematically show a view in perspective of the closing member of the processing system of fig. 2,

Figure 10 schematically shows a view in perspective of the holding member of the processing system of fig. 2,

Figure 11 schematically shows a further embodiment of the tobacco processing system according to the invention,

Figure 12 schematically shows a view in perspective of the mixing housing of the tobacco processing system of fig. 11,

Figure 13 schematically shows a view in cross section of the mixing housing of a fig. 12,

Figure 14 schematically shows a view in perspective of a further embodiment of the mixing housing of the tobacco processing system of fig. 11,

Figure 15 schematically shows a first view in cross section of the mixing housing of fig. 14,

Figure 16 schematically shows a second view in cross section of the mixing housing of fig. 14, and Figure 17 schematically shows a side view of a further embodiment of a tobacco processing system.

[0053] Figure 1 shows an embodiment of the tobacco processing system 1 according to the invention. The tobacco processing system 1 comprises a tobacco storage 37 for storing tobacco. In use, tobacco is supplied into the tobacco storage 37 (arrow 100). This is in general performed mechanically, but may also be performed manually. The tobacco in the tobacco storage 37 is transferred to a dosing device 36 (arrow 101).

[0054] The dosing device 36 produces doses of a predetermined amount of tobacco and transfers the doses of tobacco to a weighing device 38 (arrow 102).

[0055] The weighing device 38 weighs the doses of tobacco. The approved doses containing the right amount of tobacco are transferred into tobacco holders 62 of a transport device 32 (arrow 103). Each tobacco holder 62 holds one dose of tobacco. The disapproved doses containing a different amount of tobacco are discharged (arrow 104).

[0056] The tobacco holders 62 are trays 21, and the transport device 32 is a tray transporter 20 configured to move the trays 21 through the processing system 1. The trays 21 are interconnected to form an endless series of trays 21. The endless chain of trays 21 is circulated along a predetermined path. The direction of the movement of the trays 21 is indicated by the arrows 24.

[0057] After receiving a dose of tobacco, the trays 21 are moved to an additive supply unit 39. The additive supply unit 39 discharges a specific amount of additive in the tray 21 and on the tobacco (arrow 105). The additive may be selected to enhance the flavour of the tobacco. The additive may comprise one or more spices and/or one or more herbs. The additive may for example comprise mint and/or ginger and/or sugar. The additive may be in a fluid form or in a solid form containing small particles.

[0058] The trays 21 holding the tobacco and additive are subsequently transported to the tobacco mixing device 3. The mixing device 3 comprises a mixing housing 7 which encloses the tobacco and additive to form a mixing chamber 8 in which the tobacco and additive are mixed and a gas stream unit 9 which is operatively connected to the mixing housing 7 and configured to provide a gas stream 10 which moves the tobacco and additive through the mixing chamber 8. This way an effective mixing of the tobacco and additive is achieved.

[0059] The tobacco storage 37, dosing device 36 and weighing device 38 form, in cooperation with the transport device 32, the tobacco supplier 5 which supplies the tobacco to the mixing device 3. The additive supply unit 39 forms, in cooperation with the transport device 32, the additive supplier 6 which supplies the additive to the mixing device 3.

[0060] The mixing housing 7 is formed by a holding

member 17 for holding the tobacco and additive and a closing member 18 placed in a closing position 19 in which the closing member 18 is in contact with the holder member 17 such that the tobacco and additive is enclosed by the holding member 17 and the closing member 18. The holding member 17 is formed by one of the tobacco holders 62, more specifically one of the trays 21. The mixing device 3 is configured to provide the gas stream 10 in the mixing chamber 8 while the closing member 18 is located in the closing position 19 and moved along with the tray 21. The mixing device 3 comprises a member mover 22 to place the closing member 18 in the closing position 19 on one of the moving trays 21 while moving the closing member 18 along with the tray 21 over a predetermined distance. The predetermined distance is chosen such that there is sufficient time to mix the tobacco and additive with the gas stream 10 provided by the gas stream unit 9. The gas stream unit 9 comprises a controller 11 to control the gas stream in the mixing chamber.

[0061] After the mixing, the trays 21 holding the mixed tobacco and additive is transported to a packaging device 25. The mixed tobacco and additive is transferred to the packaging device 25 (arrow 107). The mixed tobacco and additive is transferred by tilting the trays 21 at a specific location above the packaging device 25 (arrow 40).

[0062] The packaging device 25 places the doses of tobacco mixed with the additive in tobacco packages. Sealed packages of mixed tobacco and additive leave the packing device 25 (arrow 108).

[0063] Figure 2 shows the additive supply unit 39, transport device 32 and mixing device 3 of a further embodiment of the tobacco processing system 1 according to the invention. The processing system 1 of fig. 2 differs from the one shown in fig. 1, in that the tobacco mixing device 3 is configured to mix the tobacco and additive of more than one tobacco holders 62, more specifically trays 21, simultaneously.

[0064] The figures 3 and 4a-d show the transport device 32 and mixing device 3 of fig. 2. The gas stream unit 9 and controller 11 are not shown in the fig. 2-4 in order to obtain a detailed view on the functioning of the mixing device 3 and its member mover 22.

[0065] The mixing device 3 comprises ten closing members 18 and is configured to mix the tobacco and additive of ten trays 21 simultaneously. The member mover 22 is configured to place each of the closing members 18 in the closing position 19 on one of the moving trays 21 while moving the closing members 18 along with the trays 21 over a predetermined distance. The mixing device 3 is configured to provide the gas stream 10 in the mixing chambers 8 while the closing members 18 are located in the closing position 19 and moved along with the trays 21. The mixing houses 7 of the different mixing chambers 8 may be operatively connected to one or several gas stream units 9.

[0066] The member mover 22 moves each of the closing members 18 along an endless path in which, after

being moved along with the trays 21 while being in the closing position 19 on one of the trays 21, the closing member 18 is moved back in the opposite direction of the movement of the trays 21 while being located at a distance from the trays 21 in order to be placed in the closing position 19 on a further one of the trays 21 and to repeat the cycle. The endless path of one of the closing members 18 is indicated by the arrows 41. The member mover 22 is configured to move the closing members 18 synchronously in the same direction such that the closing members 18 together with several of the trays 21 form multiple mixing chambers 8.

[0067] In figure 4a each of the closing members 18 is placed in the closed position 19 on one of the trays 21 holding the tobacco and additive. From this starting position, the closing members 18 are moved along with the trays 21 over a predetermined distance. During this movement, the gas stream 10 for mixing the tobacco and additive is provided in each of the mixing chambers 8 formed by the closing members 18 in the closing position 19 on the trays 21. After that, the closing members 18 are moved at a distance from the trays 21 holding the mixed tobacco and additive (fig. 4b) and subsequently in the opposite direction of the movement of the trays 21 (fig. 4c and 4d). The closing members 18 will be moved back to the starting position shown in fig. 4a, in which the closing members 18 will be positioned in closing position 19 on the next set of trays 21 to repeat the cycle. The movement of the closing members 18 and the trays 21 are tuned so that every dose of tobacco is processed once. This means that when passing the mixing device 3, no tray 21 is missed or treated more than once.

[0068] The closing members 18 are connected to a member frame 44. The member movers 22 comprises gearwheel 42 which are driven by a drive unit (not shown) and are interconnected with gear chains 43. The member frame 44 is connected to several of the gear chains 43 such that the member frame 44 follows the movement of said gear chains 43. This way the closing members 18 move along their endless path. It will be clear to the skilled person that many different arrangements can be used to achieve the required movement of the closing members 18.

[0069] Figure 5 shows a view in cross section of a mixing housing of the processing system of fig 2. The mixing housing 7 is formed by the tray 21 and the closing member 18. The closing member 18 is positioned in the closing position 19, such that the tobacco 2 and additive 4 is enclosed by the tray 21 and the closing member 18. The tray 21 and the closing member 18 define the mixing chamber 8.

[0070] The closing member 18 comprises a resilient element 48 which is placed in contact with the tray 21 to seal the mixing chamber 8. The mixing housing 7 comprises gas openings 12 which are operatively connected with the gas stream unit 9 via a gas duct 49. The gas openings 12 are provided in the closing member 18. The gas openings 12 are positioned to create a circulating

gas stream (arrows 10) in the mixing chamber 8. The mixing housing 7 comprises inner housing walls 13 which define the mixing chamber 8 and are formed to facilitate the circulating flow of the gas stream.

[0071] The tray 21 (as being the holding member 17) comprise a first inner space 53 wherein the tobacco 2 is positioned. The closing member 18 comprises a second inner space 54. The mixing chamber 8 is formed by the first inner space 53 and second inner space 54. The mixing device 3 is configured to lift the tobacco 2 and additive 4 from the first inner space 53 into the second inner space 54 with the gas stream 10.

[0072] The gas stream unit 9 comprises a controller 11 to control the gas stream 10 in the mixing chamber 8 such that a pulsating gas stream 10 is provided. The pulsating gas stream has around three gas stream pulses per second. In other examples, the pulsating gas stream has between two and five gas stream pulses per second. This facilitates the mixing of the tobacco 2 and additive 4.

[0073] The mixing housing 7 comprises further gas openings 16 which are positioned to provided a further gas stream 45 in a direction transverse to the circulating gas stream 10. This tends to create an improved mixing of the tobacco 2 and additive 4 in the mixing chamber 8. The gas openings 12 and further gas openings 16 extend transverse to each other. The further gas openings 16 are located in the closing member 18. The further gas openings 16 are operatively connected to the gas stream unit 9 via a further gas duct 50. The gas stream unit 9 comprises a further controller 31 is configured to control the further gas stream 45 in the mixing chamber 8 such that a pulsating further gas stream 45 is provided. The pulsating further gas stream has around ten gas stream pulses per second. In other examples, the pulsating further gas stream has between five and fifteen gas stream pulses per second.

[0074] The mixing housing 7 comprises a vent opening 34 to release an overpressure in the mixing chamber 8. The vent opening 34 is provided with a filter 35 to ensure that gas can pass through the vent opening 34 and the tobacco 2 and additive 4 remain in the mixing chamber 8.

[0075] The gas stream 10 and further gas stream 45 have a velocity of around 120 m/s when leaving the gas openings 12 and further gas openings 16, respectively. In other examples of the processing system, the gas stream 10 and further gas stream 45 have a velocity of between 20 m/s and 200 m/s. In a further embodiment, the gas stream 10 and further gas stream 45 have a velocity of between 50 m/s and 150 m/s.

[0076] The gas stream 10 and further gas stream 45 are air streams.

[0077] In the embodiment of fig. 5, the additive is added to the tobacco when the tobacco is located in the holding member 17, more specifically the tobacco holder 62. The additive supplier discharges the additive 4 in the holding member 17, more specifically the tobacco holder 62, before the closing member 18 is placed in the closing position 19.

[0078] In the embodiments of the figures 6 and 7, the additive is added to the tobacco when the tobacco is located in the mixing chamber 8. The additive supplier discharges the additive in the mixing chamber 8 while the closing member 18 is placed in the closing position 19 on the holding member 17, more specifically the tobacco holder 62.

[0079] The processing system 1 of figure 6 differs from the one shown in figure 2, in that the additive supplier transfers the additive 4 in the mixing chamber 8 via a supply opening 46. The supply opening 46 is formed by the vent opening 34. In other example, the supply opening 46 is separate from the vent opening 34. The supply opening 46 can be opened or closed by a lid 47. The lid 47 is pivotally movable from a closing position into an open position, and vice versa (arrow 51). The lid 47 is formed by the filter 35 of the vent opening 34. For supplying the additive 4 in the mixing chamber 8, the lid 47 is moved to open the supply opening 46 in order to allow access to the additive 4. After that, the additive 4 is transferred into the mixing chamber 8 via the supply opening 46. During the mixing of the tobacco 2 and additive 4 by the gas stream 10, the supply opening 46 is closed by the lid 47.

[0080] The processing system of figure 7 differs from the one shown in figure 2, in that the additive supplier transfers the additive 4 into the mixing chamber 8 via the further gas openings 16. In other examples, the additive 4 is discharged into the mixing chamber 8 via the at least one gas opening 12 and/or the at least one further gas opening 16. This way, the additive is transported into the mixing chamber 8 via the gas stream and/or further gas stream. This tends to be an efficient way of supplying an additive 4 in fluid form, more specifically in liquid form, into the mixing chamber 8.

[0081] Figure 8 shows the outer side of the closing member 18 and figure 9 shows the inner side of the closing member 18 of the processing system of fig. 2. The mixing house 7 comprises a length direction 14 and a width direction 15. The mixing house 7 comprises multiple gas openings 12 which are located at a distance from each other in the length direction 14. The gas openings 12 are positioned along a line extending in the length direction 14. The gas openings 12 extend over the majority of the length direction 14. The gas openings 12 extend around 75% of the length direction 14. In other examples, the gas openings 12 extend between 50% and 100% of the length direction 14.

[0082] In a further embodiment, the gas openings 12 are located at a distance from each other in the width direction 15. The gas openings 12 extend over the majority of the width direction 15. The gas openings 12 extend around 75% of the width direction 15. In other examples, the gas openings 12 extend between 50% and 100% of the width direction 15.

[0083] The mixing house 7 comprises multiple further gas openings 16 which are located at a distance from each other in the length direction 14. The further gas

openings 16 are positioned along a line extending in the length direction 14. The further gas 16 openings extend over the majority of the length direction 14. The further gas openings 16 extend around 75% of the length direction 14. In other examples, the further gas openings 16 extend between 50%-100% of the length direction 14.

[0084] In a further embodiment, the further gas openings 16 are located at a distance from each other in the width direction 15. The further gas openings 16 extend over the majority of the width direction 15. The further gas openings 16 extend around 75% of the width direction 15. In other examples, the further gas openings 16 extend between 50%-100% of the width direction 15.

[0085] Figure 10 shows the holding member 17 of the processing system of fig 2. The holding member 17 is formed by the tobacco holder 62 of the transport device 32, more specifically the tray 21 of the tray transporter 20. The tray 21 is configured to hold one dose of tobacco 2. In the tray transporter 20, the tray 21 is arranged pivotable about a pivot axis 51.

[0086] Figure 11 shows a further embodiment of the tobacco processing system according to the invention. The processing system 1 differs from the one shown in fig. 1, in that the tobacco holder 62 are tobacco packages 26. The weighing device 38 transfers the doses of tobacco into a tobacco package 26 (arrow 103). In the shown situation, the tobacco package 26 is a tobacco bin 28. The transport device 32 is a package transporter 59. The tobacco bins 28 are transported by the package transporter 59 in the direction of arrow 58. The tobacco bins 28 are moved to the additive supply unit 39 which adds the additive to the tobacco located in the tobacco bins 28 (arrow 105). The package transporter 59 subsequently moves the tobacco bins 28 to the mixing device 3. The tobacco and additive are mixed by the mixing device 3 within the tobacco bins 28 (arrow 106). This means that the tobacco packages 26, more specifically the tobacco bins 28, form the holder member 17 of the mixing device 3. The tobacco bins 28 with the mixed tobacco and additive are moved to a sealing device 60 (arrow 109) to seal the tobacco bins 28. Sealed tobacco bins 28 containing mixed tobacco and additive leave the sealing device 60 (arrow 108). In this situation, the packaging device 25 is formed by the package transporter 59 and the sealing device 60.

[0087] Figure 12 shows a view in perspective of the mixing housing of the tobacco processing system of fig. 11. Figure 13 schematically shows a view in cross section of the mixing housing of fig. 12. The holding member 17 is formed by one of the tobacco packages 26 in which the doses of tobacco are placed. The tobacco package 26 is a tobacco bin 28. The tobacco bin 28 comprise bin walls 29 defining a bin opening 30 and the closing member 18 is in the closing position 19 placed on or in the bin opening 30. The gas openings 12 are provided in the closing member 18 and positioned to create a vortex-like gas stream 10 in the mixing chamber 8. The mixing chamber 8 comprises a longitudinal axis 61 and the vortex-like

gas stream 10 rotates around the longitudinal axis 61.

[0088] The tobacco bin 28 (as being the holding member 17) comprises a first inner space 53 and the closing member 18 comprises a second inner space 54. The first inner space 53 and the second inner space 54 from the mixing chamber 8. The mixing device 3 is configured to provide a vortex-like gas stream 10 which lifts the tobacco and additive from the first inner space 53 into the second inner space 54 (arrow 55).

[0089] The volume of the mixing chamber 8 is at least 1,5 times larger than the volume of the tobacco and additive placed in the mixing chamber 8.

[0090] The volume of the mixing chamber 8 is at most 10 times larger than the volume of the tobacco and additive placed in the mixing chamber 8.

[0091] In this embodiment, the tobacco and additive are transferred into the tobacco bin 28 before the closing member 18 is placed in the closing position 19. In other examples of the processing system 1, the additive is added to the tobacco while the closing member 18 is placed in the closing position 19. This can be achieved in similar ways as shown in fig. 6 and 7.

[0092] Figure 14 shows a view in perspective of a further embodiment of the mixing housing of the tobacco processing system of fig. 11. Figure 15 shows a view in cross section of the mixing housing 7 of fig. 14. Figure 16 shows a view in cross section along line XVI-XVI of the mixing housing of fig. 15. The mixing housing 7 differs from the one of fig. 12, in that at least one further gas opening 16 and at least one auxiliary gas opening 57 is provided.

[0093] The further gas opening 16 is operatively connected to the gas stream unit 9 to provide a further gas stream 45 in the mixing chamber 8. The further gas stream extends transverse to the vortex-like gas stream 10. The further gas opening 16 extend transverse to the longitudinal axis 61. The further gas opening 16 is located in the second inner space 54.

[0094] The auxiliary gas openings 57 are operatively connected to the gas stream unit 9 to provide an auxiliary gas stream 56 in the mixing chamber 8. The auxiliary gas stream 56 is a circulating gas stream which facilitates the vortex-like gas stream 10 in the mixing chamber 8. The auxiliary gas stream 56 circulates around the longitudinal axis 64. The further gas openings 57 are located in the second inner space 54.

[0095] In other examples, the mixing housing 7 only comprises one or more further gas openings or one or more auxiliary openings besides the gas stream openings.

[0096] In this embodiment, the tobacco and additive are transferred into the tobacco bin 28 before the closing member 18 is placed in the closing position 19. In other examples of the processing system 1, the additive is added to the tobacco while the closing member 18 is placed in the closing position 19. This can be achieved in similar ways as shown in fig. 6 and 7.

[0097] Figure 17 shows a side view of a further em-

bodiment of a tobacco processing system. The processing system differs from the one shown in fig. 1, in that the additive supply unit 39 is configured to supply the additive into the tobacco storage 37, and the mixing device 3 is configured to mix the tobacco and additive in the mixing chamber 8 wherein the holder member 17 is formed by the tobacco storage 37.

[0098] It will be apparent to those skilled in the art that various modifications can be made to the tobacco processing device and method according the invention without departing from the scope as defined in the claims.

Claims

1. Tobacco processing system (1) for processing tobacco (2), which processing system comprises;

- a tobacco mixing device (3) for mixing an additive (4) in the tobacco,
- a tobacco supplier (5) for supplying the tobacco to the mixing device, and
- an additive supplier (6) for supplying the additive to the mixing device, wherein

the mixing device comprises a mixing housing (7) which encloses the tobacco and additive to form a mixing chamber (8) in which the tobacco and additive are mixed and a gas stream unit (9) which is operatively connected to the mixing housing and configured to provide a gas stream (10) which moves the tobacco and additive through the mixing chamber, and **characterized in that;**

- the mixing housing is formed by a holding member (17) for holding the tobacco and a closing member (18) placed in a closing position (19) in which the tobacco is enclosed by the holding member and the closing member,
- the processing system comprises a dosing device (36) for forming doses of tobacco and a transport device (32) for transporting the doses of tobacco in tobacco holders (62) through at least part of the processing system, and
- the holding member is formed by one of the tobacco holders.

2. Tobacco processing system according to claim 1, wherein the mixing device is configured to lift the tobacco inside the mixing chamber via the gas stream.
3. Tobacco processing system according to claim 1 or 2, wherein the gas stream unit comprises a controller (11) to control the gas stream in the mixing chamber such that a pulsating gas stream is provided and the pulsating gas stream has between 2 and 5 gas stream pulses per second.

4. Tobacco processing system according to any of the preceding claims, wherein the mixing housing comprises at least one gas opening (12) which is operatively connected with the gas stream unit.

5. Tobacco processing system according to any of the preceding claims, wherein;

- the mixing housing comprises at least one further gas opening (16) which is operatively connected to the gas stream unit and positioned to provide a further gas stream in a direction transverse to the gas stream,
- the gas stream unit comprises a further controller (31) which is configured to control the further gas stream in the mixing chamber such that a pulsating further gas stream is provided, and
- the pulsating further gas stream has between 5 and 15 gas stream pulses per second.

6. Tobacco processing system according to any of the preceding claims, wherein the mixing device is configured to provide the gas stream in the mixing chamber while the closing member is located in the closing position.

7. Tobacco processing system according to any of the preceding claims, wherein the holding member comprise a first inner space (53) wherein the tobacco is positioned, the closing member comprises a second inner space (54), the mixing chamber is formed by the first inner space and second inner space and the mixing device is configured to lift the tobacco from the first inner space into the second inner space via the gas stream.

8. Tobacco processing system according to any of the preceding claims, wherein;

- the mixing device is configured to provide the gas stream in the mixing chamber while the closing member is located in the closing position and moved along with the tobacco holder.

9. Tobacco processing system according to claim 8, wherein;

- the mixing device comprises a member mover (22) to place the closing member in the closing position on one of the moving tobacco holders while moving the closing member along with the tobacco holder over a predetermined distance,
- the member mover moves the closing member along an endless path (23) in which, after being moved along with the tobacco holder while being in the closing position, the closing member is moved back in the opposite direction of the movement of the tobacco holders while being

- located at a distance from the tobacco holders in order to be placed in the closing position on a further one of the tobacco holders and to repeat the cycle, and
- the mixing device comprises multiple closing members and the member mover is configured to move the closing members synchronously in the same direction such that the closing members together with several of the tobacco holders form multiple mixing chambers.
10. Tobacco processing system according to claim any of the preceding claims, wherein the transport device is a tray transporter (20) and the tobacco holders are trays (21) moved by the tray transporter through at least part of the processing system.
11. Tobacco processing system according to any of the claims 1-9, wherein;
- the transport device is a package transporter and the tobacco holders are tobacco packages (26) moved by the package transporter through at least part of the processing system.
12. Tobacco processing system according to claim 11, wherein;
- the tobacco packages are tobacco bins (28), and
 - the tobacco bin comprises a bin wall (29) defining a bin opening (30) and the closing member in the closing position is placed on or in the bin opening.
13. Method of processing tobacco, which method comprises the steps of;
- providing a tobacco processing system according to any of the preceding claims,
 - supplying tobacco into the mixing chamber of the mixing device,
 - supplying an additive into the mixing chamber of the mixing device,
 - providing a gas stream in the mixing chamber with the gas stream unit to move the tobacco and the additive through the mixing chamber.
14. Method according to claim 13, wherein the tobacco is lifted inside the mixing chamber via the gas stream.
15. Method according to claim 13 or 14, wherein the method comprises enclosing the tobacco with the mixing housing formed by the holding member for holding the tobacco and the closing member placed in a closing position in contact with the holding member to enclose the tobacco.

Patentansprüche

1. Tabakverarbeitungssystem (1) zum Verarbeiten von Tabak (2), wobei das Verarbeitungssystem das Folgende umfasst:
- eine Tabakmischvorrichtung (3) zum Mischen von einem Zusatzstoff (4) in den Tabak,
 - eine Tabakversorgung (5), um der Mischvorrichtung den Tabak zuzuführen, und
 - eine Zusatzstoffversorgung (6), um der Mischvorrichtung den Zusatzstoff zuzuführen, wobei die Mischvorrichtung ein Mischgehäuse (7), das den Tabak und den Zusatzstoff umschließt, um eine Mischkammer (8) auszubilden, in der der Tabak und der Zusatzstoff gemischt werden, und eine Gasstromeinheit (9) umfasst, die wirksam mit dem Mischgehäuse verbunden und konfiguriert ist, einen Gasstrom (10) bereitzustellen, der den Tabak und den Zusatzstoff durch die Mischkammer bewegt, und **dadurch gekennzeichnet ist, dass:**
 - das Mischgehäuse durch ein Halteelement (17) zum Halten des Tabaks und ein Verschlusselement (18) ausgebildet wird, das in einer Verschlussposition (19) platziert ist, in der der Tabak durch das Halteelement und das Verschlusselement umschlossen ist,
 - das Verarbeitungssystem eine Dosierungsvorrichtung (36) zum Bilden von Tabakdosen und eine Transportvorrichtung (32) umfasst, um die Tabakdosen in Tabakhaltern (62) durch mindestens einen Teil des Verarbeitungssystems zu transportieren, und
 - das Halteelement durch einen der Tabakhalter ausgebildet wird.
2. Tabakverarbeitungssystem nach Anspruch 1, wobei die Mischvorrichtung konfiguriert ist, den Tabak innen in der Mischkammer durch den Gasstrom anzuheben.
3. Tabakverarbeitungssystem nach Anspruch 1 oder 2, wobei die Gasstromeinheit eine Steuerung (11) umfasst, um den Gasstrom in der Mischkammer so zu steuern, dass ein pulsierender Gasstrom bereitgestellt wird und der pulsierende Gasstrom zwischen 2 und 5 Gasstimpulse pro Sekunde aufweist.
4. Tabakverarbeitungssystem nach einem der vorhergehenden Ansprüche, wobei das Mischgehäuse mindestens eine Gasöffnung (12) umfasst, die wirksam mit der Gasstromeinheit verbunden ist.
5. Tabakverarbeitungssystem nach einem der vorher-

gehenden Ansprüche, wobei:

- das Mischgehäuse mindestens eine weitere Gasöffnung (16) umfasst, die wirksam mit der Gasstromeinheit verbunden und positioniert ist, um einen weiteren Gasstrom in einer Querrichtung zu dem Gasstrom bereitzustellen,
 - die Gasstromeinheit eine weitere Steuerung (31) umfasst, die konfiguriert ist, den weiteren Gasstrom in der Mischkammer so zu steuern, dass ein pulsierender weiterer Gasstrom bereitgestellt wird, und
 - der pulsierende weitere Gasstrom zwischen 5 und 15 Gasstropmpulse pro Sekunde aufweist.
6. Tabakverarbeitungssystem nach einem der vorhergehenden Ansprüche, wobei die Mischvorrichtung konfiguriert ist, den Gasstrom in der Mischkammer bereitzustellen, während das Verschlusselement in der Verschlussposition lokalisiert ist.
7. Tabakverarbeitungssystem nach einem der vorhergehenden Ansprüche, wobei das Halteelement einen ersten Innenraum (53) umfasst, in dem der Tabak angeordnet ist, die Verschlusskammer einen zweiten Innenraum (54) umfasst, die Mischkammer durch den ersten Innenraum und den zweiten Innenraum ausgebildet wird und die Mischvorrichtung konfiguriert ist, den Tabak von dem ersten Innenraum in den zweiten Innenraum durch den Gasstrom anzuheben.
8. Tabakverarbeitungssystem nach einem der vorhergehenden Ansprüche, wobei:
- die Mischvorrichtung konfiguriert ist, den Gasstrom in der Mischkammer bereitzustellen, während die Verschlusskammer in der Verschlussposition lokalisiert ist und zusammen mit dem Tabakhalter bewegt wird.
9. Tabakverarbeitungssystem nach Anspruch 8, wobei:
- die Mischvorrichtung eine Elementbewegevorrichtung (22) umfasst, um das Verschlusselement in der Verschlussposition auf einen von den sich bewegenden Tabakhaltern zu platzieren, während sie das Verschlusselement zusammen mit dem Tabakhalter über eine vorbestimmte Distanz bewegt,
 - die Elementbewegevorrichtung das Verschlusselement entlang eines Endloswegs (23) bewegt, wobei das Verschlusselement, nachdem es zusammen mit dem Tabakhalter, während es sich in der Verschlussposition befindet, bewegt wurde, in die entgegengesetzte Richtung zu der Bewegung der Tabakhalter bewegt
- wird, während es in einem Abstand zu den Tabakhaltern lokalisiert wird, um in der Verschlussposition auf einen weiteren von den Tabakhaltern platziert zu werden und um den Zyklus zu wiederholen, und
- die Mischvorrichtung mehrere Verschlusselemente umfasst und die Elementbewegevorrichtung konfiguriert ist, die Verschlusselemente synchron in dieselbe Richtung zu bewegen, so dass die Verschlusselemente zusammen mit mehreren von den Tabakhaltern mehrere Mischkammern ausbilden.
10. Tabakverarbeitungssystem nach einem der vorhergehenden Ansprüche, wobei die Transportvorrichtung ein Schalentransporter (20) ist und die Tabakhalter Schalen (21) sind, die durch den Schalentransporter durch mindestens einen Teil von dem Verarbeitungssystem bewegt werden.
11. Tabakverarbeitungssystem nach einem der Ansprüche 1-9, wobei:
- die Transportvorrichtung ein Packungstransporter ist und die Tabakhalter Tabakpackungen (26) sind, die durch den Packungstransporter durch mindestens einen Teil von dem Verarbeitungssystem bewegt werden.
12. Tabakverarbeitungssystem nach Anspruch 11, wobei:
- die Tabakpackungen Tabakbehälter (28) sind, und
 - der Tabakbehälter eine Behälterwand (29) umfasst, die eine Behälteröffnung (30) definiert und das Verschlusselement in der Verschlussposition auf oder in der Behälteröffnung platziert ist.
13. Verfahren zum Verarbeiten von Tabak, wobei das Verfahren die folgenden Schritte umfasst:
- Bereitstellen von einem Tabakverarbeitungssystem nach einem der vorhergehenden Ansprüche,
 - Zuführen von Tabak in die Mischkammer der Mischvorrichtung,
 - Zuführen von einem Zusatzstoff in die Mischkammer der Mischvorrichtung,
 - Bereitstellen eines Gasstroms in der Mischkammer mit der Gasstromeinheit, um den Tabak und den Zusatzstoff durch die Mischkammer zu bewegen.
14. Verfahren nach Anspruch 13, wobei der Tabak innen in der Mischkammer durch den Gasstrom angehoben wird.

15. Verfahren nach Anspruch 13 oder 14, wobei das Verfahren das Umschließen des Tabaks mit dem Mischgehäuse umfasst, das durch das Halteelement zum Halten des Tabaks und das Verschlusselement ausgebildet wird, das in einer Verschlussposition in Kontakt mit dem Halteelement platziert ist, um den Tabak zu umschließen.

Revendications

1. Système de traitement de tabac (1) destiné à traiter du tabac (2), lequel système de traitement comprend :

- un dispositif de mélange de tabac (3) destiné à mélanger un additif (4) dans le tabac,
- un alimentateur en tabac (5) destiné à alimenter le dispositif de mélange en tabac, et
- un alimentateur en additif (6) destiné à alimenter le dispositif de mélange en additif, dans lequel le dispositif de mélange comprend un boîtier de mélange (7) qui renferme le tabac et l'additif pour former une chambre de mélange (8) dans laquelle le tabac et l'additif sont mélangés et une unité de flux de gaz (9) qui est reliée fonctionnellement au boîtier de mélange et qui est configurée pour produire un flux de gaz (10) qui déplace le tabac et l'additif à travers la chambre de mélange, et est **caractérisé en ce que** :

- le boîtier de mélange est formé par un élément récepteur (17) destiné à recevoir le tabac et un élément de fermeture (18) placé dans une position de fermeture (19) dans laquelle le tabac est renfermé par l'élément récepteur et l'élément de fermeture,
- le système de traitement comprend un dispositif de dosage (36) destiné à former des doses de tabac et un dispositif de transport (32) destiné à transporter les doses de tabac dans des supports de tabac (62) à travers au moins une partie du système de traitement, et
- l'élément récepteur est formé par l'un des supports de tabac.

2. Système de traitement de tabac selon la revendication 1, dans lequel le dispositif de mélange est configuré pour soulever le tabac à l'intérieur de la chambre de mélange par le biais du flux gazeux.

3. Système de traitement de tabac selon la revendication 1 ou 2, dans lequel l'unité de flux de gaz comprend un organe de commande (11) destiné à commander le flux de gaz dans la chambre de mélange de façon à produire un flux de gaz pulsé et de sorte que le flux de gaz pulsé a entre 2 et 5 impulsions de

flux de gaz par seconde.

4. Système de traitement de tabac selon l'une quelconque des revendications précédentes, dans lequel le boîtier de mélange comprend au moins une ouverture de gaz (12) qui est reliée fonctionnellement à l'unité de flux de gaz.

5. Système de traitement de tabac selon l'une quelconque des revendications précédentes, dans lequel :

- le boîtier de mélange comprend au moins une autre ouverture de gaz (16) qui est reliée fonctionnellement à l'unité de flux de gaz et qui est positionnée pour produire un autre flux de gaz dans une direction transversale au flux de gaz,
- l'unité de flux de gaz comprend un autre dispositif de commande (31) qui est conçu pour commander l'autre flux de gaz dans la chambre de mélange de façon à produire un autre flux de gaz pulsé et
- l'autre flux de gaz pulsé a entre 5 et 15 impulsions de flux de gaz par seconde.

6. Système de traitement de tabac selon l'une quelconque des revendications précédentes, dans lequel le dispositif de mélange est conçu pour produire le flux de gaz dans la chambre de mélange tandis que l'élément de fermeture est placé dans la position de fermeture.

7. Système de traitement de tabac selon l'une quelconque des revendications précédentes, dans lequel l'élément récepteur comprend un premier espace intérieur (53) dans lequel le tabac est positionné, l'élément de fermeture comprend un second espace intérieur (54), la chambre de mélange est formée par le premier espace intérieur et le second espace intérieur et le dispositif de mélange est conçu pour soulever le tabac du premier espace intérieur dans le second espace intérieur par le biais du flux de gaz.

8. Système de traitement de tabac selon l'une quelconque des revendications précédentes, dans lequel :


- le dispositif de mélange est conçu pour produire le flux de gaz dans la chambre de mélange tandis que l'élément de fermeture est placé dans la position de fermeture et déplacé conjointement avec le support de tabac.


9. Système de traitement de tabac selon la revendication 8, dans lequel :


- le dispositif de mélange comprend un mécanisme de déplacement d'élément (22) destiné à déplacer l'élément de fermeture dans la position de fermeture sur l'un des supports de tabac mo-

- bile tout en déplaçant l'élément de fermeture conjointement avec le support de tabac sur une distance prédéterminée,
- le mécanisme de déplacement d'élément déplace l'élément de fermeture le long d'un chemin sans fin (23) dans lequel, après avoir déplacé conjointement avec le support de tabac en position de fermeture, l'élément de fermeture est déplacé en sens inverse du mouvement des supports de tabac tout en étant placé à distance des supports de tabac pour être placé dans la position de fermeture sur un autre des supports de tabac et pour répéter le cycle, et
 - le dispositif de mélange comprend de multiples éléments de fermeture et le mécanisme de déplacement d'élément est conçu pour déplacer les éléments de fermeture de manière synchrone dans le même sens de sorte que les éléments de fermeture forment conjointement avec plusieurs des supports de tabac de multiples chambres de mélange.
- 10.** Système de traitement de tabac selon l'une quelconque des revendications précédentes, dans lequel le dispositif de transport est un transporteur de plateaux (20) et les supports de tabac sont des plateaux (21) déplacés par le transporteur de plateaux à travers au moins une partie du système de traitement.
- 11.** Système de traitement de tabac selon l'une quelconque des revendications 1 à 9, dans lequel :
- le dispositif de transport est un transporteur de paquets et les supports de tabac sont des paquets de tabac (26) déplacés par le transporteur de paquets à travers au moins une partie du système de traitement.
- 12.** Système de traitement de tabac selon la revendication 11, dans lequel :
- les paquets de tabac sont des boîtes de tabac (28), et
 - la boîte de tabac comprend une paroi de boîte (29) définissant une ouverture de boîte (30) et l'élément de fermeture en position de fermeture est placé sur ou dans l'ouverture de boîte.
- 13.** Procédé de traitement de tabac, lequel procédé comprend les étapes consistant à :
- produire un système de traitement de tabac selon l'une quelconque des revendications précédentes,
 - alimenter en tabac la chambre de mélange du dispositif de mélange,
 - alimenter en additif la chambre de mélange du dispositif de mélange,
- produire un flux de gaz dans la chambre de mélange avec l'unité de flux de gaz pour déplacer le tabac et l'additif à travers la chambre de mélange.
- 14.** Procédé selon la revendication 13, dans lequel le tabac est soulevé à l'intérieur de la chambre de mélange par le biais du flux de gaz.
- 15.** Procédé selon la revendication 13 ou 14, dans lequel le procédé consiste à enfermer le tabac avec le boîtier de mélange formé par l'élément récepteur destiné à recevoir le tabac et l'élément de fermeture placé dans une position de fermeture en contact avec l'élément récepteur pour enfermer le tabac.


Fig. 1

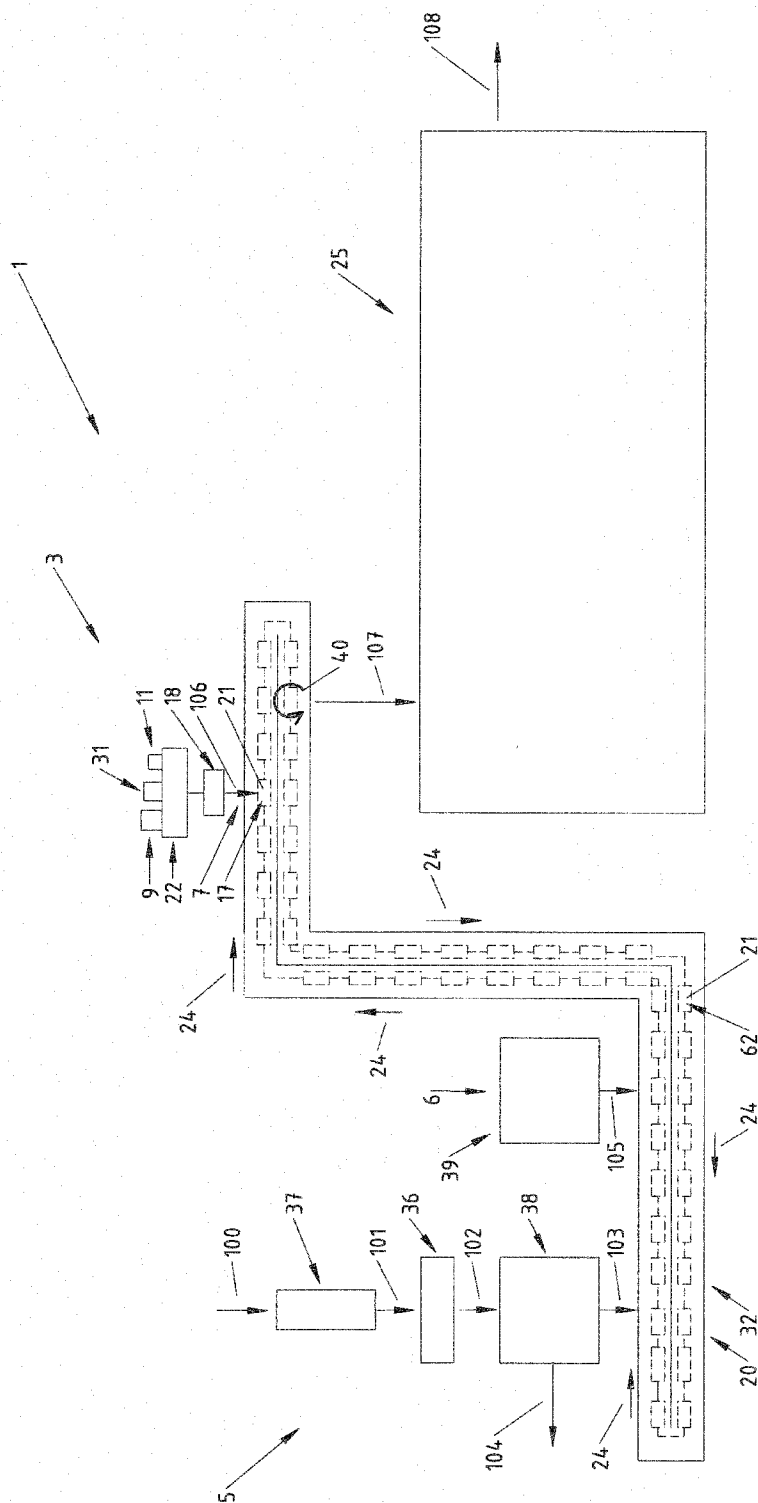

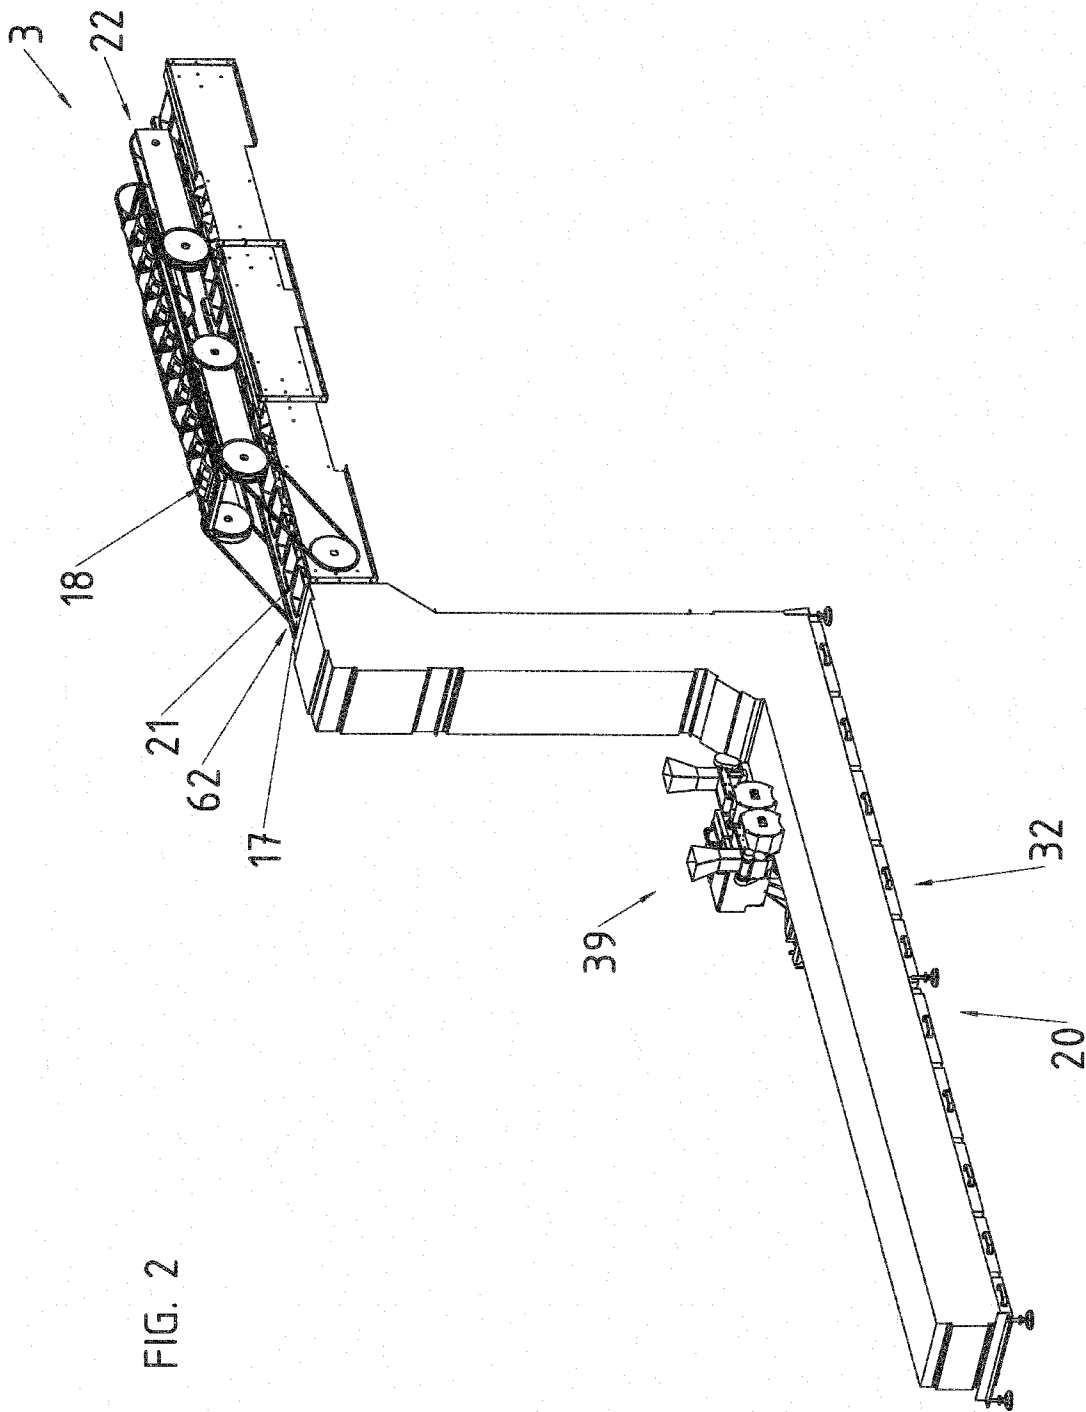

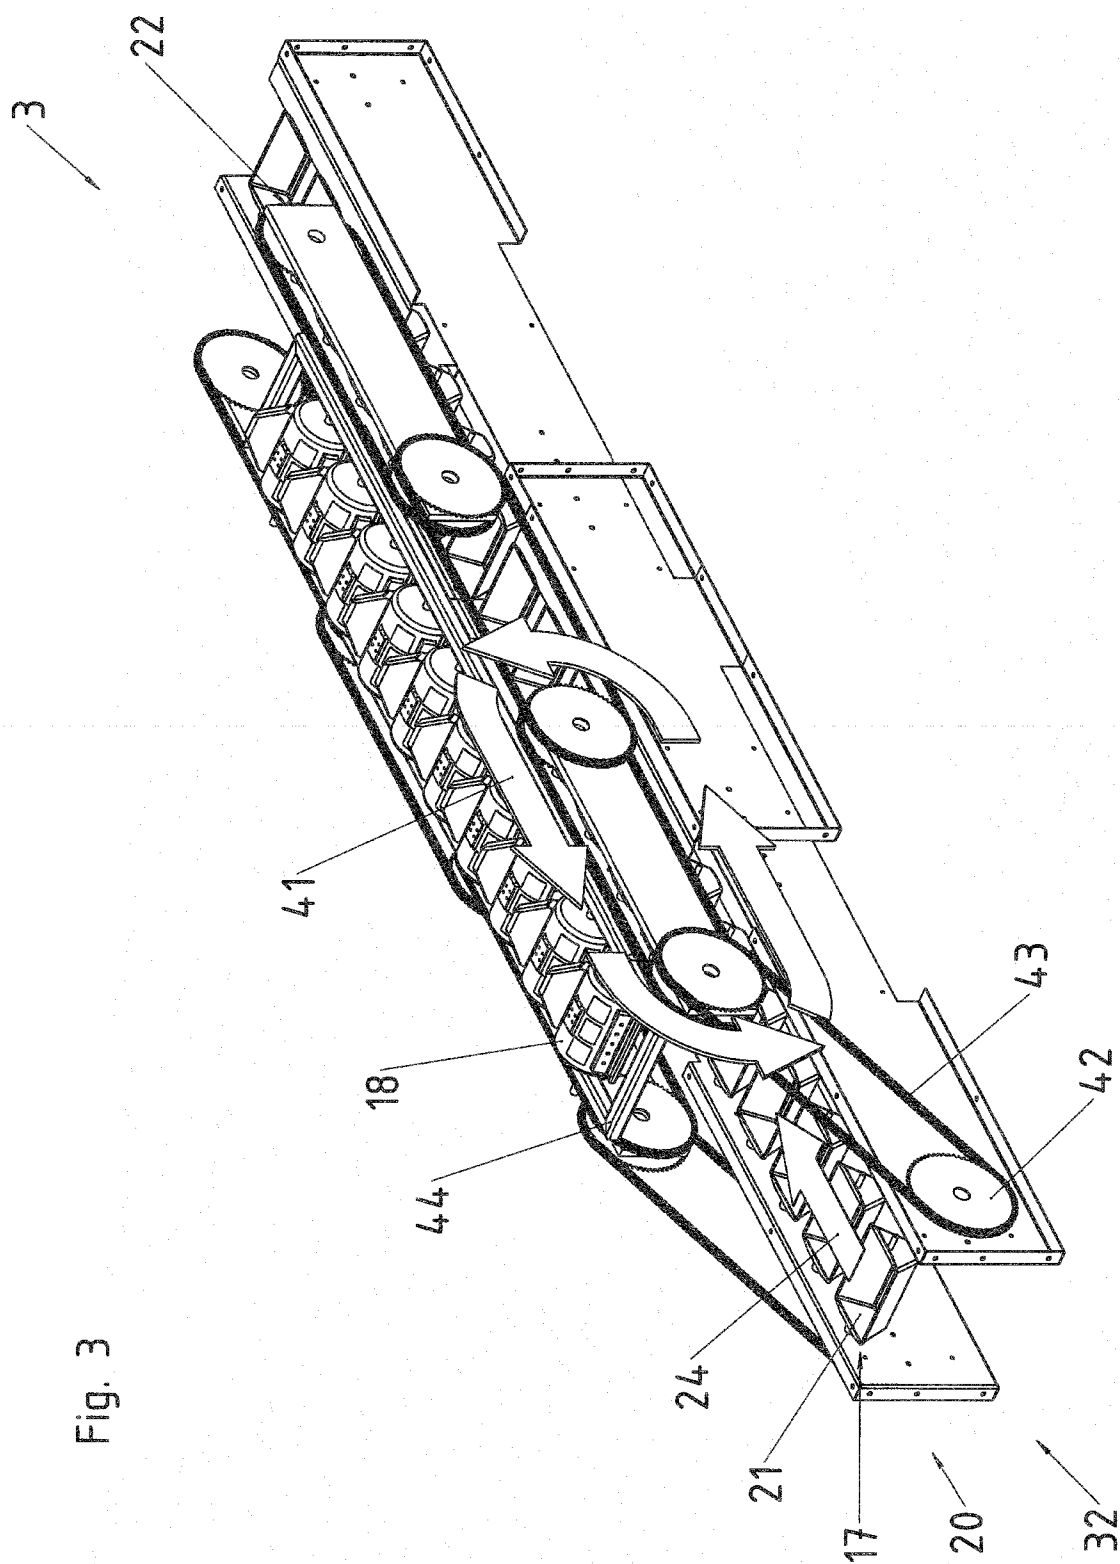

3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842

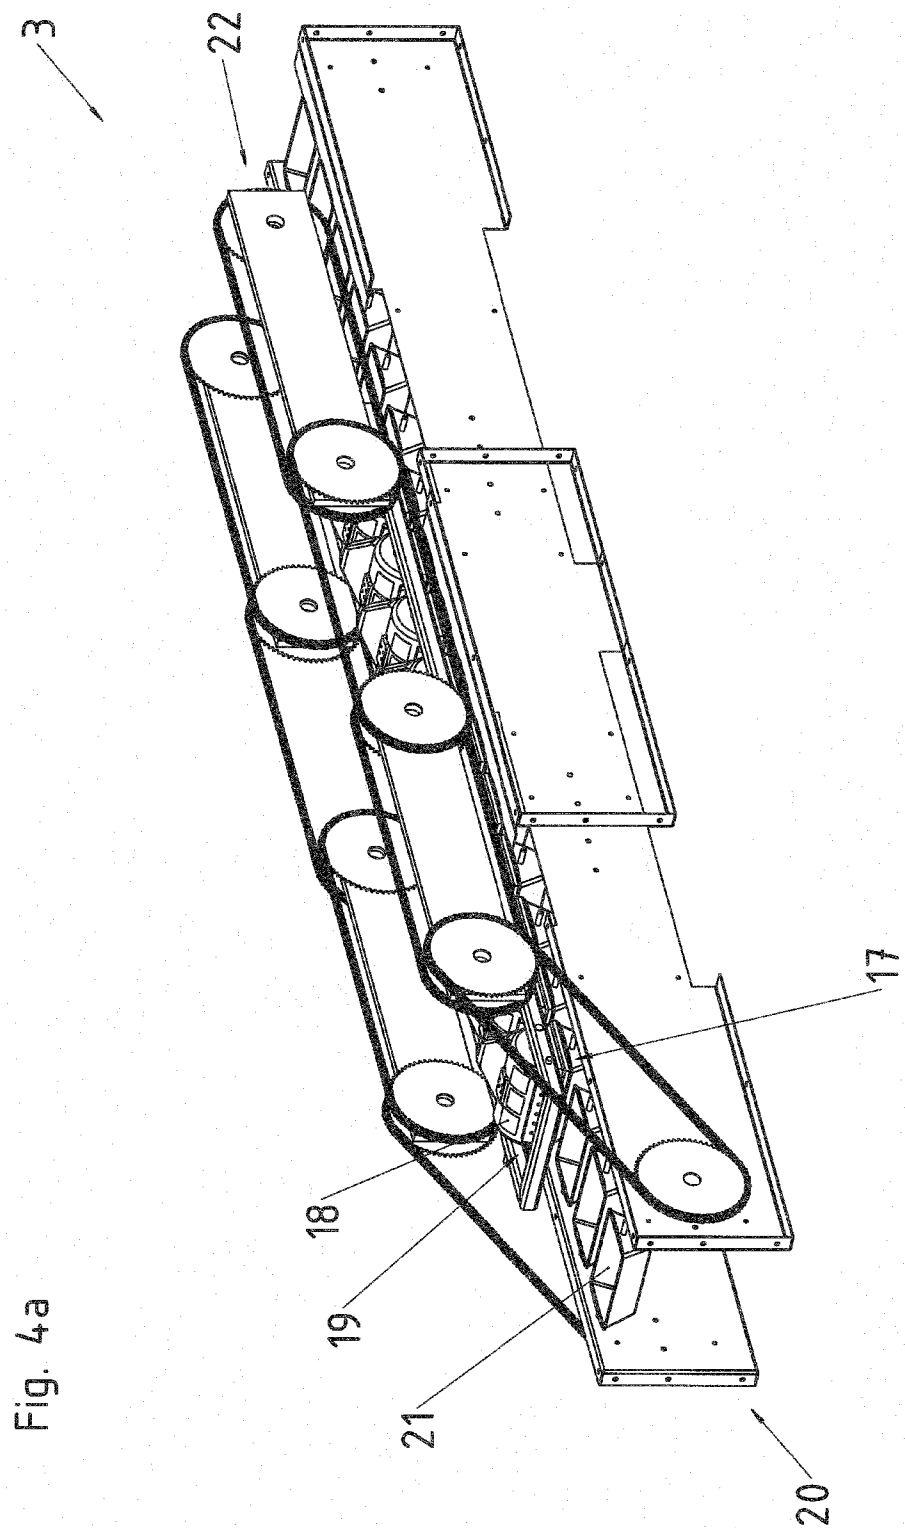

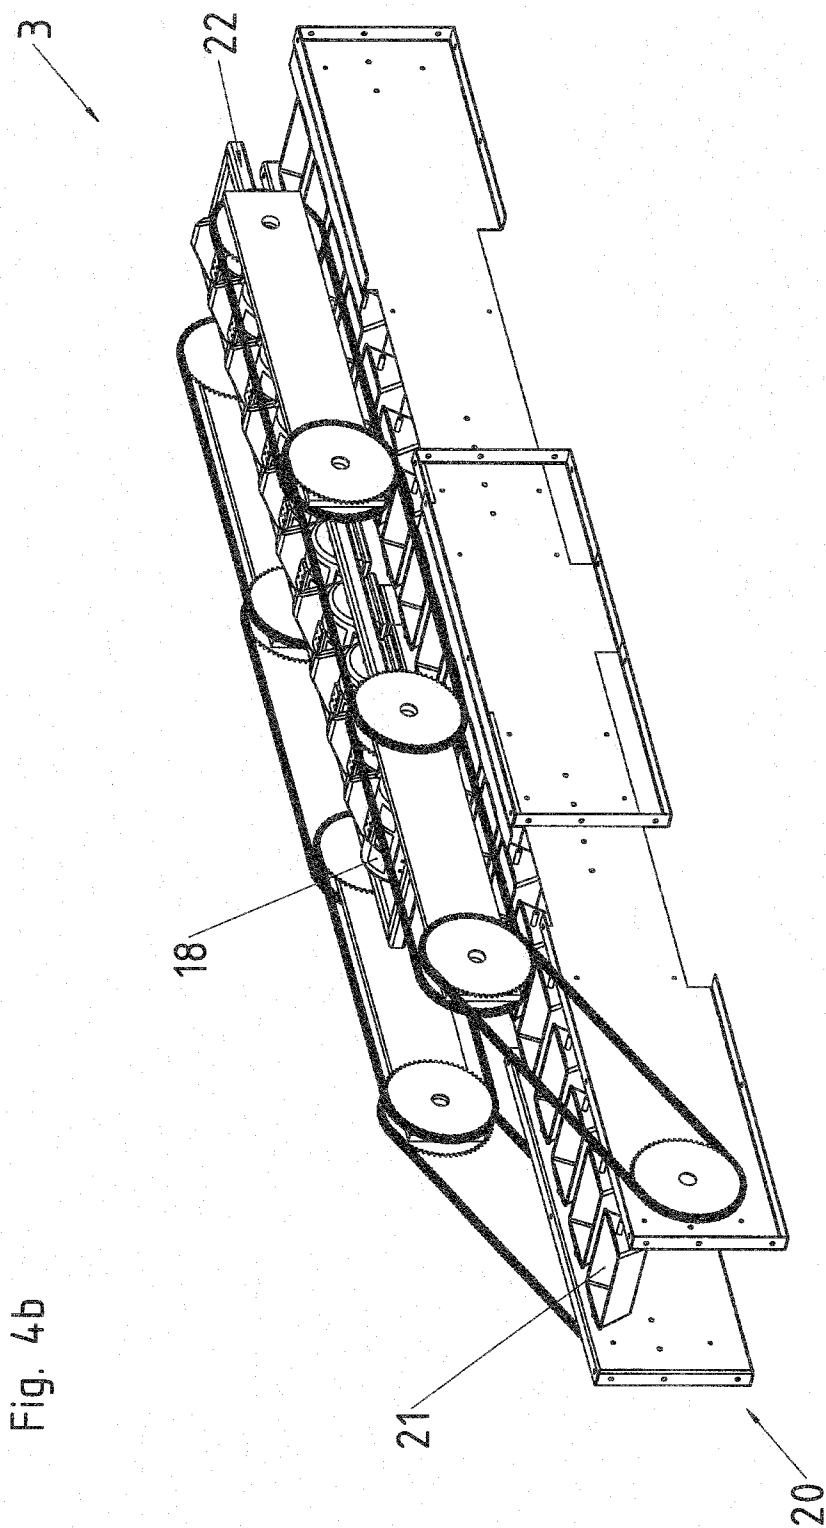
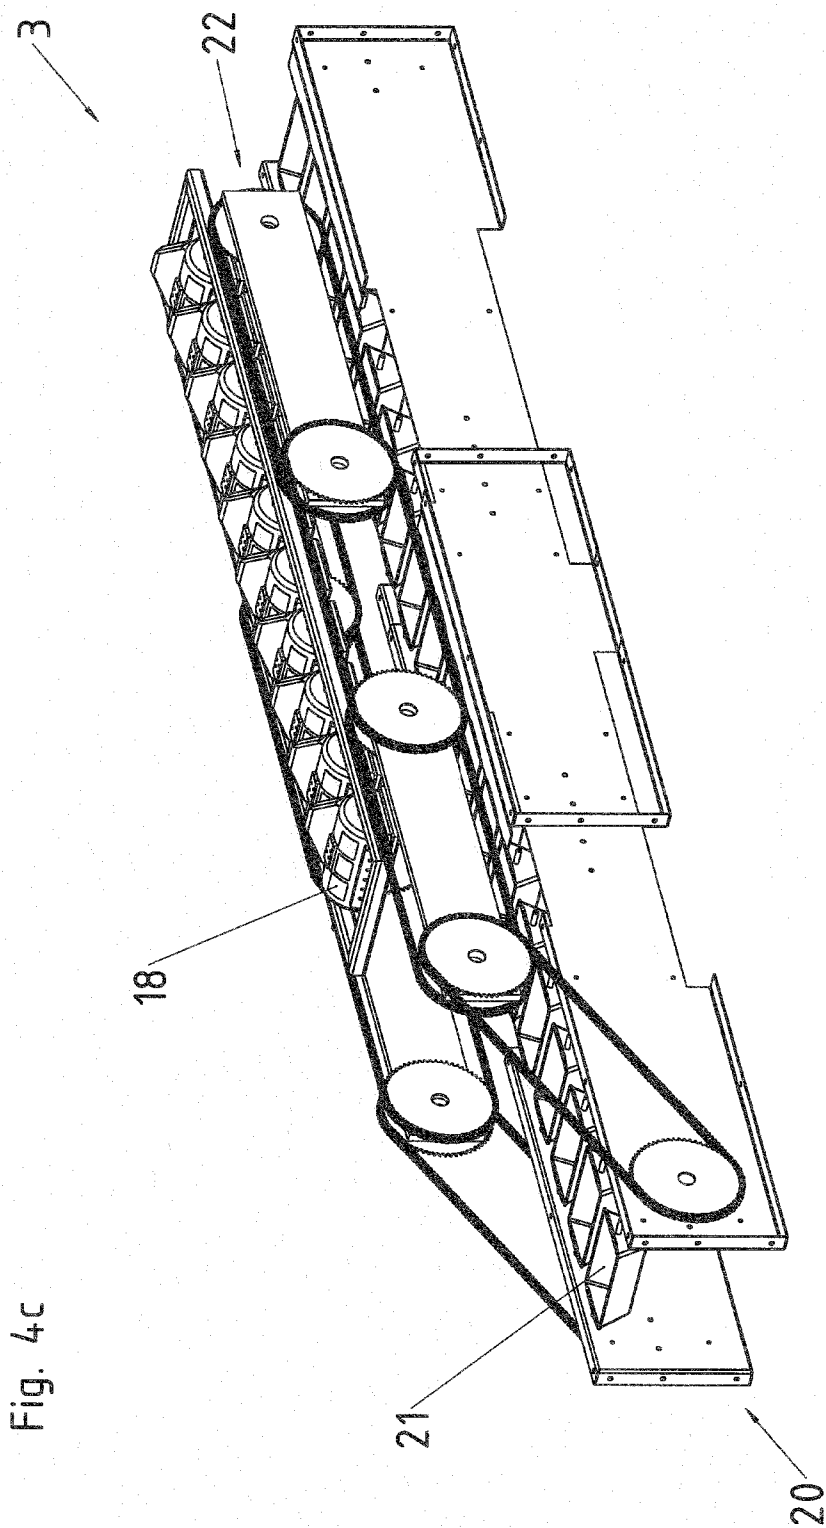


Fig. 4b



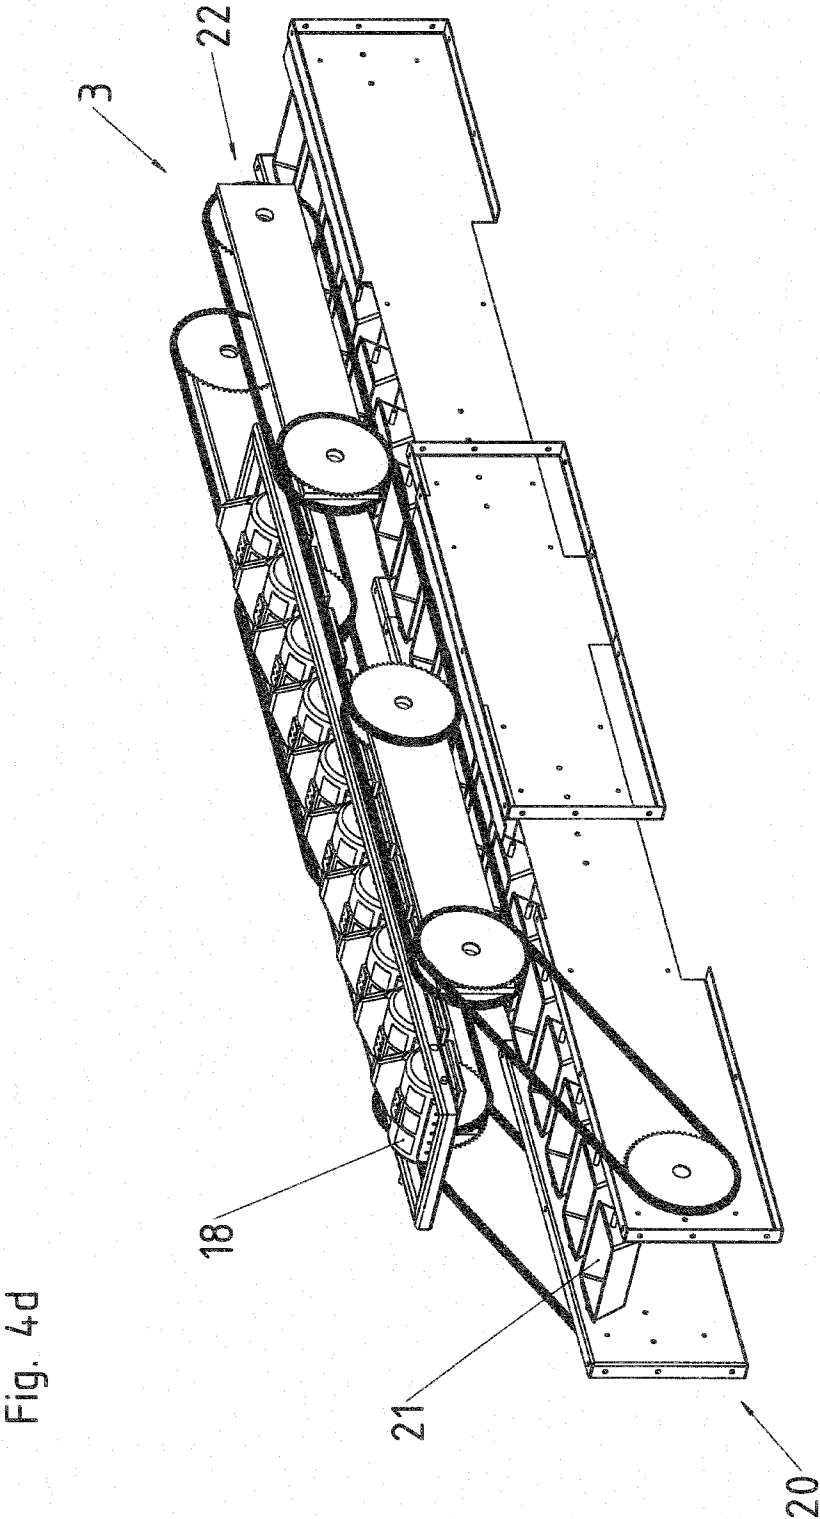


Fig. 5

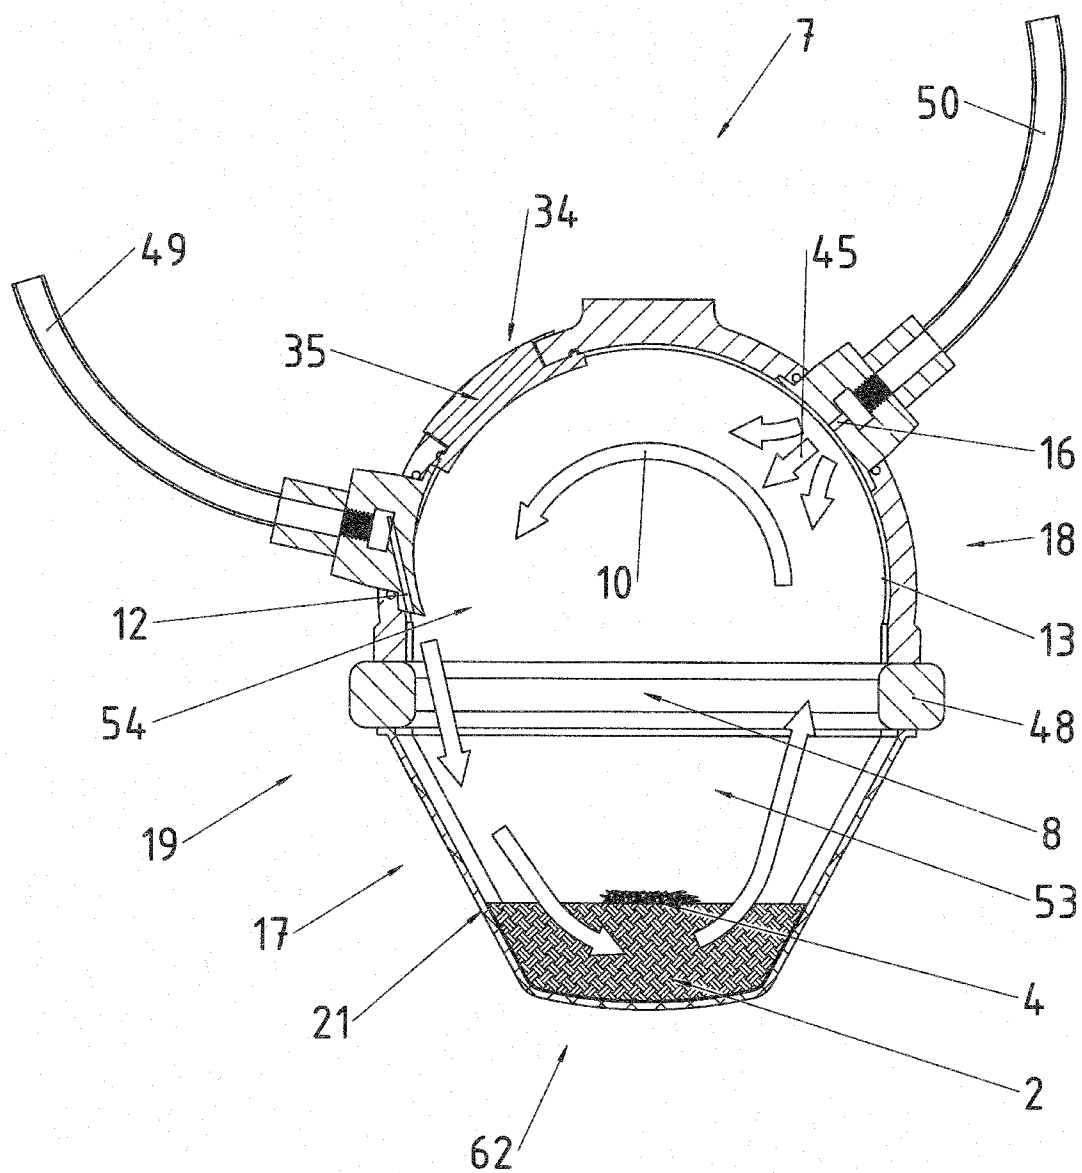
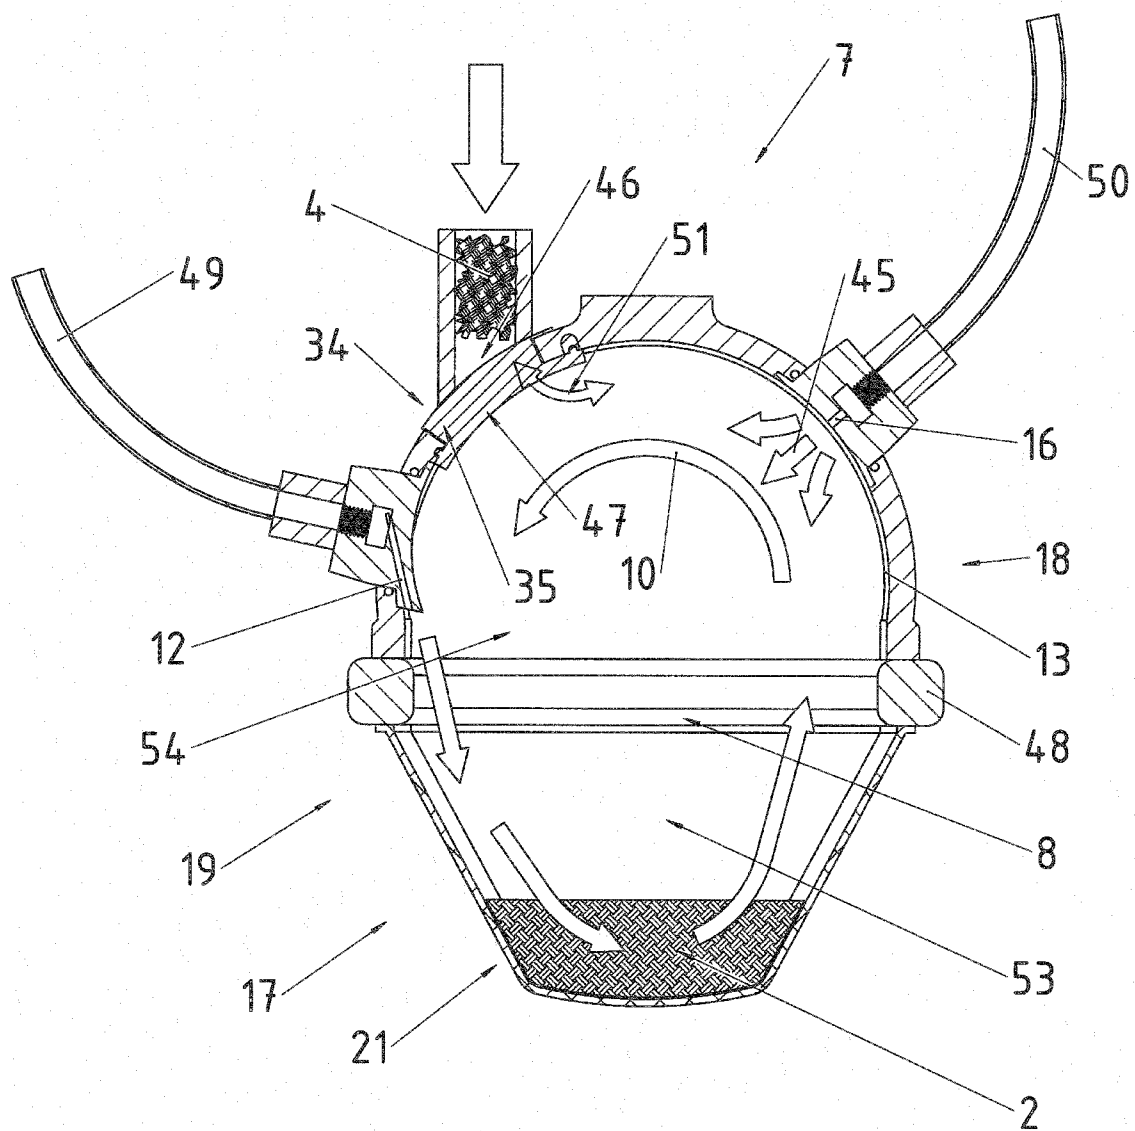


Fig. 6



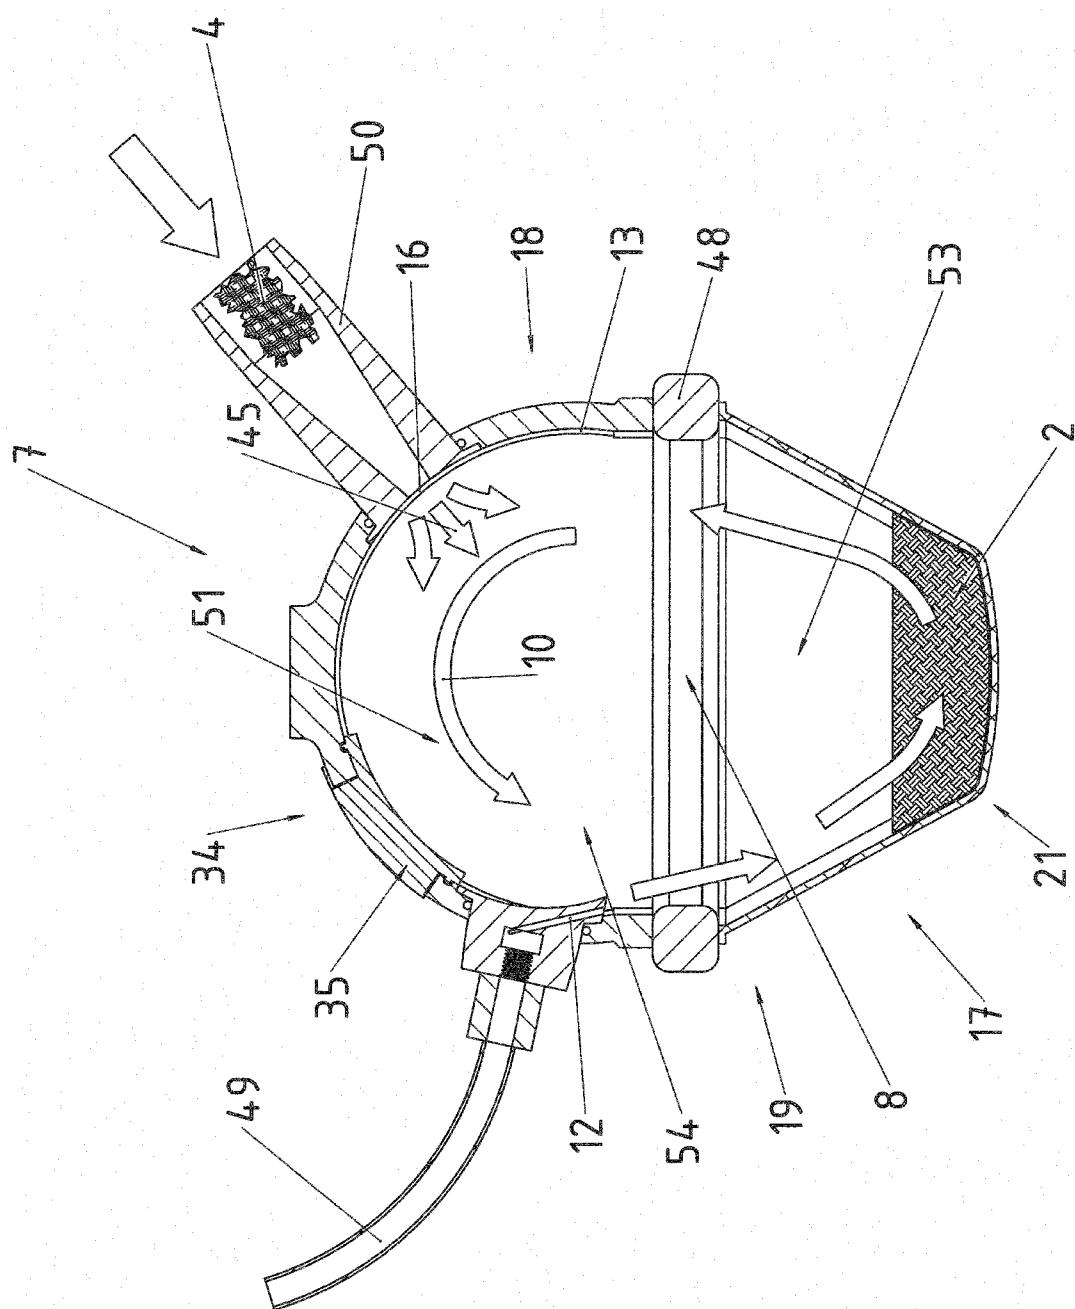
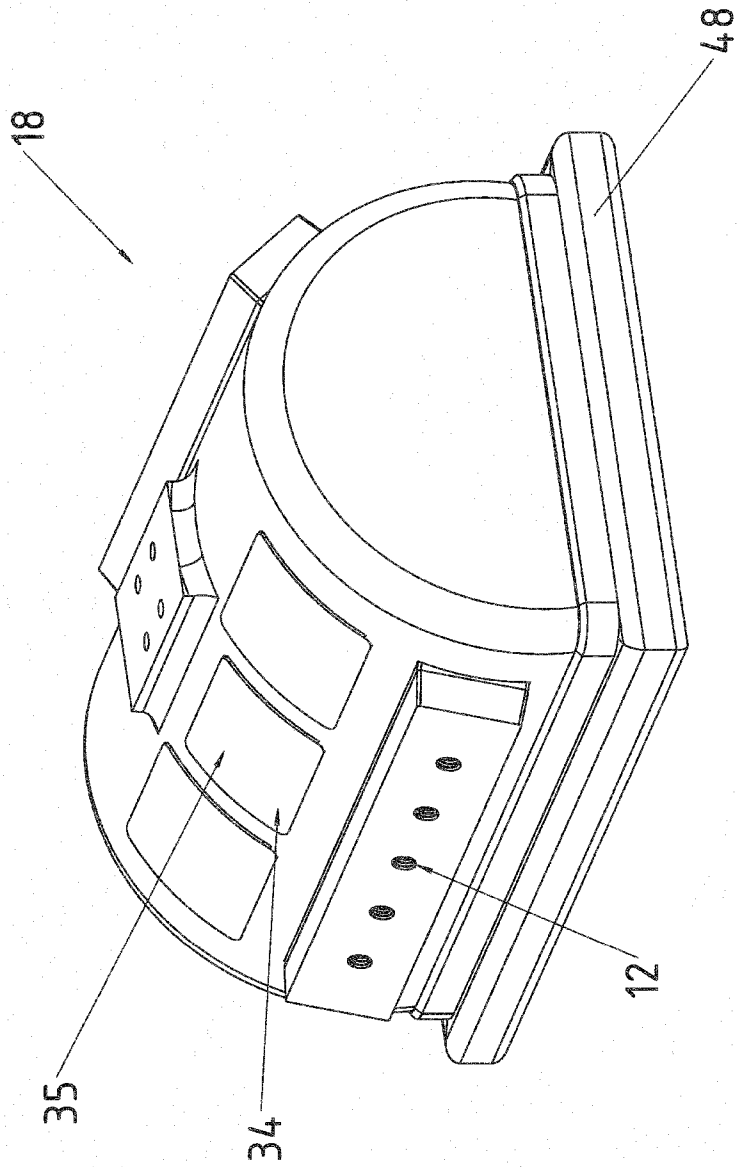


Fig. 7

Fig. 8



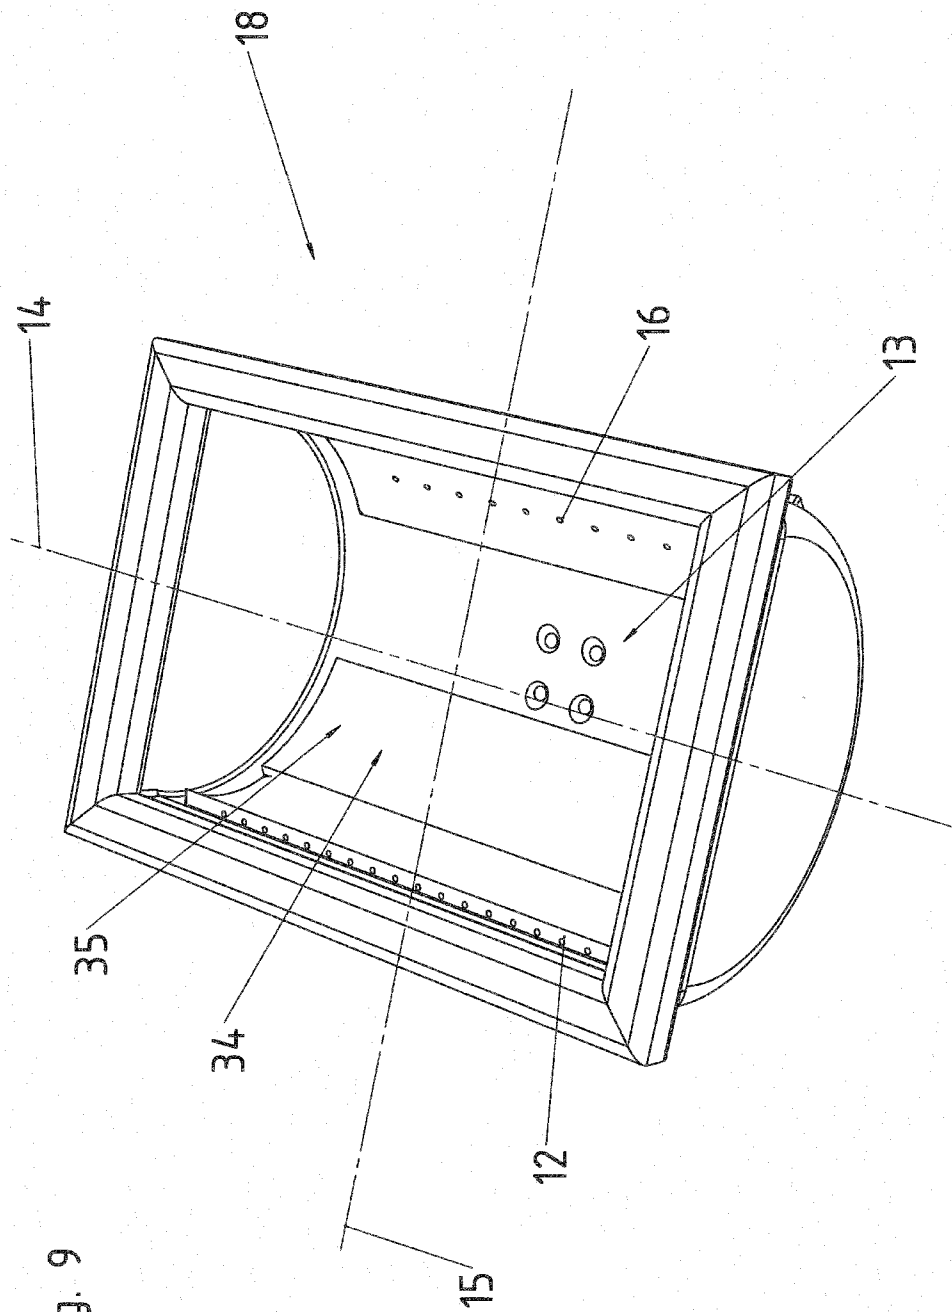


Fig. 9

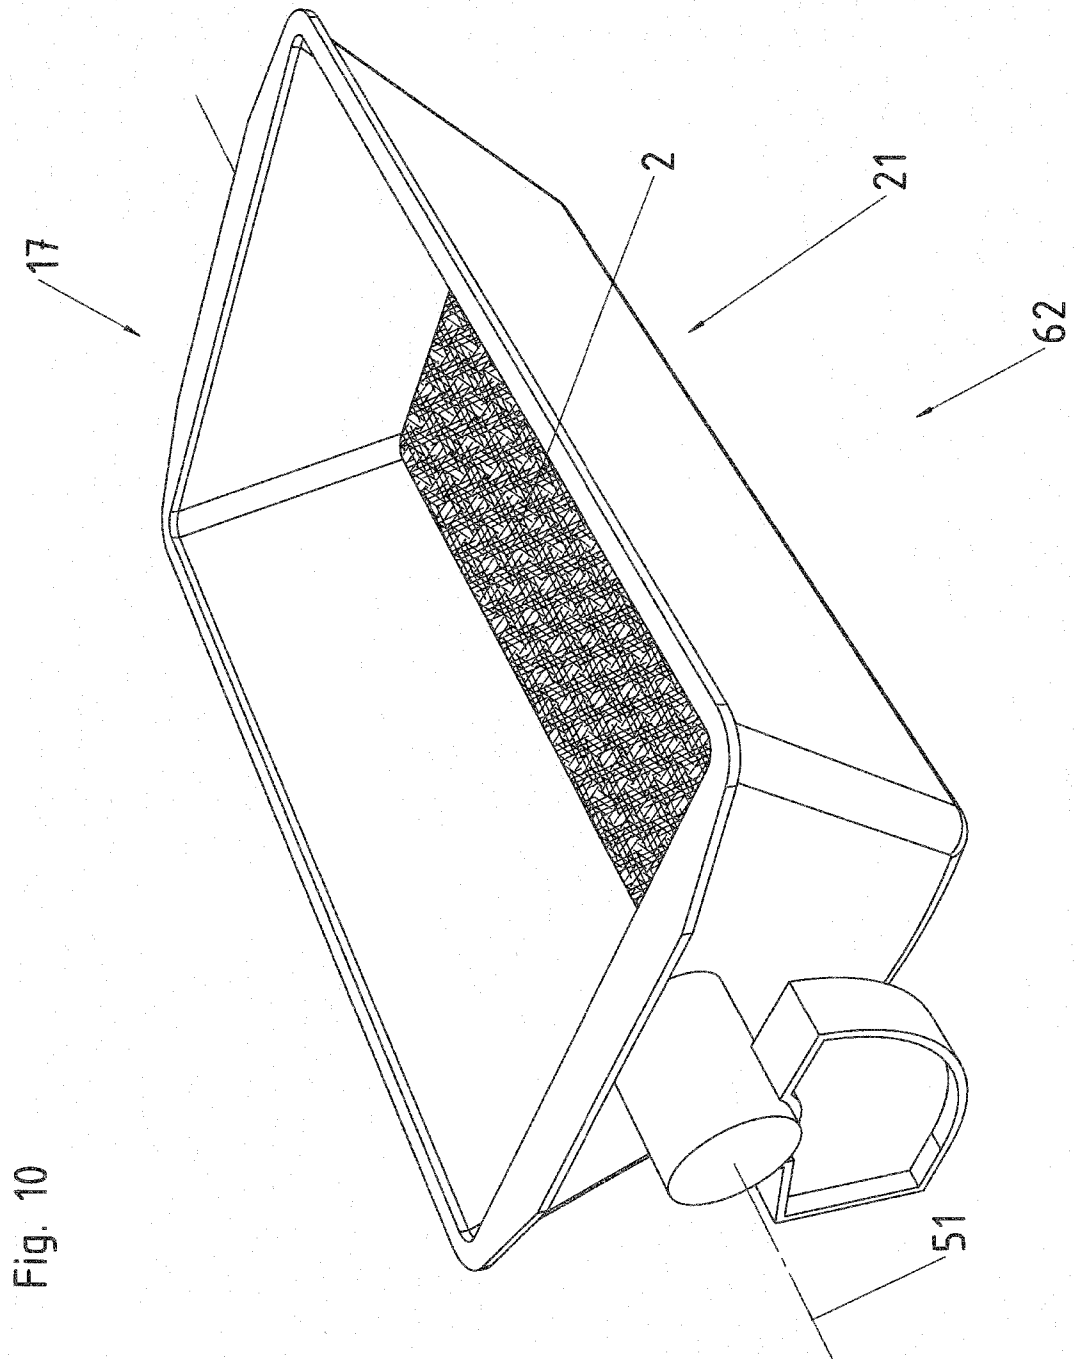


Fig. 10

Fig. 11

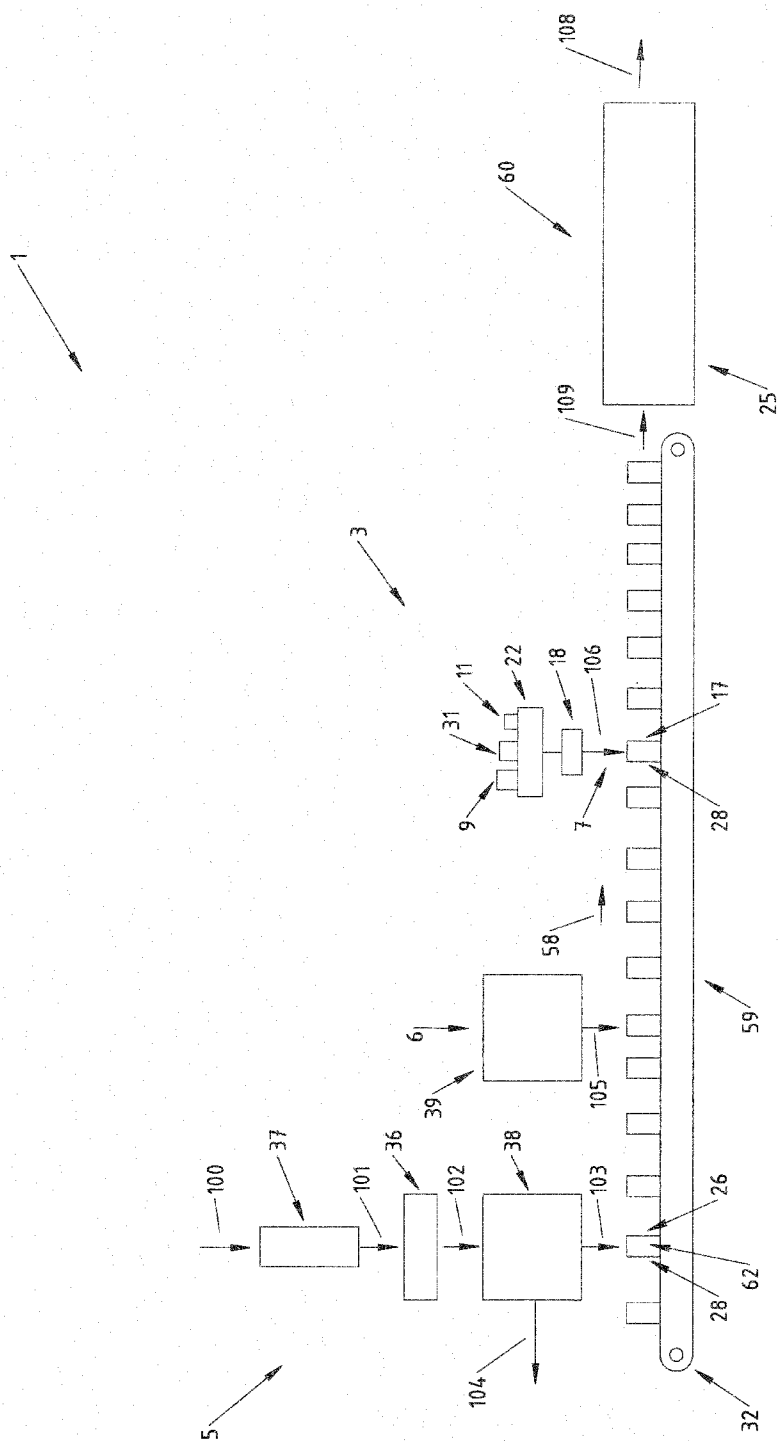


Fig. 12

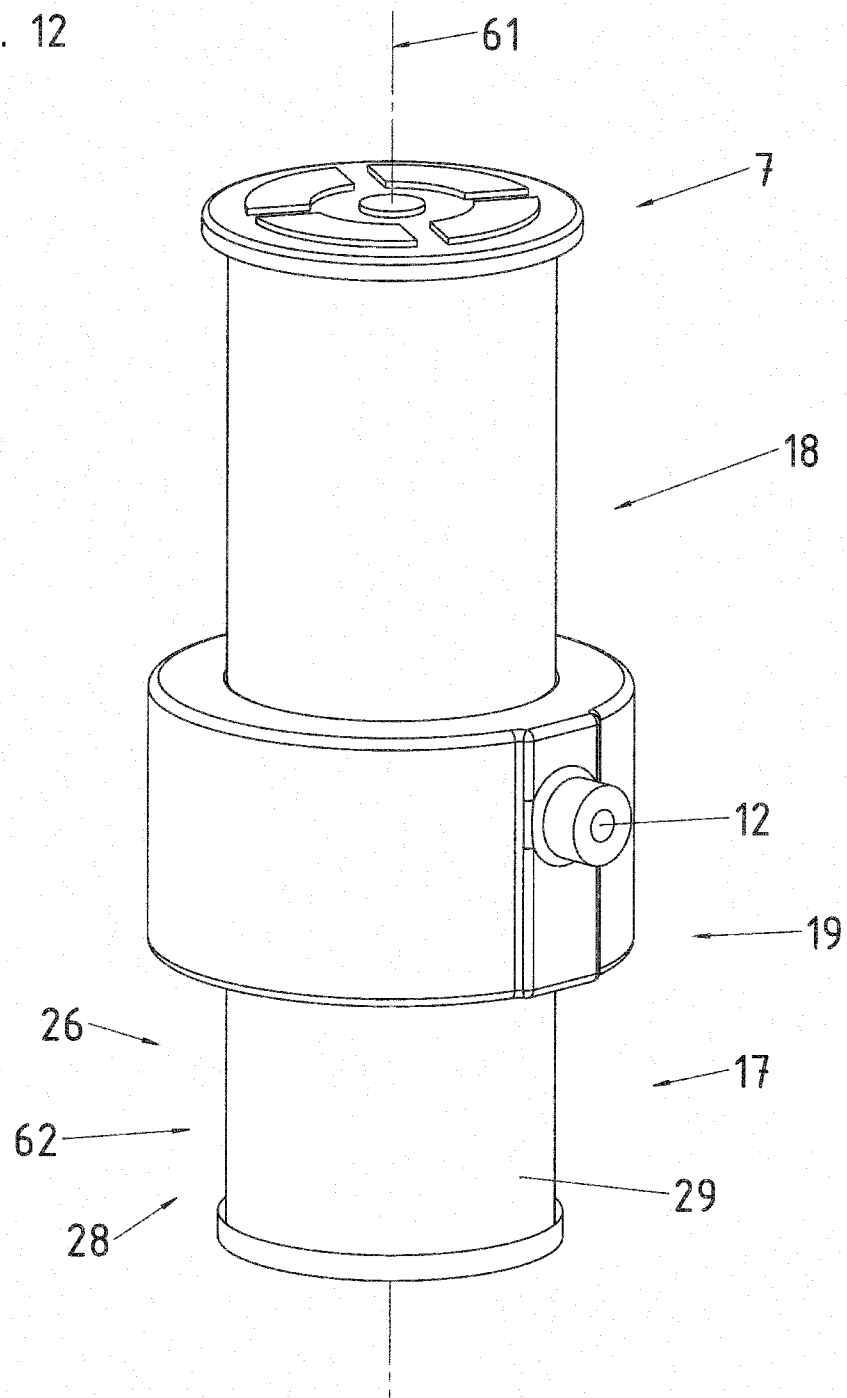


Fig. 13

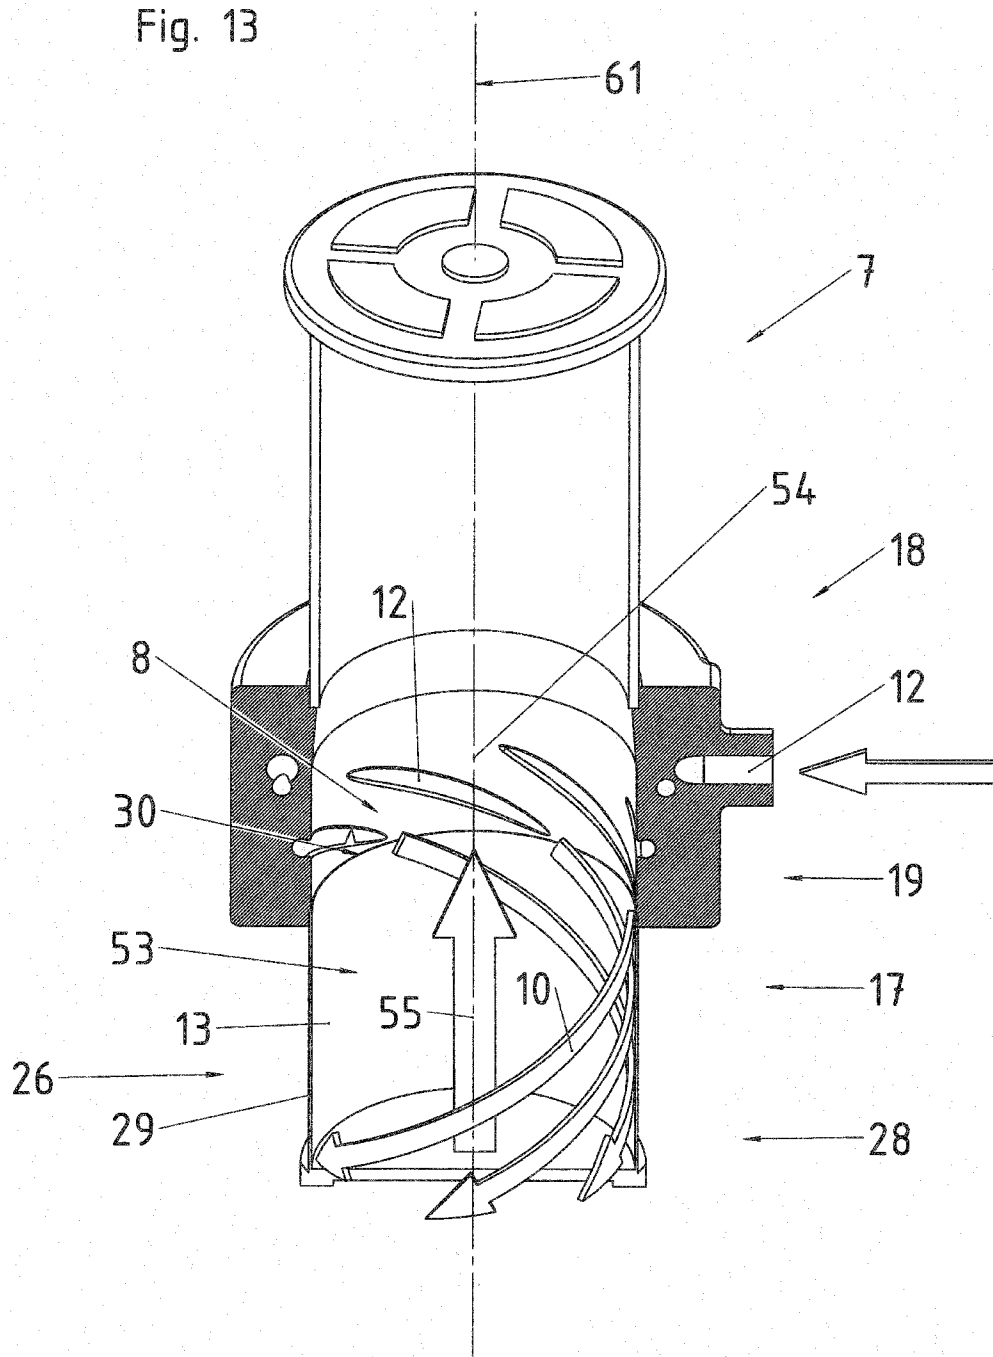


Fig. 14

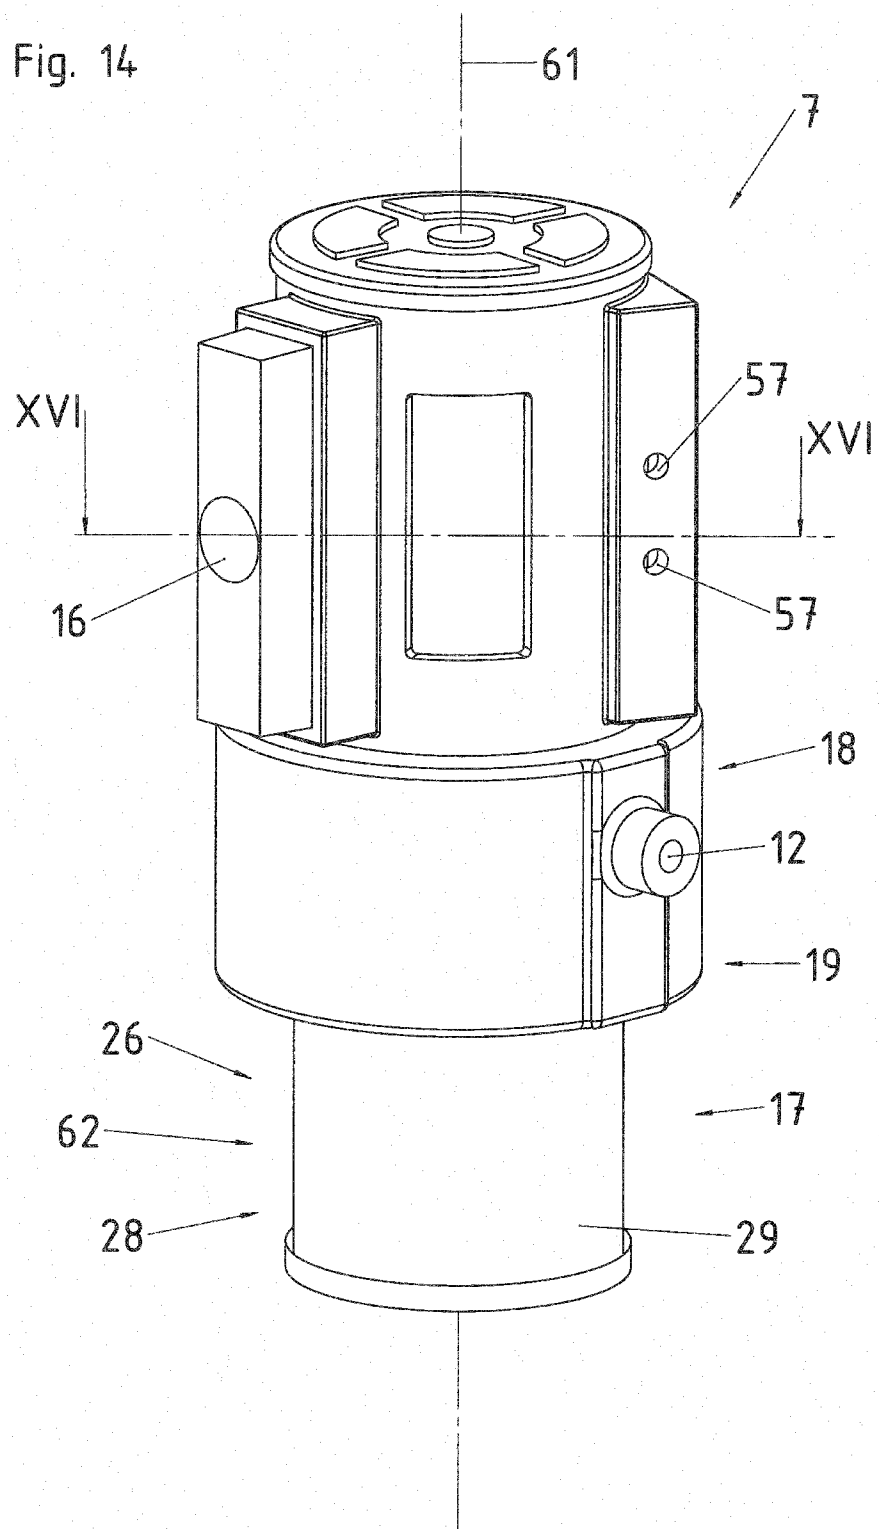


Fig. 15

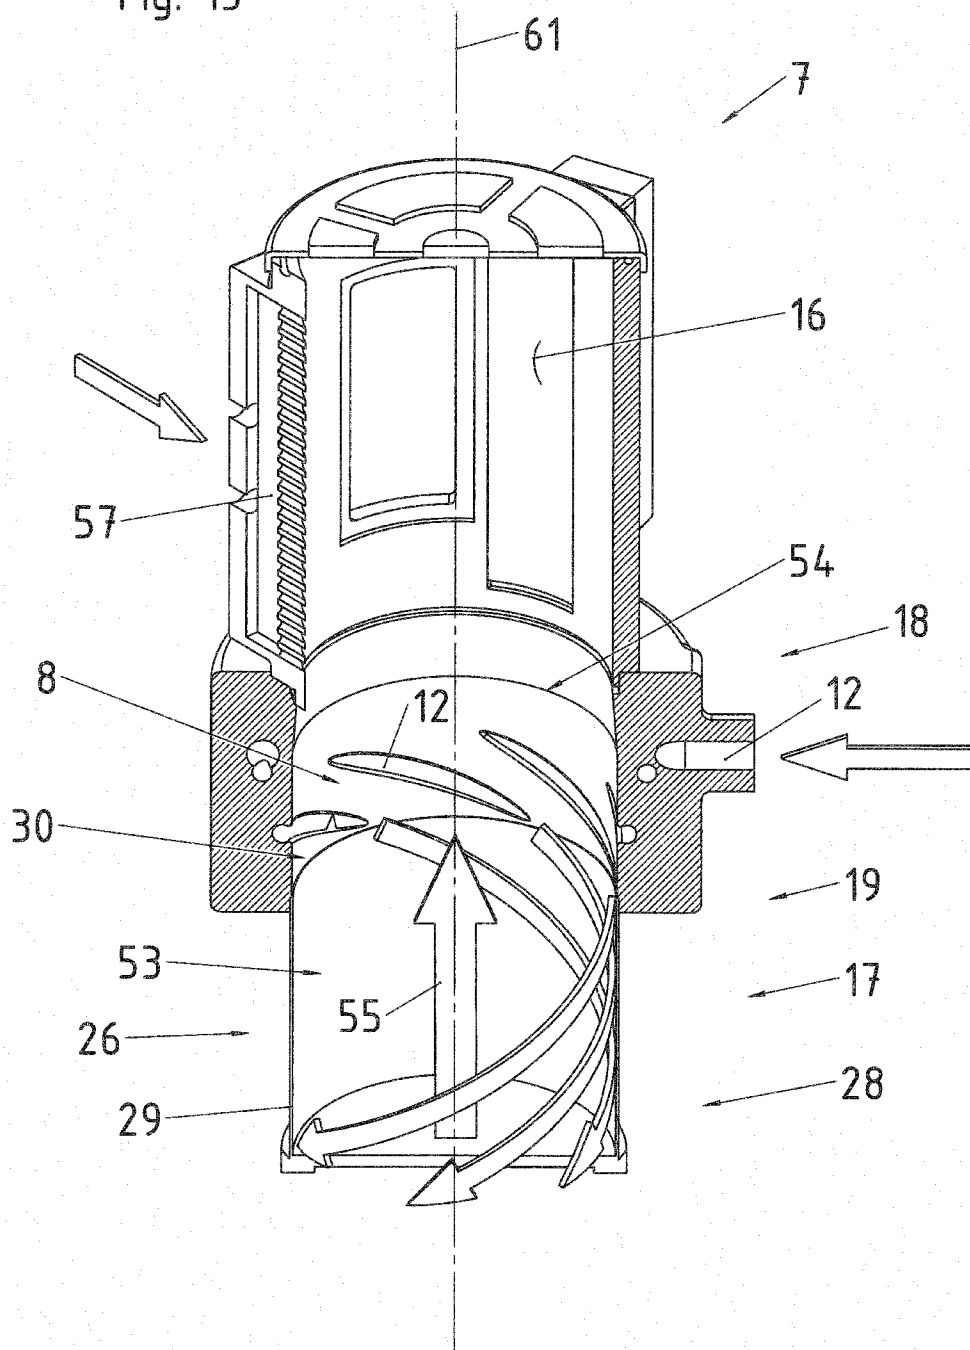


Fig. 16


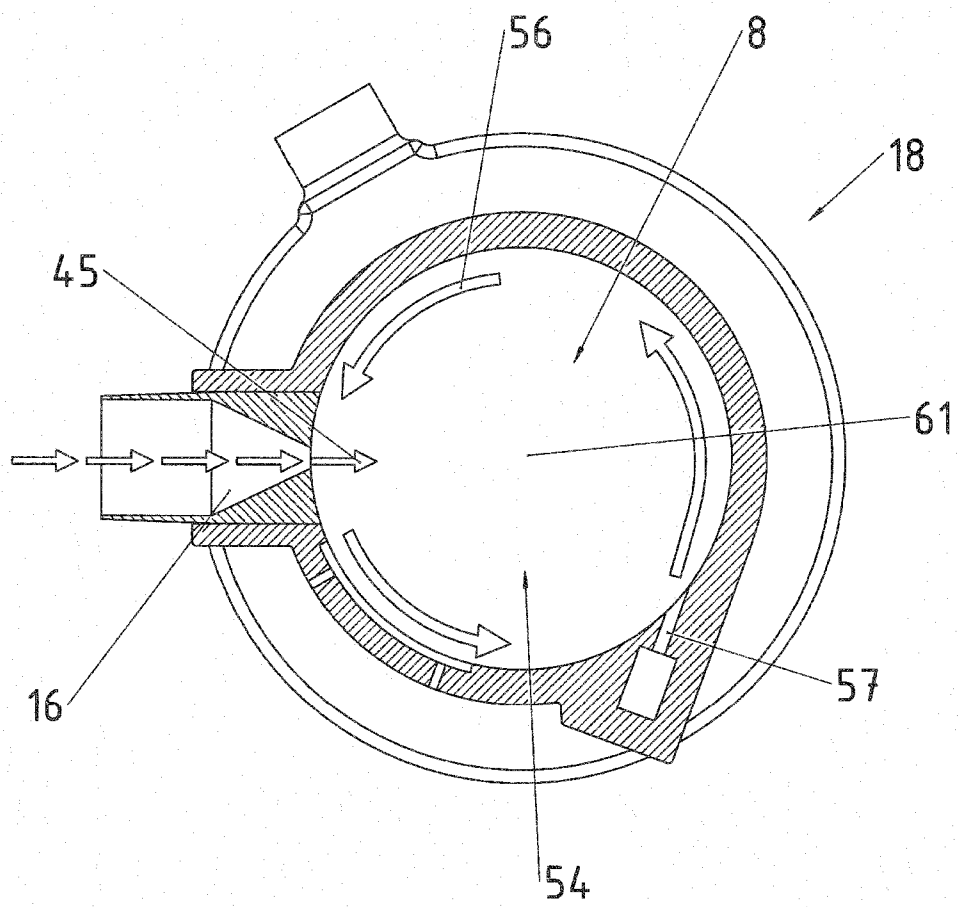


Fig. 17

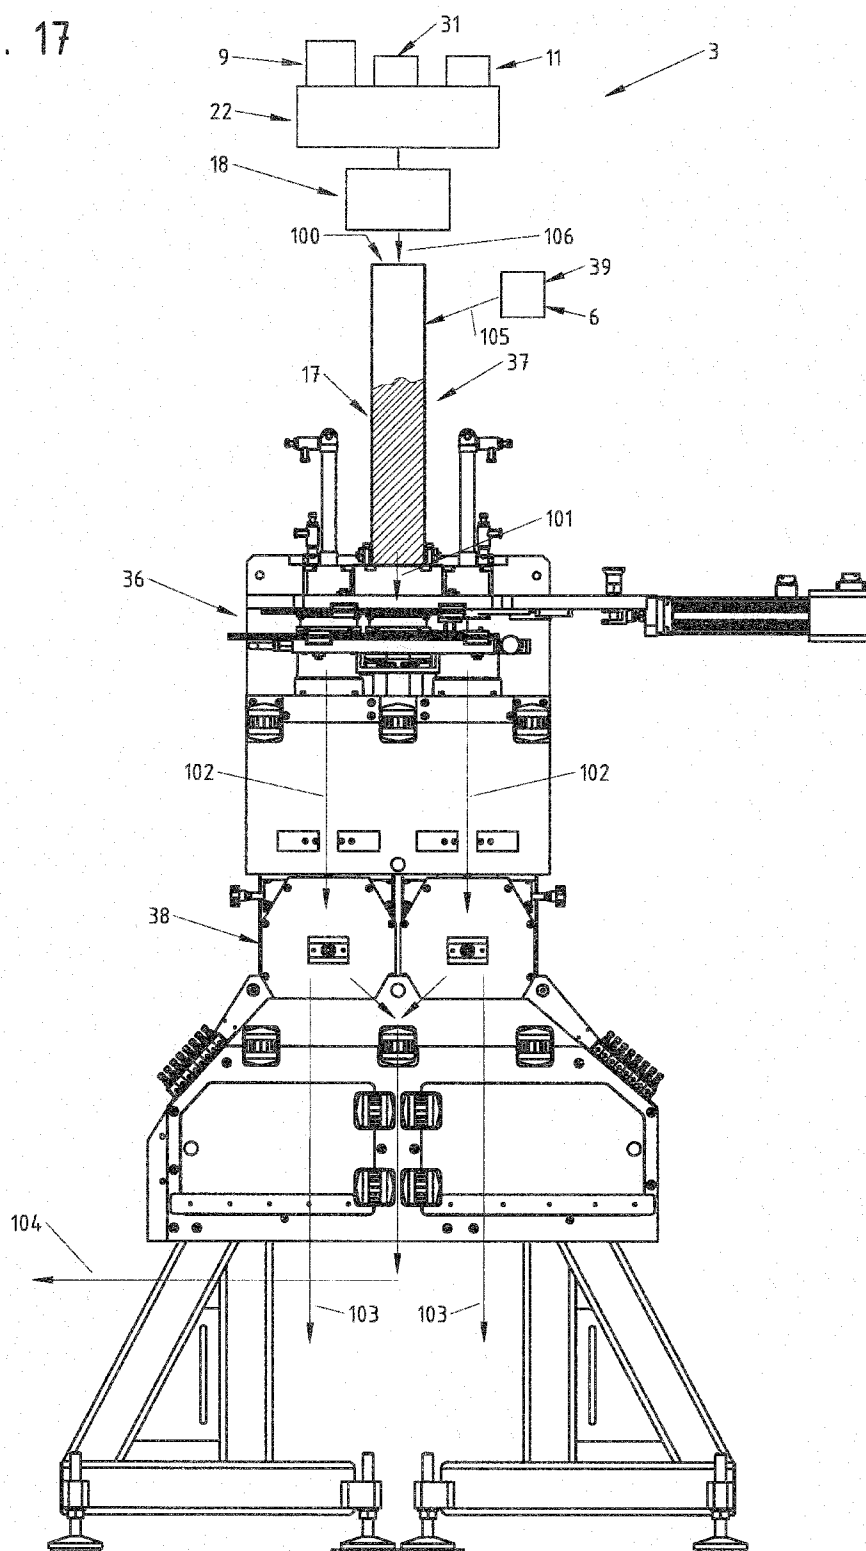

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2012123289 A [0002]
- US 5676164 A [0002]
- EP 0273596 A [0002]



DOHÁNYKEZELŐ RENDSZER

SZABADALMI IGÉNYPONTOK

1. Dohánykezelő rendszer (1) dohány (2) kezelésére, amely dohánykezelő rendszer magában foglal

- egy dohánykeverő berendezést (3) egy adalékanyagnak (4) a dohányban való elkeverésére,

- egy dohánytáplálót (5) a dohánynak a keverőberendezéshez való táplálására; és

- egy adalékanyag-táplálót (6) az adalékanyagnak a keverőberendezéshez való táplálására, amely keverőberendezés magában foglal egy keverőházat (7), amely körülzárja a dohányt és az adalékanyagot, hogy keverőkamrát (8) képezzen, amelyben a dohány és az adalékanyag elkeverése megy végbe, és egy gázáramos egységet (9), amely működésileg össze van kötve a keverőházzal, és úgy van kialakítva, hogy gázáramot (10) biztosítson, amely a dohányt és az adalékanyagot átszállítja a keverőkamrán, azzal jellemezve, hogy

- a keverőházat egy, a dohány tartására szolgáló tartótag (17) és egy záróhelyzetbe (19) helyezett zárótag (18) képezi, amely záróhelyzetben a tartótag és a zárótag körülzárja a dohányt,

- a kezelőrendszer magában foglal egy adagolóberendezést (36) dohányadagok kialakítására, valamint egy szállítóberendezést (32) a dohányadagoknak a kezelőrendszer legalább egy részén dohánytartókban (62) történő átszállítására, és

- a tartótagot a dohánytartók egyike képezi.

2. Az 1. igénypont szerinti dohánykezelő rendszer, amelyben a keverőberendezés úgy van kialakítva, hogy a gázáram felemelje a dohányt a keverőkamrában.

3. Az 1. vagy a 2. igénypont szerinti dohánykezelő rendszer, amelyben a gázáramos egység magában foglal egy szabályozót (11) a gázáramnak a keverőkamrában oly módon történő szabályozása céljából, hogy lökettő gázáram jöjjön létre, és a lökettő gázáram másodpercenként 2 és 5 közötti gázáram-löketet végez.

4. Az előző igénypontok bármelyike szerinti dohánykezelő rendszer, amelyben a keverőház magában foglal legalább egy gáznyílást (12), amely működésileg össze van kötve a gázáramos egységgel.

5. Az előző igénypontok bármelyike szerinti dohánykezelő rendszer, amelyben

- a keverőház magában foglal legalább még egy gáznyílást (16), amely működésileg össze van kötve a gázáramos egységgel, és úgy van elhelyezve, hogy egy másik, a gázáramra keresztben haladó gázáramot biztosítson,

- a gázáramos egység magában foglal még egy szabályozót (31), amely a másik gázáramnak a keverőkamrában oly módon történő szabályozására van kialakítva, hogy létrejőjön egy másik lüktető gázáram, és

- a másik lüktető gázáram másodpercenként 5 és 15 közötti gázáram-lüktetést végez.

6. Az előző igénypontok bármelyike szerinti dohánykezelő rendszer, amelyben a keverőberendezés úgy van kialakítva, hogy biztosított legyen a gázáram a keverőkamrában, miközben a zárótag záróhelyzetben helyezkedik el.

7. Az előző igénypontok bármelyike szerinti dohánykezelő rendszer, amelyben a tartótag magában foglal egy első belső teret (53), amelyben el van helyezve a dohány, a zárótag magában foglal egy második belső teret (54), a keverőkamrát az első belső tér és a második belső tér képezi, és a keverőberendezés úgy van kialakítva, hogy a gázáram a dohányt az első belső térből és a második belső térbe emelje.

8. Az előző igénypontok bármelyike szerinti dohánykezelő rendszer, amelyben

- a keverőberendezés úgy van kialakítva, hogy biztosított legyen a gázáram a keverőkamrában, miközben a zárótag a záróhelyzetbe van helyezve, és a dohánytartóval együtt mozog.

9. A 8. igénypont szerinti dohánykezelő rendszer, amelyben

- a keverőberendezés magában foglal egy tagmozgatót (22), hogy a zárótagot záróhelyzetben elhelyezze a mozgó dohánytartók egyikén, miközben a zárótagot a dohánytartóval együtt egy előre meghatározott távolságon mozgatja,

- a tagmozgató a zárótagot végtelenített pályán (23) mozgatja, amelyen a zárótag azután, hogy együtt mozgott a dohánytartóval, miközben záróhelyzetben volt, visszafelé mozog a dohánytartók mozgásával ellentétes irányban, miközben a dohánytartóktól bizonyos távolságra helyezkedik el, hogy záróhelyzetben egy másik dohánytartón legyen elhelyezve, és megismételje a ciklust, és

- a keverőberendezés több zárótagot foglal magában, és a tagmozgató úgy van kialakítva, hogy a zárótagokat ugyanabban az irányban egyidejűleg mozgassa, úgyhogy a zárótagok több dohánytartóval együtt több keverőkamrát képeznek.

10. Az előző igénypontok bármelyike szerinti dohánykezelő rendszer, amelyben a szállítóberendezés egy tálcás szállító (20), a dohánytartók pedig tálcák (21), amelyeket a tálcás szállító a kezelőrendszer legalább egy részén átszállít.

11. Az 1-9. igénypontok bármelyike szerinti dohánykezelő rendszer, amelyben

- a szállítóberendezés egy csomagszállító, a dohánytartók pedig dohánycsomagok (26), amelyeket a csomagszállító a kezelőrendszer legalább egy részén átszállít.

12. A 11. igénypont szerinti dohánykezelő rendszer, amelyben

- a dohánycsomagok dohánytartályok (28), és

- a dohánytartály magában foglal egy tartályfalat (29), amely meghatároz egy

tartálynyílást (30), és a zárótag záróhelyzetben a tartálynyíláson vagy a tartálynyílásban helyezkedik el.

13. Eljárás dohány kezelésére, amely eljárás magában foglalja a következő lépéseket

- rendelkezésre bocsátunk egy, az előző igénypontok bármelyike szerinti dohánykezelő rendszert,
- dohányt táplálunk a keverőberendezés keverőkamrájába,
- adalékanyagot táplálunk a keverőberendezés keverőkamrájába,
- gázáramot biztosítunk a keverőkamrában a gázáramos egységgel, hogy a dohány és az adalékanyag áthaladjon a keverőkamrán.

14. A 13. igénypont szerinti eljárás, amelynél a dohányt a keverőkamrában felemeltetjük a gázárammal.

15. A 13. vagy a 14. igénypont szerinti eljárás, amely eljárás magában foglalja, hogy körülzáratjuk a dohányt a dohány tartására szolgáló tartótag által képezett keverőházzal, és a zárótagot záróhelyzetben érintkezésbe helyezzük a tartótaggal, hogy körülzárják a dohányt.

(A meghatalmazott)

WHEELER, LEO GEORGE KATONY
 1910-1911
 1912-1913
 1914-1915
 1916-1917
 1918-1919
 1920-1921
 1922-1923
 1924-1925
 1926-1927
 1928-1929
 1930-1931
 1932-1933
 1934-1935
 1936-1937
 1938-1939
 1940-1941
 1942-1943
 1944-1945
 1946-1947
 1948-1949
 1950-1951
 1952-1953
 1954-1955
 1956-1957
 1958-1959
 1960-1961
 1962-1963
 1964-1965
 1966-1967
 1968-1969
 1970-1971
 1972-1973
 1974-1975
 1976-1977
 1978-1979
 1980-1981
 1982-1983
 1984-1985
 1986-1987
 1988-1989
 1990-1991
 1992-1993
 1994-1995
 1996-1997
 1998-1999
 2000-2001
 2002-2003
 2004-2005
 2006-2007
 2008-2009
 2010-2011
 2012-2013
 2014-2015
 2016-2017
 2018-2019
 2020-2021
 2022-2023
 2024-2025
 2026-2027
 2028-2029
 2030-2031
 2032-2033
 2034-2035
 2036-2037
 2038-2039
 2040-2041
 2042-2043
 2044-2045
 2046-2047
 2048-2049
 2050-2051
 2052-2053
 2054-2055
 2056-2057
 2058-2059
 2060-2061
 2062-2063
 2064-2065
 2066-2067
 2068-2069
 2070-2071
 2072-2073
 2074-2075
 2076-2077
 2078-2079
 2080-2081
 2082-2083
 2084-2085
 2086-2087
 2088-2089
 2090-2091
 2092-2093
 2094-2095
 2096-2097
 2098-2099
 2100-2101
 2102-2103
 2104-2105
 2106-2107
 2108-2109
 2110-2111
 2112-2113
 2114-2115
 2116-2117
 2118-2119
 2120-2121
 2122-2123
 2124-2125
 2126-2127
 2128-2129
 2130-2131
 2132-2133
 2134-2135
 2136-2137
 2138-2139
 2140-2141
 2142-2143
 2144-2145
 2146-2147
 2148-2149
 2150-2151
 2152-2153
 2154-2155
 2156-2157
 2158-2159
 2160-2161
 2162-2163
 2164-2165
 2166-2167
 2168-2169
 2170-2171
 2172-2173
 2174-2175
 2176-2177
 2178-2179
 2180-2181
 2182-2183
 2184-2185
 2186-2187
 2188-2189
 2190-2191
 2192-2193
 2194-2195
 2196-2197
 2198-2199
 2200-2201
 2202-2203
 2204-2205
 2206-2207
 2208-2209
 2210-2211
 2212-2213
 2214-2215
 2216-2217
 2218-2219
 2220-2221
 2222-2223
 2224-2225
 2226-2227
 2228-2229
 2230-2231
 2232-2233
 2234-2235
 2236-2237
 2238-2239
 2240-2241
 2242-2243
 2244-2245
 2246-2247
 2248-2249
 2250-2251
 2252-2253
 2254-2255
 2256-2257
 2258-2259
 2260-2261
 2262-2263
 2264-2265
 2266-2267
 2268-2269
 2270-2271
 2272-2273
 2274-2275
 2276-2277
 2278-2279
 2280-2281
 2282-2283
 2284-2285
 2286-2287
 2288-2289
 2290-2291
 2292-2293
 2294-2295
 2296-2297
 2298-2299
 2300-2301
 2302-2303
 2304-2305
 2306-2307
 2308-2309
 2310-2311
 2312-2313
 2314-2315
 2316-2317
 2318-2319
 2320-2321
 2322-2323
 2324-2325
 2326-2327
 2328-2329
 2330-2331
 2332-2333
 2334-2335
 2336-2337
 2338-2339
 2340-2341
 2342-2343
 2344-2345
 2346-2347
 2348-2349
 2350-2351
 2352-2353
 2354-2355
 2356-2357
 2358-2359
 2360-2361
 2362-2363
 2364-2365
 2366-2367
 2368-2369
 2370-2371
 2372-2373
 2374-2375
 2376-2377
 2378-2379
 2380-2381
 2382-2383
 2384-2385
 2386-2387
 2388-2389
 2390-2391
 2392-2393
 2394-2395
 2396-2397
 2398-2399
 2400-2401
 2402-2403
 2404-2405
 2406-2407
 2408-2409
 2410-2411
 2412-2413
 2414-2415
 2416-2417
 2418-2419
 2420-2421
 2422-2423
 2424-2425
 2426-2427
 2428-2429
 2430-2431
 2432-2433
 2434-2435
 2436-2437
 2438-2439
 2440-2441
 2442-2443
 2444-2445
 2446-2447
 2448-2449
 2450-2451
 2452-2453
 2454-2455
 2456-2457
 2458-2459
 2460-2461
 2462-2463
 2464-2465
 2466-2467
 2468-2469
 2470-2471
 2472-2473
 2474-2475
 2476-2477
 2478-2479
 2480-2481
 2482-2483
 2484-2485
 2486-2487
 2488-2489
 2490-2491
 249