



US 20020143350A1

(19) **United States**

(12) **Patent Application Publication**
Heitzmann et al.

(10) **Pub. No.: US 2002/0143350 A1**

(43) **Pub. Date: Oct. 3, 2002**

(54) **ROTATIONAL ATHERECTOMY SYSTEM
WITH STATIONARY CUTTING ELEMENTS**

(76) Inventors: **Harold A. Heitzmann**, Irvine, CA
(US); **John S. Honeycutt**, Fallbrook,
CA (US); **Paul Taylor**, Poway, CA
(US)

Correspondence Address:
KNOBBE MARTENS OLSON & BEAR LLP
620 NEWPORT CENTER DRIVE
SIXTEENTH FLOOR
NEWPORT BEACH, CA 92660 (US)

(21) Appl. No.: **10/158,295**

(22) Filed: **May 28, 2002**

Related U.S. Application Data

(63) Continuation of application No. 09/592,218, filed on
Jun. 12, 2000, which is a continuation of application


No. 09/398,241, filed on Sep. 17, 1999, which is a
continuation-in-part of application No. 09/260,199,
filed on Mar. 1, 1999, now Pat. No. 6,206,898, which
is a continuation-in-part of application No. 09/058,
513, filed on Apr. 10, 1998, now Pat. No. 6,001,112.


Publication Classification

(51) **Int. Cl.⁷** **A61D 1/02**
(52) **U.S. Cl.** **606/159**

(57) **ABSTRACT**

An elongate tubular body extends between a rotatable cutter
and a control. The cutter is connected to the control with a
rotatable element. A vacuum is applied through an annular
passage defined between the tubular body and the rotatable
element. The cutter has at least one radial projection which
cooperates with at least one stationary element on the
tubular body to cut material drawn into the tubular body.
Material that has been processed by the cutter is aspirated
through the tubular body for disposal.

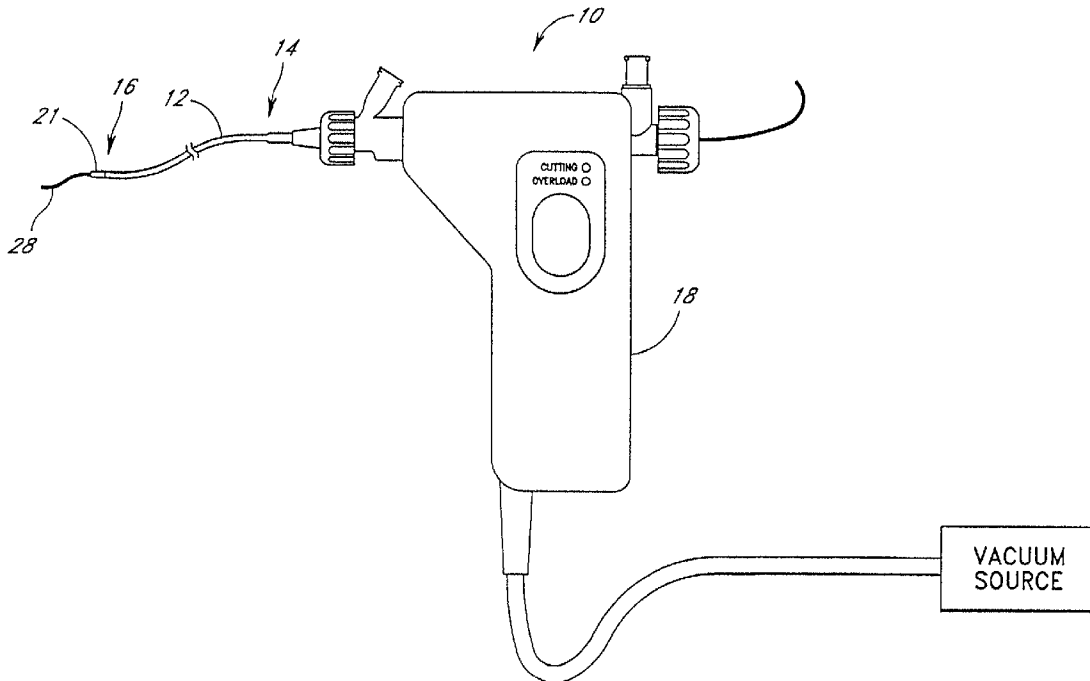

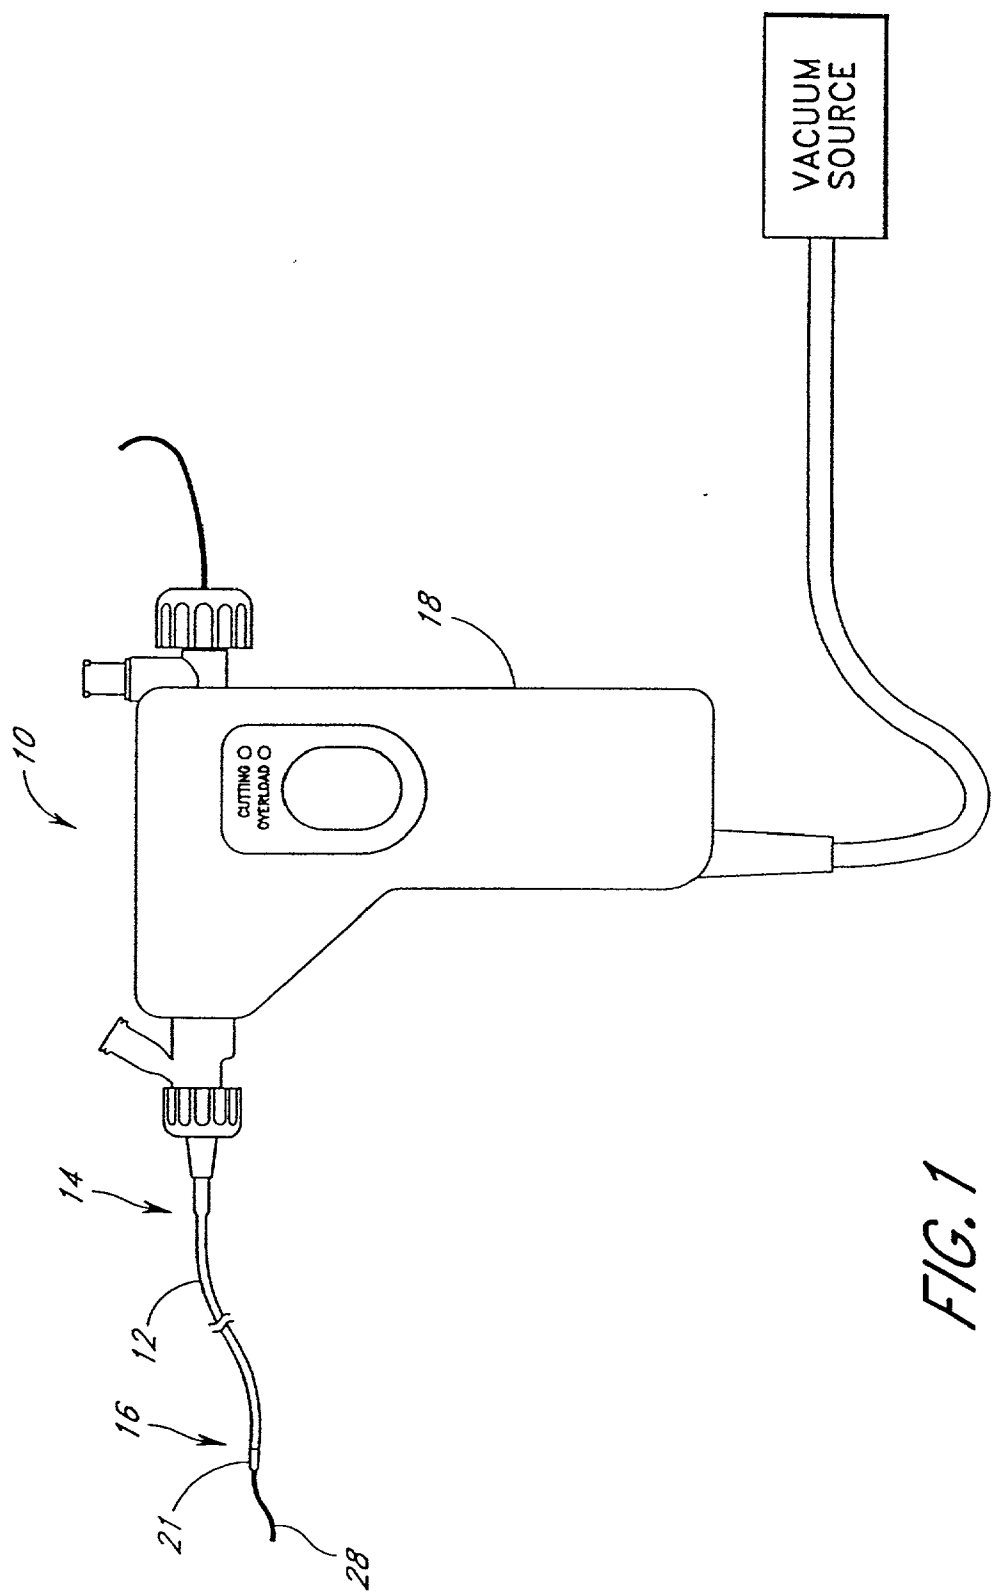

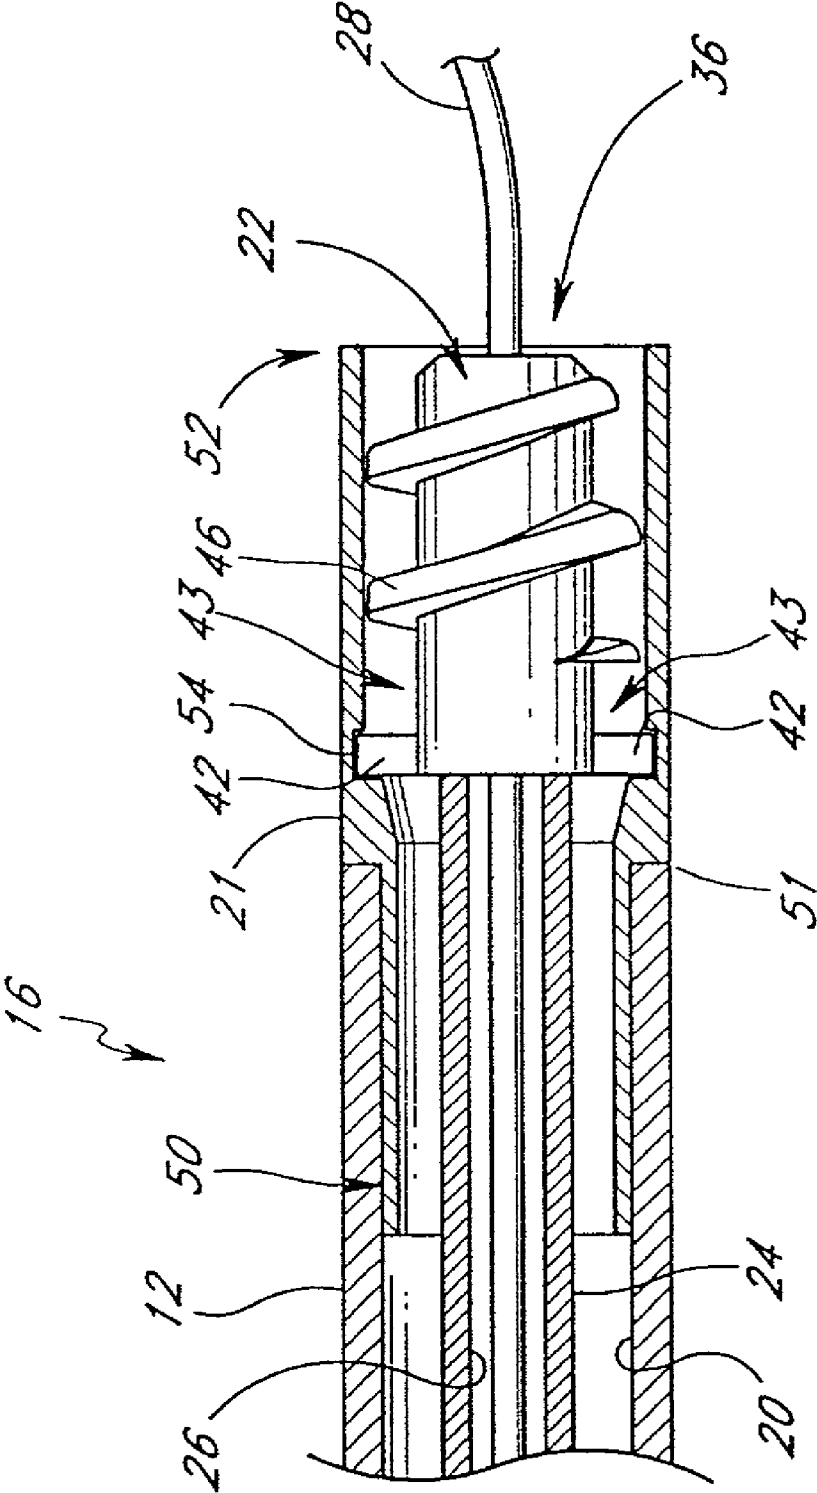


FIG. 2

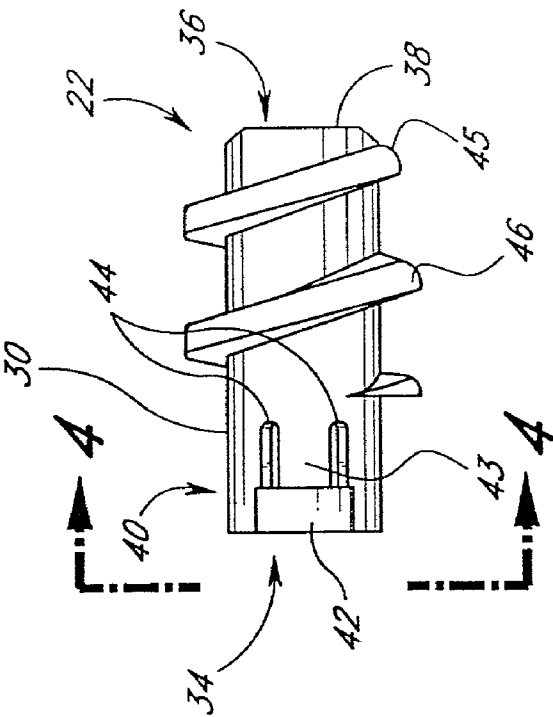


FIG. 3

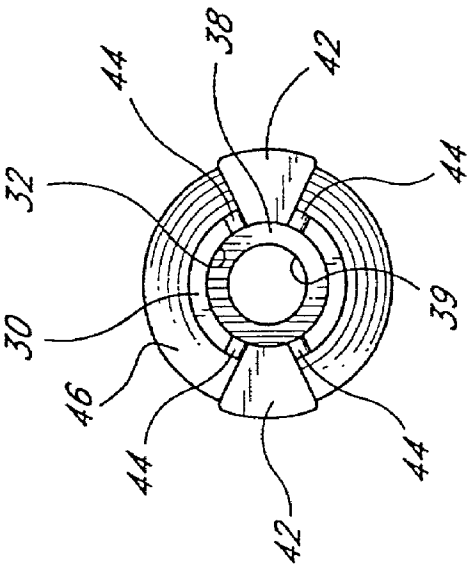


FIG. 4

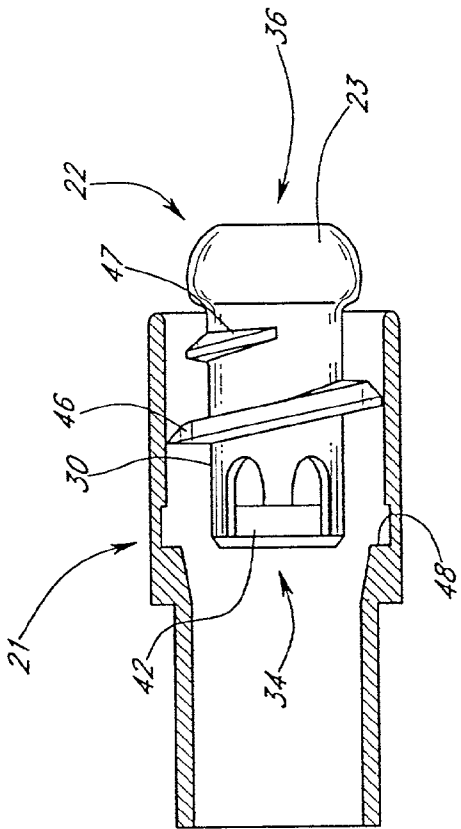


FIG. 6

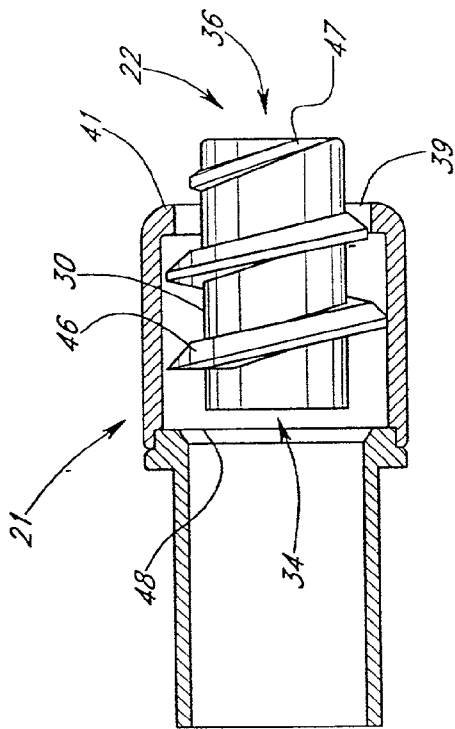


FIG. 7

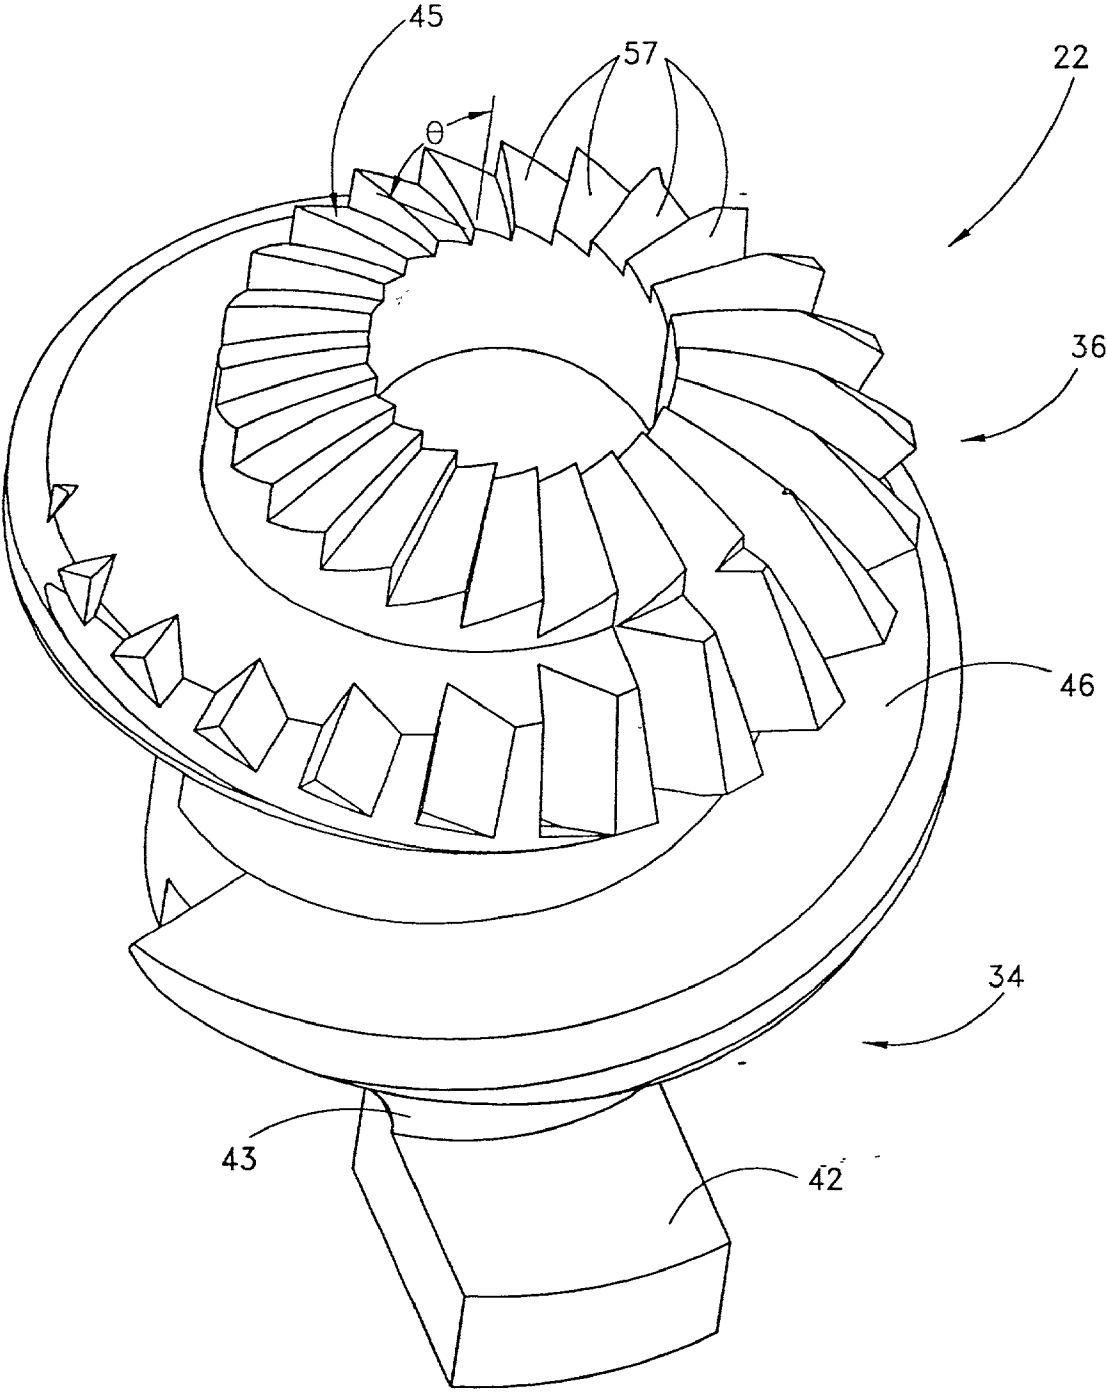


FIG. 8A

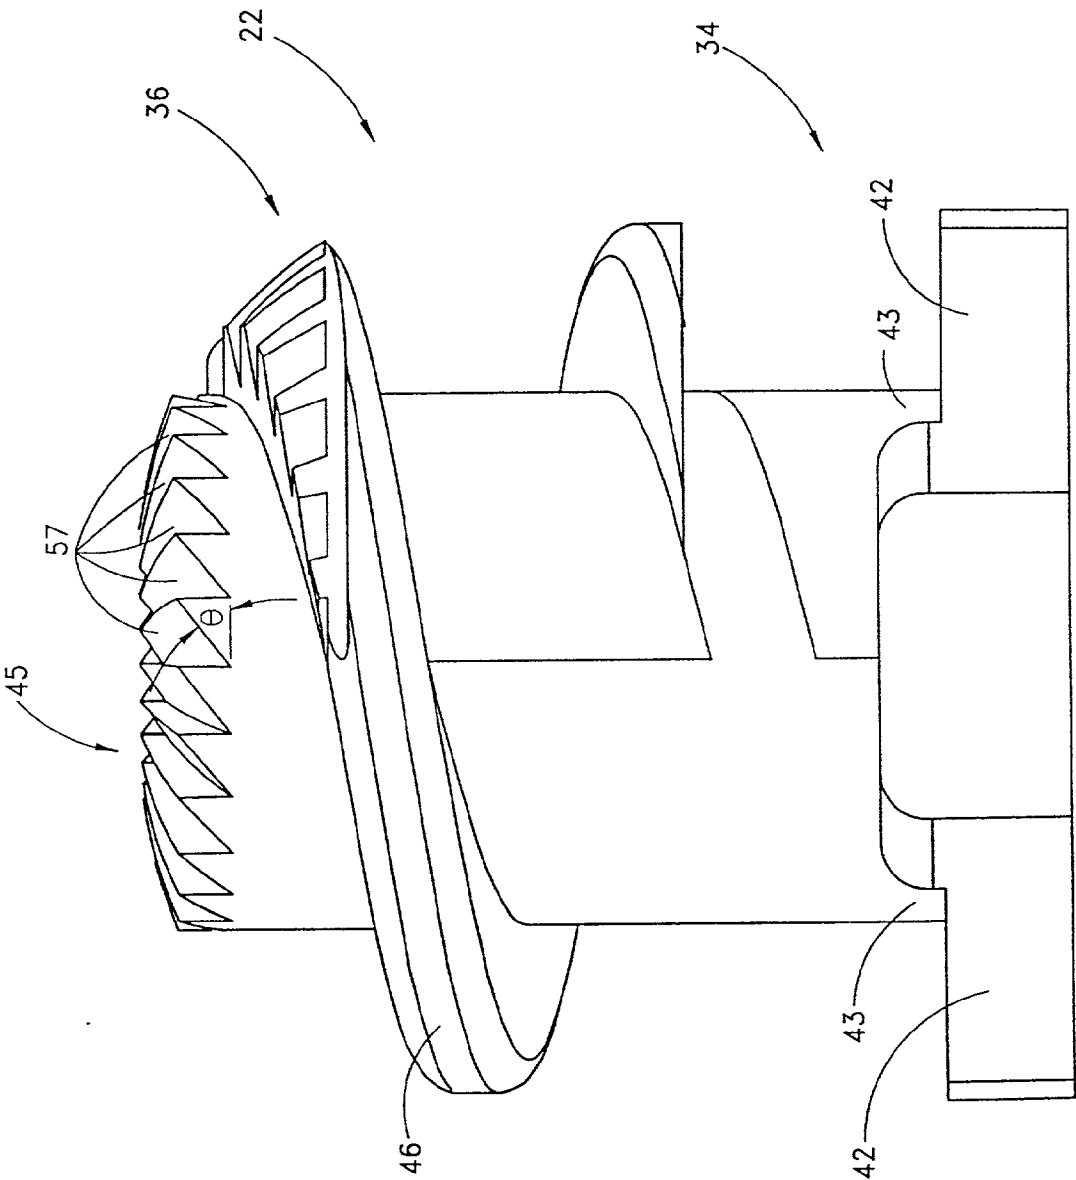
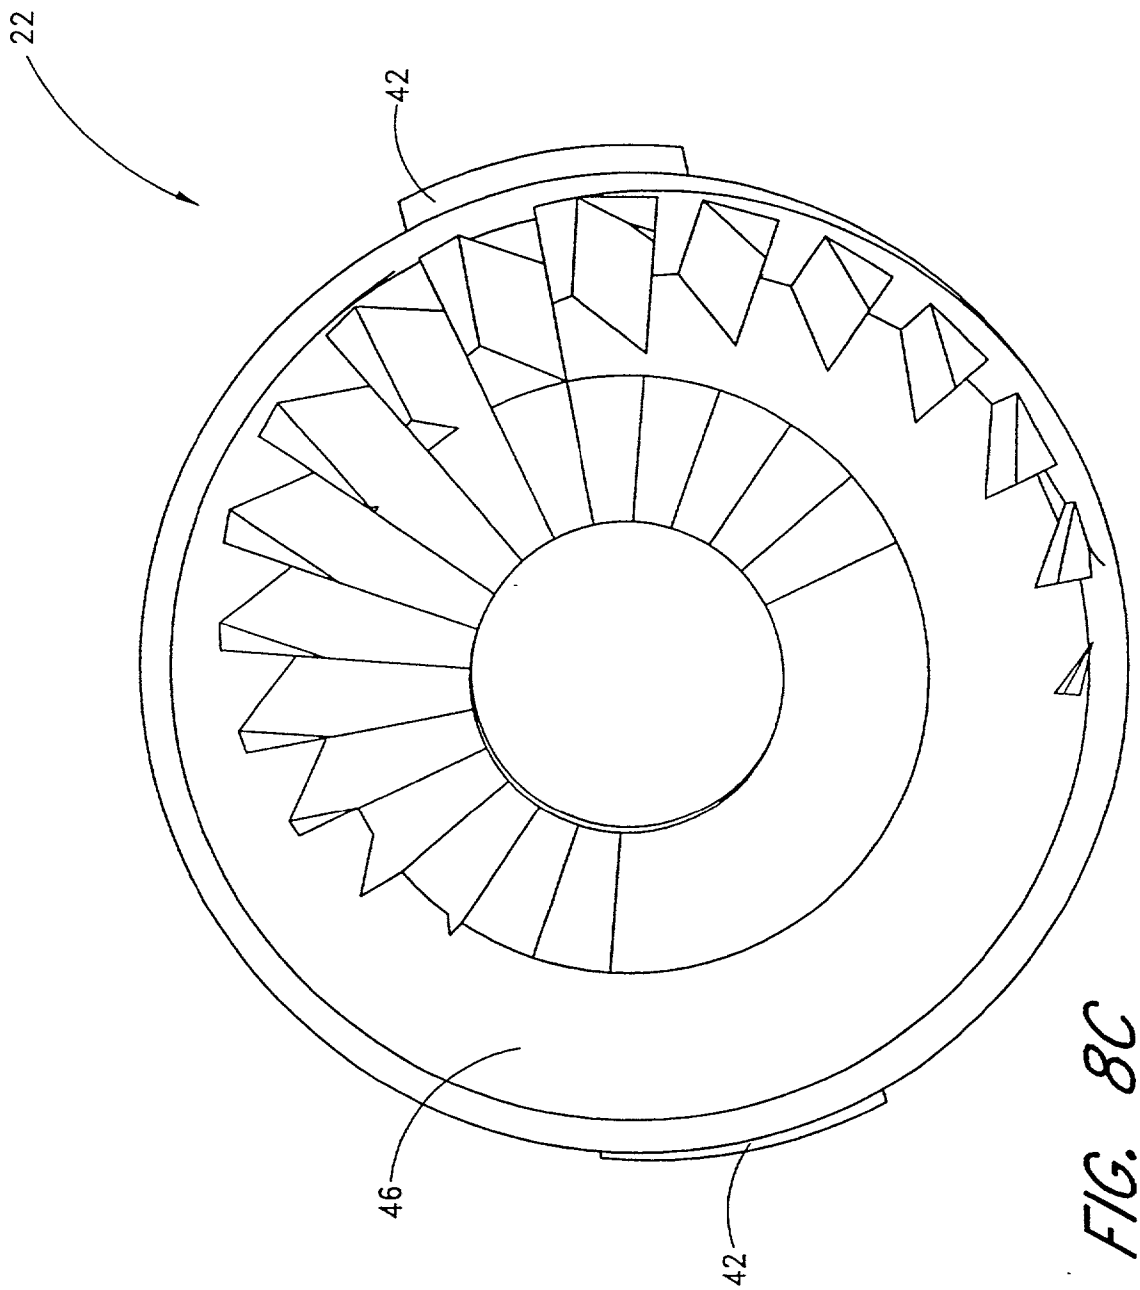
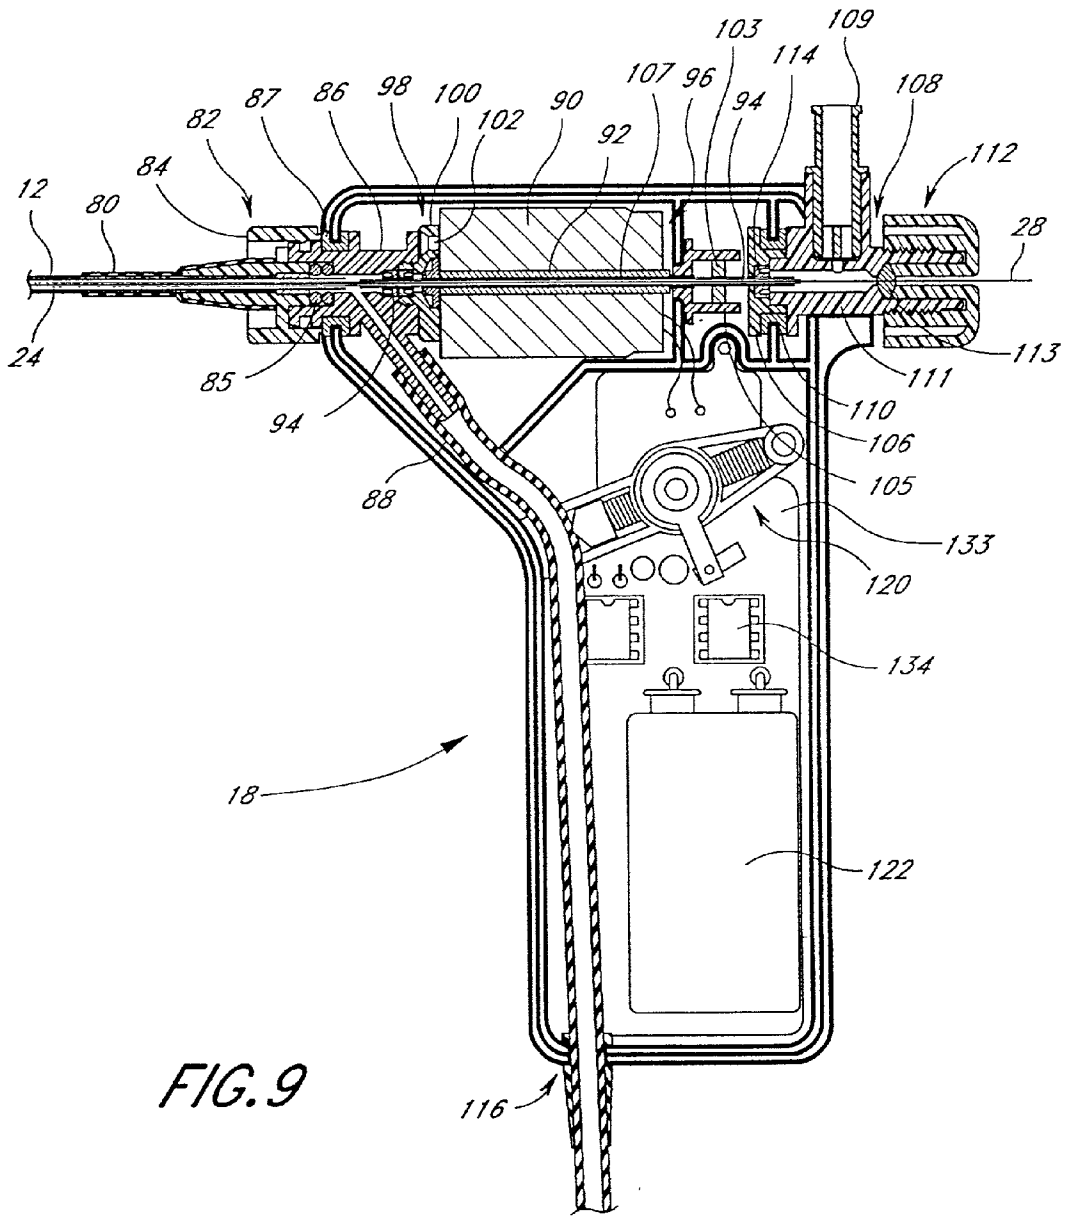


FIG. 8B





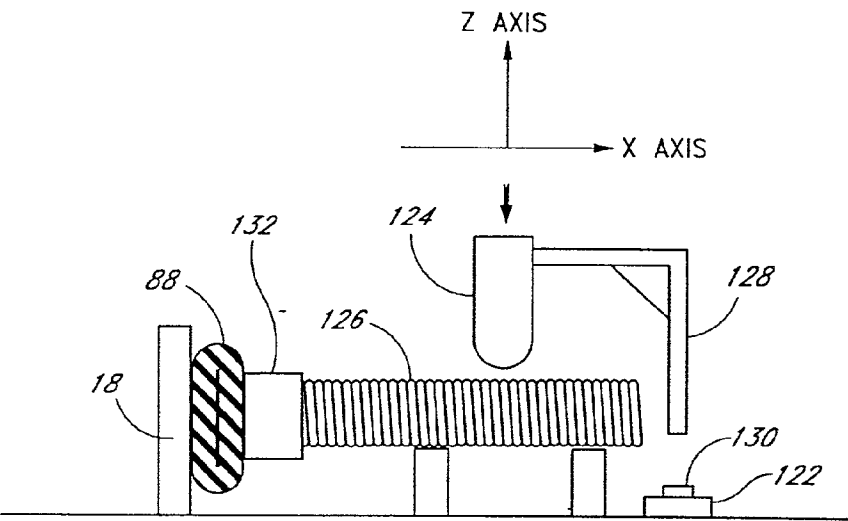


FIG. 10A

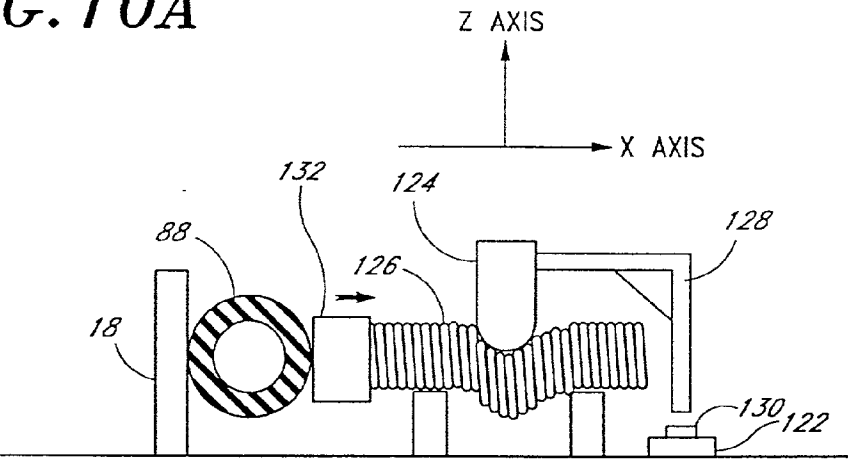


FIG. 10B

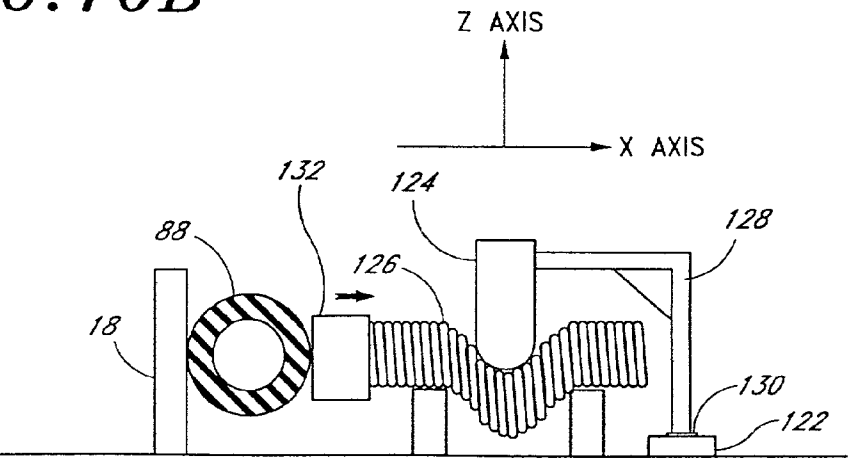


FIG. 10C

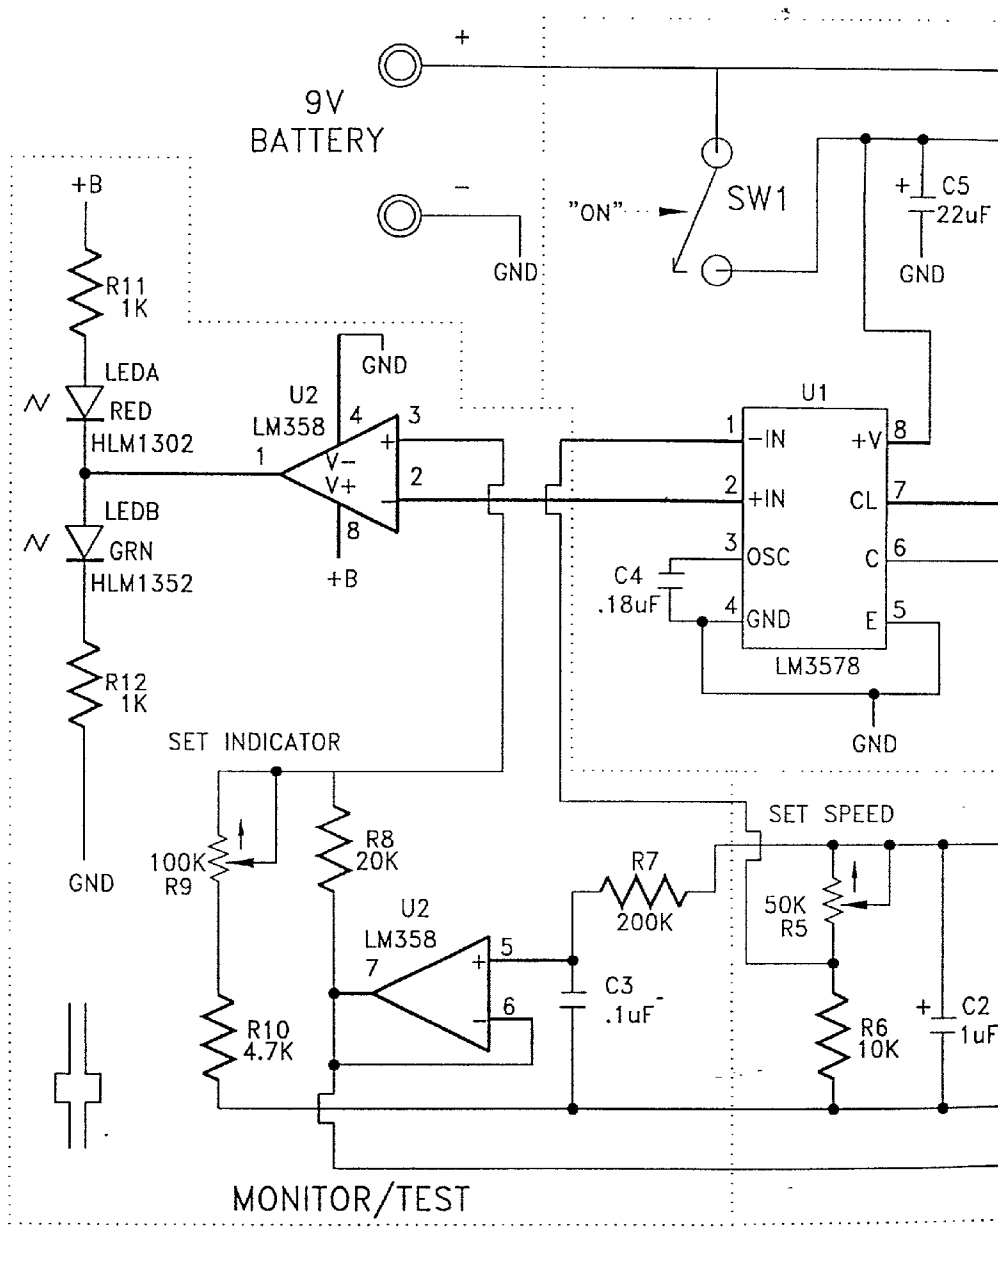


FIG. 11A

FIG. 11

FIG. 11A	FIG. 11B
----------	----------

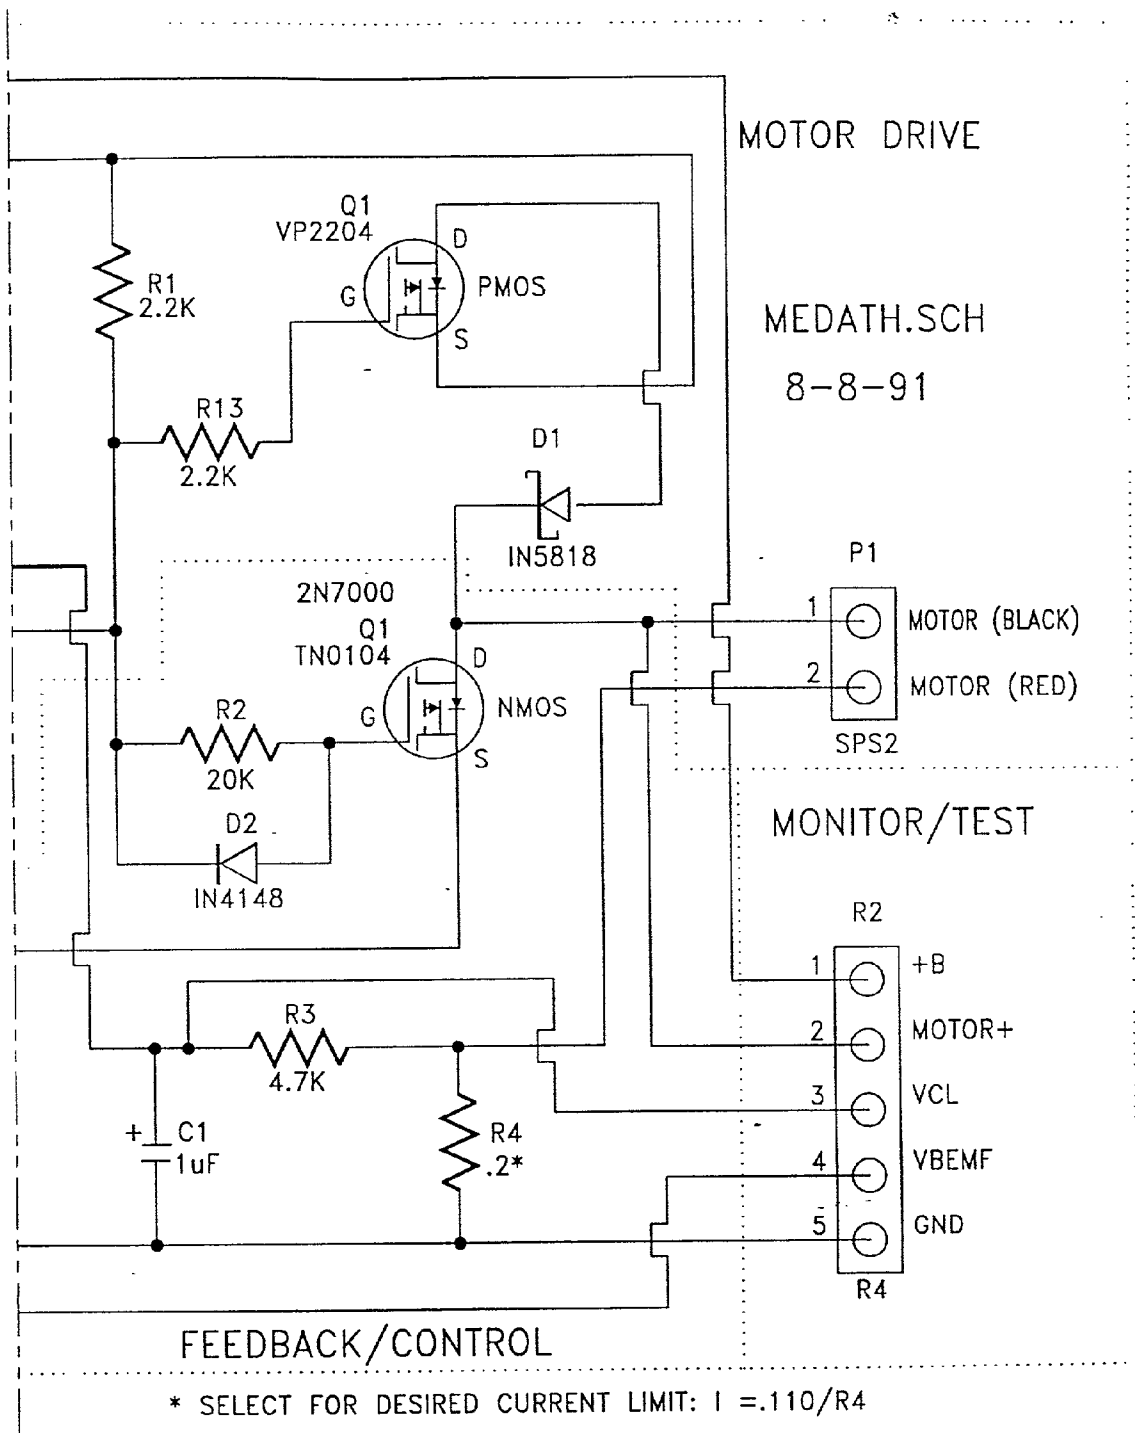


FIG. 11B

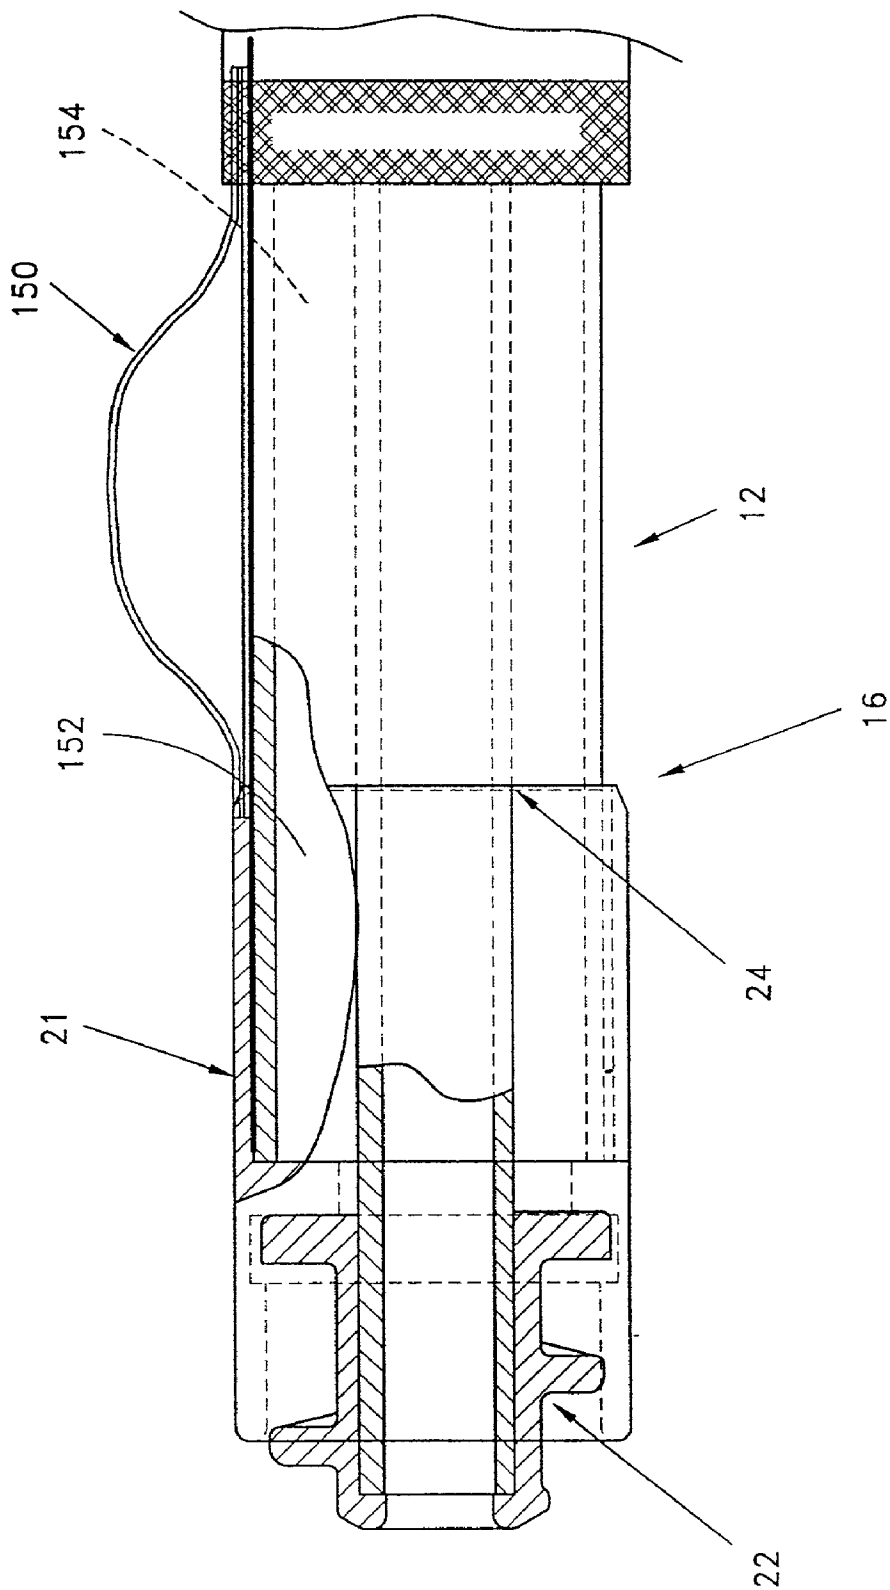


FIG. 12

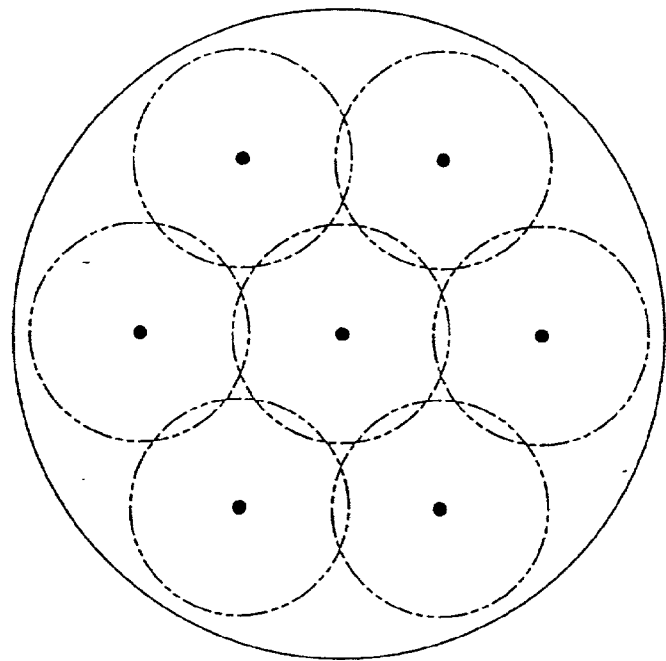


FIG. 14

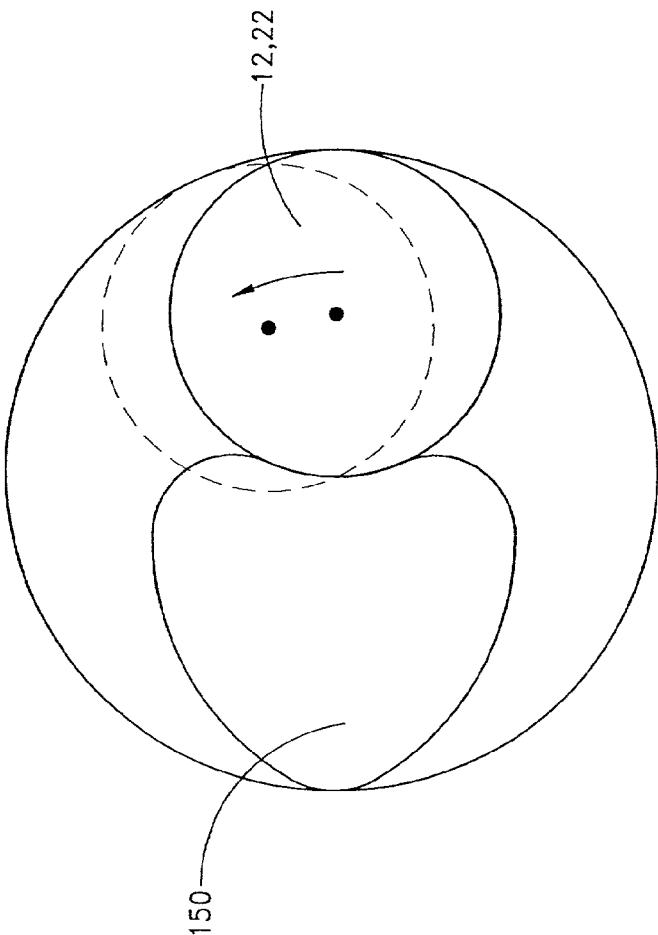


FIG. 13

ROTATIONAL ATHERECTOMY SYSTEM WITH STATIONARY CUTTING ELEMENTS

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. patent application Ser. No. 09/592,218, filed Jun. 12, 2000, which is a continuation of Ser. No. 09/398,241, filed Sep. 17, 1999, which is a continuation-in-part of U.S. patent application Ser. No. 09/260,199, filed on Mar. 1, 1999, which is a continuation-in-part of U.S. patent application Ser. No. 09/058,513, filed on Apr. 10, 1998, now U.S. Pat. No. 6,001,112.

BACKGROUND OF THE INVENTION

[0002] The present invention generally relates to medical devices and, more particularly, to atherectomy catheter devices.

[0003] A variety of techniques and instruments have been developed to remove obstructive material in arteries or other body passageways or to repair the arteries or body passageways. A frequent objective of such techniques and instruments is the removal of atherosclerotic plaques in a patient's arteries. The buildup of fatty deposits (atheromas) in the intimal layer (under the endothelium of a patient's blood vessels) characterizes atherosclerosis. Over time, what is initially deposited as relatively soft, cholesterol-rich atheromatous material often hardens into a calcified atherosclerotic plaque. The atheromas may be referred to as stenotic lesions or stenoses while the blocking material may be referred to as stenotic material. If left untreated, such stenoses can so sufficiently reduce perfusion that angina, hypertension, myocardial infarction, strokes and the like may result.

[0004] Several kinds of atherectomy devices have been developed for attempting to remove some or all of such stenotic material. In one type of device, such as that shown in U.S. Pat. No. 5,092,873 (Simpson), a cylindrical housing, carried at the distal end of a catheter, has a portion of its side-wall cut out to form a window into which the atherosclerotic plaque can protrude when the device is positioned next to the plaque. An atherectomy blade, disposed within the housing, is then advanced the length of the housing to lance the portion of the atherosclerotic plaque that extends into the housing cavity. While such devices provide for directional control in selection of tissue to be excised, the length of the portion excised at each pass of the atherectomy blade is necessarily limited to the length of the cavity in the device. The length and relative rigidity of the housing limits the maneuverability and therefore also limits the utility of the device in narrow and tortuous arteries such as coronary arteries. Such devices are also generally limited to lateral cutting relative to the longitudinal axis of the device.

[0005] Another approach, which solves some of the problems relating to removal of atherosclerotic plaque in narrow and tortuous passageways, involves the use of an abrading device carried at the distal end of a flexible drive shaft. Examples of such devices are illustrated in U.S. Pat. No. 4,990,134 (Auth) and U.S. Pat. No. 5,314,438 (Shturman). In the Auth device, abrasive material such as diamond grit (diamond particles or dust) is deposited on a rotating burr carried at the distal end of a flexible drive shaft. In the Shturman device, a thin layer of abrasive particles is bonded

directly to the wire turns of an enlarged diameter segment of the drive shaft. The abrading device in such systems is rotated at speeds up to 200,000 rpm or more, which, depending on the diameter of the abrading device utilized, can provide surface speeds of the abrasive particles in the range of 40 ft/sec. According to Auth, at surface speeds below 40 ft/sec his abrasive burr will remove hardened atherosclerotic materials but will not damage normal elastic soft tissue of the vessel wall. See, e.g., U.S. Pat. No. 4,990,134 at col. 3, lines 20-23.

[0006] However, not all atherosclerotic plaques are hardened, calcified atherosclerotic plaques. Moreover, the mechanical properties of soft plaques are very often quite close to the mechanical properties of the soft tissue of the vessel wall. Thus, one cannot always rely entirely on the differential cutting properties of such abrasives to remove atherosclerotic material from an arterial wall, particularly where one is attempting to remove all or almost all of the atherosclerotic material.

[0007] Moreover, a majority of atherosclerotic lesions are asymmetrical (i.e., the atherosclerotic plaque is thicker on one side of the artery than on the other). As will be understood, the stenotic material will be entirely removed on the thinner side of an eccentric lesion before it will be removed on the thicker side of the lesion. Accordingly, during removal of the remaining thicker portion of the atherosclerotic plaque, the abrasive burr of the Auth device or the abrasive-coated enlarged diameter segment of the drive shaft of the Shturman device will necessarily engage healthy tissue on the side that has been cleared. Indeed, lateral pressure by such healthy tissue against the abrading device is inherently required to keep the abrading device in contact with the remaining stenotic tissue on the opposite wall of the passageway. For stenotic lesions that are entirely on one side of an artery (a relatively frequent condition), the healthy tissue across from the stenotic lesion will be exposed to and in contact with the abrading device for substantially the entire procedure. Moreover, pressure from that healthy tissue against the abrading device will be, in fact, the only pressure urging the abrading device against the atherosclerotic plaque. Under these conditions, a certain amount of damage to the healthy tissue is almost unavoidable, even though undesirable, and there is a clear risk of perforation or proliferative healing response. In some cases, the "healthy tissue" across from a stenotic lesion may be somewhat hardened by the interaction (i.e., it has diminished elasticity); under such circumstances, the differential cutting phenomenon described by Auth will also be diminished, resulting in a risk that this "healthy" tissue may also be removed, potentially causing perforation.

[0008] Thus, notwithstanding the foregoing and other efforts to design a rotational atherectomy device, there remains a need for such a device that can advance through soft atheromas while providing minimal risk of dislodging emboli, and risk of injury to the surrounding vessel wall.

SUMMARY OF THE INVENTION

[0009] There is provided in accordance with one aspect of the present invention, a rotational medical device. The device comprises an elongate flexible tubular body, having a proximal end and a distal end. A rotatable element extends through the body. A rotatable tip at the distal end of the body

is connected to the rotatable element. A control is provided on the proximal end of the body. At least one radially inwardly extending stationary cutting member is provided on the tubular body, and at least one radially outwardly extending flange on the rotatable tip is provided for cooperating with the stationary cutting member to cut material drawn into the tubular body.

[0010] In one embodiment, the device comprises two radially outwardly extending flanges on the tip. The device may also comprise two stationary cutting member on the tubular body. The device may further comprise an annular recess in the tubular body, for rotatably receiving the radially outwardly extending flange. The distal end of the rotatable tip may be either approximately aligned axially with the distal end of the tubular body, extend beyond the distal end of the tubular body, or be recessed within the tubular body.

[0011] In accordance with another aspect of the present invention, there is provided a method of removing material from a vessel. The method comprises the steps of providing an elongate flexible tubular body, having a proximal end and a distal end, a rotatable tip at the distal end of the tubular body, and at least one stationary cutting member on the tubular body which cooperates with at least one flange on the rotatable tip. The distal end of the tubular body is advanced transluminally to the material, and the rotatable tip is rotated. Portions of the material are drawn proximally past the rotatable tip so that the material is cut by the action of the flange rotating past the stationary member.

[0012] Preferably, the drawing step is accomplished by applying vacuum to the proximal end of the tubular body. The advancing step generally comprises advancing the tubular body along a guidewire. Preferably, the advancing step additionally comprises advancing the tubular body through a percutaneous access site.

[0013] In one aspect of the invention, the method further comprises the step of infusing fluid through a flush port on the proximal end of the tubular body. The advancing step is accomplished by applying axial distal pressure on the tubular body, and may include the step of reducing the amount of axial distal pressure in response to feedback indicating a change in load on the rotatable tip.

[0014] In accordance with a further aspect of the present invention, there is provided a method of removing material from a patient. The method comprises the steps of providing an elongate flexible tubular body, having a proximal end, a distal end, and at least two radially inwardly extending stationary cutting members near the distal end. A rotatable distal tip is carried by the distal end of the tubular body, the tip having at least two radially outwardly extending flanges, and a control on the proximal end of the tubular body. The distal tip of the tubular body is advanced to the material to be removed, and the control is manipulated to activate a vacuum through the tubular body. Rotation of the rotatable tip is commenced to remove material from the patient, and material is sheared between the flanges and the stationary cutting members.

[0015] Further features and advantages of the present invention will become apparent to those of skill in the art in view of the disclosure herein, when considered together with the attached drawings and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1 is a schematic view of a device embodying the present invention;

[0017] FIG. 2 is a partially sectioned side view of a distal end of the device of FIG. 1, showing an embodiment of the cutter assembly;

[0018] FIG. 3 is a side view of the cutter of FIG. 2;

[0019] FIG. 4 is an end view of the cutter of FIG. 3 taken along the line 4-4;

[0020] FIG. 5A is a partially sectioned side view of another embodiment of the cutter and housing;

[0021] FIG. 5B is a cross-sectional view of the cutter and housing of FIG. 5A taken along the lines 5B-5B;

[0022] FIG. 6 is a partially sectioned side view of yet another cutter and housing;

[0023] FIG. 7 is a partially sectioned side view of a further cutter and housing;

[0024] FIG. 8A is a top perspective view of a serrated cutter configured in accordance with certain features, aspects and advantages of the present invention;

[0025] FIG. 8B is a side view of the serrated cutter of FIG. 8A;

[0026] FIG. 8C is a top view of the serrated cutter of FIG. 8A;

[0027] FIG. 9 is a sectioned side view of a control having features, aspects and advantages in accordance with the present invention;

[0028] FIG. 10A is a schematic illustration of a pinch-valve switch in a position which interrupts an applied vacuum and interrupts power flow to a drive motor;

[0029] FIG. 10B is a schematic illustration of a pinch-valve switch in a position that applies the vacuum and interrupts power flow to the drive motor;

[0030] FIG. 10C is a schematic illustration of a pinch-valve switch in a position which applies the vacuum and allows power to flow to the drive motor;

[0031] FIG. 11 is a schematic illustration of a representative motor control circuit in accordance with the present invention;

[0032] FIG. 12 is an enlarged partially sectioned side view of a cutter, housing and catheter assembly configured in accordance with certain aspects and advantages of the present invention;

[0033] FIG. 13 is a schematic view of a treatment process performed according to a first mode of off-set operation; and

[0034] FIG. 14 is a schematic view of a treatment process performed according to a second mode of off-set operation.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0035] With reference initially to FIG. 1, a surgical instrument, indicated generally by reference numeral 10 having features, aspects and advantages in accordance with the present invention is depicted therein. In general, the illus-

trative surgical instrument comprises an elongate flexible tubular body **12** having a proximal end **14** and a distal end **16**. A control **18** is preferably provided at or near the proximal end **14** of the tubular body **12** for permitting manipulation of the instrument **10**. The control **18** advantageously carries electronic controls and indicators as well as vacuum controls as will be discussed below.

[0036] With reference now to the partially sectioned view of FIG. 2, the tubular body **12** preferably has an elongate central lumen **20**. Desirably, the tubular body **12** has a cutter housing **21** for receiving a cutter **22** that may rotate therein. The illustrated cutter **22** is coupled to the control **18** for rotation by way of an elongate flexible drive shaft **24**, as will be described below. In an over-the-wire embodiment, the drive shaft **24** may also be provided with an axially extending central lumen **26** for slidably receiving a guidewire **28** as will be understood by those of skill in the art. Moreover, in such configurations, the cutter **22** may also have a central lumen.

[0037] The diameter of the guidewire **28** is preferably in the range of about 0.010 inch to about 0.020 inch. The lengths of the guidewire **28** and the tubular body **12** may be varied to correspond to a distance between a percutaneous access site and a lesion being treated. For example, the guidewire **28** and the tubular body **12** should be long enough to allow the cutter **22** of the present surgical instrument **10** to track along the guidewire **28** and reach a target occlusion while also allowing a proximal portion of the guidewire **28** to remain exterior to the patient for manipulation by the clinician (not shown). In an application for removing coronary artery atheroma by way of a femoral artery access, guidewires having lengths from about 120 cm to about 160 cm may be used, and the length of the tubular body **12** may range between about 50 cm and about 150 cm, as will be understood by those of skill in art. For other applications, such as peripheral vascular procedures including recanalization of implanted vascular grafts, the length of the guidewire **28** and the tubular body **12** may depend upon the location of the graft or other treatment site relative to the percutaneous or surgical access site. Suitable guidewires for coronary artery applications include those manufactured by Guidant or Cordis.

[0038] With reference now to FIGS. 3 and 4, the illustrated cutter **22** includes a generally cylindrical sleeve shaped body **30** having a central lumen **32** (FIG. 4). The cylindrical body **30** of the cutter **22** generally has an external diameter of between about 0.035 inch and 0.092 inch. In one embodiment, the external diameter is approximately 0.042 inch. The body **30** has a wall thickness between about 0.003 inch and about 0.010 inch. In one embodiment, the wall thickness is about 0.009 inch. The length of one embodiment of the present cutter **22** from proximal end **34** to distal end **36** is approximately 0.096 inch but the length may vary from about 0.040 inch to about 0.120 inch or more, depending upon the intended use. In general, tip lengths of no more than about 0.100 inch are preferred; shorter tip lengths permit greater lateral flexibility and enable increased remote access as will be apparent to those of skill in the art.

[0039] With continued reference to FIG. 3, an end cap **38** may be formed on the distal end **36** of the present cutter tip **22**. Specifically, the cylindrical body **30** may be machined to create an integral (i.e., one piece) end cap **38**. The end cap

38 may have a thickness of approximately 0.007 inch; however, the end cap thickness may range from about 0.003 inch to about 0.020 inch. Additionally, it is contemplated that a discrete end cap **38** may also be separately machined and attached. For instance, the end cap **38** may be formed from a more lubricious material to reduce frictional contact between the guidewire **28** and the end cap **38**. Such an end cap may be attached in any suitable manner. The end cap **38** preferably has an outside diameter that substantially corresponds to the outside diameter of the distal end **26** of the present cutter tip **22**. The end cap outside diameter may, however, substantially correspond to the inside diameter of the cylindrical body in some embodiments.

[0040] The end cap **38** may also have a centrally located aperture **39**. The aperture **39**, if present, preferably has a diameter of between about 0.013 inch and about 0.025 inch. In one embodiment, the aperture **39** has a diameter of approximately 0.022 inch. Desirably, the aperture **39** may accommodate a guidewire **28** or allow fluids to flow therethrough. As will be appreciated, the cutter **22** may have a machined or otherwise integrally formed radially inwardly extending annular flange **41** (see FIG. 6). It is also anticipated that aspects of the present invention may also be practiced without employing an end cap or inwardly extending annular flange **41**. In such configurations, the flange **41** may extend fully around the circumference of the cutter **22** or may have portions removed such that the annular flange **41** is actually a series of inwardly projecting tabs. Additionally, an outside distal edge of the end cap **38** or annular flange **41** is desirably broken, chamfered or rounded such that any sharp edge resulting from manufacturing may be removed, and such that the end cap may be rendered substantially atraumatic.

[0041] With reference now to FIGS. 2-4, a connector portion **40** is preferably provided at or near the proximal end **34** of the illustrated cutter **22** for securing the cutter **22** within the cutter housing **21** such that the cutter may rotate therein. Additionally, the connector portion **40** may be a mechanical, self-locking method to secure the rotating cutter **22** within the cutter housing **21** and to guard against undesired axial movement of the cutter **22** relative to the housing **21**. In certain embodiments, axial movement of the cutter may be accommodated within the housing **21**, and even within the tubular body **12**, as will be discussed below in more detail.

[0042] As will be recognized by those of skill in the art, safety straps, redundant glue joints, crimping, and swaging are commonly used to create redundant failure protection for catheter cutter tips. The advantageous structure of the present connector portion **40** retains the cutter tip **22** within the cutter housing **21** and may reduce the need for such multiple redundancies. As will be described, the connector portion **40** may take various forms.

[0043] In embodiments similar to the one illustrated in FIGS. 2-4, the connector portion **40** generally comprises two outwardly extending radial supports, such as a set of wedge-shaped flanges **42**. The flanges **42** may be formed by removing material from an annular circumferential flange at the proximal end **34** of the cutter **22**. The flanges **42** may be formed into the illustrated wedge-shape, although other shapes may also be desirable. The flanges **42** may also be bent from a proximal extension of the wall of tubular body

30, or adhered or otherwise secured to the proximal end **34** of the cutter **22**. Moreover, as will be recognized by one of ordinary skill in the art, the cutter **22** and flanges **42** may be cast or molded using any suitable method dependent upon the material chosen. As will be recognized by those of ordinary skill in the art, the flanges **42** may alternatively be connected to tubular body **30** at a point in between the proximal end **34** and the distal end **36** of the cutter tip.

[0044] Although two opposing flanges **42** are illustrated in FIGS. 2-4, three or more flanges **42** may be utilized, as will be apparent to those of skill in the art. In general, the flanges **42** should be evenly distributed around the circumference of the cutter **22** to improve balance during rotation of the cutter **22**. For example, three flanges **42** would preferably extend radially outward from the cylindrical wall of the body **30** on approximately 120° centers. Similarly, four outwardly extending radial flanges **42** would preferably be located on approximately 90° centers.

[0045] With reference now to FIGS. 8A-8C, another configuration of the connector portion **40** is illustrated therein. In the illustrated configuration, the outwardly extending radial supports **42** are also formed by removing material from an annular circumferential flange at the proximal end of the cutter **22**. The supports **42** are attached to the balance of the cutter **22** with tangs **43** that are carved from the cutter **22** when the supports **42** are formed. In this manner, the tangs **43** do not require the slots that form the arms described above. Of course, a combination of the slots and arms and the tangs without slots may also be used to attach the flange **42** to the cutter **22**. In the illustrated embodiment, the tangs **43** preferably are between about 0.010 inch and about 0.050 inch in length. More preferably, the tangs **43** are about 0.015 inch long. In one embodiment, the tangs are about 0.25 inch long. The tangs also have a width between about 0.010 inch and about 0.050 inch. In a presently preferred embodiment, the tangs have a width of about 0.020 inch.

[0046] The illustrated connector portion **40** has an outside diameter taken about the opposing flanges **42** of approximately 0.071 inch. Generally, the outside diameter may range from about 0.057 inch to about 0.096 inch in a device intended for coronary artery applications. The thickness of the flanges **42** in the axial direction (i.e., the dimension normal to the increase in diameter resulting from the flanges) is about 0.010 inch but may range from about 0.004 inch to about 0.025 inch. In general, an outside diameter defined about the flanges **42** may be selected to cooperate with the inside diameter of an annular retaining race or groove **54** in the housing **21**, discussed below, to axially retain the cutter **22** while permitting rotation of the cutter **22** relative to the housing **21**. The thickness of the flanges **42** and the axial width of the retaining groove **54** also are generally designed to either allow axial movement of the cutter **22** within the housing **21** or to limit or eliminate substantial axial movement of the cutter **22** within the housing **21**, as is discussed below.

[0047] With continued reference to now FIG. 3, each illustrated flange **42** is preferably attached to the cutter **22** by a spring arm **43**. Each arm **43** is defined by two longitudinally extending slots **44** which are formed in the cylindrical wall of the body **30** adjacent each flange **42**. The slots **44** are preferably about 0.005 inch in width; however the width may range from approximately 0.001 inch to approximately

0.025 inch. The slots **44** of the present cutter **22** are also generally at least about 0.025 inch in axial length along the longitudinal axis of the body **30**. One skilled in the art will readily appreciate that the slots **44** of the present cutter **22** can be varied in axial length to vary the length of the cantilevered arm **43** that connects the flanges **42** to the cutter **22**. The slots **44**, and the arm **43** defined between the slots **44**, and the tangs, allow radial inward compression of the flanges **42** and spring arms **43**, or tangs, to ease assembly of the cutter **22** within the cutter housing **21** as described below.

[0048] Desirably, the cutter **22**, and especially the portion containing the slots **44**, is made of a material having an adequate spring constant as will be understood by those of skill in the art. In one embodiment, the cutter **22** is made from a medical grade stainless steel alloy. The chosen material preferably has characteristics including the ability to allow the cantilevered spring arm **43** to deflect radially inwardly an adequate distance over the length of the arm **43** without exceeding the elastic limit of the material (i.e., the deflection is an elastic deformation). As is known, elastic deformations allow structures to deflect and substantially return to their initial shape or position. For instance, special hardening methods may be used to maintain the elasticity of the selected material in the deflection range necessary for a specific application.

[0049] With reference now to FIG. 2, the cutter **22** is snap fit into the cutter housing **21**. Advantageously, the arms **43** may be deflected radially inward such that the cutter **22** may be inserted into the cutter housing **21** through an aperture or lumen having a smaller ID than the inside diameter of the retaining groove **54** of the cutter housing **21**. Preferably, the cutter **22** is inserted from the distal end of the housing **21** and slid proximally through the housing **21** until the flanges **42** snap outward into the race **54**. Thus, the cutter **22** will be retained in this housing even if it separates from its drive element **24**. Desirably, the arms **43** substantially return to their original, relaxed positions within the retaining groove **54** of the cutter housing **21** following installation. It should be appreciated that the arms **43** may also be maintained under a slight bending stress (i.e., the inside diameter of the race **54** may be smaller than the outside diameter about the relaxed flanges **42**) if desired.

[0050] With reference now to FIGS. 2-7, an external element for cutting or manipulating occlusions, such as thrombus, will be described in detail. The element may include a thread **46** that extends along a portion of the exterior surface of the body **30** of the present cutter **22**. The thread **46** preferably extends distally from a location on the body **30** that is distal to the connector **40**. The thread **46** may be manufactured using any suitable technique well known to those of skill in the art.

[0051] In one embodiment having a cutter housing **21** with an inside diameter of about 0.0685 inch, the major diameter of the thread **46** is approximately 0.0681 inch. However, the major diameter of the present thread **46** may range from about 0.050 inch to about 0.130 inch or otherwise, depending upon both the inner diameter of the cutter housing and the intended clinical application. The thread **46** of the foregoing embodiment has a pitch of approximately 0.0304 inch and is desirably helical. The pitch may range from about 0.005 inch to about 0.060 inch, and may be constant

or variable along the axial length of the cutter 22. The thickness of the present thread 46 in the axial direction is approximately 0.008 inch; however, the thickness may range from about 0.003 to about 0.05, and may be constant or variable along the length of the thread 46. Thus, it is anticipated that the cutters 22 may also have a generally spiral helix thread.

[0052] In some of the illustrated embodiments, the thread 46 extends approximately two complete revolutions around the cylindrical body 30. The thread 46 may be a continuous radially outwardly extending ridge as illustrated, or may comprise a plurality of radially outstanding blades or projections preferably arranged in a helical pattern. The thread 46 may extend as little as about one-half to one full revolution around the cutter body 30, or may extend as many as 2-½ or 3 or more full revolutions around the circumference of the body 30, as is discussed more below. Optimization of the length of the thread 46 may be accomplished through routine experimentation in view of the desired clinical objectives, including the desired maneuverability (i.e., tractability through tortuous anatomy) and the length of the cutter 22, as well as the nature of the cutting and/or aspiration action to be accomplished or facilitated by the cutter 22. In addition, while the present cutter 22 is illustrated and described as having a single thread, one skilled in the art will appreciate that the cutter 22 may also have multiple threads, a discontinuous thread or no threads.

[0053] Referring now to FIGS. 6 and 7, the thread 46 illustrated therein is a constant pitch and varies in cross-section along its length from a relatively low profile at the distal end 36 to a relatively higher profile at the proximal end 34 of the cutter tip 22. Such a ramped thread 46 improves performance when the catheter encounters more dense obstructive material. In such an embodiment, the major diameter of the distal lead 47 of the thread 46 is smaller than the major diameter of the thread along the more proximal portions of the cutter shaft 30. It is anticipated that the pitch of the thread 46 may also vary along with the profile of the thread 46 to alter the clinical effects accomplished.

[0054] As discussed directly above, the pitch of the thread 46 may also be varied along the axial length of the cutter body 30. Varying the pitch allows a modified function at different points along the axial length of the cutter 22, such as a greater axial thread spacing at the distal end 36 of the cutter 22 to engage material and a relatively closer axial spacing of the threads at the proximal end 34 of the cutter 22 for processing the material. In general, the pitch may range from about 0.010 inch at the distal end to about 0.080 inch at the proximal end. In one embodiment, the pitch at the distal end 36 is approximately 0.034, the pitch at the proximal end 34 is approximately 0.054, and the pitch varies continuously therebetween. The maximum and minimum pitch, together with the rate of change of the pitch between the proximal end 34 and the distal end 36 can be optimized through routine experimentation by those of skill in the art in view of the disclosure herein.

[0055] With reference to FIG. 6, the ramped thread diameter results in a distal portion 36 of the cutter 22 that can extend distally beyond the cutter housing 21 and a proximal portion 34 of the cutter tip 22 that will be retained within the cutter housing 21. This results, in part, from a radially inwardly extending retaining flange 41 which reduces the

diameter of the opening 39 at a distal end 52 of the cutter housing 21 relative to an internal bore of the housing 21. As shown in FIG. 3, the distal portion 45 of the thread 46 may have its leading edge broken, chamfered or rounded to remove a sharp corner or edge. By eliminating the sharp corner or edge, the risk of accidental damage to the patient is reduced. The distal edge of the cylindrical body 30 and the flanges 42 may also be broken, chamfered or otherwise rounded to eliminate or reduce sharp edges.

[0056] With reference to FIG. 2, the outside diameter of the thread 46 in this embodiment has a close sliding fit with the inside diameter, or inner wall, of the cutter housing 21. In this configuration, the atheromatous material will be avulsed by the threads 46, fed further into the housing 21 toward the flanges 42 and chopped or minced by the flanges 42. To further enhance the chopping or mincing action of the flanges 42, a stationary member (not shown) or a set of stationary members (not shown) may be positioned such that the rotating flanges 42 and the stationary member or members (not shown) effect a shearing action. The shearing action breaks up the strands into shorter sections, which are less likely to clog the instrument, as described below. Moreover, the flanges 42 may be provided with sharply chamfered leading or trailing edges to alter their cutting action, if desired.

[0057] It may be desirable in some embodiments to provide an annular space between the outside diameter of the thread 46 and the inside diameter of the cutter housing 21. By spacing the thread 46 apart from the inside wall of the central lumen 20, an annular space is provided for material to pass through the cutter housing 21 without being severed by the thread 46 of the cutter tip 22. This may be utilized in conjunction with vacuum, discussed below, to aspirate material into the atherectomy device without the necessity of complete cutting by the thread 46 or flanges 42. This may be advantageous if the rate of material removal effected by aspiration is higher than the rate at which material removal may occur with the thread 46 engaging such material. In addition, the rotational atherectomy device 10 may more readily aspirate certain lesion morphologies, such as those including portions of calcified plaque, if the thread 46 is not required to cut all the way through the aspirated material. In general, the desired radial distance between the thread 46 and the inside wall of the cutter housing 21 will be between about 0.0001 inch and about 0.008 inch, to be optimized in view of the desired performance characteristics of the particular embodiment. In an embodiment intended solely to aspirate soft atheromas, the cutting function of the thread 46, or the thread 46 itself, may be deleted entirely, so that cutting occurs by the flanges or cutting blocks 42 and/or stationary members (not shown) in cooperation with the aspiration provided by a vacuum source.

[0058] Interventions for which an atraumatic distal tip is desired, such as, for example but without limitation, saphenous vein graphs, can be well served by an atraumatically tipped cutter 22, as illustrated in FIG. 7. The blunt tip cutter 22 preferably has a bulbous or rounded tip 23 that extends from the distal end of the cutter 22. The tip 23 preferably has a radially symmetrical configuration such that upon rotation it presents a smooth, atraumatic surface for tissue contact. Viewed in side elevation, such as in FIG. 7, the tip 23 may have a generally hemispherical, oval, elliptical, aspheric or other smooth curve on its radial surface with either a curved

or truncated (i.e., flat) distal surface. As will be recognized, the shape of the tip **23** may be varied to achieve desirable effects on the catheter crossing profile or on soft atheromas, etc. In general, the tip **23** advantageously minimizes the possibility of traumatic contact between the healthy wall of the vessel and the thread **46** or other cutting element.

[0059] The outside diameter of the tip **23** may range from the outside diameter of the cutter body **30** to the outside diameter of the cutter housing **21**. Diameters greater than the housing **21** may also be used, but diameters smaller than the housing **21** facilitate a smaller crossing profile of the instrument **10**. The axial length of the tip **23** may be varied to suit the intended application, but will generally be within the range of from about 0.050 inch to about 0.100 inch in a coronary artery application.

[0060] The outside surface of tip **23** may be provided with surface texturing or treatments. As will be recognized by those of skill in the art, the surface texturing or treatments may be formed by abrasive coating (i.e., coating the tip with diamond particles), acid etching or any other suitable method. The texture or treatments may be on the distal surface or the lateral surfaces or both such that a two-stage interaction with the encountered materials may occur. Thus, the tip can be used for grinding or otherwise remodeling the encountered materials. For example, an abrasive distal surface can be used to cut through calcified plaque, while a smooth radial surface can compress soft material against the vessel wall to facilitate acceptance into the helical thread **46** of the cutter **22**. Varying the distance between the distal end **47** of the thread **46** and the proximal end of the tip **23**, as well as varying its geometry, can allow adjustments to the cutter aggressiveness. For instance, the thread **46** may extend up to the proximal edge of the tip **23** and allow early engagement of the encountered materials relative to a cutter **22** having a length of unthreaded shaft between the proximal edge of the tip **23** and the distal end **47** of the thread **46**.

[0061] The tip **23** can be integrally formed with the cutter tip **22**, such as by machining techniques known in the art. Alternatively, it can be separately formed and secured thereto, such as by soldering, adhesives, mechanical interference fit, threaded engagement and the like. The tip can be machined from a suitable metal or molded or otherwise formed from a suitable polymeric material such as polyethylene, nylon, PTFE or others known to those of ordinary skill in the art.

[0062] Moreover, the cutter tip **22** itself may be machined such that the distal facing end is serrated or discontinuously formed. The discontinuous thread may comprise a number of inclined surfaces forming distally facing teeth. In such cutters, the cutter is more aggressive in the forward direction. With reference to FIG. 8A-8C, such a cutter tip **22** may have serrations **57** formed along the distal end **47** of the thread **46**. The serrations may also be positioned on an extended nose portion (not shown) of the cutter. The serrations **57** preferably are formed to extend outward radially from the center axis of the cutter **22**. While the illustrated serrations **57** are formed in a straight line, the serrations **57** may also be arcuate in shape to form a sickle-shaped cutting surface. The illustrated serrations **57** preferably have a depth of between about 0.0005 inch and about 0.0040. More preferably, the serrations **57** are about 0.0020 deep. The serrations **57** also preferably are formed with a sloping face

59 that is at an angle of between about 45° and about 85° with a longitudinal plane that extends through the axis of rotation. In a presently preferred arrangement, the sloping face extends at an angle of about 60° relative to the same plane. Moreover, the run of the sloping face **59** is preferably between about 0.0020 inch and about 0.0050 inch. In the preferred arrangement, the run is about 0.0035 inch in length. The serrations in the illustrated cutter extend over only a forward facing portion **45** of the distal end **36** of the cutter **22**; however, it is anticipated that the cutter **22** may also comprise a serrated thread that extends the entire length of the thread **46**.

[0063] In many interventions, it is desirable to have the cutter **22** floating axially within the housing **21**. FIG. 6 illustrates a cutter **22** arranged to float axially within the housing **21**. Preferably, in such configurations, the cutter **22** is provided with an antilocking thread design. For instance, the thread **46** may be configured such that it cannot jam within the housing **21** at either extreme of axial travel. Such a configuration may involve having a minimum thread major diameter which is greater than the diameter of the opening in the distal end of the device **10** or having a pitch which is less than the thickness of the ring flange **41** formed at the distal tip of the cutter housing **21**. Other configurations may also be readily apparent to those of ordinary skill in the art. The axial travel and the thread design desirably cooperate to allow the cutter **22** to self-adjust to digest soft fibrous material.

[0064] The housing **21** may conveniently be assembled from two pieces, to entrap the cutter **22** therein. The two pieces are then laser-welded or otherwise secured together. In one embodiment, the housing **21** may be split longitudinally, the cutter **22** inserted, and the two pieces may then be secured together. In another presently preferred embodiment, the two pieces may split the housing **21** into a distal component and a proximal component (see FIG. 6). The two components may be assembled to trap the cutter **22** therein and may then be laser-welded or otherwise secured together. Such assemblies allow for the cutter **22** to be captured within the cutter housing **21** as well as allow for certain relatively loose manufacturing tolerances for the cutter **22** and the cutter housing **21** such as will reduce manufacturing costs. Such assemblies also enable better fits because the flanges **42** require less travel (i.e., the flanges **42** do not require deflection for insertion into the housing **21**).

[0065] Desirably the cutter **22** is positively retained in the cutter housing **21** for rotation, as discussed directly above. With reference again to FIG. 2, the illustrated housing **21** internally may be a stepped cylinder having a proximal end **50** and the distal end **52**. In some embodiments featuring axial movement of the cutter **22** relative to the cutter housing **21** or tubular body **12**, an annular bearing surface **48** (see FIG. 6) provides a proximal limit of travel for the flanges **42** on cutter **22**. Notably, the annular bearing surface **48** may be formed within the cutter housing **22** (as illustrated in FIG. 6) or within the tubular body **12** (not shown).

[0066] In a specific coronary artery embodiment, the internal diameter of the distal portion **52** of the cutter housing **21** is approximately 0.0689 inch and may range from about 0.050 inch to about 0.150 inch. The proximal end **50** of the present cutter housing **21** preferably has an internal diameter of approximately 0.0558 inch. The internal diameter **50** of

the proximal end of the present cutter housing 21 may range from about 0.035 inch to about 0.130 inch. At its distal end 52, the cutter housing 21 may be provided with a radially inwardly extending retaining lip, such as flange 41 in FIG. 6, sized and configured such that the cutter 22 is captured within the cutter housing 21 and such that the cutter 22 cannot screw itself out of its captured position within the cutter housing 21.

[0067] The exterior diameter of the distal end 52 of the cutter housing 21 in one embodiment is approximately 0.0790 inch; however, the distal exterior diameter may range from about 0.039 inch to about 0.150 inch depending upon cutter design and the intended clinical application. The distal portion 52 of the cutter housing 21 in the illustrated embodiment is about 0.117 inch in length but the length may vary from about 0.020 inch to about 0.50 inch. In the embodiment illustrated in FIG. 2, the outside diameter of the proximal portion 50 of the cutter housing 21 may be less than the diameter of the distal portion 52 to produce an annular shoulder 51 to limit concentric proximal advance of the proximal section within the tubular body 12. The proximal section of the housing 50 extends axially for approximately 0.09 inch but its length may vary as will be understood by those of skill in the art.

[0068] In general, the cutter housing 21 may be integrally formed or separately formed and secured to the distal end 16 of the tubular body 12 in accordance with any of a variety of techniques which will be known to those of skill in the art. The concentric overlapping joint illustrated in FIG. 2 can be utilized with any of a variety of secondary retention techniques, such as soldering, the use of adhesives, solvent bonding, crimping, swaging or thermal bonding. Alternatively, or in conjunction with any of the foregoing, an outer tubular sleeve (not shown) may be heat shrunk over the joint between the cutter housing 21 and the tubular body 12. While not shown, it is presently preferred to slide the proximal end 50 of the cutter housing 21 over the distal end 16 of the tubular body 12 and apply a fillet of adhesive about the proximal extremity of the cutter housing 21 to hold the two components together. In such a configuration, the proximal portion 50 of the cutter housing 21 desirably does not block a portion of the annular recess defined between the central lumen 20 and the outer surface of the drive element 24. It is anticipated that this style of connection can be utilized with any of the cutter housing features described herein and that the cutter housing 21 may be provided with an internal stop to limit axial displacement of the cutter housing 21 relative to the distal end 16 of the tubular body 12.

[0069] With reference again to FIG. 2, at the proximal interior end of the distal component 52 of the housing 21 is the shallow outwardly extending annular retaining race or groove 54 introduced above. The retaining race 54 in one embodiment is approximately 0.0015 inch deep relative to the inner diameter of the distal section 52 and may range in depth from about 0.0005 inch to about 0.020 inch. The retaining race 54 in the illustrated embodiment is about 0.0135 inch in axial width; however, as one skilled in the art will readily appreciate, the race width may be varied and still accomplish its retention function as is discussed further below. Moreover, the race 54 may be located proximally, or extend proximally, of the cutter housing 21 such that the cutter 22 may be retracted within the tubular body 12.

[0070] The retaining race 54 cooperates with the flanges 42 of the present cutter 22 to retain the cutter 22 within the cutter housing 21 as described in detail above. The flanges 42 provide a bearing surface for the cutter 22 to facilitate rotational movement of the cutter 22 relative to the housing 21. In addition, where the axial dimensions of the flanges 42 and the race 54 are approximately the same, the cutter 22 may be substantially restrained from axial movement within the cutter housing 21. As will be appreciated, the race 54 may be larger in axial width relative to the thickness of the flanges 42 to allow axial movement of the cutter 22 within the cutter housing 21 or even into the tubular body 12 as discussed above.

[0071] With continued reference to FIG. 2, the distal extremity of the illustrated cutter 22 may be approximately aligned with the distal extremity of the cutter housing 21. As such, the length of the cutter housing 21 distal of the retaining groove 54 substantially corresponds to the length of the portion of the cutter 22 which extends distally of the distal surfaces of flanges 42. By creating a substantially flush positioning at the distal end 52 of the cutter housing 21 and the cutter 22, the possibility of accidental damage to the intima by the cutter 22 is reduced. One skilled in the art will readily recognize, however, that the distal end 36 of the cutter 22 may alternatively extend beyond, or be recessed within, the distal end 52 of the cutter housing 21 (i.e., the embodiment of FIG. 7). Additionally, the cutter 22 may be arranged for selective extension and retraction relative to the cutter housing 21, the benefits of which are described below.

[0072] Another cutter 60 and associated cutter housing 70 are illustrated in FIGS. 5A and 5B. Although the cutter 60 embodies many of the same features as the cutter 22 described above, like elements will generally be called out by new reference numerals for ease of discussion. It should be recognized, however, that any of the features, aspects or advantages of the cutter 22 described above and the cutter 60 described below may be easily interchanged by one of ordinary skill in the art.

[0073] The cutter 60 is preferably symmetrical about the rotational axis having a body 61 with an annular retention structure, such as a retaining race 62, located near the body's proximal end 64. The retaining race 62, or connector portion, in the illustrated embodiment is about 0.007 inch deep, and about 0.008 inch wide, although both dimensions can be varied as may be desired and still achieve the desired retention function, as will be readily recognized by one with skill in the art. Proximal to the retaining race 62, the outside diameter of the body 61 is rounded or tapers from about 0.04 inch to about 0.036 inch. Preferably, all edges are broken, chamfered or otherwise rounded to ensure burr free and dull corners and to facilitate assembly. The cutter 60 may also have a thread 66 similar to that described above.

[0074] The cutter 60 is preferably snap fit into the cutter housing 70 by inserting the cutter 60 into the distal end 74 of the cutter housing 70. The cutter housing 70 is preferably similar to that described above with the exception that the retaining race 54 of the first housing is replaced by a set of inwardly extending radial retaining members 72. With reference to FIG. 5B, the present cutter housing 70 has three retaining members 72, preferably circumferentially symmetrically distributed (i.e., on about 120° centers). One

skilled in the art will recognize that the number, size and shape of the retaining members can vary; at least two will generally be used to achieve opposition, and embodiments having 3, 4, 5 or more may be readily utilized. It is possible, however, to utilize a single retaining member in some applications such that the single retaining member operates as a stationary cutter member either with or without a set of cutter blocks (42 in the embodiments described above).

[0075] As with the arms 43 above, the retaining members 72 are sized and configured to allow deflection within the elastic range such that the retaining members 72 may be deflected and inserted into the race 62 as discussed below. Again, this snap fit configuration advantageously enables the cutter 60 to be retained in the cutter housing 70 even if the cutter 60 separates from the driving element (not illustrated).

[0076] As introduced directly above, the retaining members 72 may serve the added function of stationary cutting members. As such the retaining members 72 may be sized accordingly. The illustrated retaining members 72 are about 0.007 inch thick in the axial direction; however, one skilled in the art will appreciate that the thickness can range from about 0.003 inch to about 0.030 inch or otherwise depending upon material choice and the desired degree of axial restraint. The retaining members 72 extend about 0.007 inch inward from the interior wall of the cylindrical cutter housing 70. The retaining member 72 length can vary, however, depending upon the desired dimensions of the cutter housing 70 and the cutter 60. As shown in FIG. 5B, the side edges 73 of the retaining members 72 may be provided with a radius such that the radial interior and exterior ends are wider than the central portion. Additionally, while shown with a concave radius, the stationary retaining members 72 may alternatively be provided with a convex radius (not shown) to form a smoothly transitioning profile.

[0077] As one skilled in the art will appreciate, the retaining members 72 are provided to engage within the retaining race 62 of the cutter 60. The retaining members 72 and the race 62 may be sized and configured such that the cutter 60 is either substantially restrained from axial movement relative to the cutter housing 70 or some axial travel is allowed between the two components. The retaining members 72 may also provide a bearing surface for the rotational movement of the cutter 60 relative to the cutter housing 70. For instance, the race 62 of the cutter 60 desirably rides on the ends of the retaining members 72 such that the retaining members 72 provide bearing surfaces at their inner most edges and allow the cutter 60 to be rotated relative to the housing 70. Similar to the assembly described above, the distal end 65 of the cutter 60 may be approximately flush with the distal end 74 of the cutter housing 70. Alternatively, the distal end 65 of the cutter 60 may extend distally from or may be slightly recessed within the distal end 74 of the cutter housing 70 by as much or more than is shown in FIG. 5A. Moreover, in specific applications, the cutter 60 may be selectively advanced or retracted relative to the cutter housing 70, enabling advantages that are described below.

[0078] With reference again to FIG. 2, the distal end of a flexible drive shaft 24 may be firmly secured within an axial bore 32 of the cutter 22. The cutter 22 may be secured to the flexible drive shaft 24 by any of a variety of ways such as crimping, swaging, soldering, interference fit structures,

and/or threaded engagement as will be apparent to those of skill in the art. Alternatively, the flexible drive shaft 24 could extend axially through the cutter 22 and be secured at the distal end 36 of the cutter 22.

[0079] In any of the embodiments described herein, the cutter 22 and the cutter housing 21 may be designed so that the cutter 22 may be positioned within the cutter housing 21 in a manner that allows axial movement of the cutter 22 relative to the cutter housing 21. Controllable axial movement of the cutter 22 may be accomplished in a variety of ways, to achieve various desired clinical objectives. For example, in either of the embodiments illustrated in FIGS. 2 and 5a, a minor amount of axial movement can be achieved by increasing the axial dimension of the annular recesses 54, 62 with respect to the axial dimension of the flanges 42, or retaining members 72. The annular proximal stop 48 (FIG. 2) can be effectively moved proximally along the tubular body 12 to a position, for example, within the range of from about 5 centimeters from the distal end 52 to at least about 10 or 20 centimeters from the distal end 52. This permits increased lateral flexibility in the distal 10 cm or 20 cm or greater section of the tubular body 12. Alternatively, the proximal stop 48 can be eliminated entirely such that the entire inside diameter of the tubular body 12 is able to accommodate the flanges 42 or their structural equivalent, or the outside diameter of the thread 46, depending upon the embodiment. Limited axial movement can also be accomplished in the manner illustrated in FIGS. 6 and 7, as will be appreciated by those of skill in the art.

[0080] In general, relatively minor degrees of axial movement, such as on the order of about one or two millimeters or less may be desirable to help reduce the incidence of clogging and also reduce trauma, such as by the distal cutting tip pressing against a vessel wall. Minor axial movability can also help compensate for differential elongation or compression between the tubular body 12 and the drive shaft 24.

[0081] A greater degree of axial movability may be desirable in embodiments in which the cutter 22 may be controllably extended partially beyond the housing 21 such as to improve engagement with hard obstructive material. Retraction of the cutter 22 within the cutter housing 21 may be desirable during insertion of the device 10, to minimize trauma to the vascular intima during positioning of the device 10. The cutter 22 may thereafter be advanced distally on the order of 1 to 3 or 5 millimeters beyond the distal end 52 of the housing 21, such as to engage obstructive material to be drawn into the cutter housing 21.

[0082] More significant proximal retraction of the cutter 22 within the housing 21, such as on the order of 5 to 20 centimeters from the distal end 52, may be advantageous during positioning of the atherectomy catheter. As is understood in the art, one of the limitations on positioning of a transluminal medical device within tortuous vascular anatomy, particularly such as that which might be encountered in the heart and intracranial space, is the lateral flexibility of the distal portion of the device. Even if the outside diameter or crossing profile of the device is small enough to reach the stenotic region, the device still must have sufficient pushability and sufficient lateral flexibility to navigate the tortuous anatomy.

[0083] In the context of rotational atherectomy catheters, the rotatable drive shaft 24, as well as the cutter 22, can

significantly increase the rigidity of the catheter. In accordance with the present invention, the drive shaft **24** and the cutter **22** may be proximally withdrawn within the tubular housing **12** to provide a relatively highly flexible distal catheter section that is capable of tracking a guidewire **28** through tortuous vascular anatomy. Once the outer tubular housing **12** of the atherectomy catheter has been advanced to the treatment site, the cutter **22** and the drive shaft **24** may be distally advanced through the tubular body **12** and into position at the distal end **16**. In this manner, the rotational atherectomy catheter can be positioned at anatomical locations that are not reachable if the drive shaft **28** and housing **21** at the distal end **16** of the tubular body **12** are advanced as a single unit.

[0084] In general, the cutter **22** is preferably proximally retractable from the distal end **52** of the cutter housing **21** by a distance sufficient to permit the outer tubular body **12** and cutter housing **21** to be positioned at the desired treatment site. In the context of coronary artery disease, the distance between the distal end **52** of the cutter housing **21** and the retracted cutter **22** is generally be within the range of from about 5 cm to about 30 cm and preferably at least about 10 cm. Proximal retraction of the cutter **22** over distances on that order will normally be sufficient for most coronary artery applications.

[0085] The flexible drive shaft **24** is preferably a hollow, laminated flexible "torque tube" such as may be fabricated from an inner thin-wall polymeric tubing, an intermediate layer of braided or woven wire, and an outer polymeric layer. In one embodiment, the torque tube comprises a polyimide tube having a wall thickness of about 0.004 inch, with a layer of braided 0.0015 inch stainless steel wire embedded therein. The laminated construction advantageously produces a tube with a very high torsional stiffness and sufficient tensile strength, but which is generally laterally flexible. However, depending upon the desired torque transmission, diameter and flexibility, any of a variety of other materials and constructions may also be used. In general, the drive shaft **24** should have sufficient torsional rigidity to drive the cutter **22** through reasonably foreseeable blockages. It is also recognized that in some applications, the drive shaft **24** may be a wire or other solid construction such that no inner lumen **26** extends therethrough.

[0086] The outside diameter of one embodiment of the present hollow flexible drive shaft **24** is approximately 0.032 inch, but may range between about 0.020 inch and about 0.034 inch or more. One skilled in the art will appreciate that the diameter of the flexible drive shaft **24** may be limited by a minimum torsional strength and a guidewire diameter, if a guidewire **28** is present, at the low end, and maximum permissible catheter outside diameter at the high end.

[0087] The selection of a hollow drive shaft **24** allows the device **10** to be advanced over a conventional spring-tipped guidewire **28**, and preferably still leaves room for saline solution, drugs or contrast media to flow through the lumen **26** of the drive shaft **24** and out of the distal opening **39** on the cutter **22**. The internal diameter of the present hollow flexible drive shaft **24** is thus partially dependent upon the diameter of the guidewire **28** over which the flexible drive shaft **24** must track. For example, the internal diameter of the guidewire lumen **26** in one embodiment of the present hollow flexible drive shaft **24**, intended for use with a 0.018

inch diameter guidewire, is approximately 0.024 inch. Because the flexible drive shaft **24** preferably extends between the control **18** and the cutter **22**, the length of the present hollow flexible drive shaft **24** should be sufficient to allow the cutter assembly to reach the target location while also allowing adequate length outside of the patient for the clinician to manipulate the instrument **10**.

[0088] With reference again to FIG. 2, the lumen **20** of the assembled device **10** is thus an annular space defined between the inside wall of the flexible tubular body **12** and the outside of the flexible drive shaft **24**. This lumen **20** may be used to aspirate fluid and material from the cutter. Preferably, sufficient clearance is maintained between the tubular body **12** and the rotating drive shaft **24** to minimize the likelihood of binding or clogging by material aspirated from the treatment site.

[0089] In general, the cross-sectional area of the lumen **20** is preferably maximized as a percentage of the outside diameter of the tubular body **12**. This permits an optimization of lumen cross-sectional area which maintains a minimal outside diameter for tubular body **12**, while at the same time permitting an acceptable flow rate of material through the aspiration lumen **20**, with minimal likelihood of clogging or binding which would interrupt the procedure. Cross-sectional area of the aspiration lumen **20** thus may be optimized if the drive tube **24** is constructed to have relatively high torque transmission per unit wall thickness such as in the constructions described above. In one embodiment of the invention, intended for coronary artery applications, the outside diameter of tubular body **12** is about 0.080 inch, the wall thickness of tubular body **12** is about 0.008 inch, and the outside diameter of the drive shaft **24** is about 0.031 inch. Such a construction produces a cross-sectional area of the available aspiration portion of central lumen **20** of about 0.00245 square inch. This is approximately 50% of the total cross-sectional area of the tubular body **12**. Preferably, the cross-sectional area of the lumen **20** is at least about 25%, more preferably at least about 40%, and optimally at least about 60% of the total cross-sectional area of the tubular body **12**.

[0090] The tubular body **12** may comprise any of a variety of constructions, such as a multi-layer torque tube. Alternatively, any of a variety of conventional catheter shaft materials such as stainless steel, or single layer polymeric extrusions of polyethylenes, polyethylene terephthalate, nylon and others well known in the art can be used. In one embodiment, for example, the tubular body **12** is a PEBAX extrusion having an outside diameter of approximately 0.090 inch. However, the outer diameter can vary between about 0.056 inch for coronary vascular applications and about 0.150 inch for peripheral vascular applications. Also, because the tubular body **12** must resist collapse under reasonably anticipated vacuum forces, the foregoing tubular body **12** desirably has a wall thickness of at least about 0.005 inch. The wall thickness can, however, be varied depending upon materials and design.

[0091] The distal end of the tubular body **12** may be affixed to the proximal end **50** of the cutter housing **21** as shown in FIG. 2 and described above. The proximal end of the tubular body **12** may be affixed to the control **18** as described below.

[0092] With reference to FIG. 9, the point at which the flexible drive shaft **24** is connected to the control **18** is a

likely point of damaging bending forces. As such, a reinforcing tube **80** is desirably provided to reduce the likelihood of a failure at that location due to bending forces. The reinforcing tube **80** may extend from the control unit **18** along a proximal portion of the tubular body **12**. The reinforcing tube **80** preferably extends distally over the tubular body **12** at least about 3 cm and more preferably about 6 cm, and desirably comprises silicone or other conventional biocompatible polymeric material. The illustrated reinforcing tube **80** provides support to avoid over bending and kinking at the proximal end of the drive shaft **24**. With continued reference to **FIG. 9**, the reinforcing tube **80** may be fastened to the control **18** such as by interference fit over a snap tip assembly **82** through which the flexible drive shaft **24** and tubular body **12** enter the control **18**. Thus, the reinforcing tube **80** advantageously envelops a proximal portion of the tubular body **12**.

[0093] Respectively, the flexible drive shaft **24** and the tubular body **12** operatively connect the cutter **22** and the cutter housing **21** to the control **18** of the illustrated embodiment. With continued reference to **FIG. 9**, the tubular body **12** and the drive shaft **24** enter the control **18** through the snap tip assembly **82**. The snap tip assembly **82** may be provided with a connector, such as a hub **84**, having a central lumen in communication with a vacuum manifold **86**. The tubular body **12** may be connected to the hub **84**. Specifically, the hub **84** may snap onto and seal a vacuum manifold **86** to the hub **84** and, consequently, to the tubular body **12**. The hub material, therefore, desirably provides long-term memory for snap-fit tabs that secure this part to the rest of the assembly. The presently preferred hub **84** is injection molded using a white acetyl such as Delrin. The hub **84** may be rotatable, and may enable the operator to rotate the tubular body **12** relative to the control **18** such that the operator, or clinician, may steer the tubular body **12** without having to move the control **18** along with the tubular body **12**. Friction to limit this rotation may be provided by a bushing **87** that is compressed against the hub **84** in the illustrated embodiment.

[0094] The tubular body **12** may be reinforced internally where it passes through the hub **84**, such as by a thin-wall stainless steel tube (not shown) that extends through and is bonded to the hub **84**. In general, a good rotational coupling is desired between the tubular body **12** and the hub. In one embodiment, a portion of the hub bore may be hexagonal shaped, or formed in any other non-circular shape which corresponds to a complementary shape on the tube to enhance the rotational connection between the hub bore and the tube (not shown). Epoxy or other adhesives (not shown) may also be injected into a space around the stainless steel tube to help prevent the stainless steel tube (not shown) from rotating relative to the hub **84**. The adhesive also advantageously secures the two components such that the tube (not shown) is less likely to axially pull out of the hub **84**.

[0095] With continued reference to **FIG. 9**, the vacuum manifold **86** is preferably fastened to a vacuum hose **88** at one outlet and to a motor **90** at a second outlet. The hub-end of the vacuum manifold **86** desirably houses two silicone rubber O-rings **85** that function as dynamic (rotatable) seals between the manifold **86** and the steel tube (not shown) which extends through the hub **84**. The opposite end of the manifold **86**, near the proximal end of the drive tube **24**, preferably contains a pair of butyl rubber fluid seals **94**.

These dynamic fluid seals **94** may be lubricated with silicone grease. The two fluid seals **94** are mounted back-to-back, with their lips pointing away from each other. In this configuration, the distal seal (i.e., closest to the cutter **22**) protects against positive pressure leaks such as may be caused by blood pressure and the proximal seal (i.e., closest to the motor **90**) excludes air when the system is evacuated and the pressure outside the instrument **10** is higher than the pressure inside the instrument **10**.

[0096] The vacuum manifold **86** may be connected to the motor **90** through use of a threaded motor face plate **100**. The vacuum manifold **86** is preferably threaded onto the face plate **100** but may be connected in any suitable manner. The face plate **100** may be attached to the output end of the motor **90** by a threaded fastener **102**. The presently preferred motor **90** is a modified 6-volt direct-current hollow-shaft, 22 mm outside diameter motor built by MicroMo.

[0097] In the illustrated embodiment, power is transmitted from the motor **90** to the flexible drive shaft **24** by a length of medium-wall stainless steel tubing that is preferably adhesively-bonded to the drive shaft **24**. The tubing forms a transfer shaft **107** and is preferably coated on the outer surface with approximately 0.001 inch of Type-S Teflon. The Teflon-coated, exposed ends of the rigid drive shaft, or transfer shaft **107**, provide a smooth wear-surface for the dynamic fluid seals discussed above. The transfer shaft tubing may be hypodermic needle stock measuring approximately 0.036 inch inside diameter by 0.053 inch outside diameter, before coating. The transfer shaft **107** desirably is slip fit through the approximately 0.058 inch inside diameter of the hollow motor shaft, and desirably extends beyond the length of the motor shaft in both directions. The slip fit advantageously accommodates axial sliding movement of the transfer shaft **107** relative to the motor **90** and the balance of the instrument **10**. Thus, axial movability may be accommodated.

[0098] The drive shaft **24** is advantageously capable of axial movement relative to the motor **90** as described above. Controlled axial movement of the drive shaft **24**, and ultimately the cutter **22** and its connected components, is desirable regardless of the mechanical connection allowing such movement. The movement allows the cutter **22** and, in some embodiments, the drive shaft **24** to be withdrawn proximally during placement of the catheter sheath, or tubular body **12**, in the vasculature. Following positioning, the cutter **22** may then be advanced forward into a cutting position. Such a configuration allows increased maneuverability and flexibility during positioning and easier tracking through the vasculature. This configuration also allows for easier sterilization of the outer tubular body **12** in a compact coiled package. However, as will be recognized by those of skill in the art, such relative axial movement of the cutter **22** and the tubular body **12** is not necessary for utilization of various other aspects and advantages of the current invention.

[0099] A small drive plate **103**, bonded to the rear end of the transfer shaft **107**, advantageously couples with a drive sleeve **105** that is attached to the approximately 0.078 inch outside diameter motor shaft **92**. The drive plate **103** may be any of a number of geometric configurations. Preferably, the drive plate **103** is a rotationally symmetrical shape having a central aperture although other configurations may also be

used. The symmetry facilitates rotational balancing. In one embodiment, the drive plate **103** is square with a central aperture, triangular with a central aperture, or circular with a central aperture, with a connecting member to tie the drive plate to the drive sleeve with a reduced likelihood of slippage. Together, the drive plate **103** and the drive sleeve **105** form a concentric drive coupling, similar to a spline connection, between the motor shaft **92** and the transfer shaft **107**.

[0100] The transfer shaft **107**, in turn, may be connected to the flexible drive shaft **24**. The concentric drive coupler configuration preferably allows approximately 0.25 inch of relative longitudinal movement between the drive plate **103** and the drive sleeve **105**, which is sufficient to accommodate thermal and mechanical changes in the relative lengths of the outer tube **12** and flexible drive tube **24**. An integral flange on the drive plate **103** or the drive sleeve **105** may serve as a shield to deflect fluid away from the rear motor bearings in the event of a leaking fluid seal. Thus, the drive sleeve **105** is preferably a solid walled annular flange which acts as a tubular deflection as will be understood by those of skill in the art.

[0101] The drive sleeve **105** and the drive plate **103** are preferably molded from Plexiglas-DR, a medical-grade, toughened acrylic resin made by Rohm and Haas. These parts have shown little tendency to crack in the presence of the chemicals that might be present or used in the assembly of the device; these chemicals include cyanoacrylate adhesives and accelerators, motor bearing lubricants, alcohol, epoxies, etc. The drive sleeve **105** and the drive plate **103** are also preferably lightly press-fitted to their respective shafts **92**, **107**, and secured with a fillet of adhesive applied to the outside of the joints.

[0102] With continued reference to **FIG. 9**, an infusion manifold **108** may be arranged at the proximal end of the control **18**. The infusion manifold **108** is preferably designed as an input circuit; thus any fluid that can be pumped or injected at a pressure exceeding the diastolic pressure in the artery or vein could be used, but saline solutions, therapeutic drugs and fluoroscope contrast media are most likely to be used with this device. For instance, saline solutions may be used to purge air from the tubular body **12** and drive tube **24** before performing procedures such that air embolism may be avoided, and may also be used during an atherectomy procedure to provide a continuous flow of liquid (other than blood) during cutting to help carry debris through a return circuit. As will be recognized, the device **10** generally is purged of air prior to performing procedures. In such a case, an infusion pump or elevated IV bag may be used to ensure a continuous, low-pressure flow of saline solution through the system, depending upon the application and procedure.

[0103] At various times during a procedure, the clinician may request that a bolus of contrast medium be injected into the instrument **10** to enhance a fluoroscopic image of the artery or vein, either to position or to direct the guidewire **28**, to locate a blockage, or to confirm that a stenosis has indeed been reduced. Contrast medium is a relatively dense material and high pressure (usually several atmospheres) is usually required to force the material quickly through the small, elongated lumen **26** of the drive tube **24**. Such a medium may be infused using an infusion pump, for instance.

[0104] In the case of the illustrated surgical instrument **10**, the infusion manifold **108** may be comprised of several components. The first component may be an infusion port that may contain a medical infusion valve **109**, such as that supplied by Halkey-Roberts Corp. This silicone rubber check valve assembly **109** is preferably designed to be opened by insertion of a male Luer-taper (or lock) fitting. The valve **109** more preferably stays open as long as the taper fitting remains in place, but desirably closes immediately if it is withdrawn. This action provides simple access when needed, but provides the required backflow protection to minimize loss of blood through this route.

[0105] The infusion valve **109** is preferably permanently bonded into a side arm of a flush port manifold **111**, an injection-molded, transparent acrylic fitting. The flush port manifold **111** desirably has an integral threaded extension that may protrude from the proximal side of the control **18**. The threaded extension may be provided with a silicone guidewire seal **113**, and an acetyl (Delrin) guidewire clamp nut **112** that together function as a hemostasis valve compression-fitting. Delrin may be used for the clamp nut **112** to minimize stiction and galling of the threads during use. Note that the materials indicated for the compression-fitting may be varied as will be recognized by those of skill in the art. An internal shoulder on the threaded portion of the nut **112** advantageously acts as a position stop, preventing extrusion of the seal **113** that might otherwise result from over-tightening. The guidewire **28** desirably extends through both the seal **113** and the nut **112**.

[0106] When the clamp nut **112** is tightened, the guidewire seal **113** may compress against the guidewire **28** to lock it in place and to prevent leakage of blood or air through the seal **113**. When it is necessary to slide the guidewire **28**, or to slide the surgical instrument **10** along the guidewire **28**, the clamp nut **112** is first loosened to reduce the clamping action somewhat and the relative movement is then initiated. If no guidewire **28** is used, the seal **113** may compress against itself and close off the passageways to reduce or prevent leakage.

[0107] A fluid channel advantageously extends through the flush port manifold **111**, continuing through the open lumen of the drive tube **24**, through a distal aperture **39** in the distal extremity of the cutter **22**. The guidewire **28** preferably follows the same path. A leak-proof connection between the flush port manifold **111** and the drive tube **24** is therefore desirable.

[0108] Accordingly, a flush port flange **106** may be bonded to the motor end of the flush port manifold **111**, creating a chamber housing a low durometer butyl rubber lip seal **114**. The flange **106** may be manufactured of molded acrylic or the like. The lip seal **114** forms an effective dynamic seal against one end of the transfer shaft **107**. Lip seals are pressure-compensating devices that function at zero or low pressure by light elastomeric compression against a shaft, minimizing the drag component in a dynamic application. When pressure against the seal increases, the lip tightens against the shaft, increasing both the sealing action and the dynamic friction. In this application, however, a high pressure sealing requirement preferably is only encountered during injection of contrast medium, typically when the cutter **22** is not rotating. Lower pressure dynamic sealing may be required during saline infusion, however, so pressure compensating lip seals are presently preferred.

[0109] The lip seal **114** is desirably transfer-molded butyl rubber, with about a 0.047 inch inside diameter lip (generally within the range of from about 0.035 inch to about 0.050 inch), running on the transfer shaft **107**, which may have an outside diameter of approximately 0.055 inch. Medical-grade silicone grease may be used lubricate the interface between the lip seal **114** and the transfer shaft **107**, but the grease tends to be forced away from the lip during prolonged use. Thus, a Teflon coating on the transfer shaft **107** may act as a back-up lubricant to reduce or eliminate seal damage in the event the grease is lost.

[0110] Returning to the vacuum manifold **86**, as illustrated in **FIG. 9**, the vacuum hose **88** may be attached to the remaining port of the Y-shaped vacuum manifold **86**. The hose **88** may be attached in any suitable manner as will be appreciated by those of ordinary skill in the art. The vacuum hose **88** generally extends between the vacuum manifold **86** of the control **18** and a vacuum source (see **FIG. 1**) such as a house vacuum of the catheter lab of a hospital or a vacuum bottle.

[0111] The vacuum hose **88** desirably extends through a switch configuration **120** described in detail below. In the illustrated embodiment, the vacuum hose **88** then further extends to the bottom portion of the control **18**. A pinch resistant sleeve **116** may be provided to prevent the pinching of the vacuum hose **88** as it exits the control **18**. Additionally, the pinch resistant sleeve **116** provides a liquid seal to further reduce the likelihood of liquids entering the control **18** unit during operation.

[0112] In interventions such as those with which the present surgical instrument **10** has particular utility, it has been discovered to be desirable that cutting should occur only under sufficient aspiration. Accordingly, an aspect of the present invention involves a cutter lock-out mechanism that will not allow cutting of material unless sufficient aspiration is present. The aspiration rate may be directly sensed (i.e., flow monitoring) or indirectly sensed (i.e., vacuum monitoring). For instance, because the level of vacuum will typically be one determining factor of the level of aspiration, the vacuum level may be monitored to determine when a new vacuum bottle should be employed. In such a situation, if the level of a sensed vacuum drops below about 15 inches Hg, insufficient clearing vacuum is present and the risk of blockage within the device **10** increases. Thus, a cutter lock-out mechanism should be employed to prevent cutting of material until the vacuum level is replenished. Specifically, it has been determined that a sensed vacuum of about 13.5 to about 14 inches Hg usually precedes clogging in the illustrated embodiment.

[0113] The cutter lock-out mechanism is generally comprised of two components, either of which may find utility individually or in combination. One of the components is a vacuum monitor. The vacuum monitor (not shown) is desirably a linear pressure transducer that senses the presence of an adequate vacuum force. The signal from the transducer is preferably utilized to enable an automatic override of the motor such that the motor cannot turn the cutter **22** if the vacuum drops below a threshold level (e.g. 15 inches Hg). Generally, the vacuum monitor may also comprise a vacuum detector, a comparator of any suitable type, an alarm or circuit cut-out. Thus, the vacuum detector may sample the state of operation of the vacuum, the comparator may

determine varying operating conditions, and if the vacuum force drops below or unexpectedly and suddenly exceeds the pre-set threshold level for any reason the alarm can alert the operator to take corrective action, and/or the cut-out circuit can automatically stop rotation of the cutter.

[0114] The cutter lock-out mechanism may also comprise a flow monitor (not shown). The flow monitor may be of any suitable type and may simply monitor the flow rate, or aspiration rate, through the aspiration channel. The flow monitor also may be connected to circuitry or alarms such that the user may be warned if the aspiration rate slows (i.e., conditions indicative of a blockage arise) and/or such that the device **10** may automatically take corrective action when a decrease in the aspiration rate is detected. For instance, the device **10** may disable cutting (i.e., rotation of the cutter **22**), increase the suction level or otherwise attempt to auto-correct the situation. Also, it is anticipated that various alarms, be they visual, tactile or auditory, may be utilized to inform the operator or clinician of the alert status.

[0115] Another component of the cutter lock-out mechanism is a switch arrangement that advantageously controls the motor state and vacuum application as described below. As will be recognized by those of skill in the art, such a switch may be mechanical, electromechanical, or software-controlled. With reference to **FIGS. 9A-9C**, a schematically illustrated switch configuration **120** desirably assures that the motor **90** driving the rotatable drive shaft **24**, which in turn drives the cutter **22**, may not be activated unless the vacuum is being applied. The illustrated pinch valve switch **120** generally comprises a push button oriented along the Z axis shown in **FIG. 10A**. The switch push button **124** may translate along the Z axis when depressed by the user. Desirably, the lower portion of the push button **124** is provided with a unshaped cut out forming a tunnel along the x-axis. The cut out is preferably sized to correspond to a compression spring **126** extending therethrough. The presently preferred compression spring **126** is a precision-length stack-wound button spring fabricated from 0.027" diameter **302** stainless steel wire, with a closed retainer loop at one end. The push button **124** may be positioned along a portion of the compression spring **126** such that the push button **124** rests on the compression spring **126** and is supported in an up position. The switch push button **124** thus can travel to a down position when depressed by the operator to a position such as that shown in **FIG. 10B**. The compression spring **126** provides a bias such that the push button **124** will return to the up position when released. Of course, any other suitable biasing mechanism or component may also be used.

[0116] The switch push button **124** may be further provided with an axial arm **128** that preferably extends in a direction perpendicular to the direction of travel of the push button **124**. Thus, in some embodiments, the arm may assume an "L" shaped configuration. It is anticipated that a variety of arm configurations may also be employed.

[0117] An electronic switch **130** is desirably located below the axial arm **128** of the switch push button **124**. Thus, as the push button **124** is further depressed beyond the position in **FIG. 10B**, to a position such as that illustrated in **FIG. 10C**, contact is made on the electrical switch **130**. The electrical switch **130**, when closed, allows current to flow from a power source **122** to the motor **90**. Thus, depression of the push button **124** creates a flow of current that drives the

motor 90. The motor 90 drives the drive tube 24 and cutter 22 of the present surgical instrument 10 as described above.

[0118] Advantageously, the compression spring 126 is also preferably attached to a pinching member 132 of the switch configuration 120. As the push button 124 is depressed, the compression spring 126 is advantageously initially deflected. Desirably, the deflection in the compression spring 126 causes the pinch member 132 to retract. Thus, the pinch member 132 is retracted once the push button 124 is depressed. As the pinch member 132 is retracted, a vacuum is initiated and aspiration flow is allowed to pass the pinch valve 120. Advantageously, the amount of flow past valve may depend on how far the button 124 is depressed, enabling control of the amount of suction (and, thereby, the level of aspiration) if desired. Further depression of the push button 124 beyond the retraction point initiates a contact of the electrical switch 130 and, therefore, allows the motor 90 to be powered only after the vacuum flow has begun.

[0119] FIG. 10A illustrates a relaxed, non-depressed condition in which the vacuum hose 88 is closed by the pinch valve 132 and the spring 126, and the electrical switch 130 which controls power supply to the motor 90 is open. With reference to FIG. 10B, the push button 124 is partially depressed, thereby causing the vacuum hose 88 to be opened while maintaining the electrical switch 130 open. Further depression of the push button 124, illustrated in FIG. 10C, closes the electrical switch 130 while the vacuum hose 88 is maintained in an open state. Thus, depressing the push button 124 an initial amount starts the vacuum first and further depression initiates the cutting action. Such timing reduces risks associated with cutting without aspiration. Because repeated cycles of opening and closing the valve may tend to shift the position of the tube 88, internal ribs (not shown) are preferably provided in the control 18 to maintain the proper position of the tube 88.

[0120] A return flow path of the illustrated device 10 for aspiration and the like starts at the cutter 22, passes through the helical thread 46 and the cutter blocks 42 of the cutter 22 (and stationary blocks of the cutter housing, if present), continues through the outer lumen 20 of the outer tube 12 to the vacuum manifold 86, and then passes through a length of vacuum tubing 88 to a tissue collection/fluid separation container, such as a vacuum bottle. The return flow may be assisted by a positive vacuum supply, such as the vacuum bottle or a house vacuum, as is known in the art. For instance, the collection container may be connected to a vacuum collection canister that may be, in turn, hooked to a regulated central vacuum source or a suction collection pump or evacuated container.

[0121] The pinch valve assembly is preferably designed with a "shipping lock-out" feature (not shown) that secures the button 124 in a partially depressed position where the vacuum tube 88 is no longer compressed, but the switch 130 is not yet actuated. This preserves the elastic memory of the pinch tube and protects the device from accidental actuation during handling or storage. In its present form, a thin, flexible lock-out wire with an identifying tag (not shown) can be inserted at the last stage of instrument manufacturing, passing through a hole in the button (not shown) and extending through a notch in the side wall of the control 18. In this configuration, a highly-visible tag protrudes from the

side of the control 18, preventing use of the device until the wire is pulled free. Removing the lock-out wire releases the button 124 and returns the control 18 to a functional condition. Once removed from the original locked position, the lock-out wire (not shown) desirably cannot be reinserted without disassembly of the control 18.

[0122] With reference again to FIG. 9, the device 10 is preferably controlled by electronic circuitry such as may be contained on a printed circuit board 133. The circuitry providing the power to the motor 90 may also include a circuit to check the load on the motor. An exemplary motor control and feedback circuit is illustrated in FIG. 11; however, as will be readily recognized by those of ordinary skill in the art, many other motor control circuits may also be implemented. As is known, when a direct current motor, as used in this invention, encounters resistance to rotational movement, an increased load is placed on the power source 122. Accordingly, as described below, the circuitry is provided with the capability to identify, indicate, record and possibly compare the speed and/or torque to previously recorded speeds or torques. Specifically, the speed and/or torque, as indicated by the level of current to the motor, may be compared over time through the use of a comparator. Additionally, a reverse switch may be provided to reverse out of jams or potential jams when necessary. Such a reverse switch may be a momentary switch or any other suitable switch as will be recognized by those of skill in the art.

[0123] As described below in detail, a motor controller 134 preferably provides the motor 90 with sufficient energy by using a combination of missing pulse and pulse width modulation. For instance, the motor speed may be sensed by measuring the back electromotive force (EMF), which is proportional to speed. A portion of the back EMF may be fed to the controller 134, which preferably varies the drive power to the motor 90 to maintain a constant speed. The circuit values of the controller 134 allow motor speed settings of about 1,000 RPM to about 8,000 RPM. The speed chosen for no load operation in one embodiment may preferably range from approximately 1,500 RPM to about 5,000 RPM. In a presently preferred embodiment, the no load operation speed is approximately 2,000 RPM. Desirably, the motor speeds associated with the present invention are less than those associated with abrasive-type devices and turbulence-based devices as will be recognized by those of skill in the art. In some embodiments, the motor control circuitry may limit the motor torque to a range of about 0.10 oz-inches to about 0.45 oz-inches by sensing the motor current and setting the motor drive power to the appropriate level. A switching controller, thus, may be used for two reasons: (a) it is very efficient—it uses less than 0.015 amperes (the motor current would vary from 0.05 to 0.4 amperes, or perhaps more), and (b) it can deliver appropriate torque instantly or on demand, even at low motor speeds, so the likelihood of stalling is minimized.

[0124] The power source 122, preferably a 9-volt battery, may not be electrically connected to the controller 134 until the push button 124 is depressed, as discussed above, so standby power drain is advantageously eliminated or reduced. In the illustrated embodiment, a light emitting diode (LED) is desirably on when the motor is running at normal loads (i.e., the sensed current level is lower than a predetermined current level requiring an alert). This LED may be green in some embodiments and will be referred to

as such in connection with the illustrated embodiment. Another LED turns on at a motor current of approximately 0.25 amperes, or another threshold level that may indicate a motor "overload" situation. This LED may be red in some embodiments and will be referred to as such in connection with the illustrated embodiment. For instance, the red LED may indicate that the current is proximate, or has achieved, a predetermined maximum safe value. The preset maximum safe value is the upper limit, as determined by the specific design and configuration of the device **10**, for current that indicates an overload condition. Thus, another feature of the present invention includes the ability to provide feedback to the operator based upon motor load. This is advantageous in that the operator can be alerted to a potential binding of the instrument and react accordingly. For instance, the progression rate of the instrument may be reduced or stopped or the instrument may be backed from the trouble location using the reverse switch or otherwise. It should also be understood that the device may make automatic adjustments to the motor speed relative to the sensed load utilizing methods which would be readily apparent to one skilled in the art following a review of **FIG. 11**.

[0125] Any of a variety of tactile, auditory or visual alarms may also be provided either in combination with, or as alternatives to, each other and the LEDs. For instance, the surgical instrument could vibrate or provide an audible signal when it encounters an overload situation. The pulses or tones may vary to correspond to any variance in resistance to rotation. For example, the pitch may increase with resistance or the speed of a repeating pulse of sound may increase. Additionally, where a (CRT) monitor is used to visualize the operation, a visual signal could be sent to the monitor to display the operating characteristics of the surgical equipment. As will be further recognized to those skilled in the art, other variations of alerting the operator to the operating characteristics of the present invention may be provided.

[0126] The present invention thus provides feedback to the clinician in real time during the progress of the rotational atherectomy procedure. Real time feedback can allow the clinician to adjust the procedure in response to circumstances that may vary from procedure to procedure, thereby enhancing the overall efficiency of the procedure and possibly minimizing additional risks such as the creation of emboli. Pressing the cutter **22** into a lesion with too much force may produce an increased load, which can then be detected by the circuitry **131** and communicated to the clinician in any of a variety of ways as has been discussed. This may allow the clinician to ease back on the distal advancement force and/or adjust the vacuum or RPM of the cutter **22**, such as by reducing the advancement force and lowering the resistance to rotation of the cutter **22**, until the load is reduced to an acceptable level, and continue with the procedure. As will be recognized, if aspiration drops due to increased material being aspirated, the load is likely to have increased; therefore, the clinician is alerted to such an increase in load such that corrective action may be taken. By allowing the load to return to an acceptable level, the aspiration rate may also return to an acceptable level in some embodiments. As will be recognized, the load may increase due to a blockage and the blockage would lower the aspiration rate; however, clearing the blockage will generally return the aspiration rate to a desired level as well as reduce the load on the motor.

[0127] In addition, increased load can be incurred by kinks at any location along the length of the instrument, thereby reducing the motor speed. Kink-originated loading could be reflected in the feedback mechanism to the clinician, so that the clinician can assess what corrective action to take.

[0128] Another aspect of the present invention involves a selectively reversible tip rotation. For instance, the drive motor may be reversed such as by manipulation of the reverse control switch (not shown) on the handle of the control **18**. Motor reversing circuitry, with or without a variable speed control, is well understood by those of skill in the art. Momentary reversing of the direction of rotation of the distal cutter, most likely at a relatively low speed of rotation, may be desirable to dislodge material which may have become jammed in the cutter tip. In this manner, the clinician may be able to clear a cutter tip blockage without needing to remove the catheter from the patient and incur the additional time and effort of clearing the tip and replacing the device. Low speed reverse rotation of the cutter may be accomplished in combination with a relatively increased vacuum, to reduce the likelihood of dislodging emboli into the blood stream. Following a brief period of reverse rotation, forward rotation of the cutter tip can be resumed. Whether the obstruction has been successfully dislodged from the cutter tip will be apparent to the clinician through the feedback mechanisms discussed above. Moreover, it is anticipated that the device may alternatively have substantially the same torque, speed, vacuum force, and alarm thresholds when the cutter is rotated in either direction. It is, however, presently preferred to utilize the same speed of rotation in both forward and reverse rotation.

[0129] In the presently preferred embodiment of the control and power supply circuitry illustrated in **FIG. 11**, the motor controller has an LM3578A switching regulator, indicated generally by **U1** in **FIG. 11**. The switching regulator may be an LM3578A switching regulator in some embodiments; one of ordinary skill in the art will readily recognize other components and circuitry that can perform essentially the same functions. The switching regulator is normally used as a power supply regulator, wherein it may provide a substantially constant voltage regardless of load. A negative in jack (pin **1**) may be used as an error input. For instance, when the voltage at pin **1** is less than about 1 volt, an inference may be established that the motor speed may be too low, therefore the output jack (pin **6**) goes low. When the output at pin **6** goes low, it may cause a gate (pin **G**) of **Q1** to be near 0 volts. As will be recognized, this may cause **Q1** to turn on with a resistance of about 1.3 ohms in the illustrated embodiment. Advantageously, the end result is that the motor, **Q1**, **D1** and **R4** may be connected in series across the battery. The motor current will likely be rather heavy, so the motor speed may increase. This "on" condition lasts for a time that is preferably controlled by **U1**'s oscillator, whose frequency (about 500 Hz) may be set by **C4**. Also, the switching regulator **U1** desirably limits the output on time to about 90% of this 2-millisecond period (1/frequency=period) because it uses the first 10% portion purely for comparing the error signal to the reference. The comparison advantageously continues during the 90% period, with the output on or off as determined by the error signal. If the motor speed were to increase to the proper level during the 90% portion of the cycle, the output would preferably shut off immediately, thereby resulting in a narrowed pulse. Hence, pulse width modulation is achieved.

[0130] Desirably, the output of the switching regulator U1 only goes low, so R1 preferably pulls the output high when the switching regulator U1 is off. R13 isolates the switching regulator U1 from the gate capacitance of Q1, thereby advantageously ensuring a more reliable start-up of the switching regulator U1 upon application of power. D1 preferably prevents below-ground motor switching transients from reaching the transistor Q1. In the illustrated embodiment, the VP2204 may have a 40-volt rating, which advantageously provides plenty of margin for withstanding voltage transients. As will be recognized by those of skill in the art, any other suitable control circuit may also be utilized. Power supply filter C5 preferably helps provide the large short duration currents demanded by the controller, especially when the battery power is nearly depleted.

[0131] In the illustrated embodiment, an N-channel FET, indicated by reference numerals Q2, preferably switches the motor's back EMF to a storage capacitor C2 during the portion of the control cycle when the motor is not powered (i.e., Q2 is off when Q1 is on, and vice versa). The resistor R2, along with the gate capacitance of the FET Q2, advantageously forms a delay network so that when the FET Q2 turns on after the FET Q1 turns off. This configuration may block turn-off transients and may present a voltage to C2 that more accurately reflects the back EMF. The FET's Q2 turn-off need not be delayed, so D2 may turn on with negative-going signals and may parallel the resistor R2 with a low impedance, thereby giving only a slight delay. A resistor R5 and a resistor R6 preferably divide the back EMF to provide the error voltage (nominally about 1 volt) to pin 1 of the switching regulator U1. The value of the resistor R5 desirably determines the level of back EMF, and, therefore, the motor speed required to produce about 1 volt at the switching regulator U1, pin 1.

[0132] The resistor R4 may be in series with the motor and may be used to sense the motor current and limit the motor torque accordingly. For instance, the current pulses through the resistor R4 generate voltage pulses, which may be integrated (averaged) by the resistor R3 and the capacitor C1 and fed to pin 7 of the switching regulator U1, which is the current limit input. Preferably, when the voltage at this pin is about 0.110 volts or more, the switching regulator U1 may not increase the output drive, regardless of the error voltage. The circuit values shown result in about 0.45 amp average, or between about 0.45 and about 0.5 oz-in. of stall torque for the motor.

[0133] The back EMT voltage stored by the capacitor C2 is preferably further filtered by a resistor R7 and a capacitor C3 and may appear at the output (pin 7) of an amplifier (U2) as a relatively noise-free signal which follows the motor speed with a slight time lag. The amplifier in the illustrated embodiment is an LM358 buffer amplifier. The voltage is desirably divided by a resistor R8, a resistor R9 and a resistor R10 and may appear at the positive input of the comparator section of the amplifier U2 (pin 3). A negative input is desirably fixed at about 1 volt, since it is connected to the switching regulator U1, pin 2. When the voltage at pin 3 exceeds that at pin 2, the output (pin 1) is high and the green (Cutting) LED is on in the illustrated embodiment. When the voltage at pin 3 is less than at pin 2, the output is low and the red (Overload) LED is on in the illustrated embodiment. "Overload" in the embodiment being described herein has been defined as the point when the

motor current reaches about 70% of stall current; however, any desired percentage of stall current may be used to define an overload condition. The value of a resistor R9 determines approximately equal red and green LED intensities with a dynamic motor load that causes a motor current of approximately 0.35 amperes.

[0134] With continued reference to FIG. 11, a test connector P2 provides signals and voltages for production testing of the controller board, which may be tested as a subassembly prior to installation. The test connector P2 may also be accessible when the top half of the housing is removed, such as for testing at higher levels of assembly. It should be appreciated that one of skill in the art may modify the test connector and related circuitry such that the connector could also become a data bus all data to be passed from the control to a recorder, a display or the like.

[0135] In a presently preferred method of use, a guidewire 28 is first percutaneously introduced and transluminally advanced in accordance with well known techniques to the obstruction to be cleared. The surgical instrument 10 is then introduced by placing the distal end 16 of the flexible tubular body 12 on the guidewire 28, and advancing the flexible tubular body 12 along the guidewire 28 through the vessel to the treatment site. When the distal end 16 of the flexible tubular body 12 has been maneuvered into the correct position adjacent the proximal terminus of material to be removed, the drive tube 24 is rotated relative to the tubular body 12 to cause the cutter 22 to rotate in a direction which will cause the forward end 47 of the thread 46 to draw material into the housing 21. A circular cutting action may be provided by mutual cooperation of the outer cutting edge of the screw thread 46 with lip 39 of the cutter housing 21 and the internal peripheral wall of the cutter housing 21. In addition, the cutter housing 21 in cooperation with the flanges 42 and any other stationary members present, effectively chops or minces the strands of material being drawn into the cutter housing 21. The cut material is then carried proximally through the annular passageway between the flexible drive tube 24 and the tubular body 12 under the force of vacuum. If an increase in load and/or decrease in RPM is detected, the clinician can take reactive measures as described above. The vacuum preferably pulls the cuttings through the entire length of the lumen 20 and vacuum tube 88 and into a suitable disposal receptacle. A manual or automatic regulator may regulate the vacuum source such that a constant flow velocity may be maintained, or blockages reduced or cleared, through the vacuum tube 88 regardless of the viscosity of the material passing through the vacuum tube 88.

[0136] With reference now to FIG. 12, a further aspect of the present rotational atherectomy device will be described in detail. As illustrated, the elongate flexible member 12 preferably includes an expandable component 150 near the distal end 16 of the flexible member 12. More preferably, the expandable component 150 is positioned proximate the cutter housing 21 at a location directly adjacent the proximate end of the housing 21. In some embodiments, the expandable member 150 may be positioned on the housing 21 itself.

[0137] The expandable member 150 preferably extends about only a portion of the total circumference of the flexible member 12. In this regard, the expandable member is used

to offset the cutter tip **22** such that the axis of rotation of the cutter tip is disposed about a second axis that is generally parallel to an axis of the artery in which the device is disposed but the cutter tip axis is laterally displaced from the axis of the artery. Specifically, as the expandable member **150** is inflated, or expanded, the expandable member **150** contacts one of the sides of the artery, thereby displacing the flexible member **12** and the cutter tip **22** in a radial direction away from the center of the artery. In the illustrated embodiment, the expandable member **150** extends about 75° around the circumference of the flexible member **12**. In other embodiments, the expandable member may extend around between about 45° to about 270°.

[0138] The expandable member may comprise any of a number of components. For instance, the illustrated expandable member is a Pellethane balloon having eccentric tails **152**. The presently preferred material, Pellethane, forms a compliant balloon that allows the diameter to grow with increases in inflation pressure. The preferred variant of Pellethane is 2363-90AE which allows a working pressure of between about 10 psi and about 60 psi with diameter growths of between about 1.5 mm to about 2.0 mm. Of course, other materials may be chosen depending upon the application. In other embodiments, the working pressure may range from about 5 psi and about 50 psi with diameter growths of between about 0.8 mm and about 3.0 mm. The inflatable portion of the balloon preferably has an axial length of between about 8 mm and 2 mm with a more preferred length being about 5 mm. In arrangements having an inflatable length of about 5 mm, it is anticipated that about 3 mm of the balloon will be useful in offsetting the cutter tip **22** relative to an axis of the lumen in which the cutter tip **22** is disposed.

[0139] The eccentric tails **152** of the balloon also form a part of the presently preferred arrangement. The eccentric tails **152** generally lie flat along the flexible member **12** to which they are attached. Such an arrangement allows the deflated profile of the device **10** to be decreased as well as eases the bonding between the expandable member **150** and the flexible member **12**. While concentric tailed balloons may adequately function as the expandable member **150**, the eccentric tailed balloons are presently preferred. The tails are preferably adhered to the flexible member with an epoxy resin or ultraviolet adhesive. In some arrangements, the tails **152** are preferably captured by external rings, housings or tubes.

[0140] An inflation lumen **154** extends between the expandable member **150** and a portion of the device **10** which is external to a patient. The lumen **154** may be formed within the flexible member **12** or may be positioned to the outside of the flexible member **12**. The positioning of the inflation lumen **154** may be selected as a result of the application in which the device **10** will be used.

[0141] In use, the device **10** featuring the balloon operates in a similar manner to the device **10** described above. Specifically, as described above, the guidewire **28** is first percutaneously introduced and transluminally advanced in accordance with well known techniques to the obstruction to be cleared. The surgical instrument **10** is then introduced by placing the distal end **16** of the flexible tubular body **12** on the guidewire **28**, and advancing the flexible tubular body **12** along the guidewire **28** through the vessel to the treatment

site. When the distal end **16** of the flexible tubular body **12** has been maneuvered into the correct position adjacent the proximal terminus of material to be removed, the expandable element is inflated with a fluid in a known manner. The expandable member **150** acts as a deflecting mechanism to offset the cutter tip **22** from the centerline of the artery.

[0142] At this point, any of at least two modes of operation may be used. In a first mode, illustrated schematically in FIG. 13, the drive tube **24** is rotated relative to the tubular body **12** to cause the cutter **22** to rotate in a direction which will cause the forward end **47** of the thread **46** to draw material into the housing **21**. Also, suction may be used to pull material into the housing **21**. A circular cutting action may be provided by mutual cooperation of the outer cutting edge of the screw thread **46** with lip **39** of the cutter housing **21** and the internal peripheral wall of the cutter housing **21**. In addition, the cutter housing **21** in cooperation with the flanges **42** and any other stationary members present, effectively chops or minces the strands of material being drawn into the cutter housing **21**.

[0143] The cutter tip **22** is then rotated in an eccentric rotation by turning the flexible member **12** while the cutter tip **22** is spinning in the housing **22**. In one arrangement, the cutter tip is eccentrically rotated through a pass of about 360°; however, the sweep of the cutter tip may be varied depending upon any one of a number of factors. Also, the rotation of the flexible member **12** may be performed manually. After a complete rotation of the flexible member **12**, the cutter tip **12** is then advanced forward through another portion of the material to be removed. The cut material is carried proximally through the annular passageway between the flexible drive tube **24** and the tubular body **12** under the force of vacuum. If an increase in load and/or decrease in RPM is detected, the clinician can take reactive measures as described above. The vacuum preferably pulls the cuttings through the entire length of the lumen **20** and vacuum tube **88** and into a suitable disposal receptacle. A manual or automatic regulator may regulate the vacuum source such that a constant flow velocity may be maintained, or blockages reduced or cleared, through the vacuum tube **88** regardless of the viscosity of the material passing through the vacuum tube **88**.

[0144] In another mode of operation, illustrated schematically in FIG. 14, the cutter tip **22** is axially advanced through the material to be removed after the deflecting expandable member **150** is inflated. A circular cutting action may be provided by mutual cooperation of the outer cutting edge of the screw thread **46** with lip **39** of the cutter housing **21** and the internal peripheral wall of the cutter housing **21**. In addition, the cutter housing **21** in cooperation with the flanges **42** and any other stationary members present, effectively chops or minces the strands of material being drawn into the cutter housing **21**. The cut material is carried proximally through the annular passageway between the flexible drive tube **24** and the tubular body **12** under the force of vacuum. If an increase in load and/or decrease in RPM is detected, the clinician can take reactive measures as described above. The vacuum preferably pulls the cuttings through the entire length of the lumen **20** and vacuum tube **88** and into a suitable disposal receptacle. A manual or automatic regulator may regulate the vacuum source such that a constant flow velocity may be maintained, or block-

ages reduced or cleared, through the vacuum tube **88** regardless of the viscosity of the material passing through the vacuum tube **88**.

[0145] After the cutter tip **22** has traversed the length of the material to be removed, the cutter tip **22** is withdrawn through substantially the same path of axial travel through the material. The expandable member **150** is then deflated and the flexible member **12** is reoriented for a second pass through the material. In some arrangements, the expandable member **150** may remain inflated or may be partially deflated during reorientation. The flexible member **12** may be rotated to any degree desired by the operator. In one arrangement, the flexible member **12** is rotated about 60 degrees from the first pass. This arrangement is illustrated schematically in **FIG. 14**. The expandable member **150** is then inflated and the cutter tip **22** is again axially advanced through the material to be removed. This process is repeated as desired in any particular application. In the illustrated arrangement, a non-offset pass is also performed such that the cutter tip **22** passes through a generally central location. One of ordinary skill in the art will readily recognize that the degree of overlap between passes may vary from operator to operator. Also, in instances in which the overlap is not extensive, the paths formed by the individual passes may coalesce into a single lumen.

[0146] As will be recognized, either of the above described modes of operation will result in an enlarged effective flow path as compared to the outside diameter of the device. It should be recognized that any combination of the modes of use of the deflection expandable member discussed directly above may also be used. The off-center cutting arrangement advantageously implements the device **10** in an operation which enlarges the diameter of the cleared material over and above the outside diameter of the catheter being used to house the cutter.

[0147] Although this invention has been described in terms of certain preferred embodiments, other embodiments apparent to those of ordinary skill in the art are also within the scope of this invention. Accordingly, the scope of this invention is intended to be defined only by the claims that follow.

What is claimed is:

1. A percutaneous device for removing material from a body lumen, comprising:

- an elongate, flexible tube having a distal end and a proximal end and defining a passageway therethrough;
- a material removal tip on the distal end of the tube, including an outer housing rotationally fixed with respect to the tube and a member permitted to rotate within the outer housing,

the outer housing having a lumen extending therethrough and an open distal mouth;

the rotatable member having proximal and distal ends, a central body, and a plurality of circumferentially spaced flanges extending radially outward from the body; and

a shearing member on the housing axially adjacent to the flanges and having a shearing edge to shear material received into the open mouth of the housing between the shearing member and the flanges.

2. The device of claim 1 further including a screw thread on the body formed distally with respect to the flanges.

3. The device of claim 1, wherein the shearing member extends radially from a wall of the housing lumen.

4. The device of claim 3 further comprising shear planes of said shearing member precluding thrombus build-up within said housing lumen.

5. A rotational medical device comprising:

an elongate flexible tubular body having a proximal end, a distal end and an elongate central lumen;

a cutter housing rotationally fixed to said distal end of said tubular body and a cutter positioned within said cutter housing, said cutter being capable of rotation within said cutter housing;

said cutter housing comprising a lumen and an open distal end;

said cutter comprising proximal and distal ends, a central body and a plurality of flanges extending radially outward from said central body; and

a stationary member positioned on said cutter housing axially adjacent to said flanges and comprising a shearing edge to shear material between said stationary member and said flanges when material is received into said open distal end of said cutter housing.

6. The device of claim 5 further comprising a screw thread on said central body of said cutter, said screw thread being formed distally of said flanges.

7. The device of claim 5, wherein said stationary member extends radially inward into said housing lumen.

8. The device of claim 7, wherein said stationary member defines a shear plane and said shear plane precluding thrombus build-up within said housing lumen.

* * * * *