



US 20140338509A1

(19) **United States**(12) **Patent Application Publication**
Lindee et al.(10) **Pub. No.: US 2014/0338509 A1**(43) **Pub. Date: Nov. 20, 2014**(54) **MAINTENANCE AND SAFETY SYSTEM FOR
A FOOD ARTICLE SLICING MACHINE****Publication Classification**(71) Applicant: **FORMAX, INC.**, Mokena, IL (US)(72) Inventors: **Scott A. Lindee**, Mokena, IL (US);
Glenn Sandberg, New Lenox, IL (US);
David Hansen, Orland Park, IL (US);
James E. Pasek, Tinley Park, IL (US);
David Hancock, Morris, IL (US)(51) **Int. Cl.****B26D 7/22** (2006.01)**F16P 3/14** (2006.01)**B26D 7/24** (2006.01)(52) **U.S. Cl.**CPC **B26D 7/225** (2013.01); **B26D 7/24** (2013.01);
F16P 3/144 (2013.01)USPC **83/58**(21) Appl. No.: **14/297,962**(22) Filed: **Jun. 6, 2014****Related U.S. Application Data**(63) Continuation of application No. 12/255,661, filed on
Oct. 21, 2008, now Pat. No. 8,850,938.(60) Provisional application No. 60/999,961, filed on Oct.
22, 2007, provisional application No. 61/000,202,
filed on Oct. 23, 2007.

(57)

ABSTRACT

A slicing apparatus and a weighing and classifying conveyor combination with cleanup position wherein, the elevated food article feed mechanism can be collapsed to a maintenance position, the weighing and classifying conveyor is oriented at a distance from the slicing apparatus and the slicing head cover is automatically lifted to an open cleanup position. The machine has laser intrusion detectors that are used to shut down systems when an unwanted intrusion by a person or object is detected.

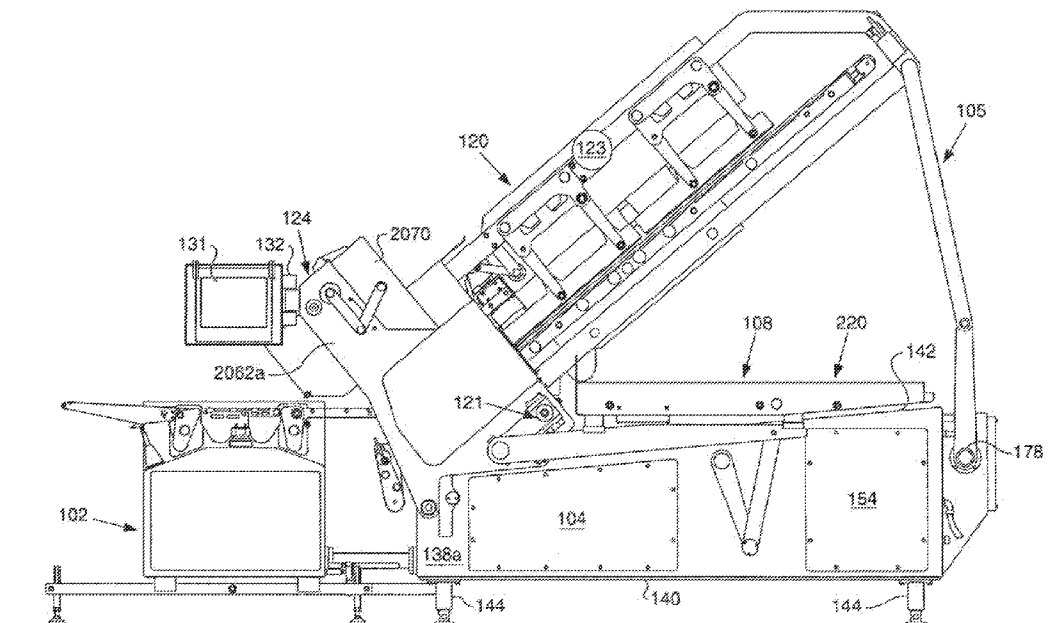


FIG. 1

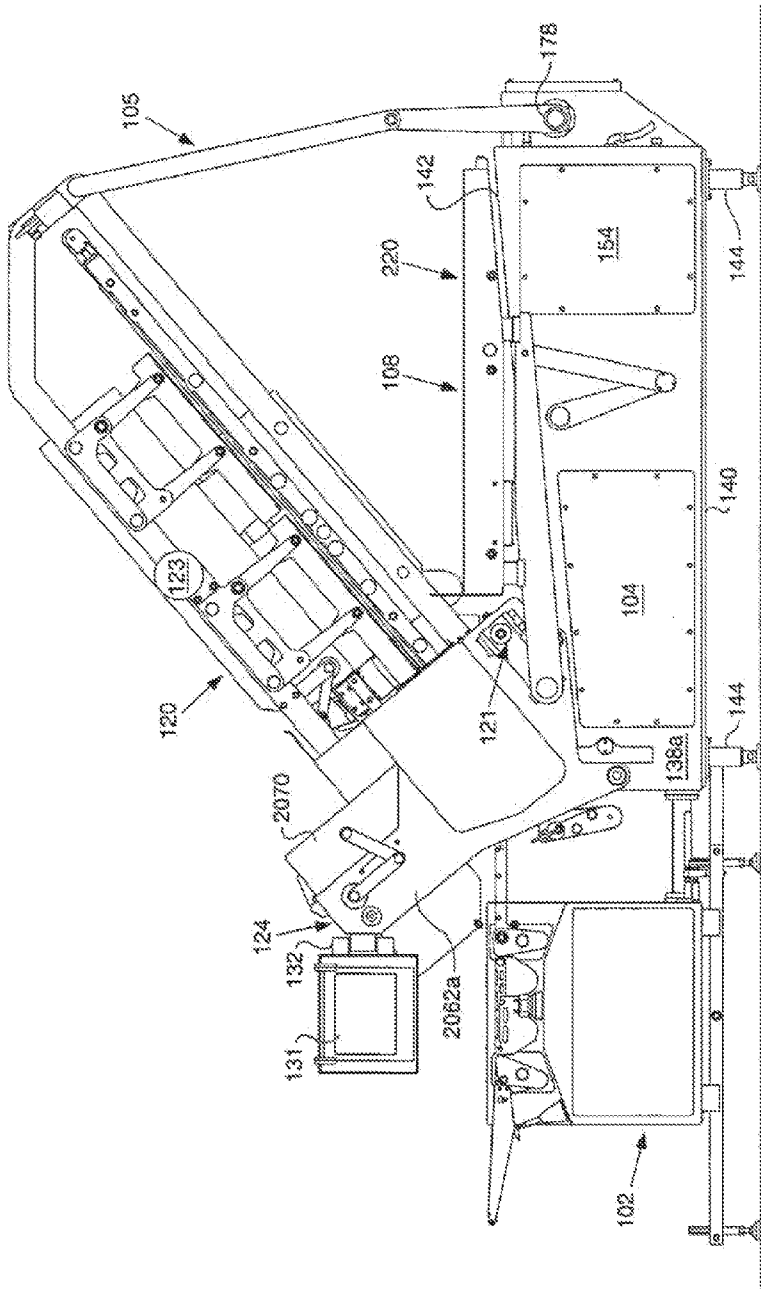


FIG. 2

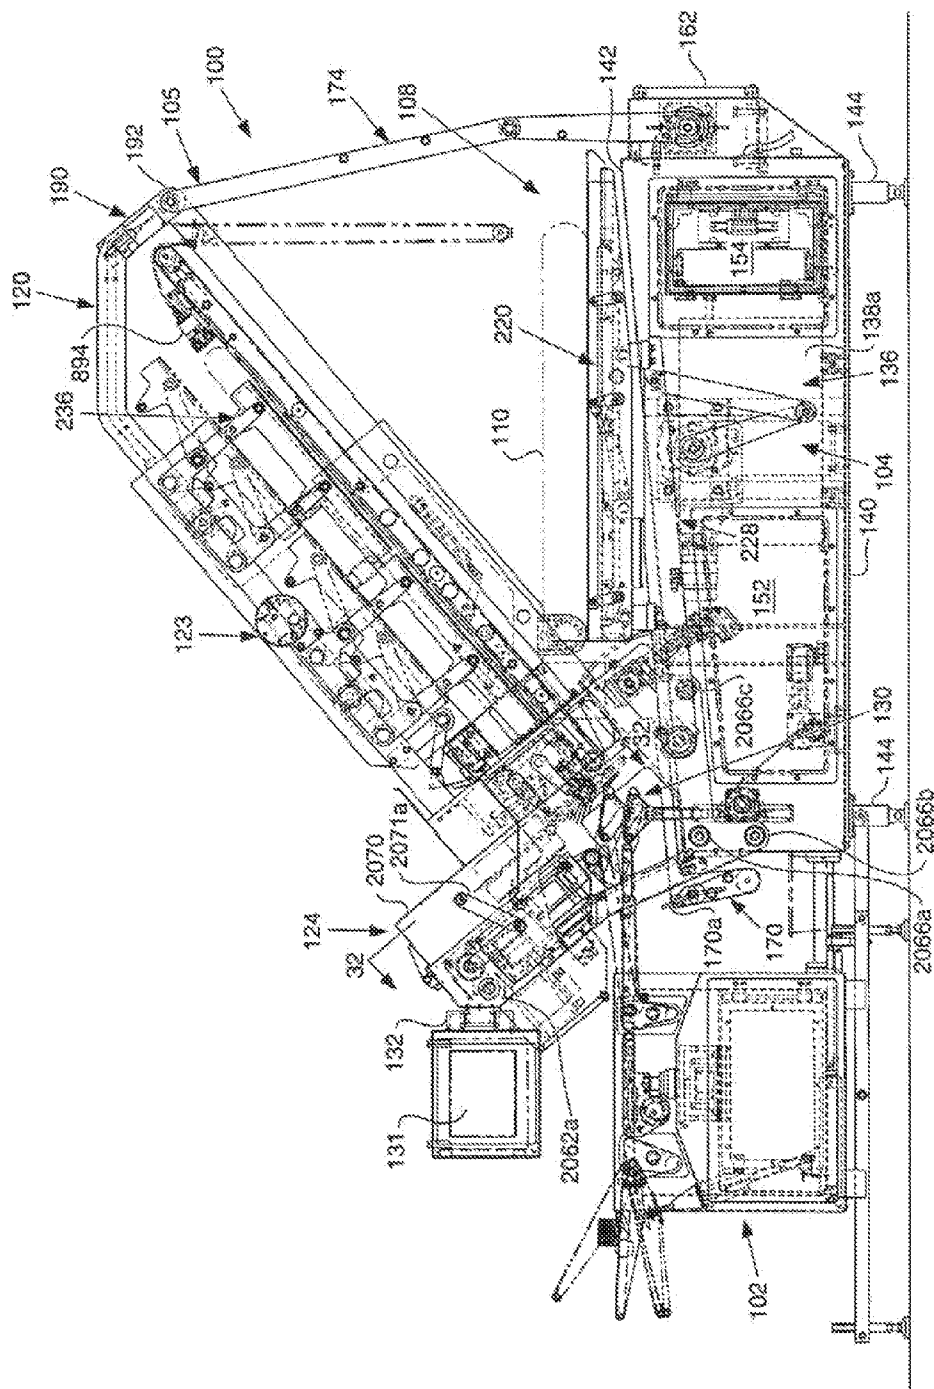


FIG. 3

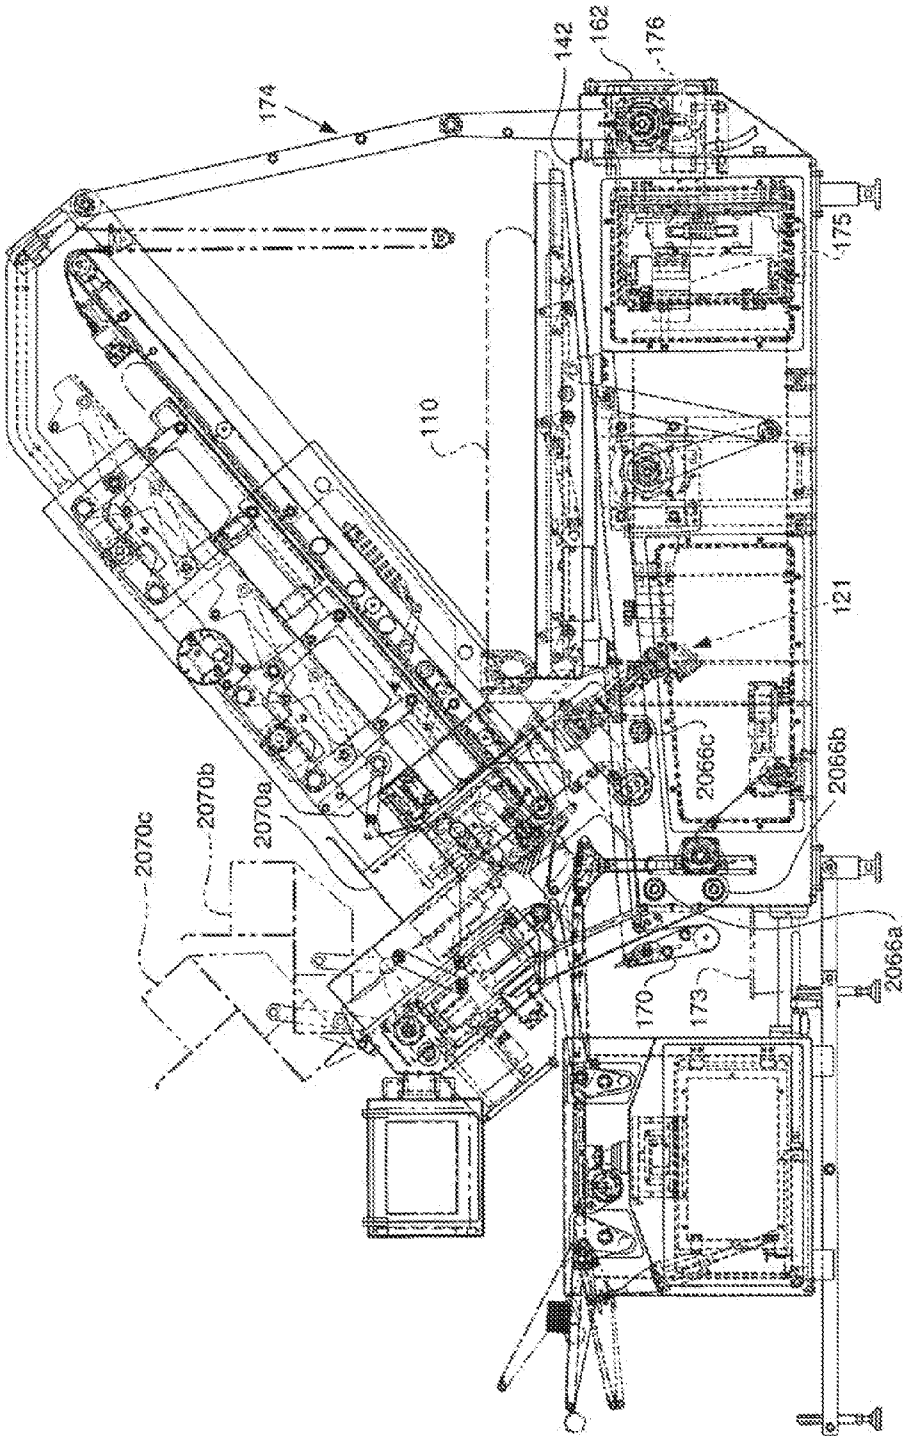


FIG. 4

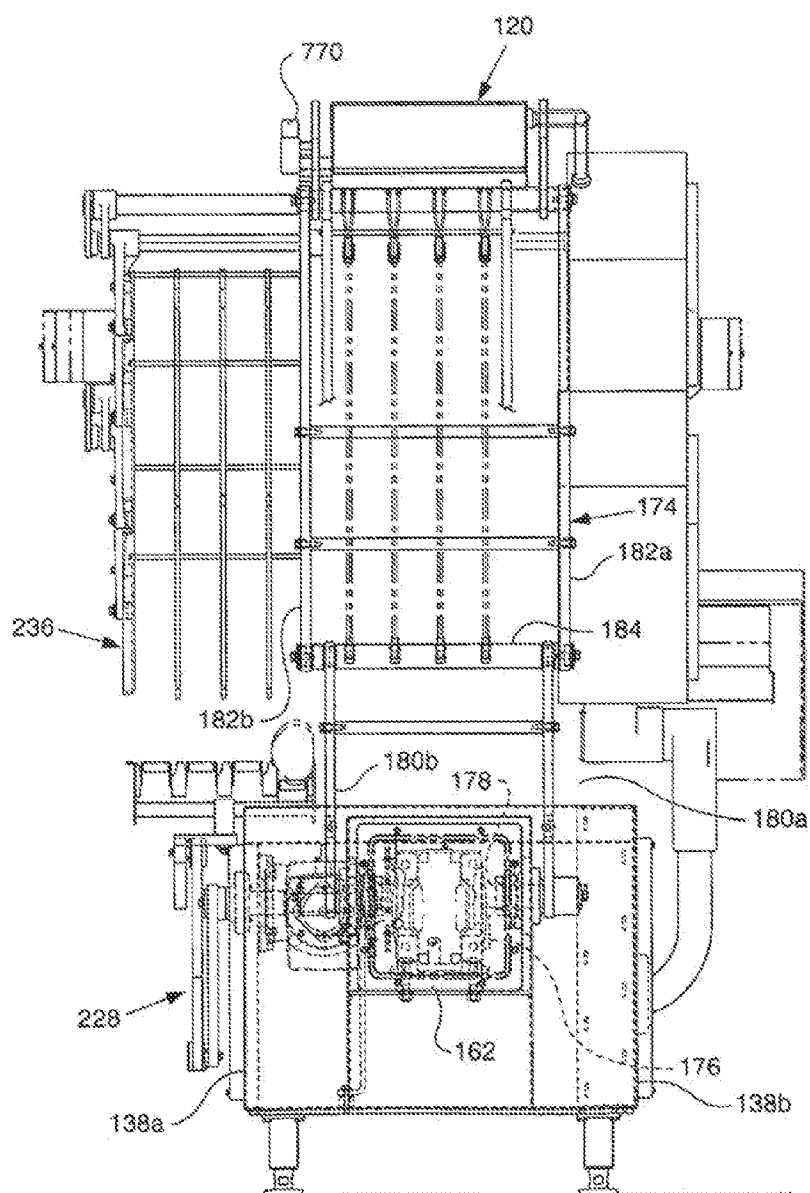


FIG. 4A

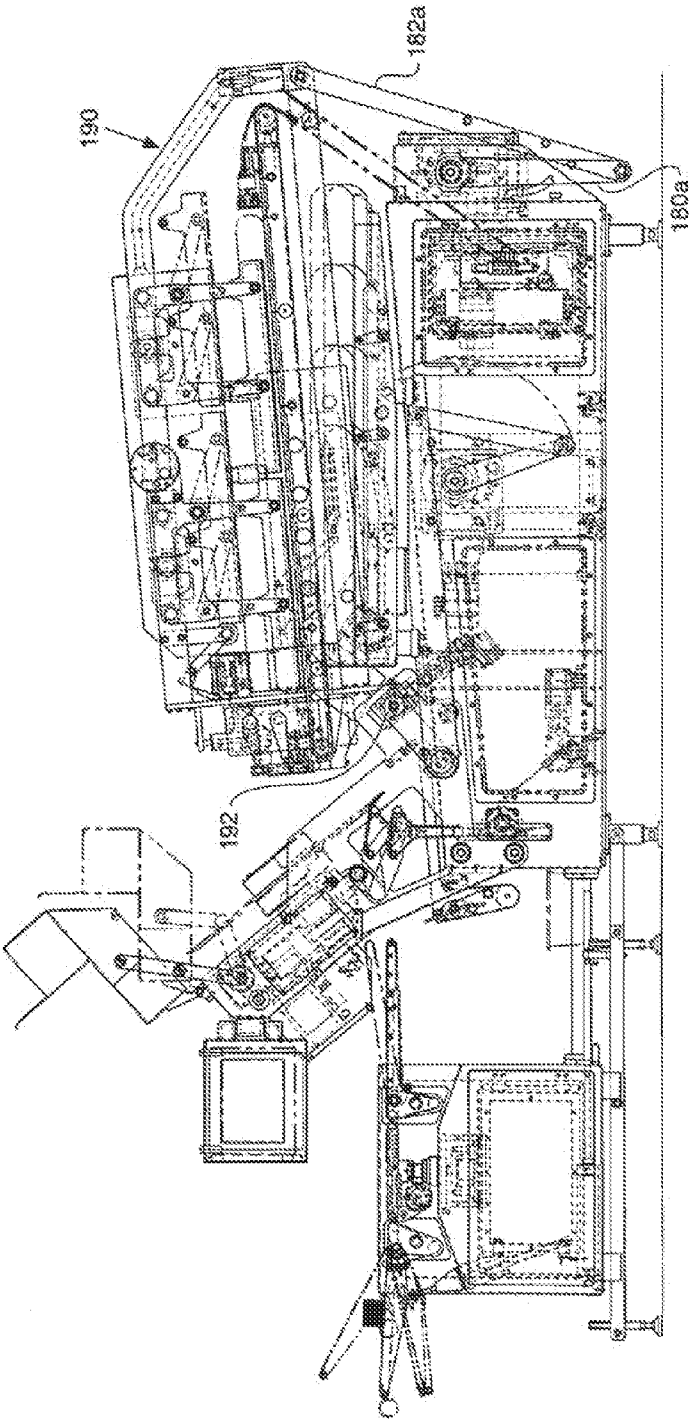


FIG. 5

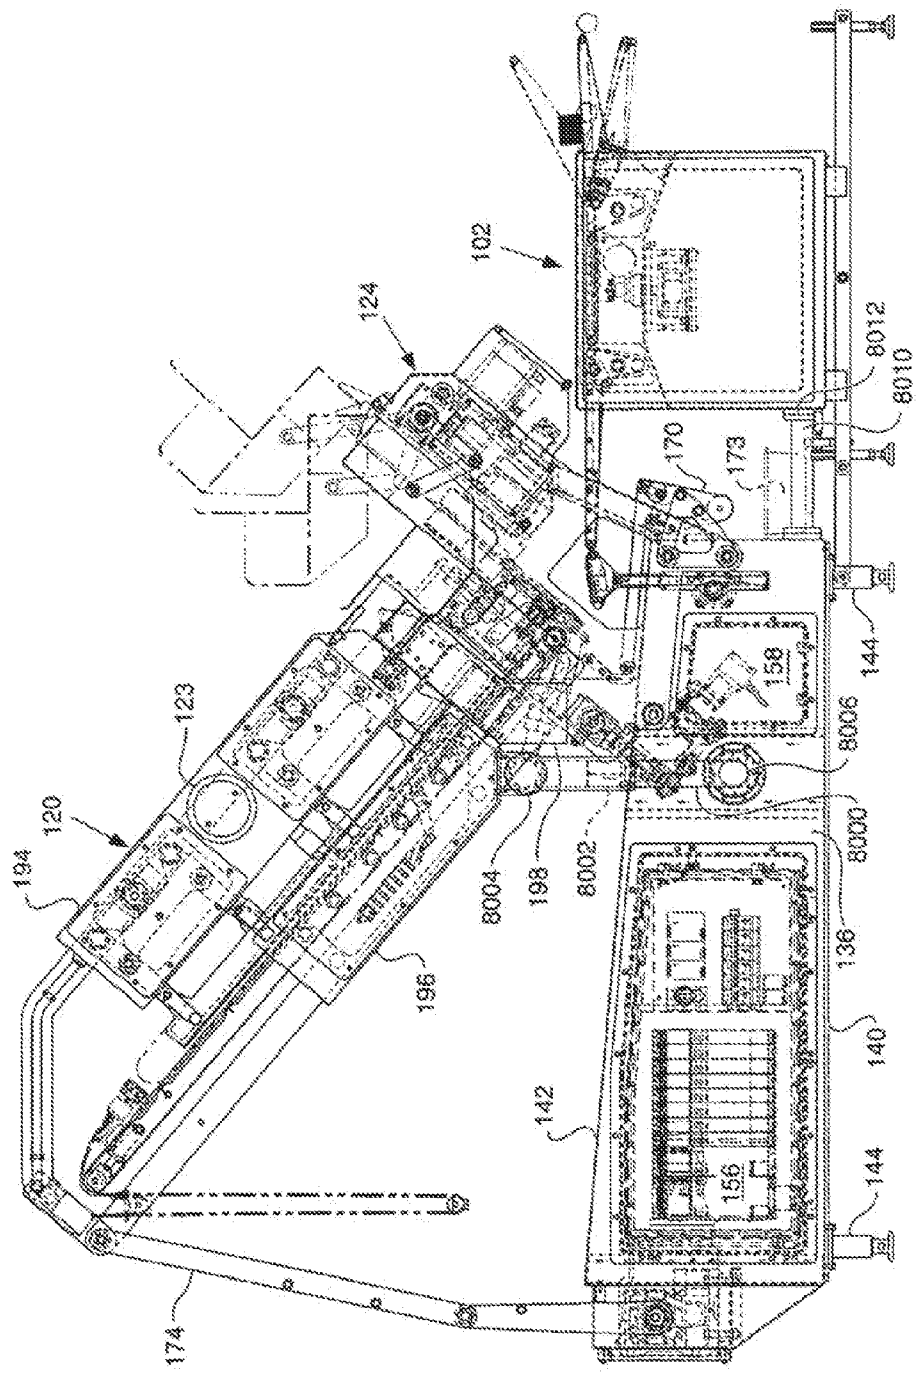


FIG. 6

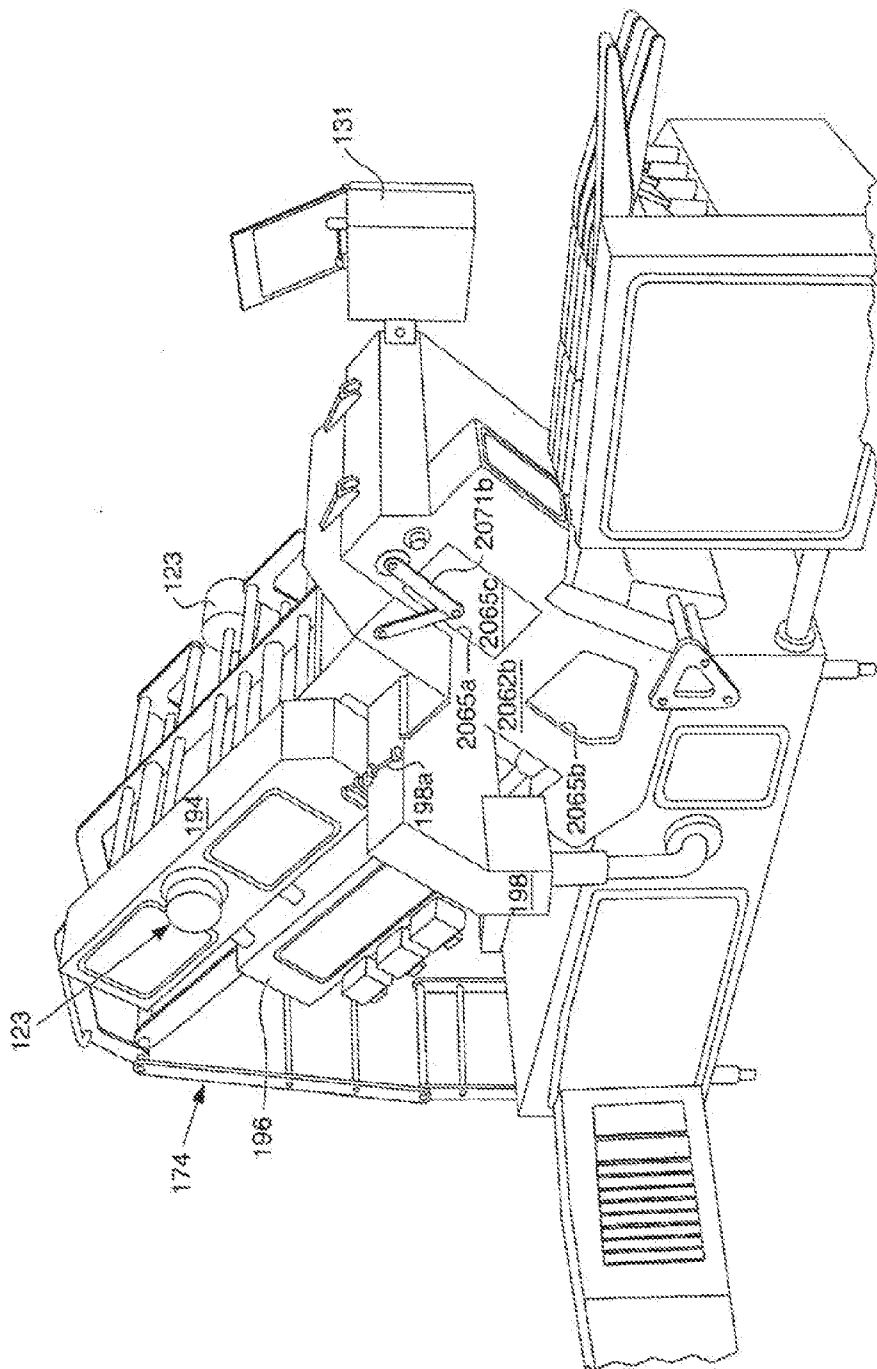


FIG. 7

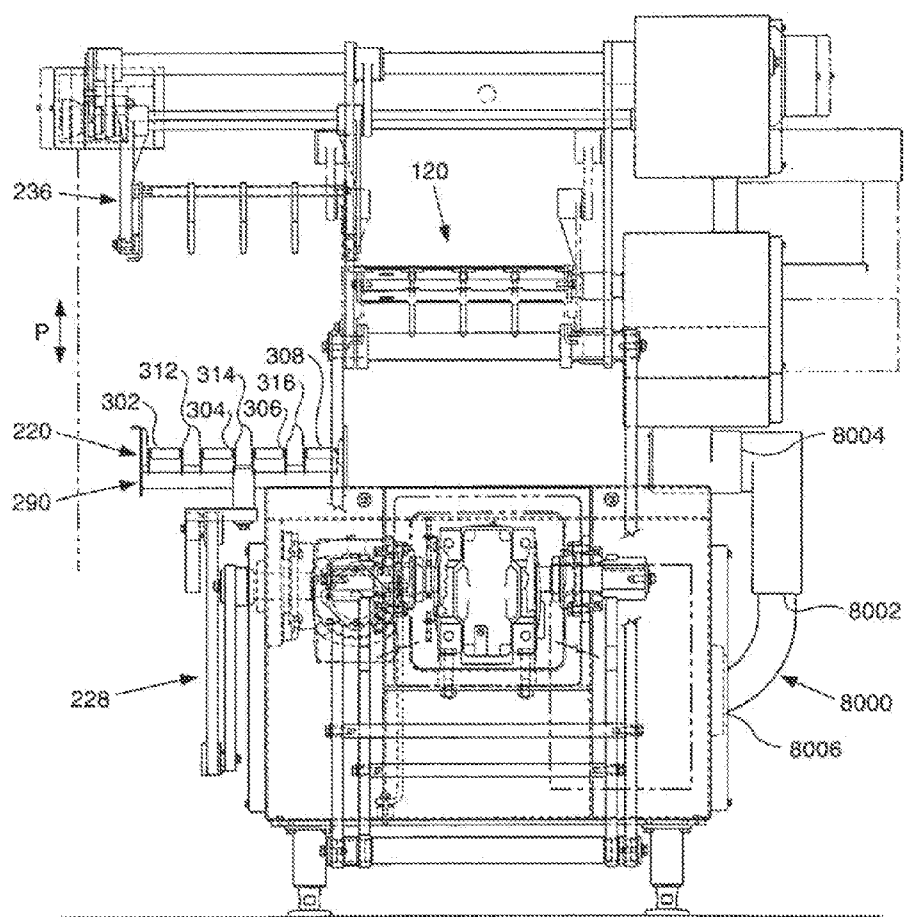


FIG. 8

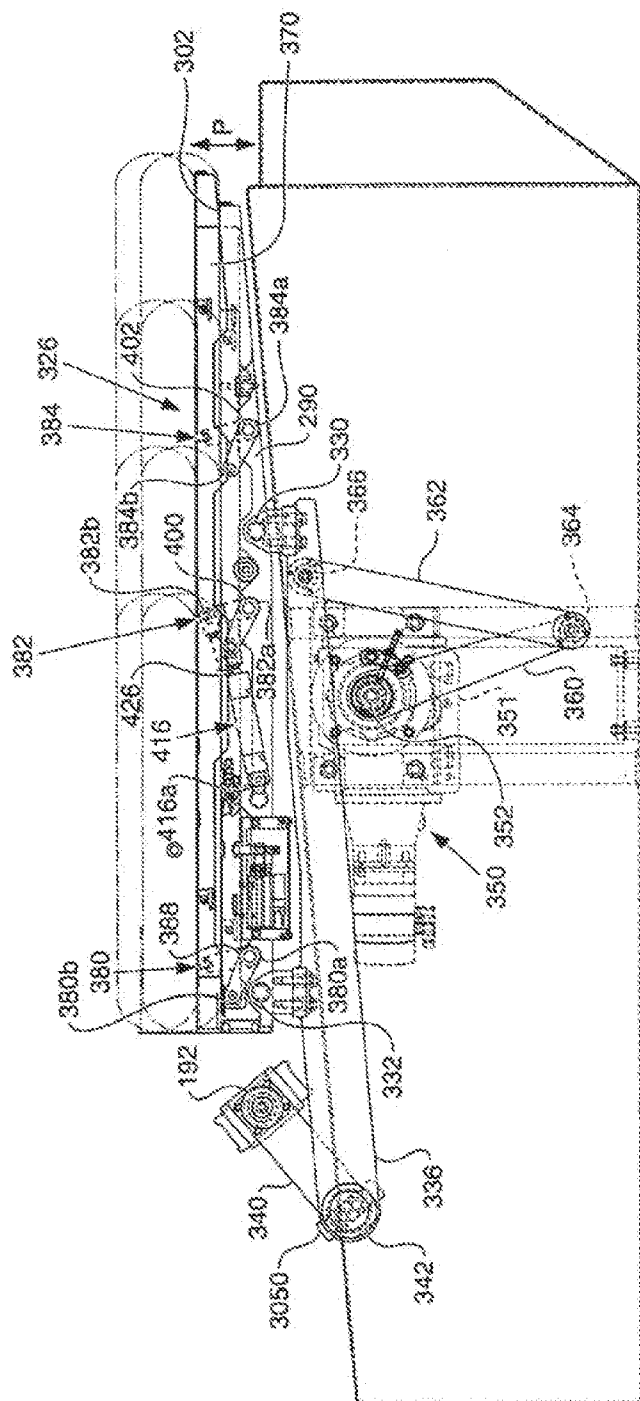


FIG. 8A

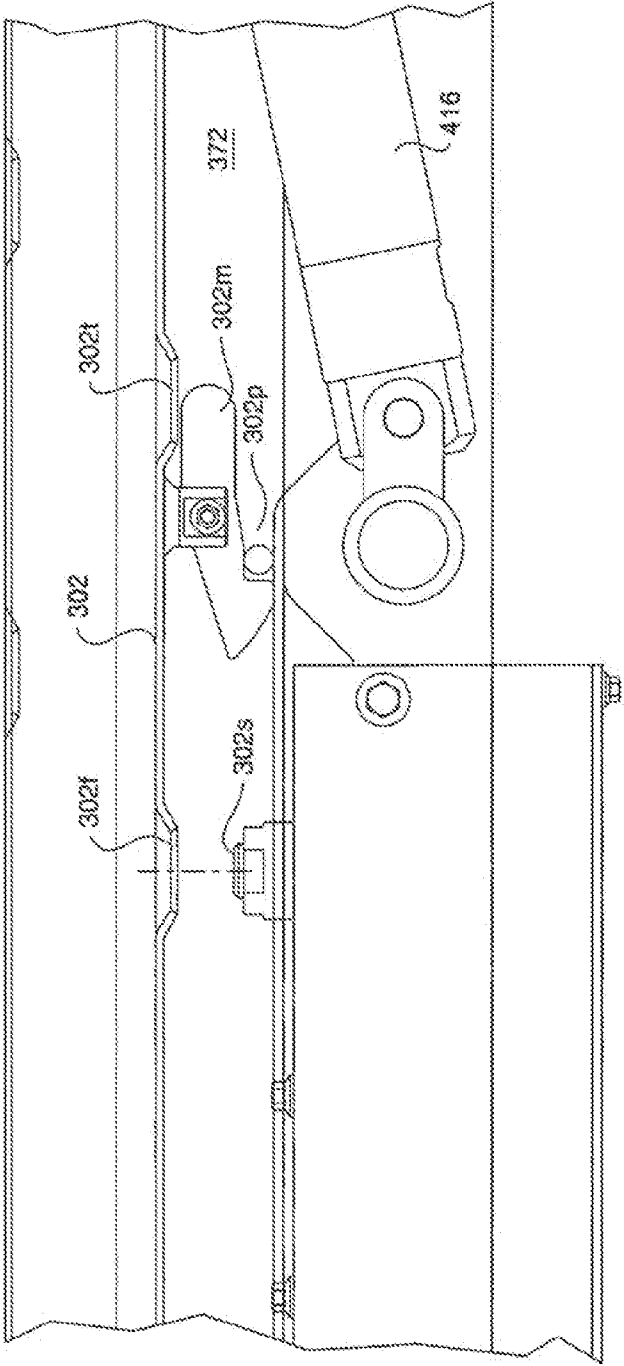


FIG. 9

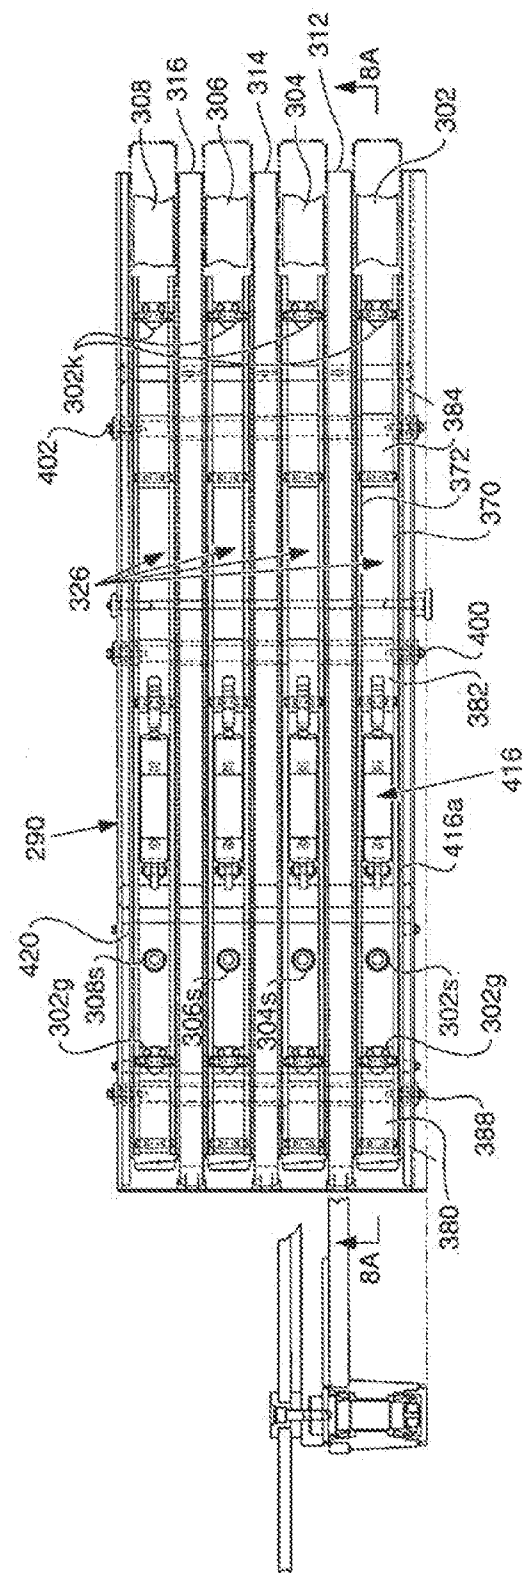


FIG. 10

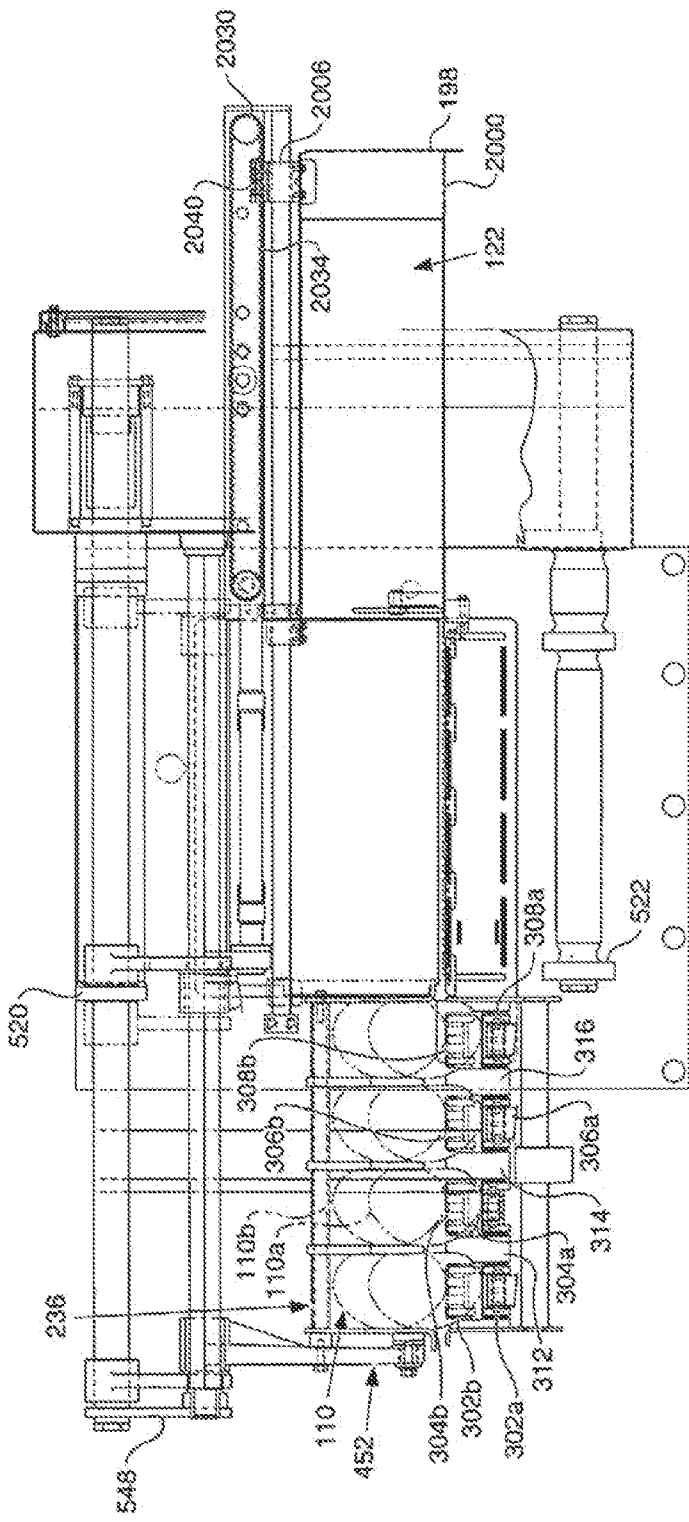


FIG. 11

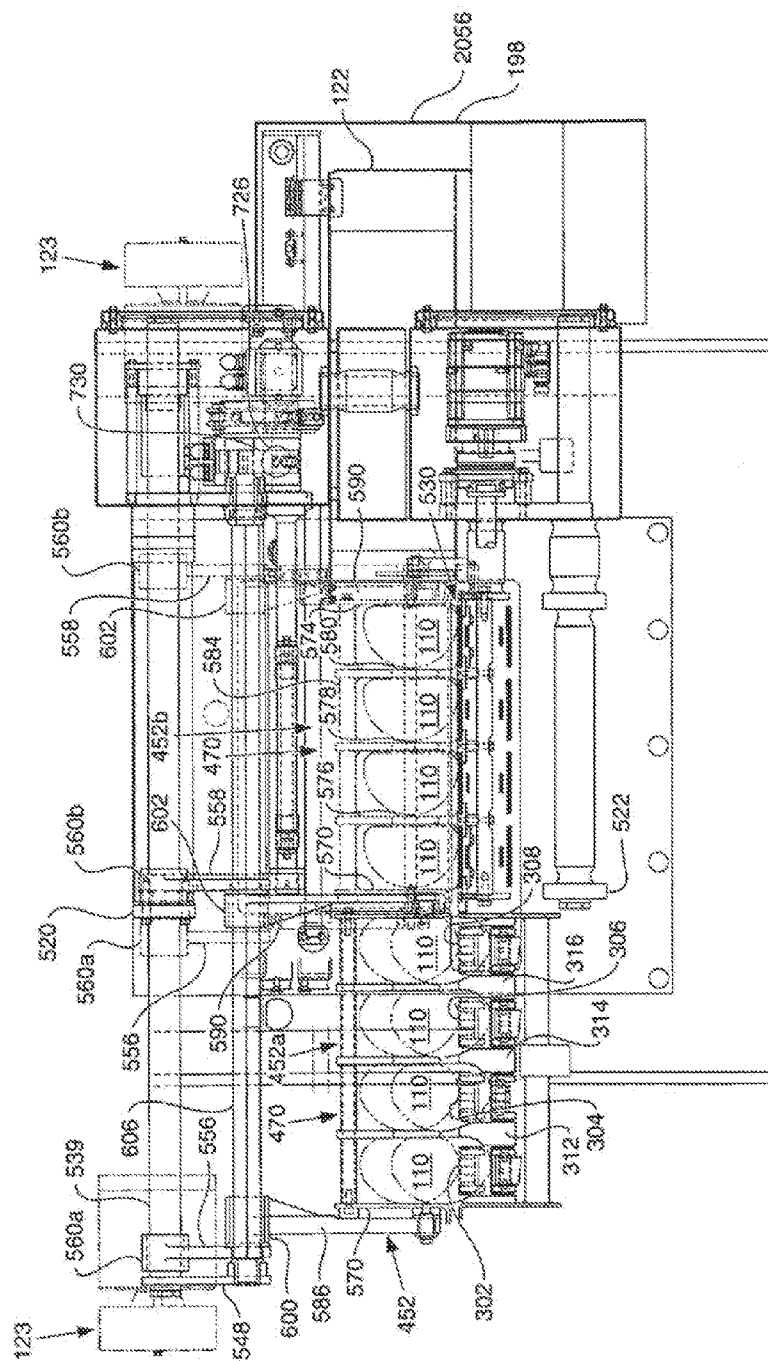


FIG. 12

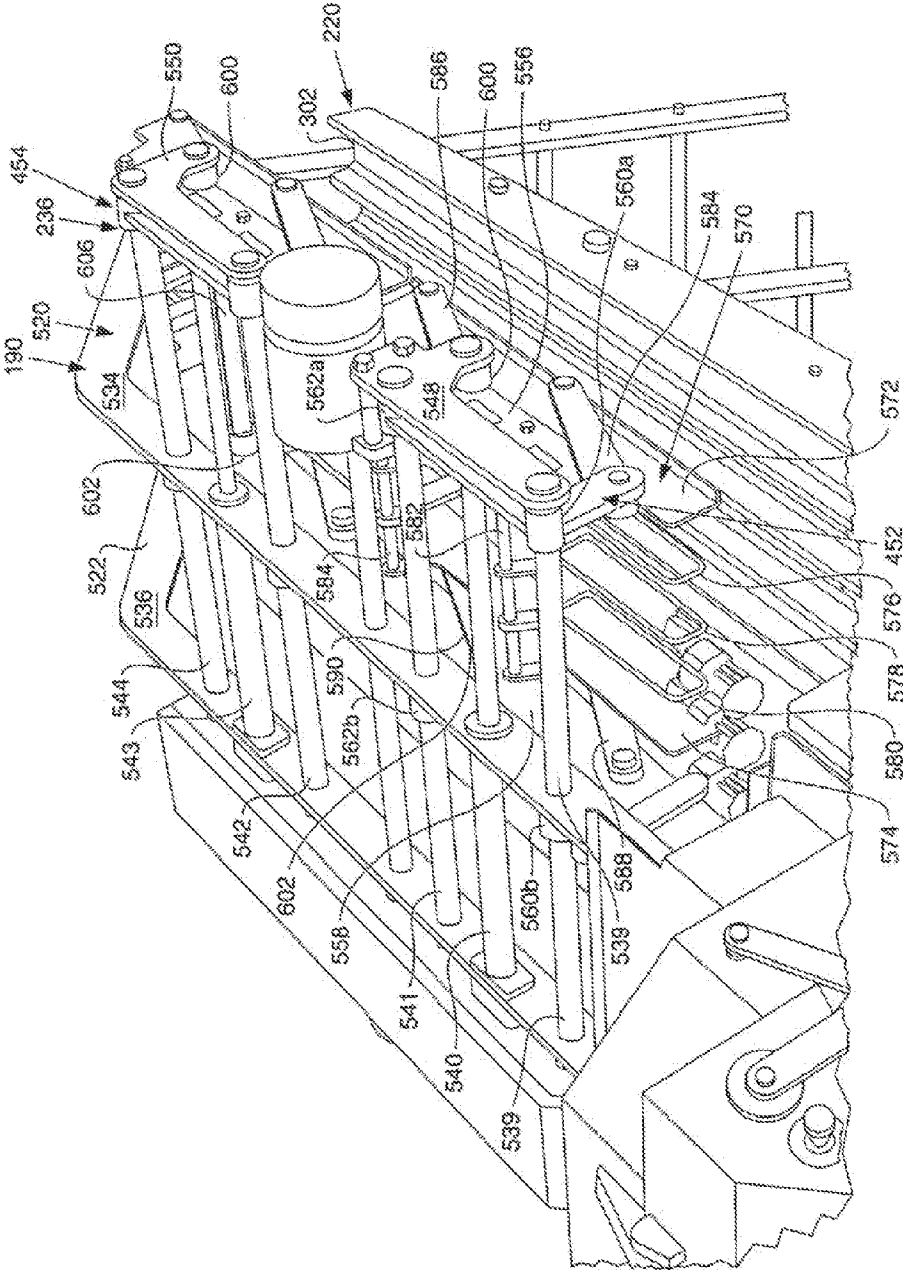


FIG. 12A

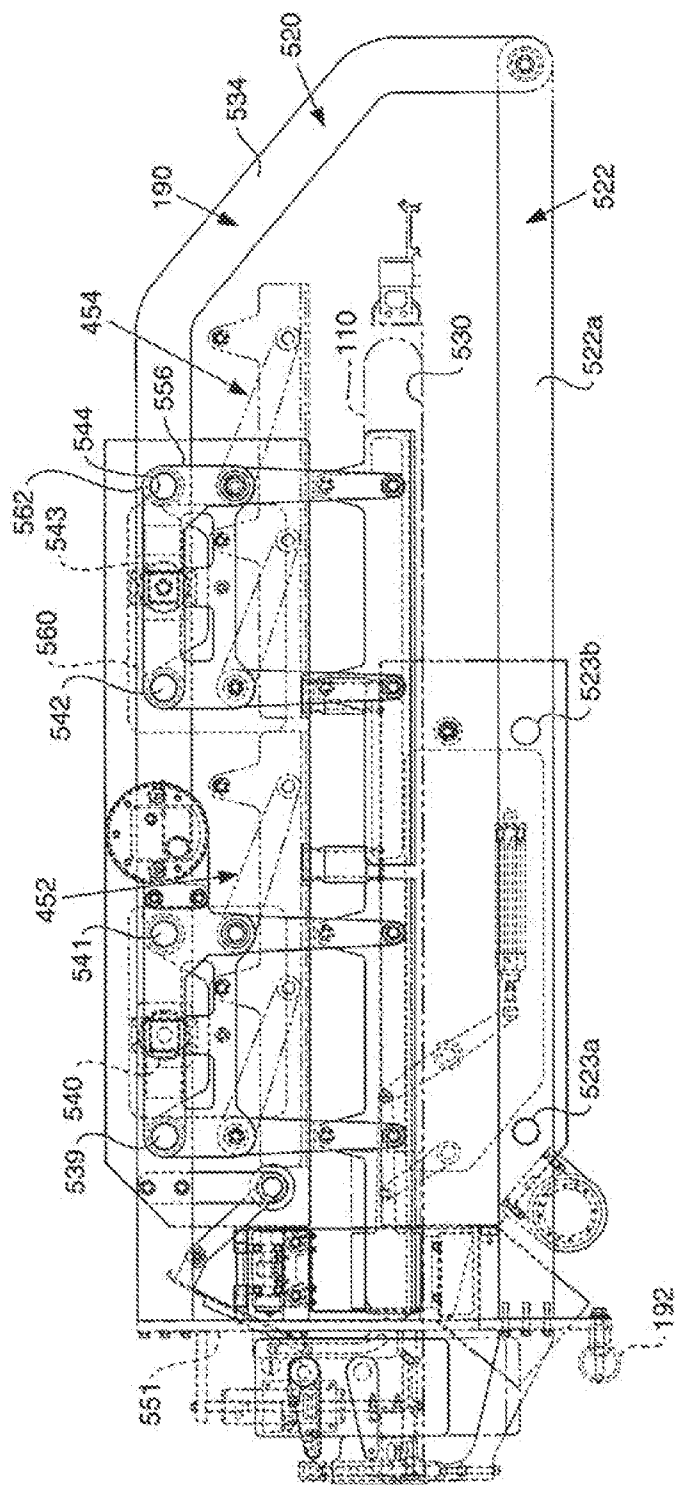


FIG. 13

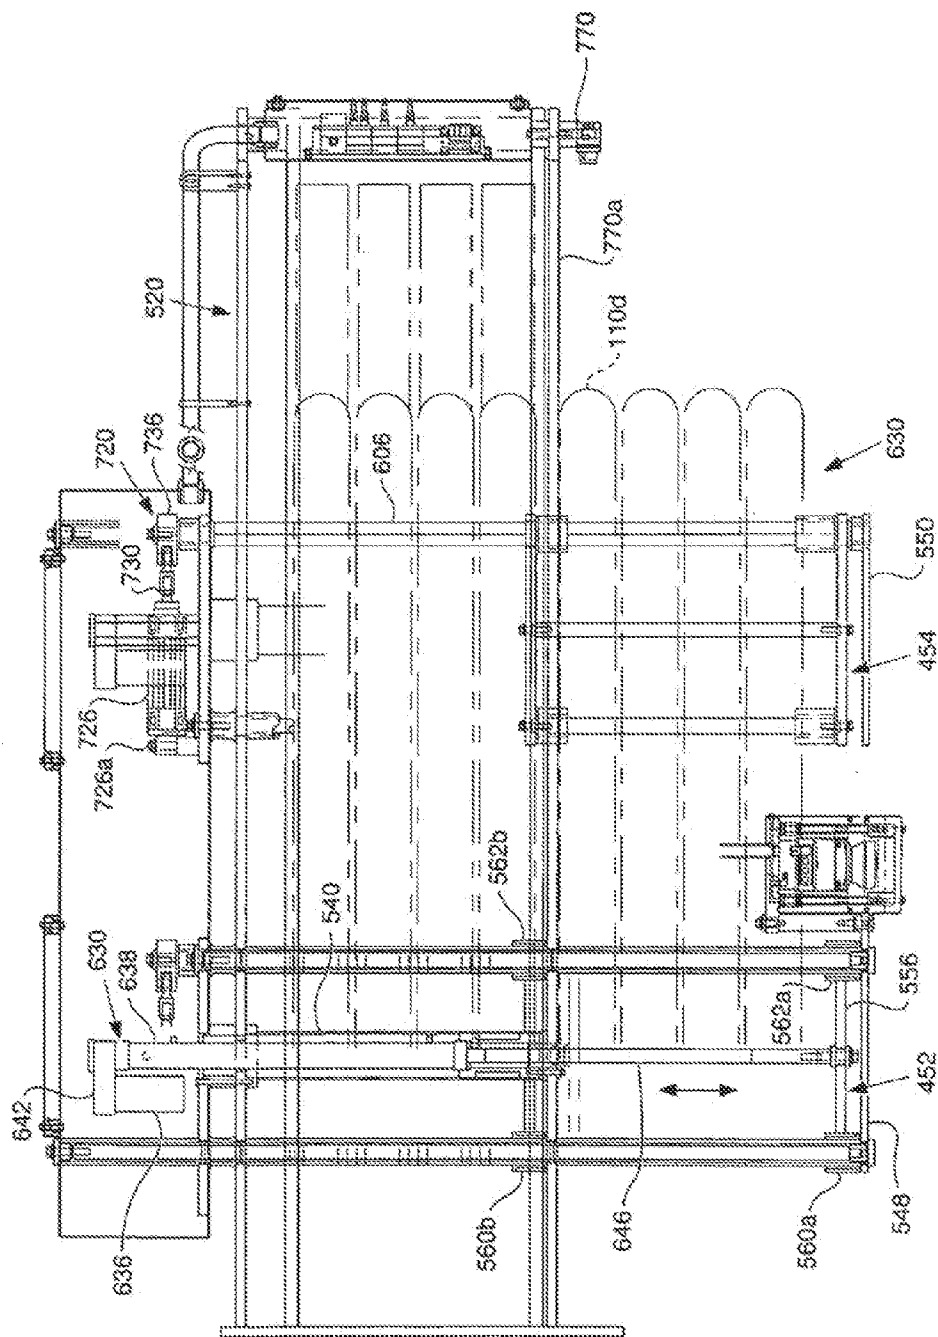


FIG. 14

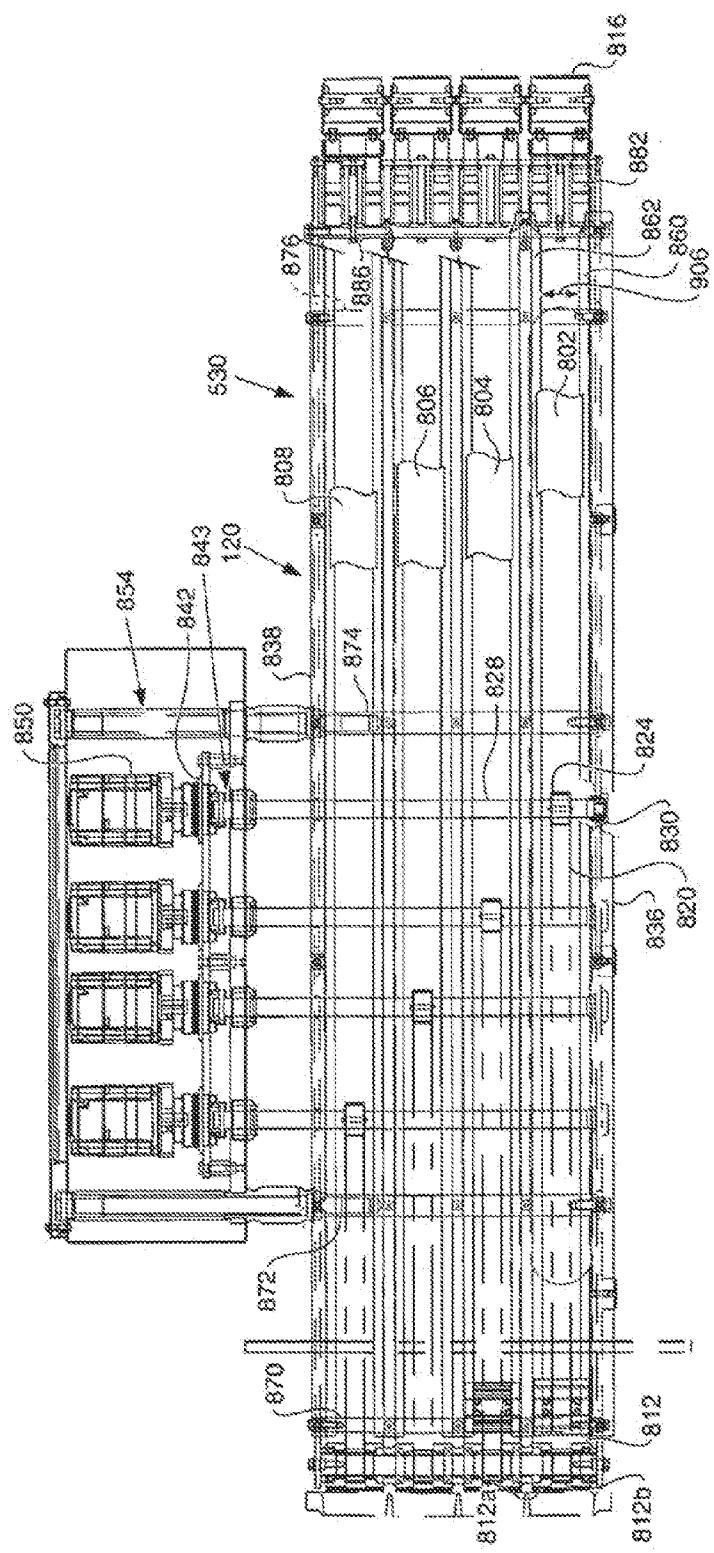


FIG. 15

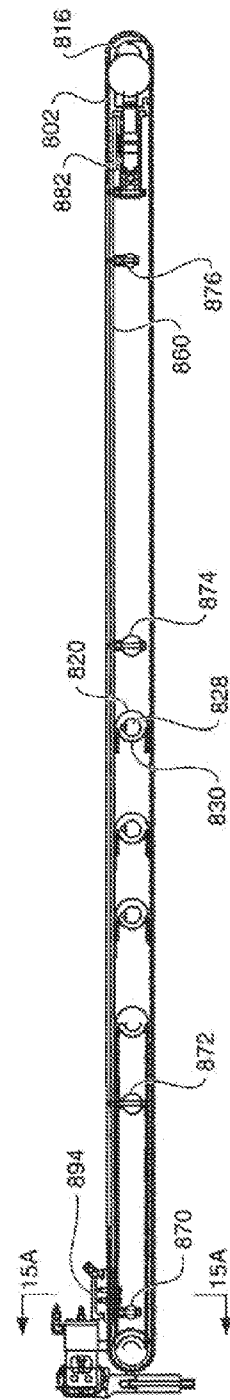


FIG. 15A

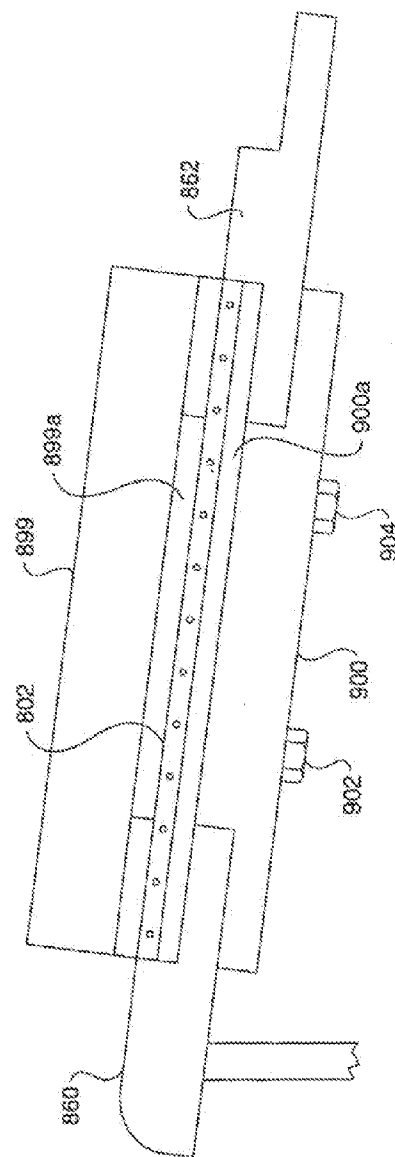


FIG. 16

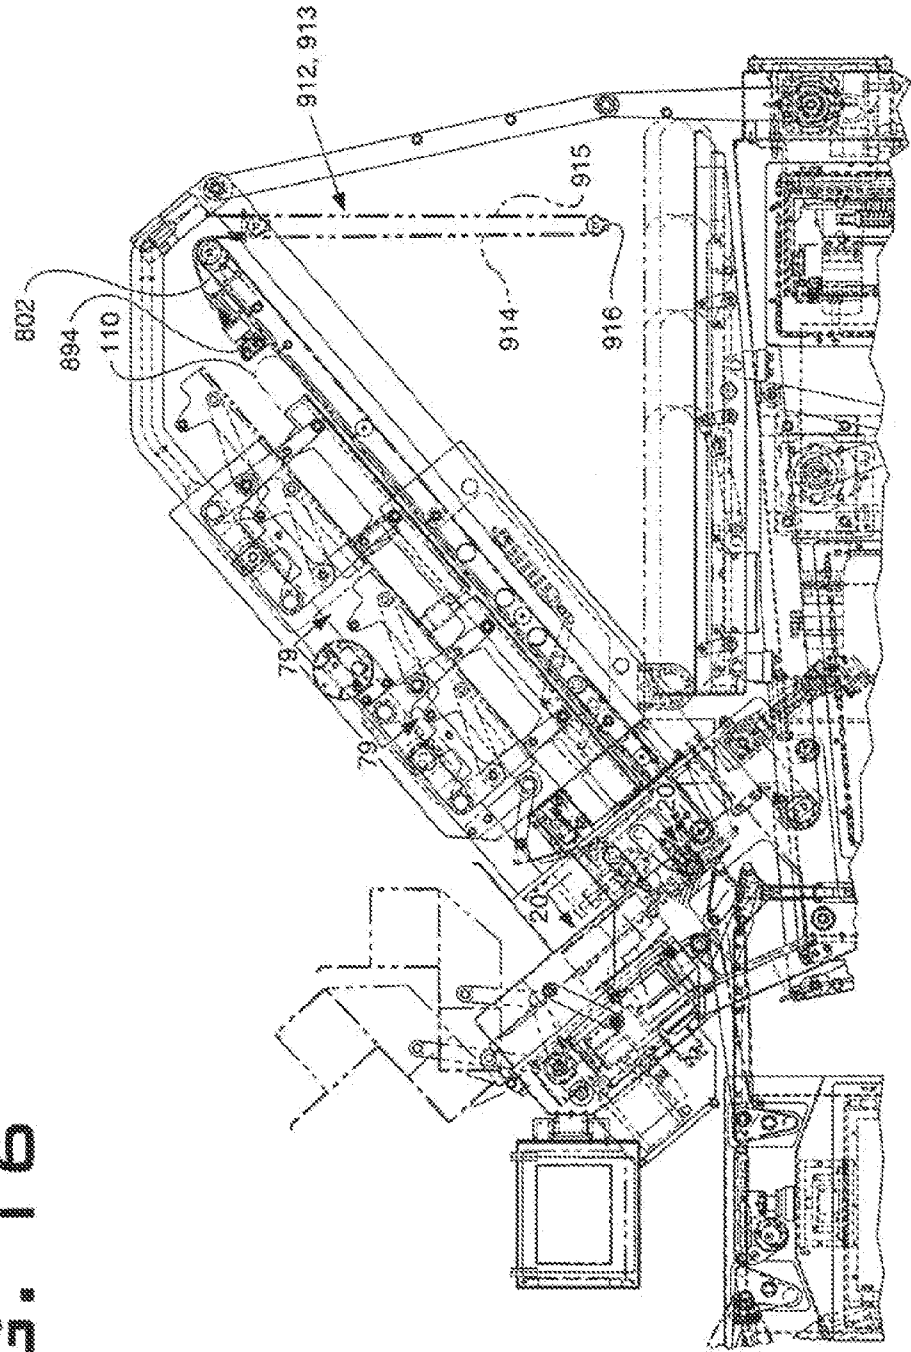


FIG. 17 FIG. 17A FIG. 18

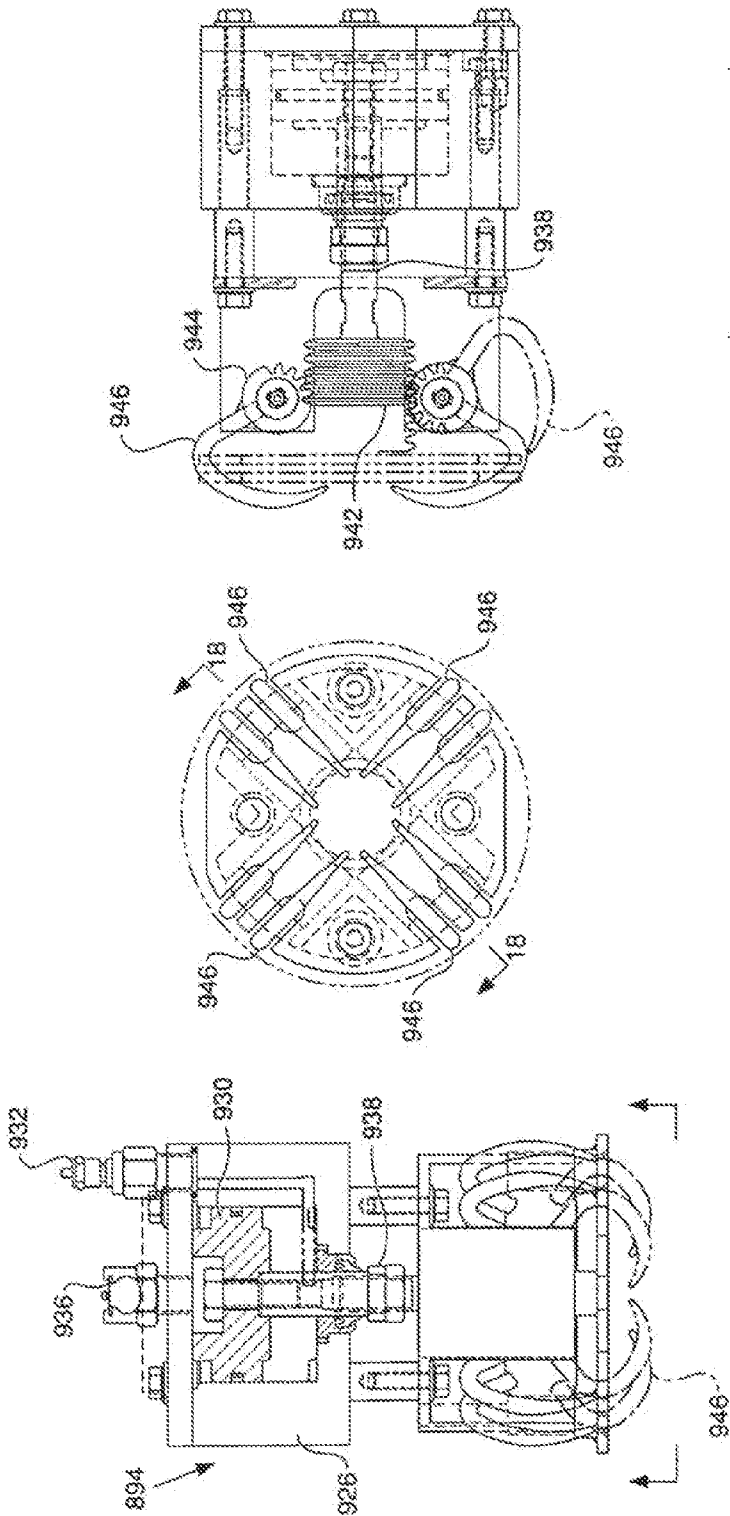


FIG. 19

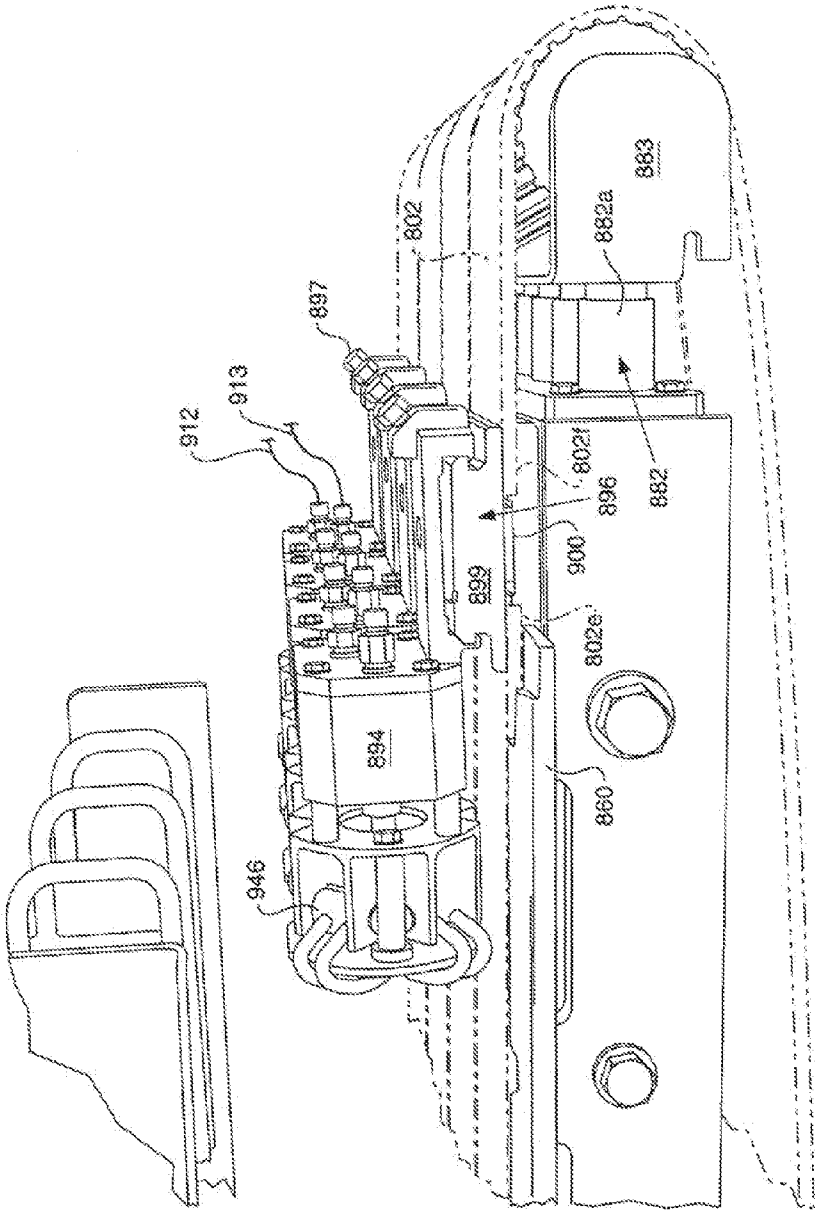


FIG. 21

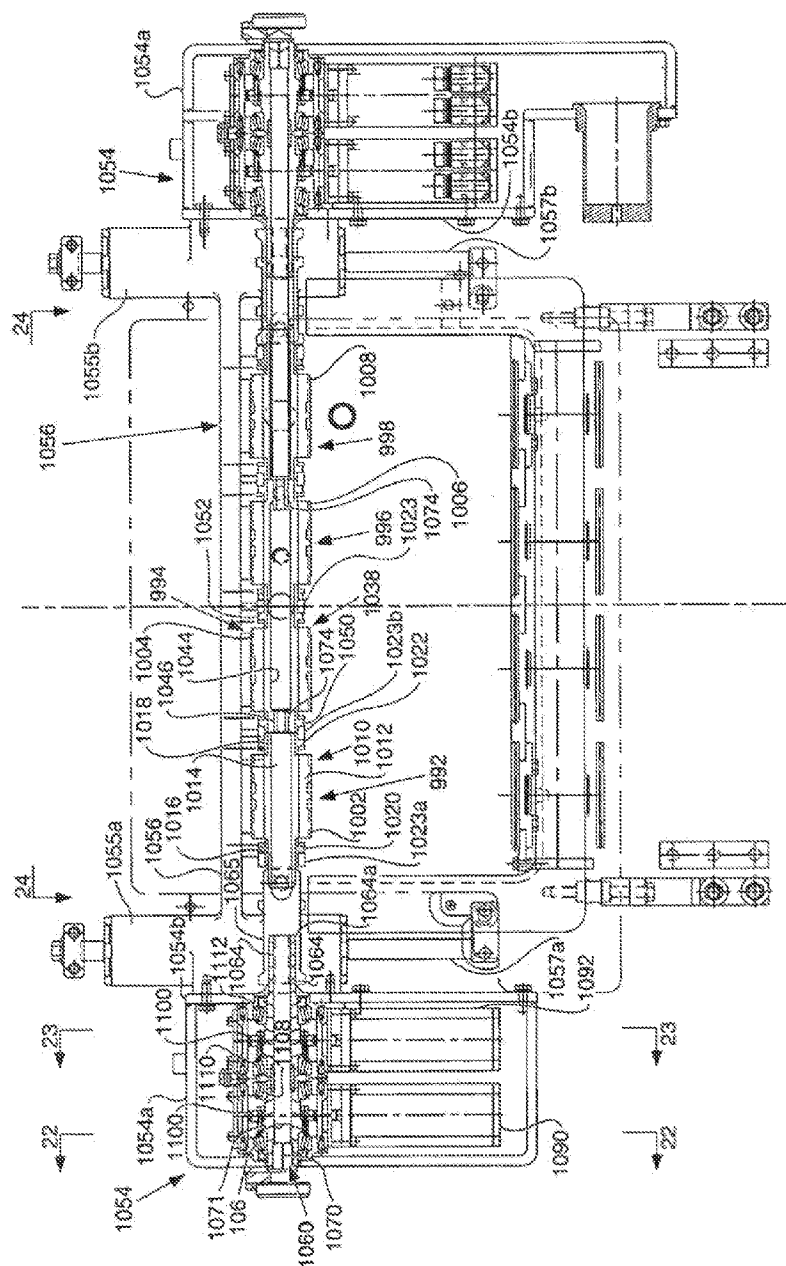


FIG. 23

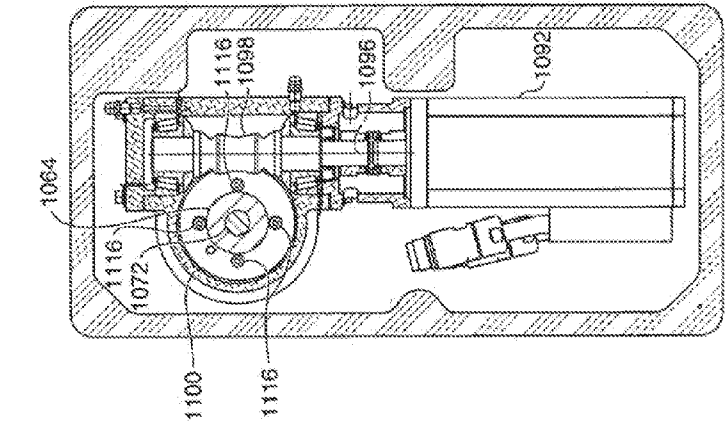


FIG. 22

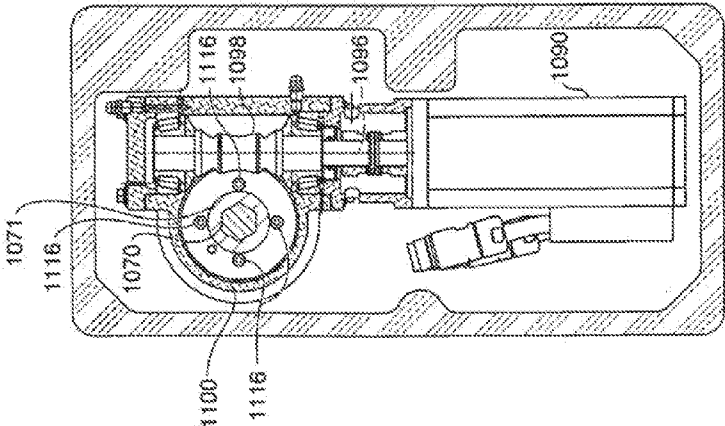


FIG. 24

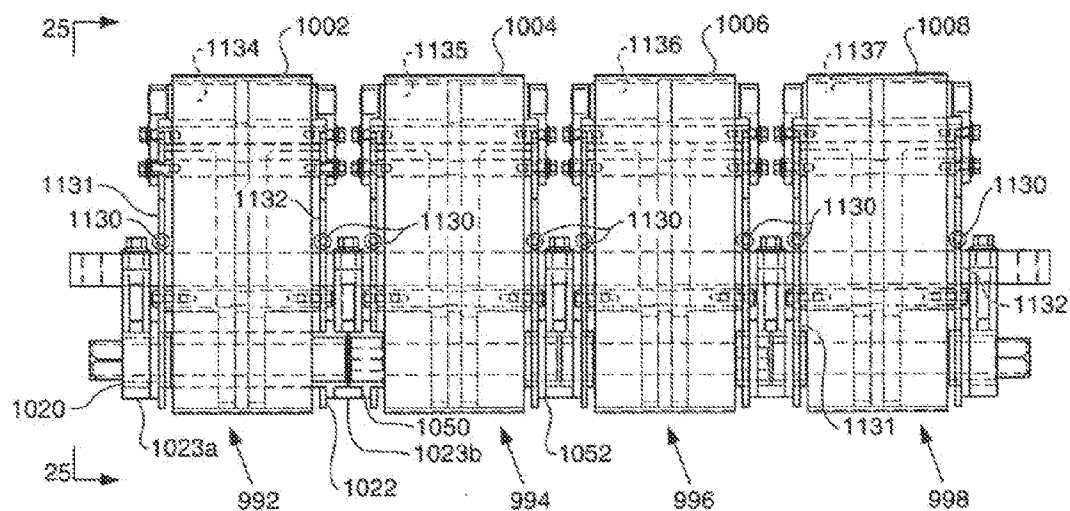


FIG. 25

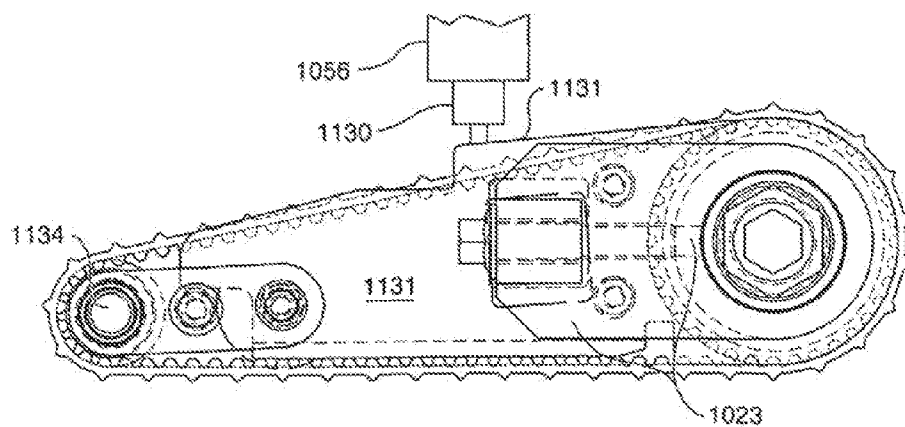


FIG. 27

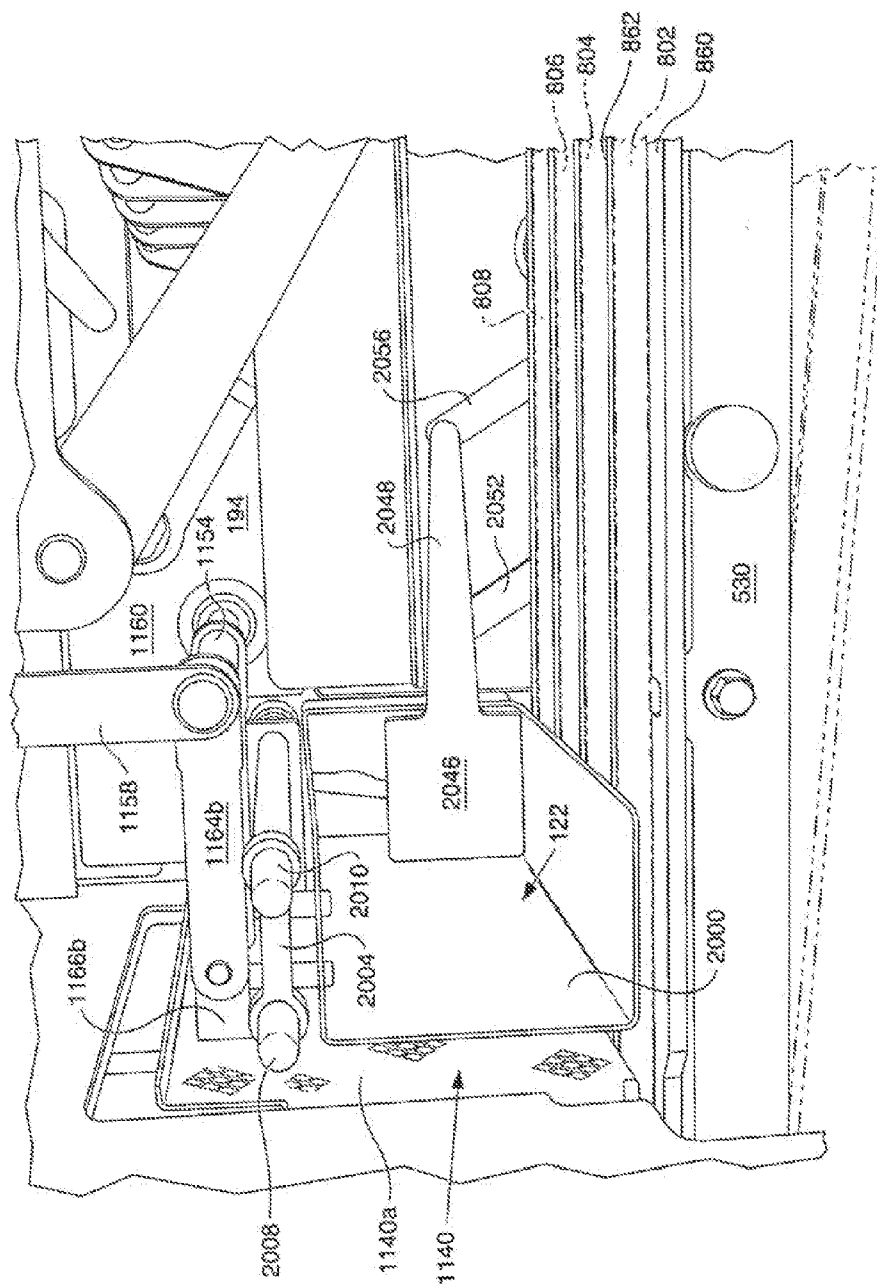


FIG. 28

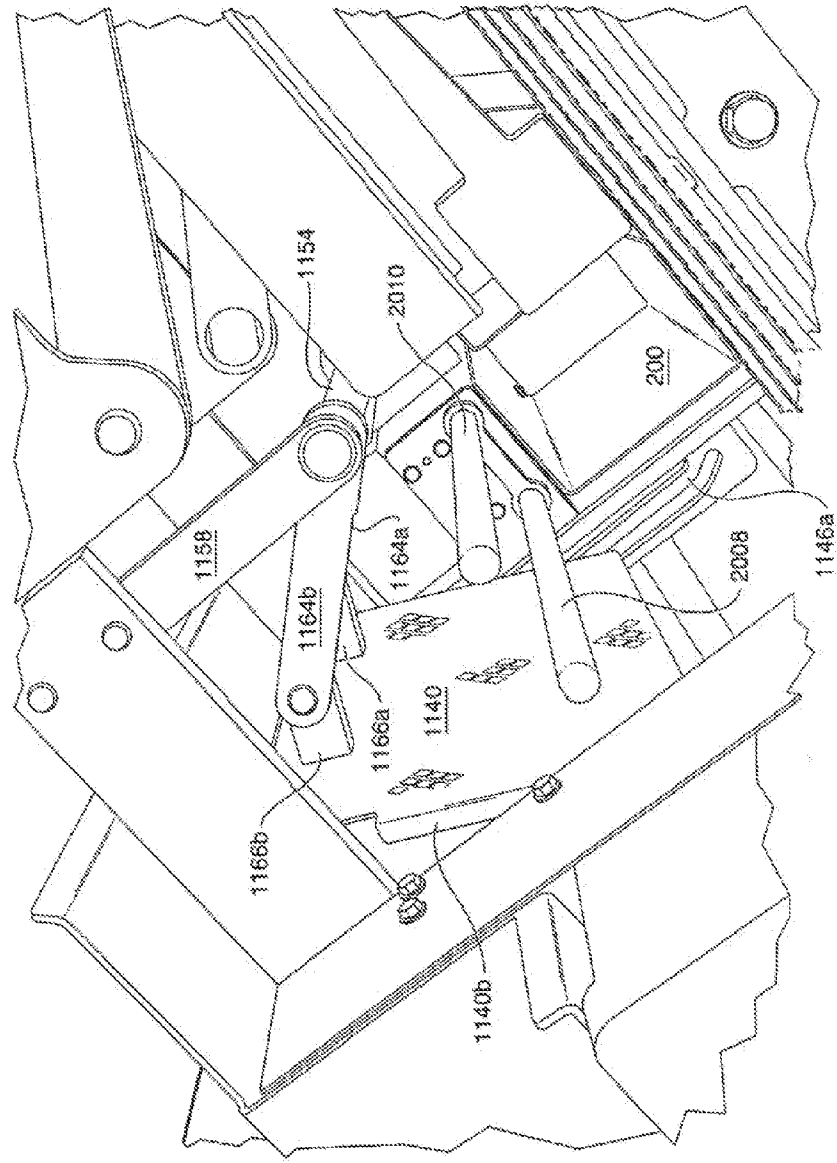


FIG. 29

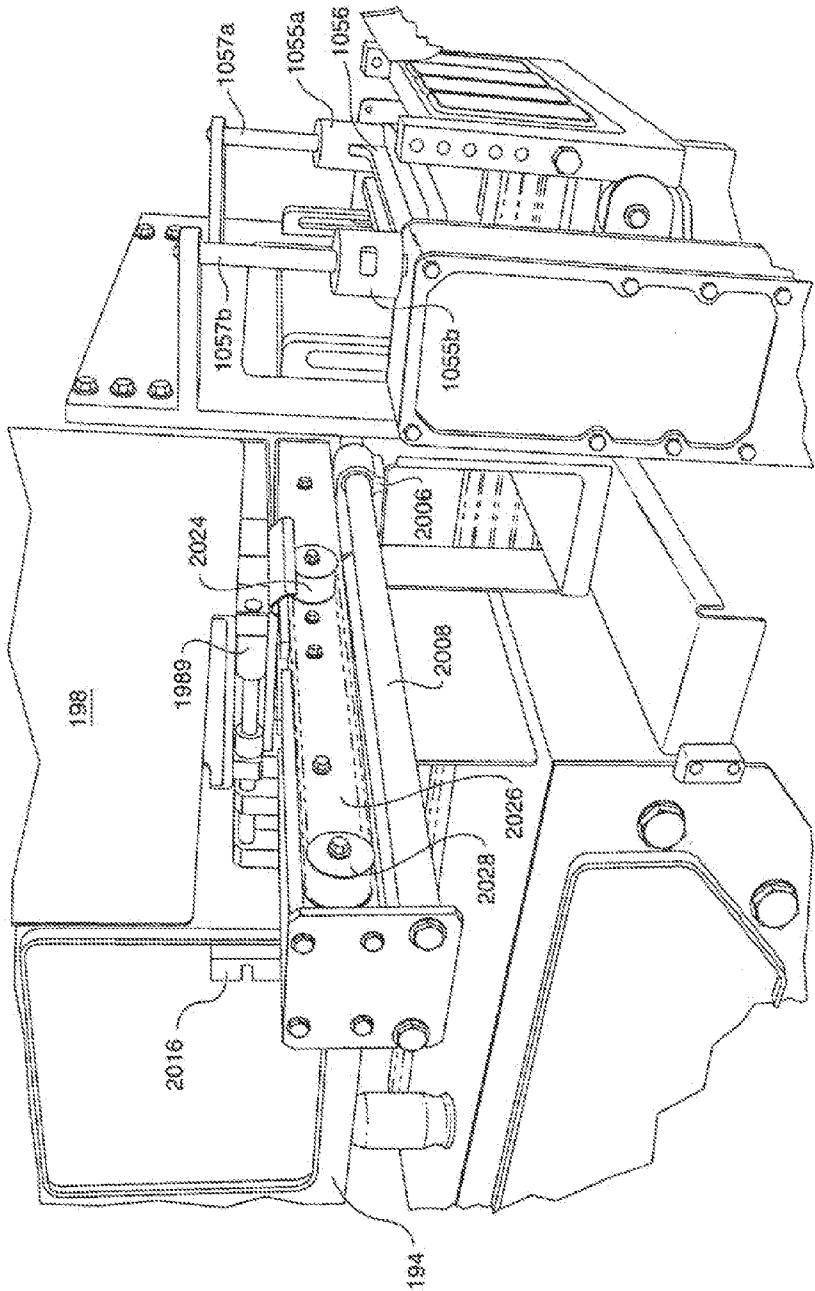


FIG. 30

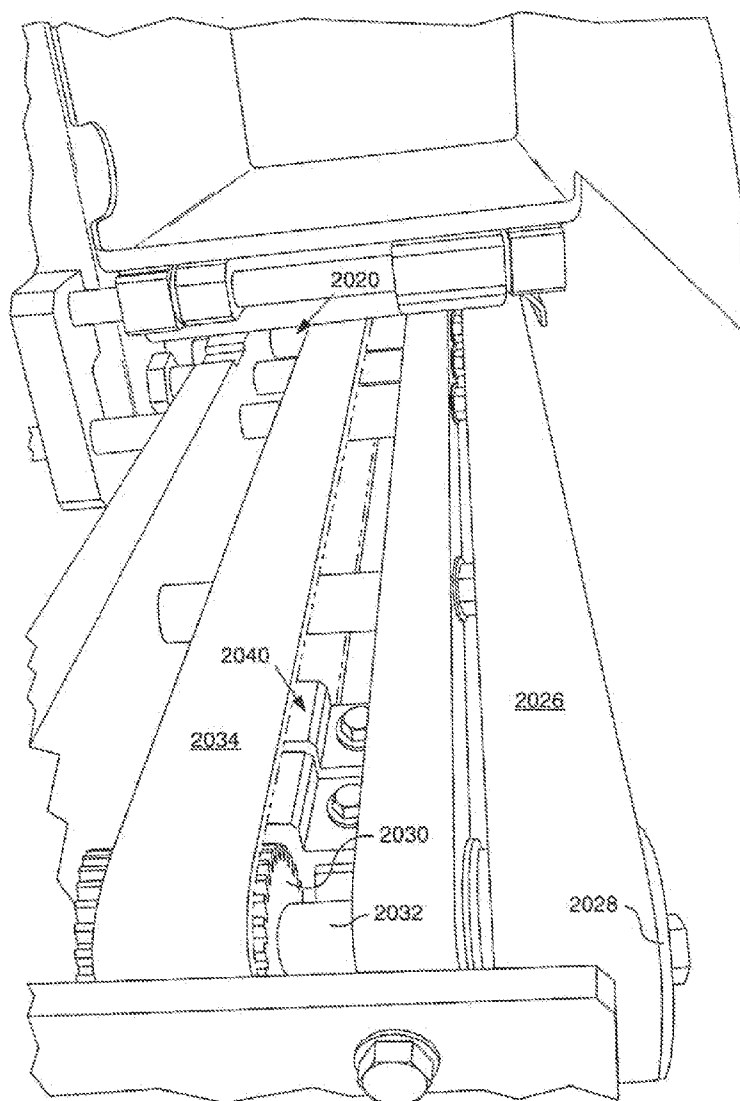


FIG. 31

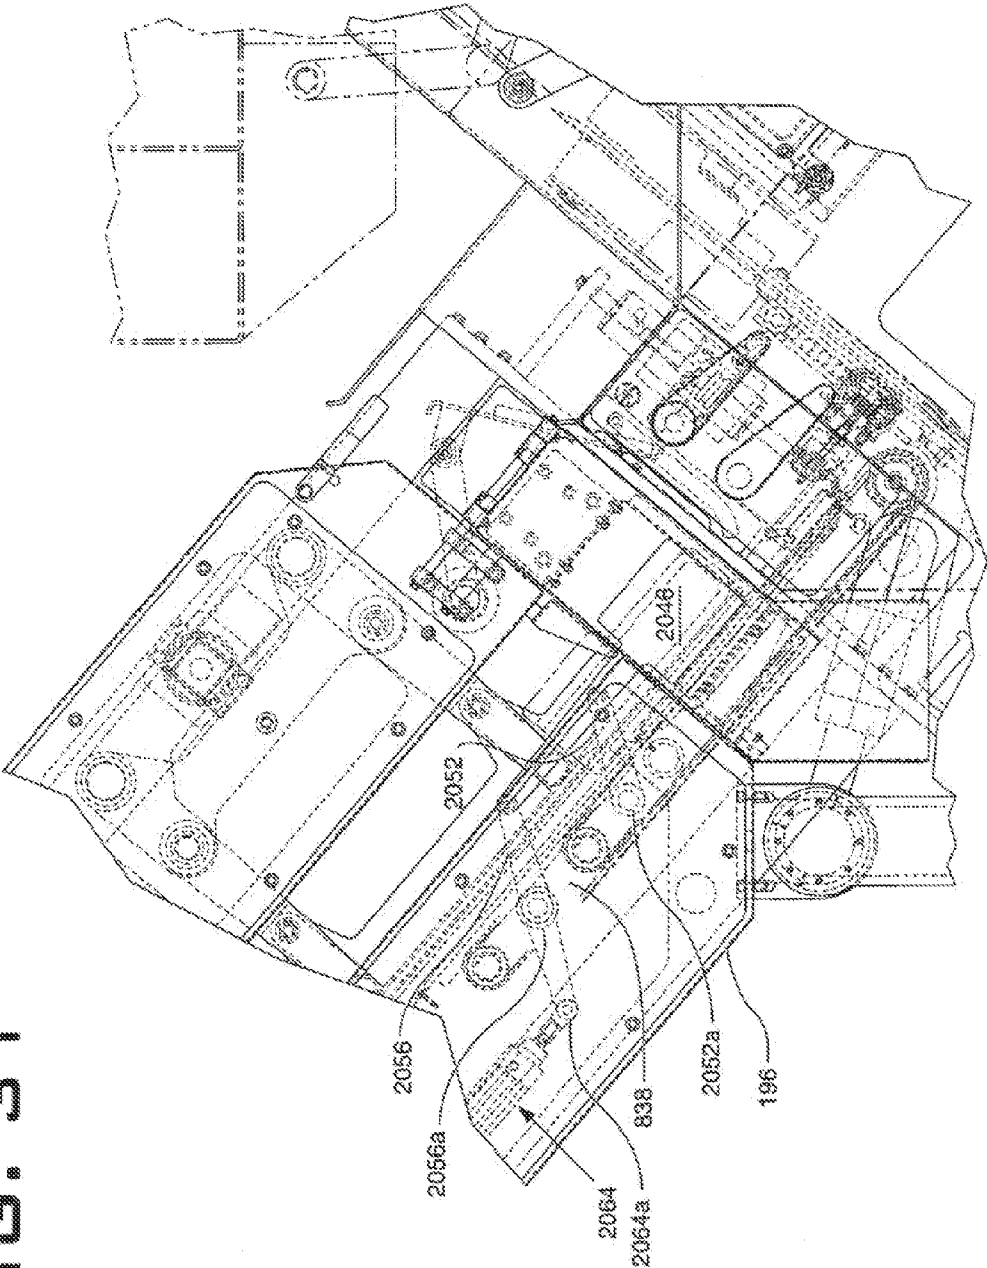


FIG. 32

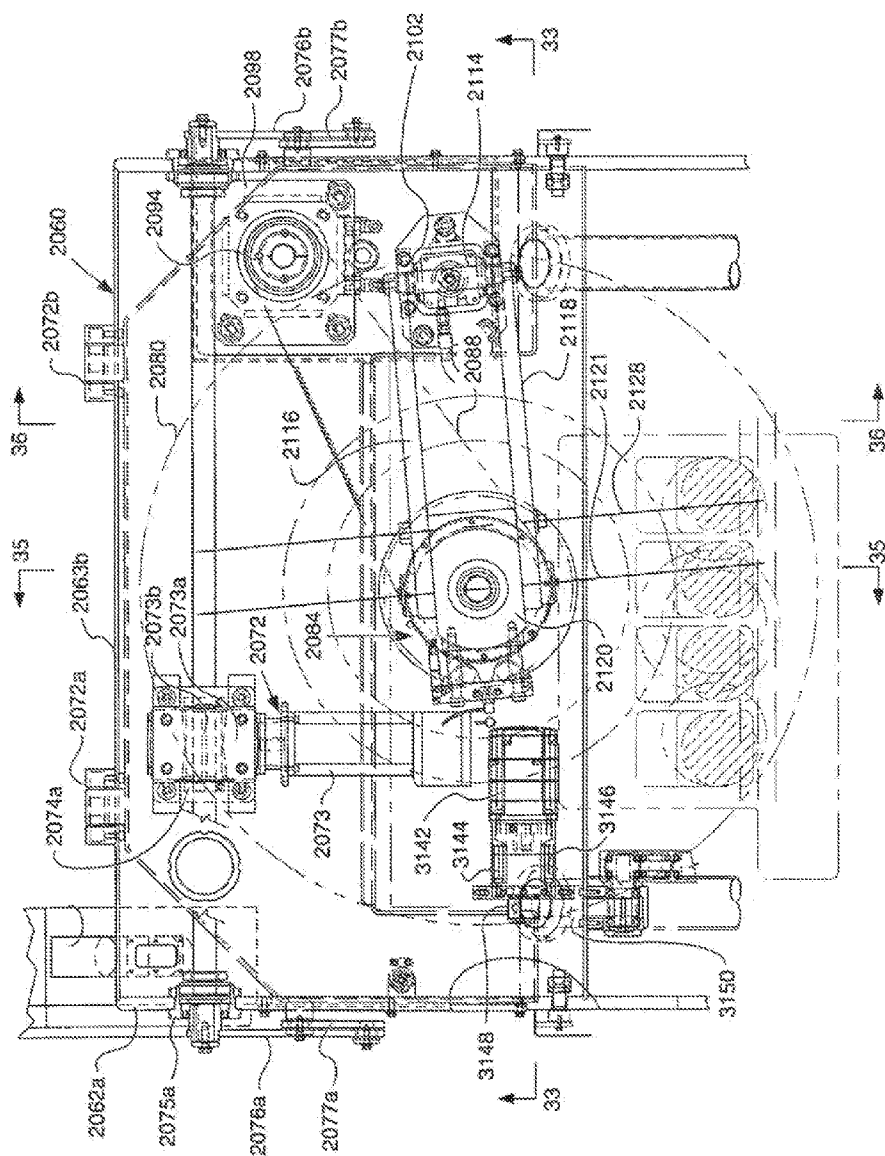


FIG. 33

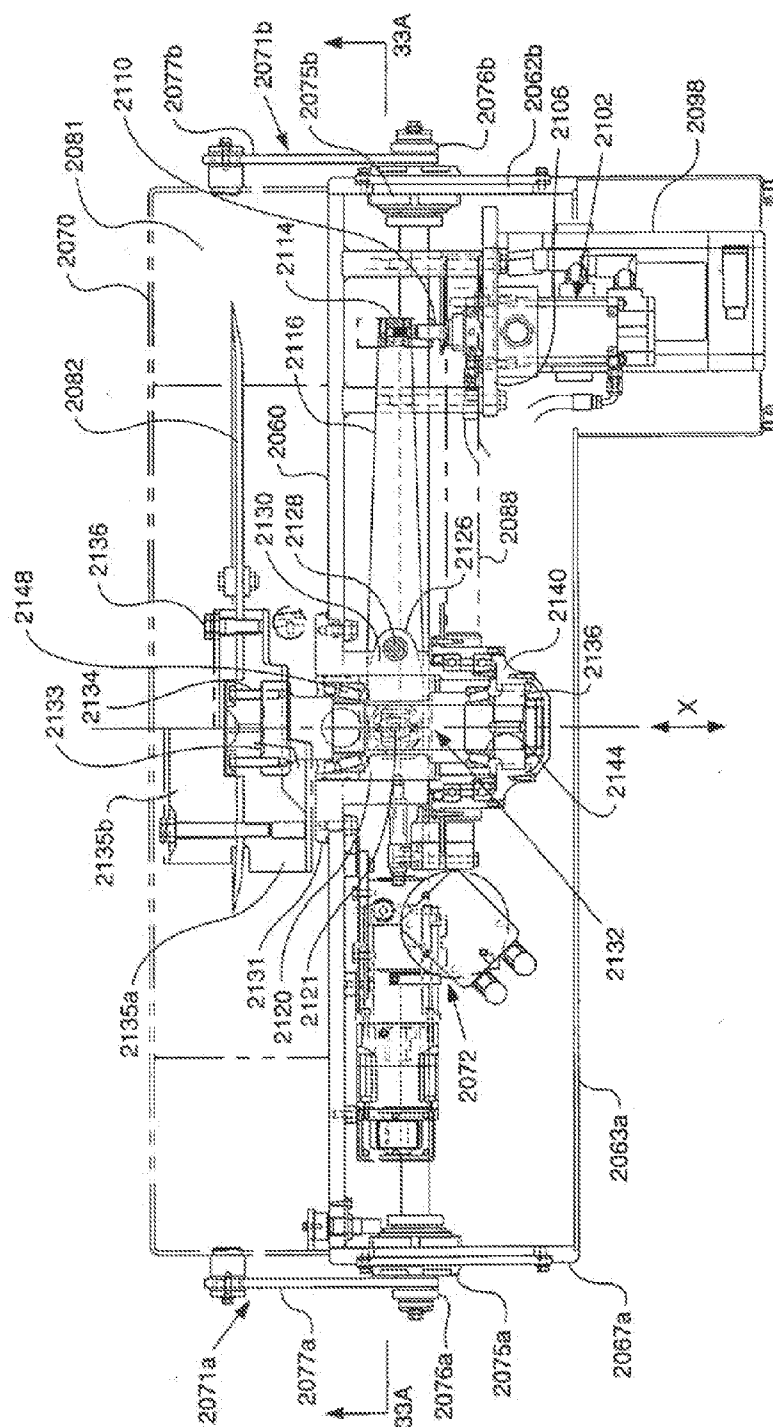


FIG. 33A

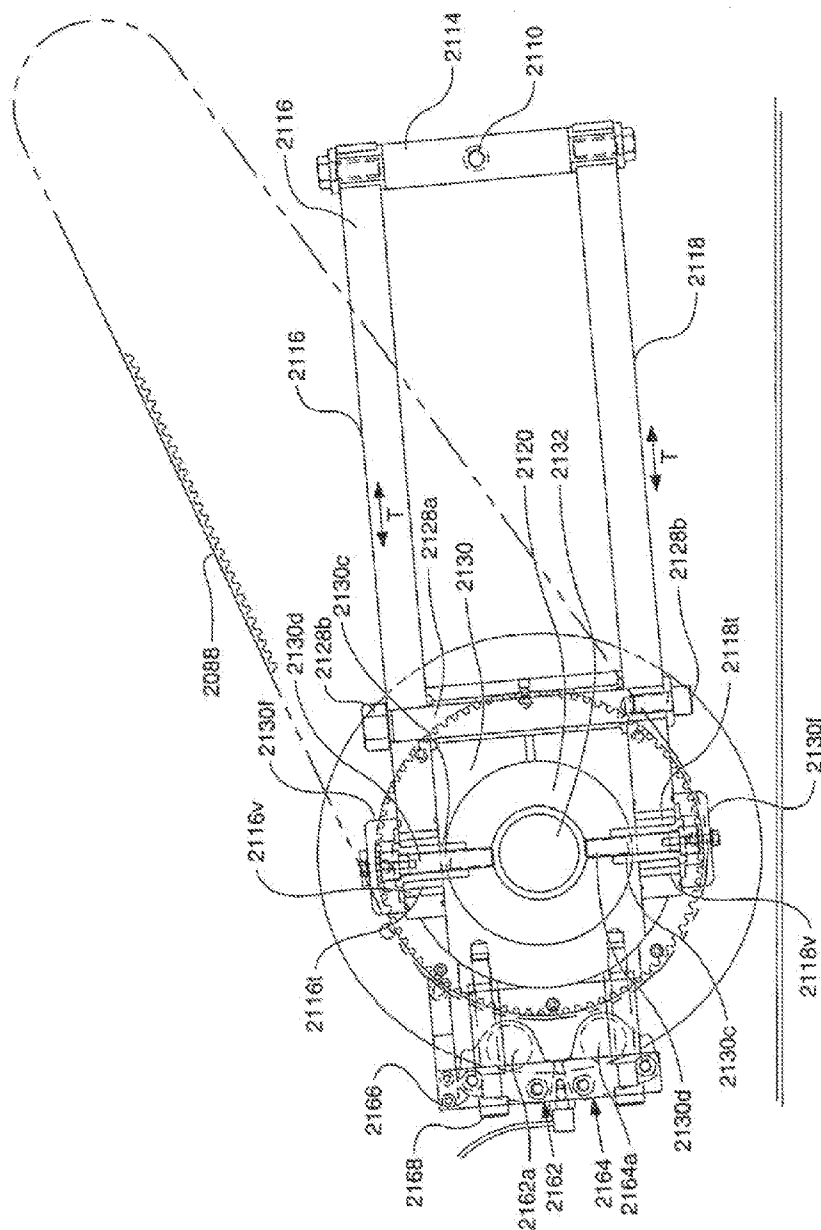


FIG. 34

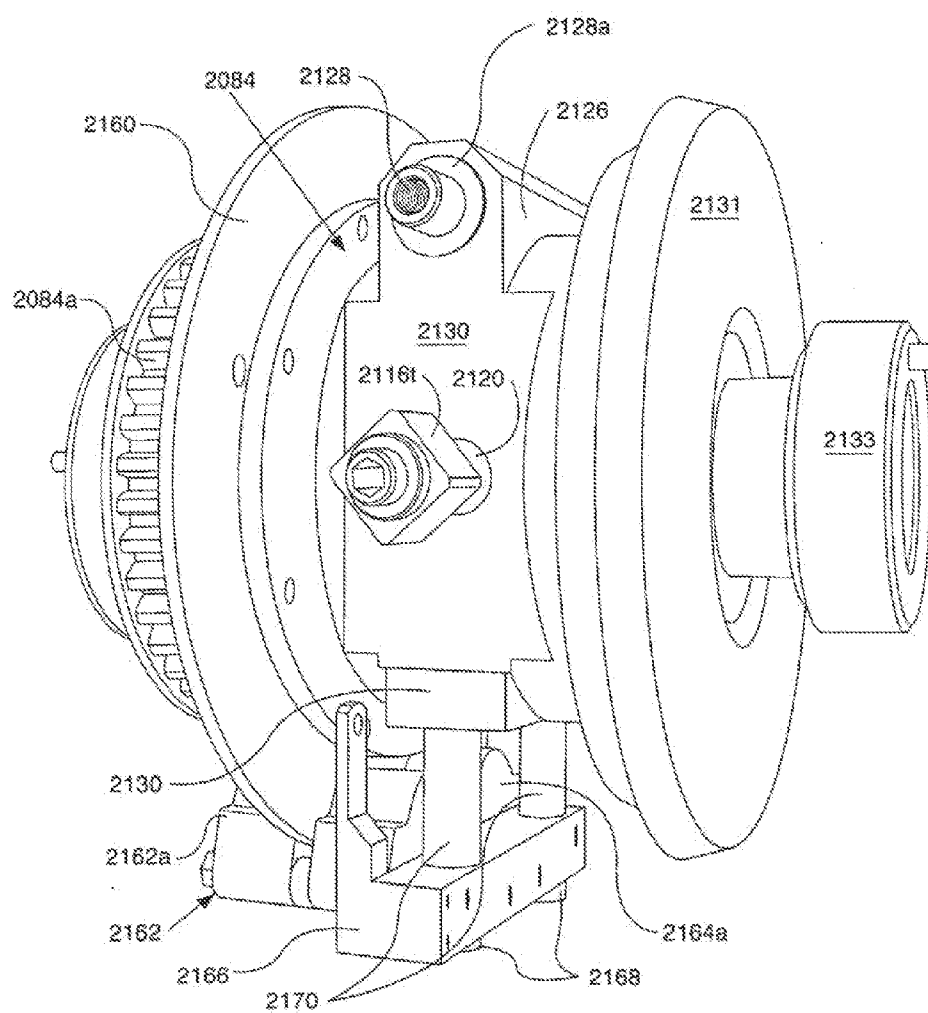


FIG. 36

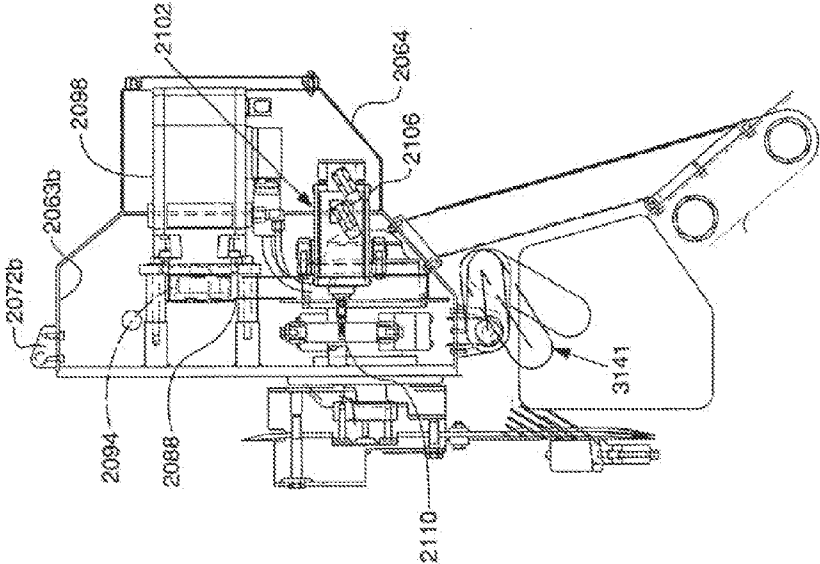


FIG. 35

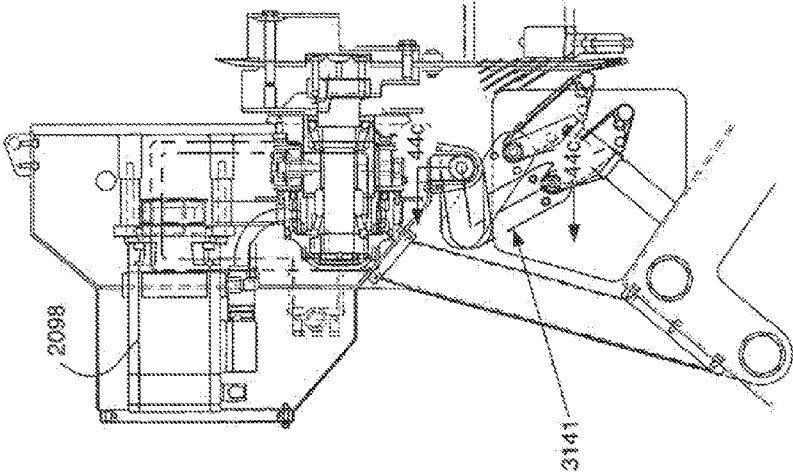


FIG. 37

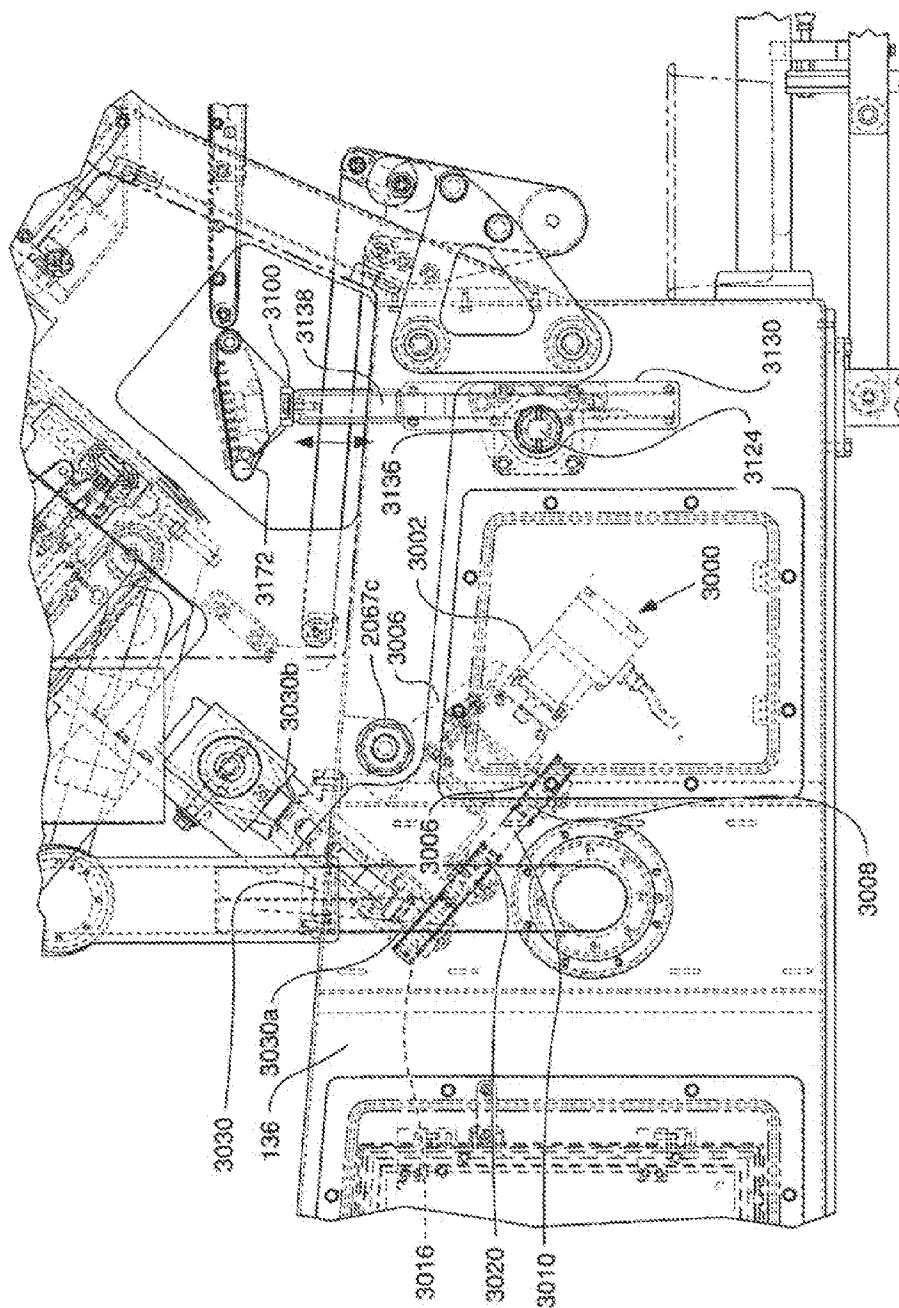


FIG. 38

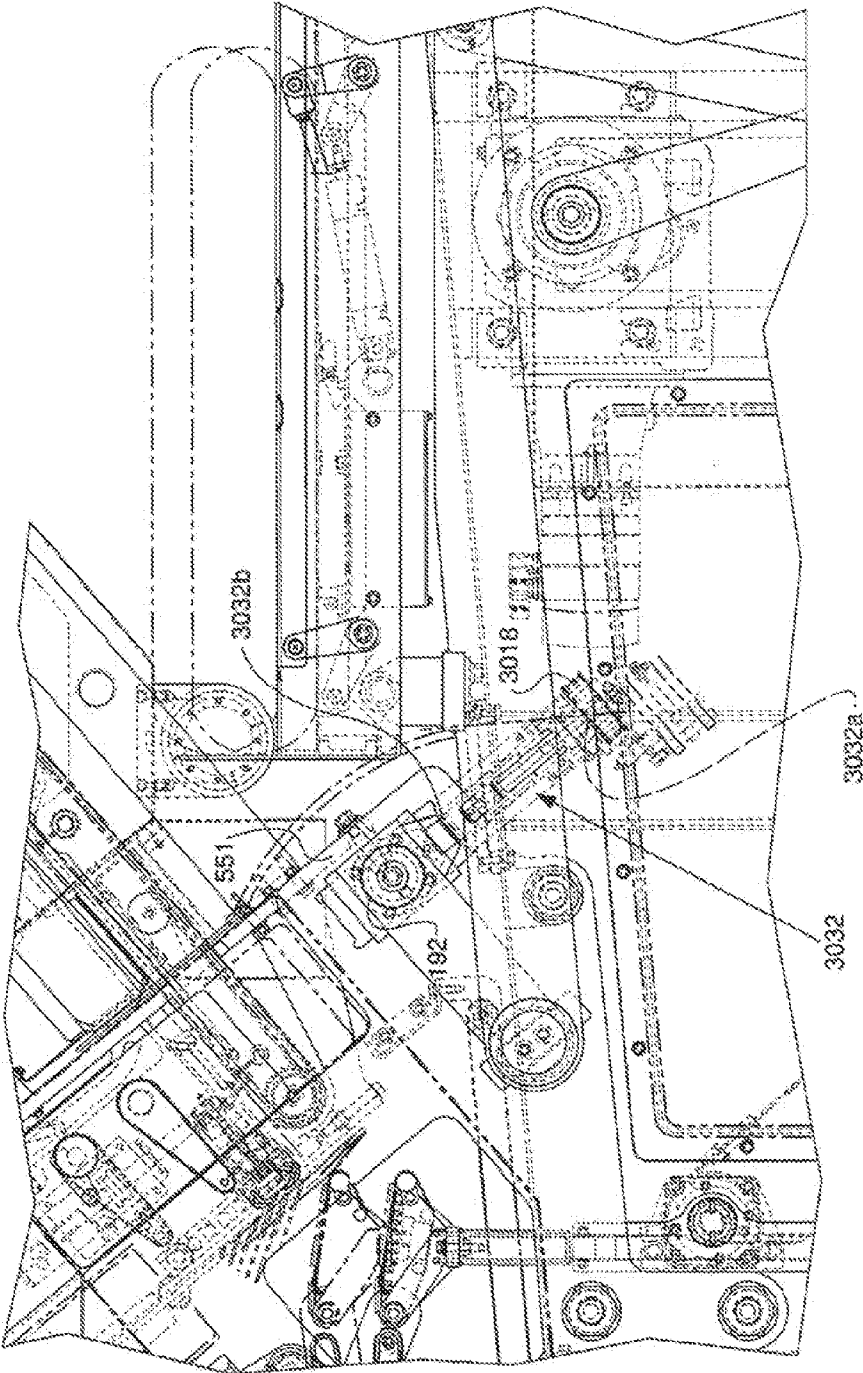


FIG. 39

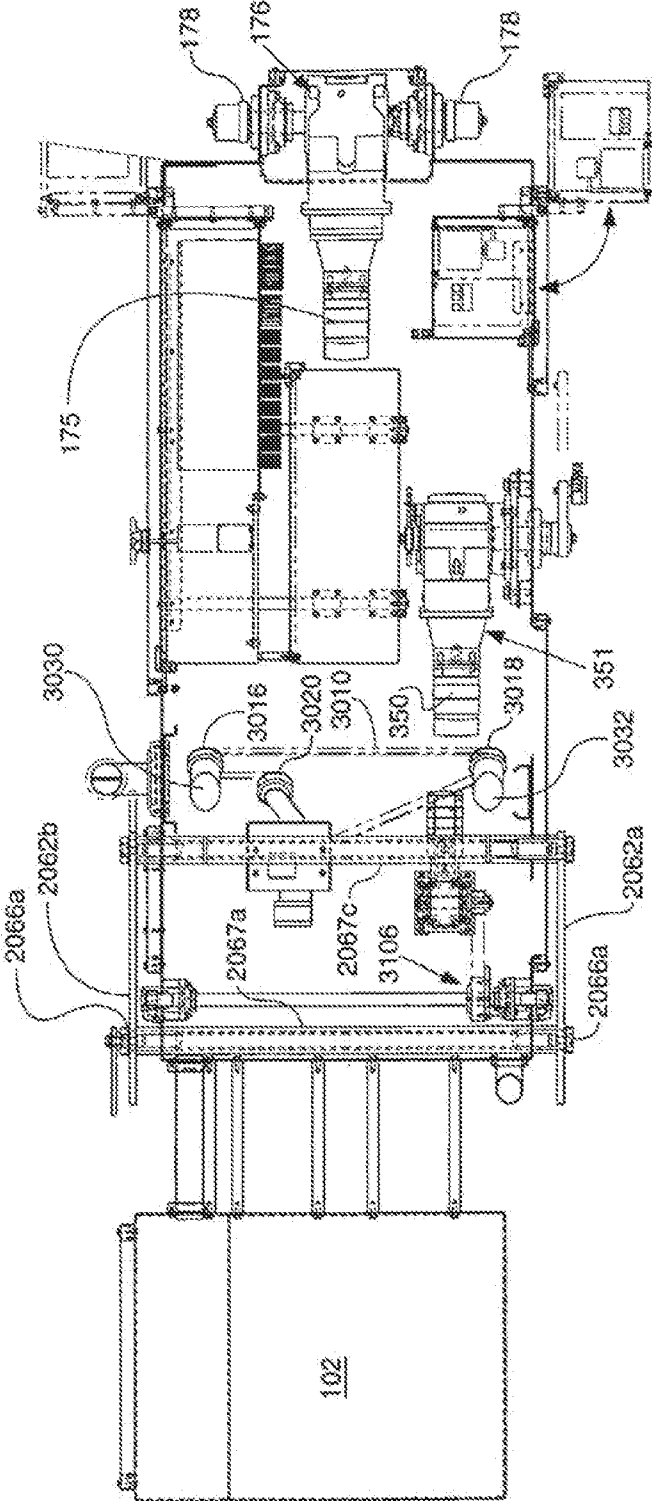


FIG. 40

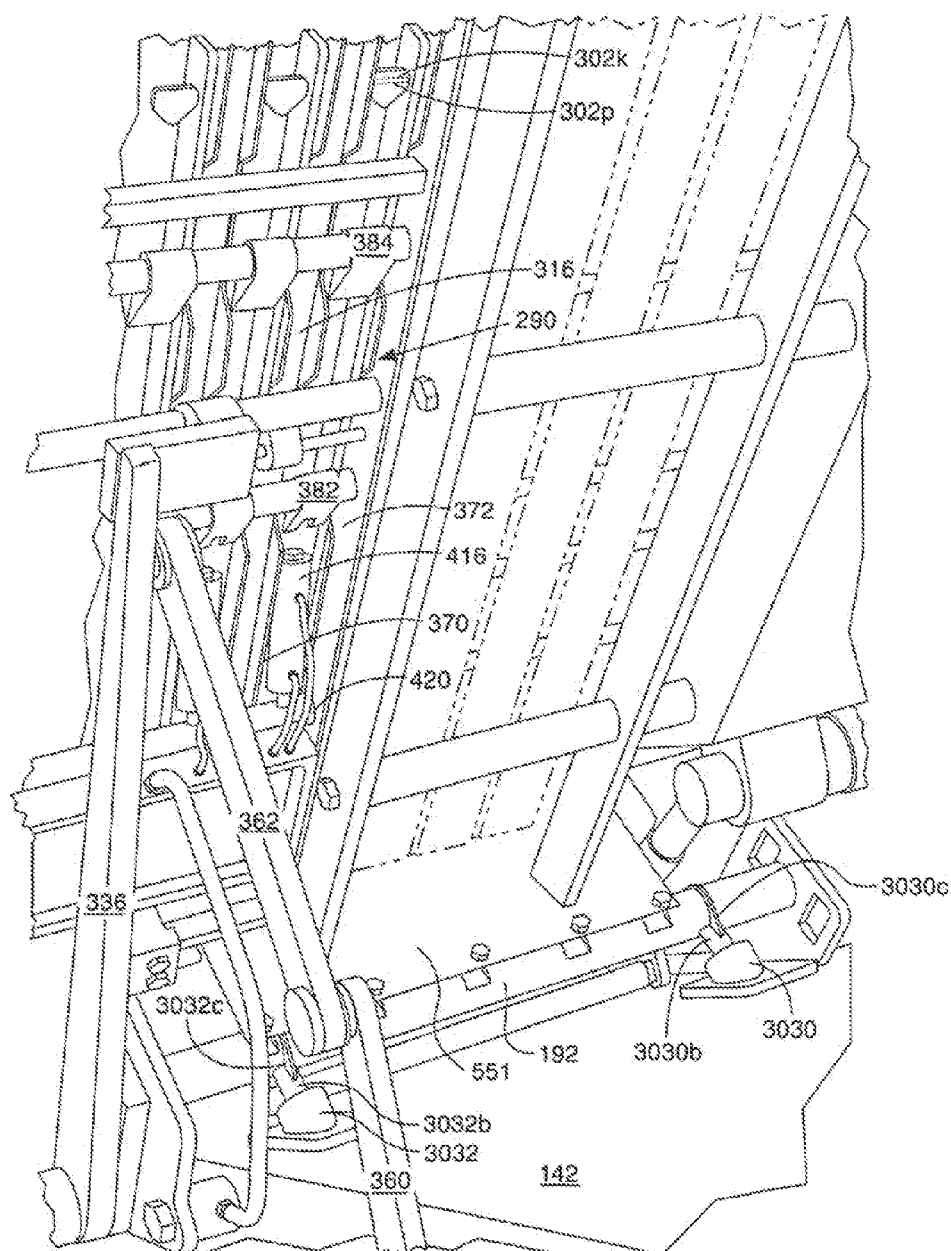


FIG. 41

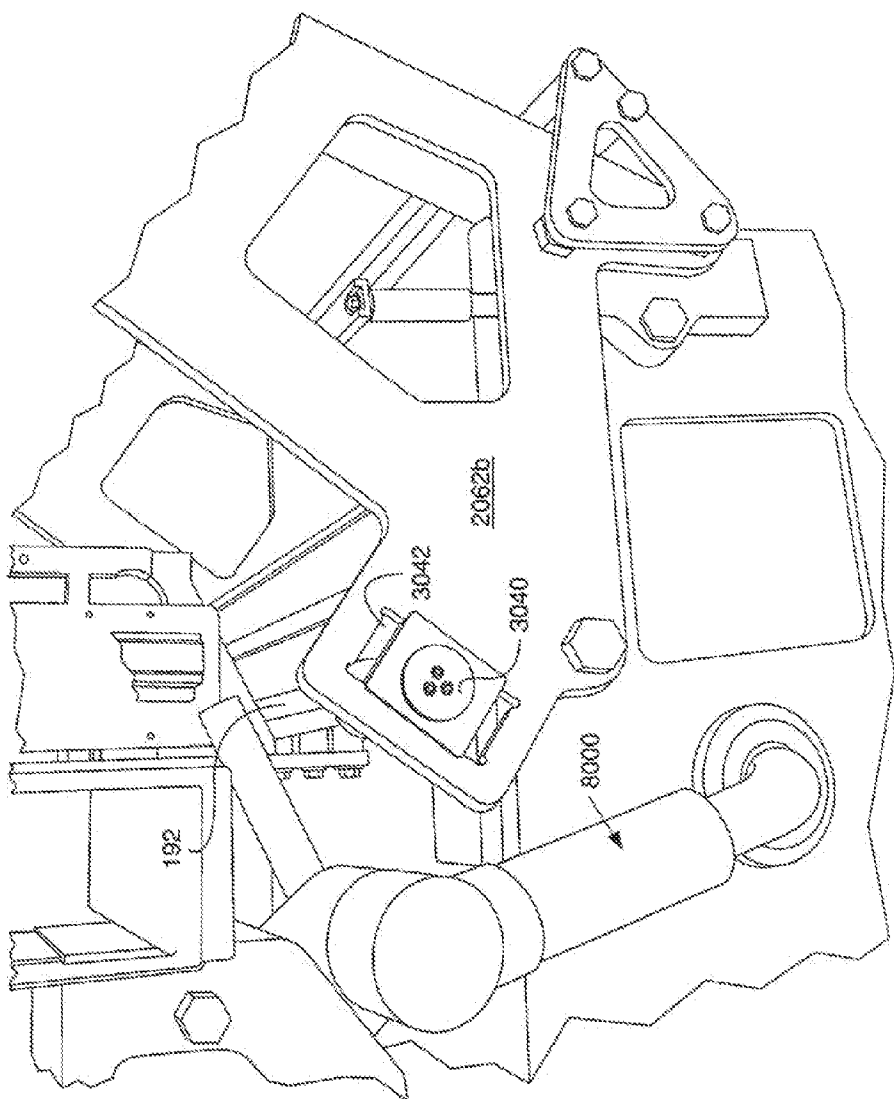


FIG. 42

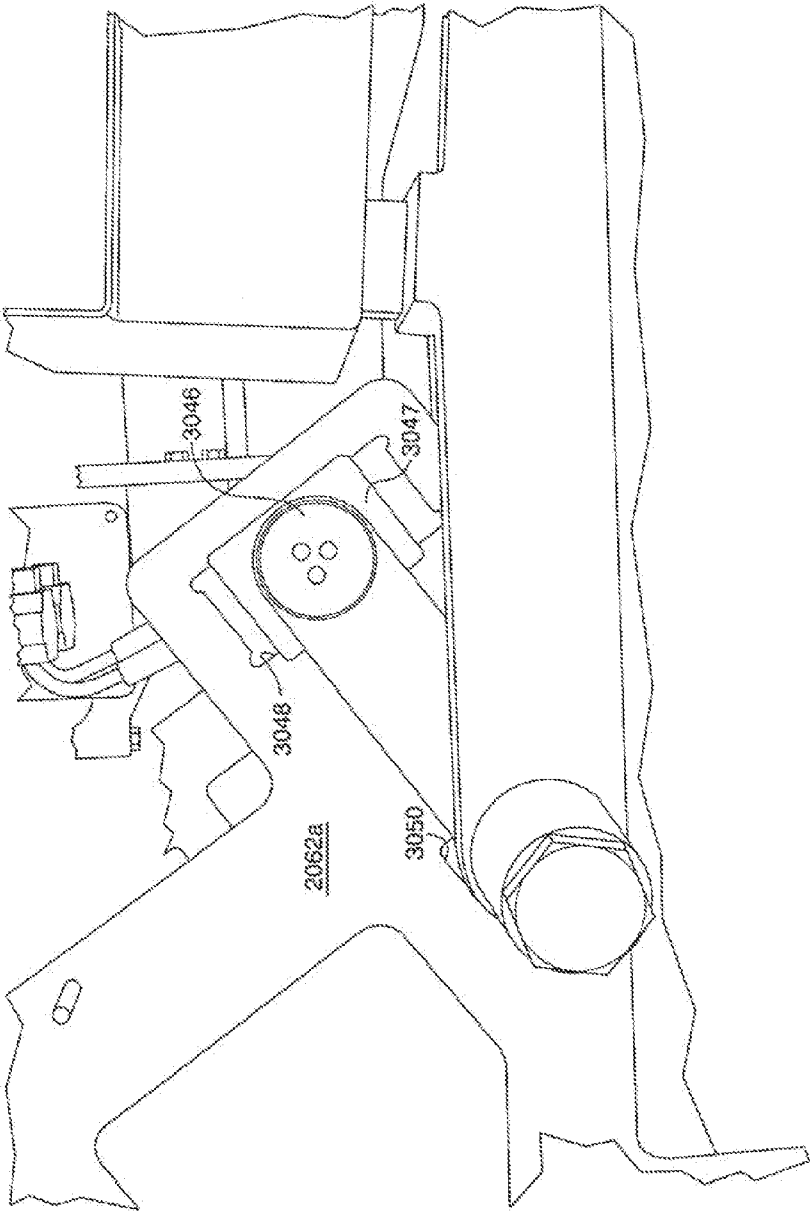


FIG. 43

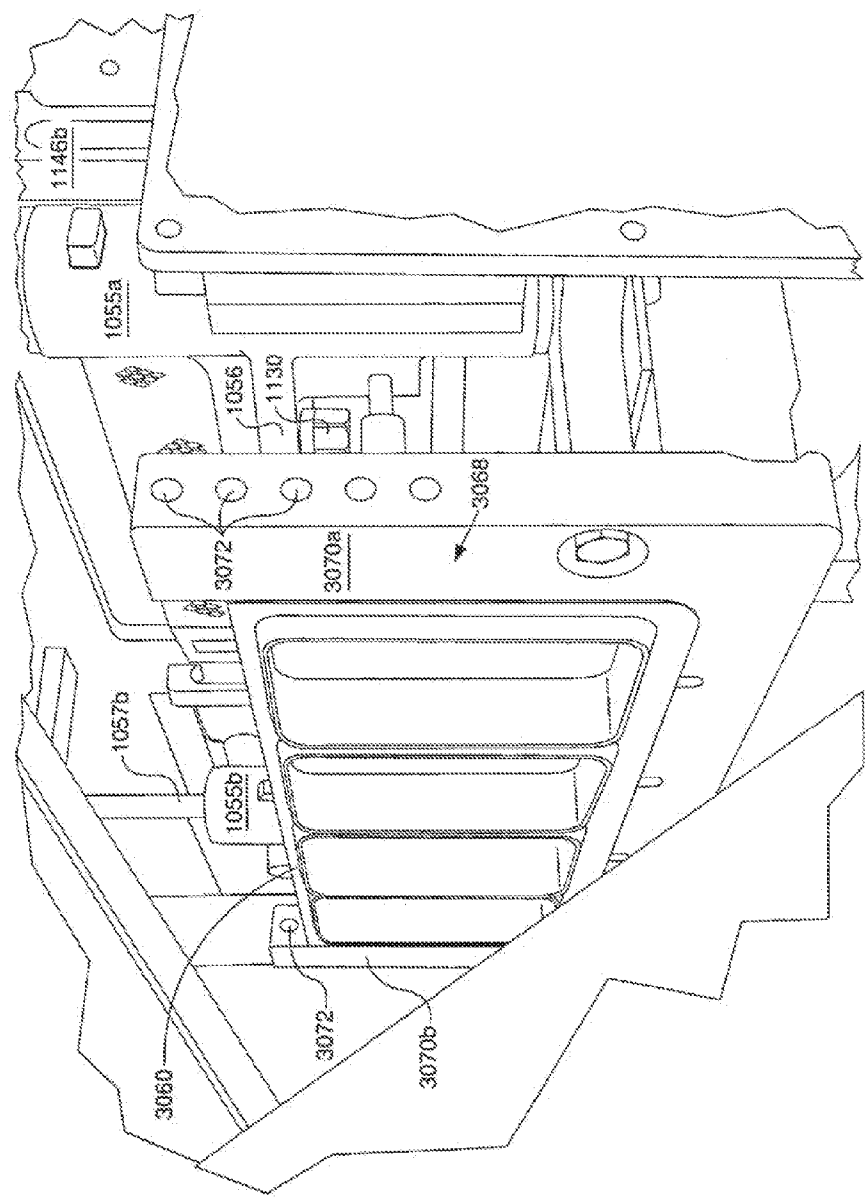


FIG. 44

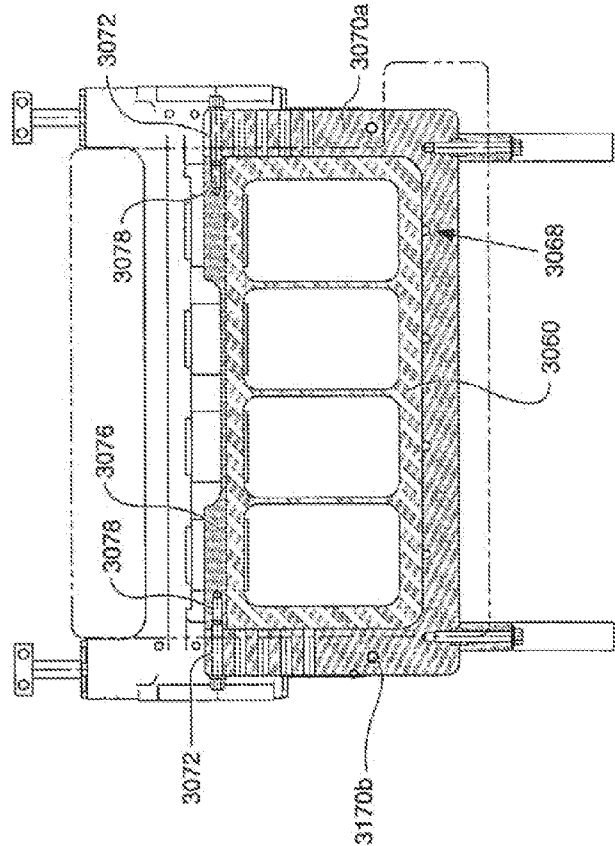


FIG. 44c

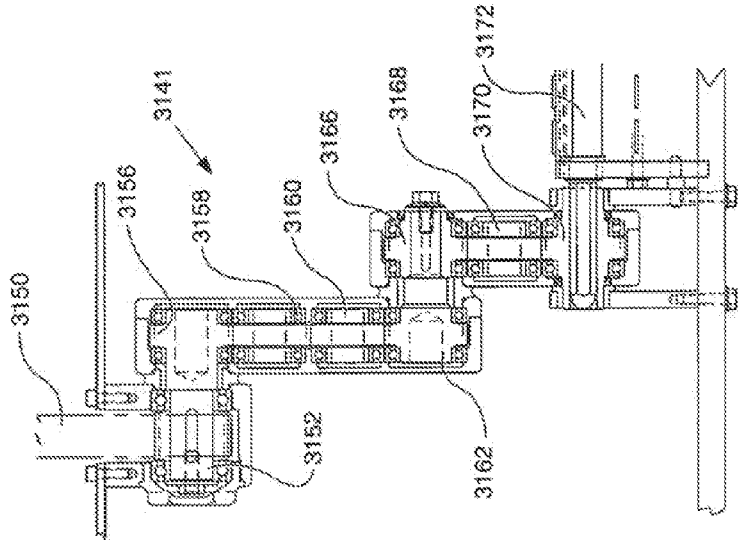


FIG. 44B


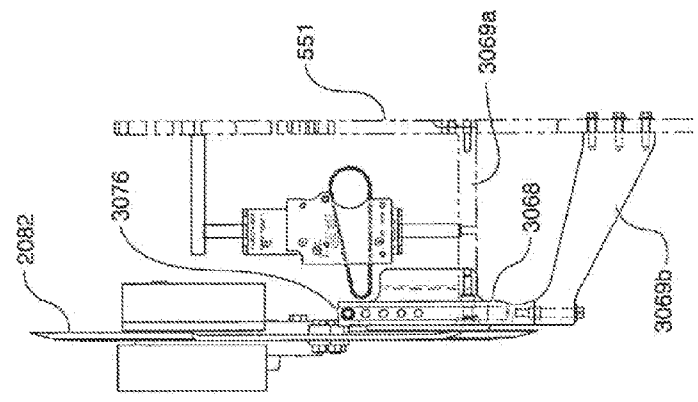


FIG. 44A

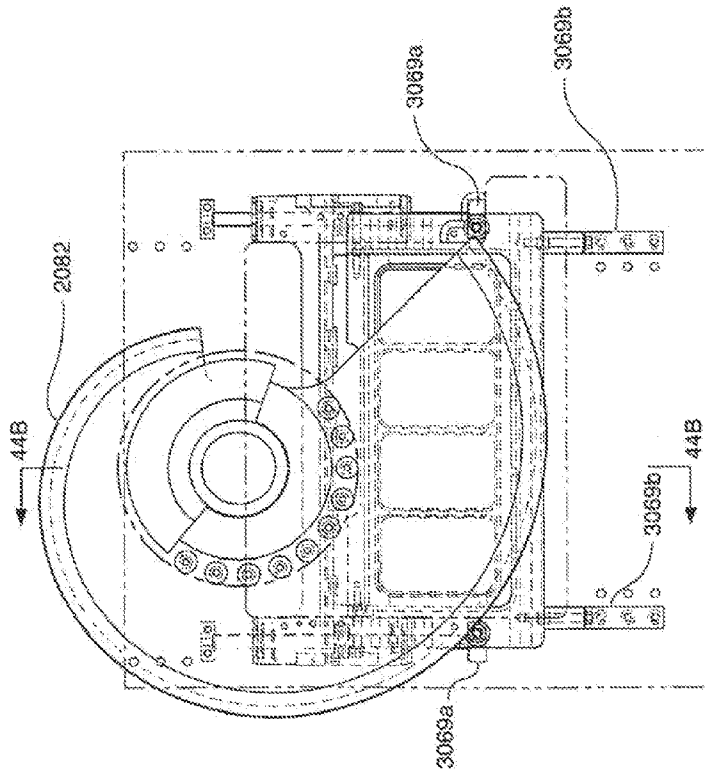

54. 6

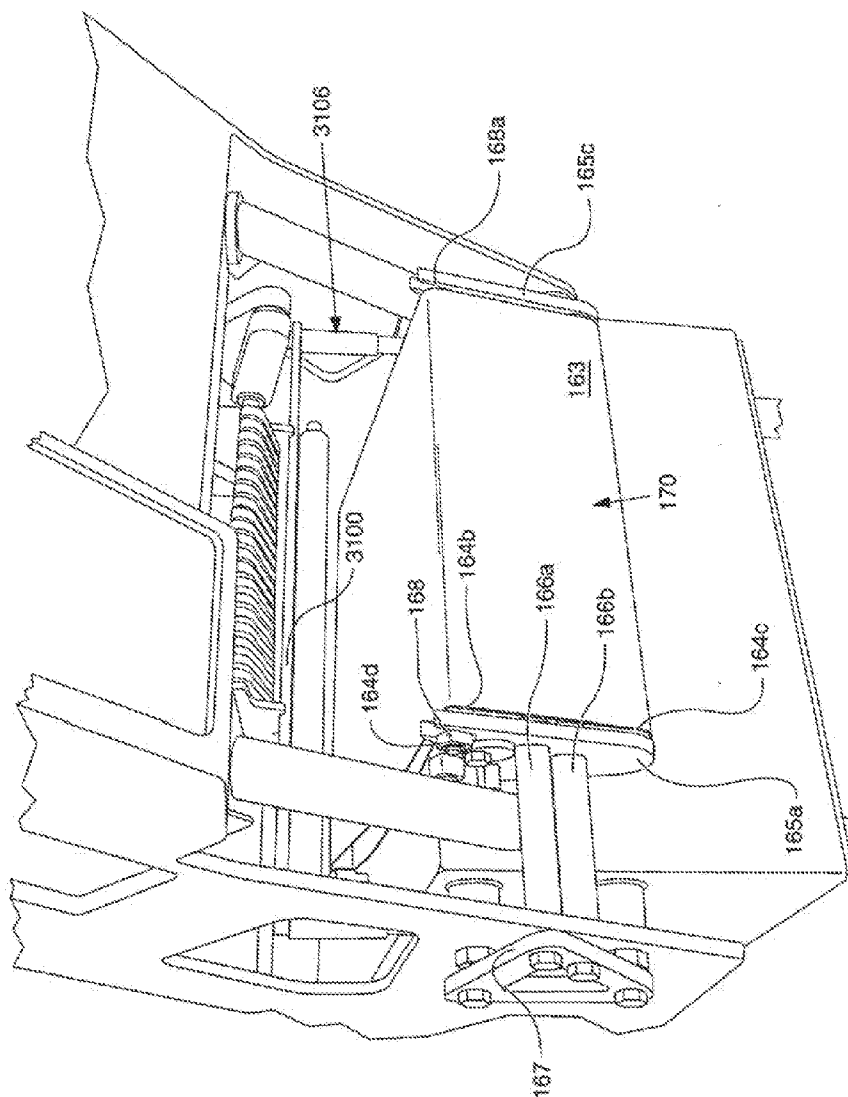


FIG. 46

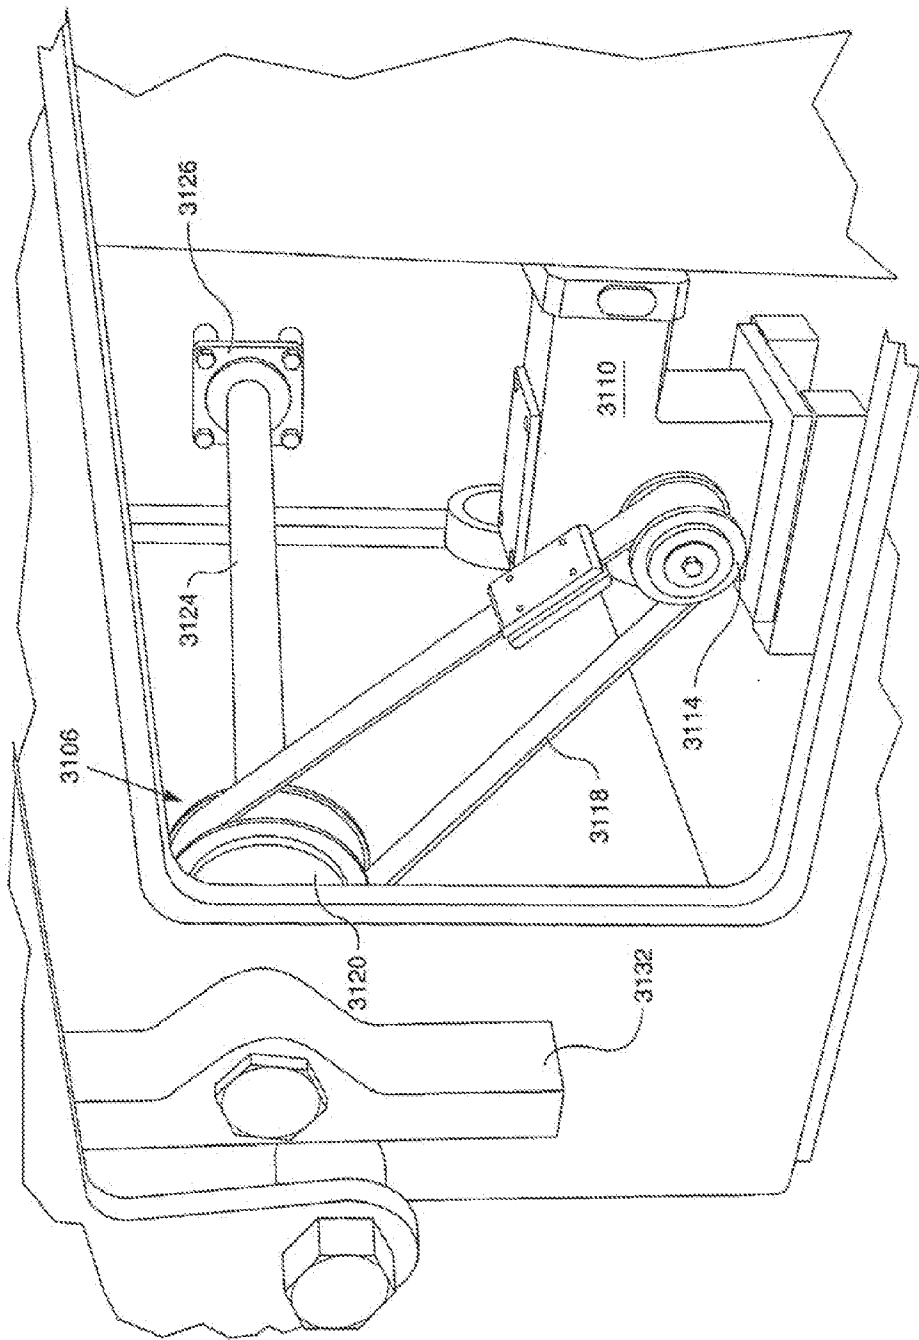


FIG. 46A

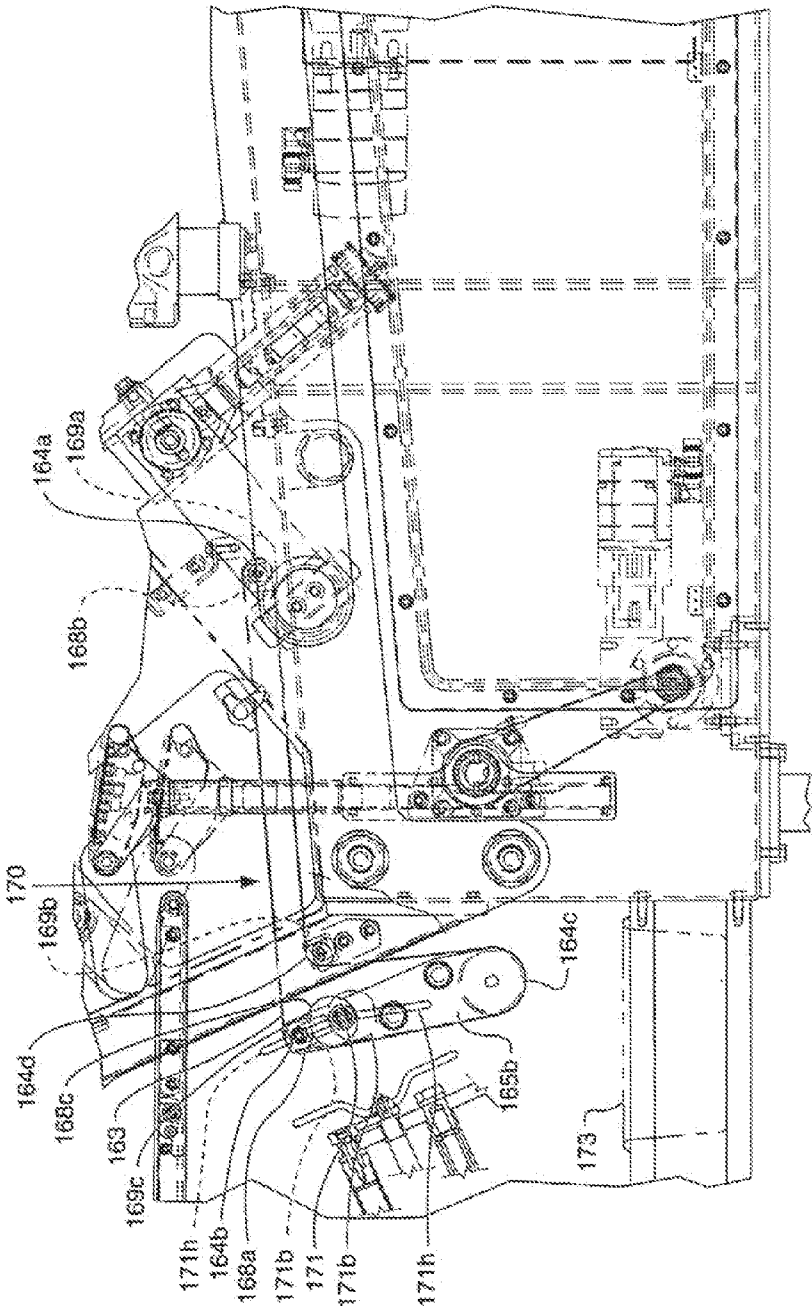


FIG. 47

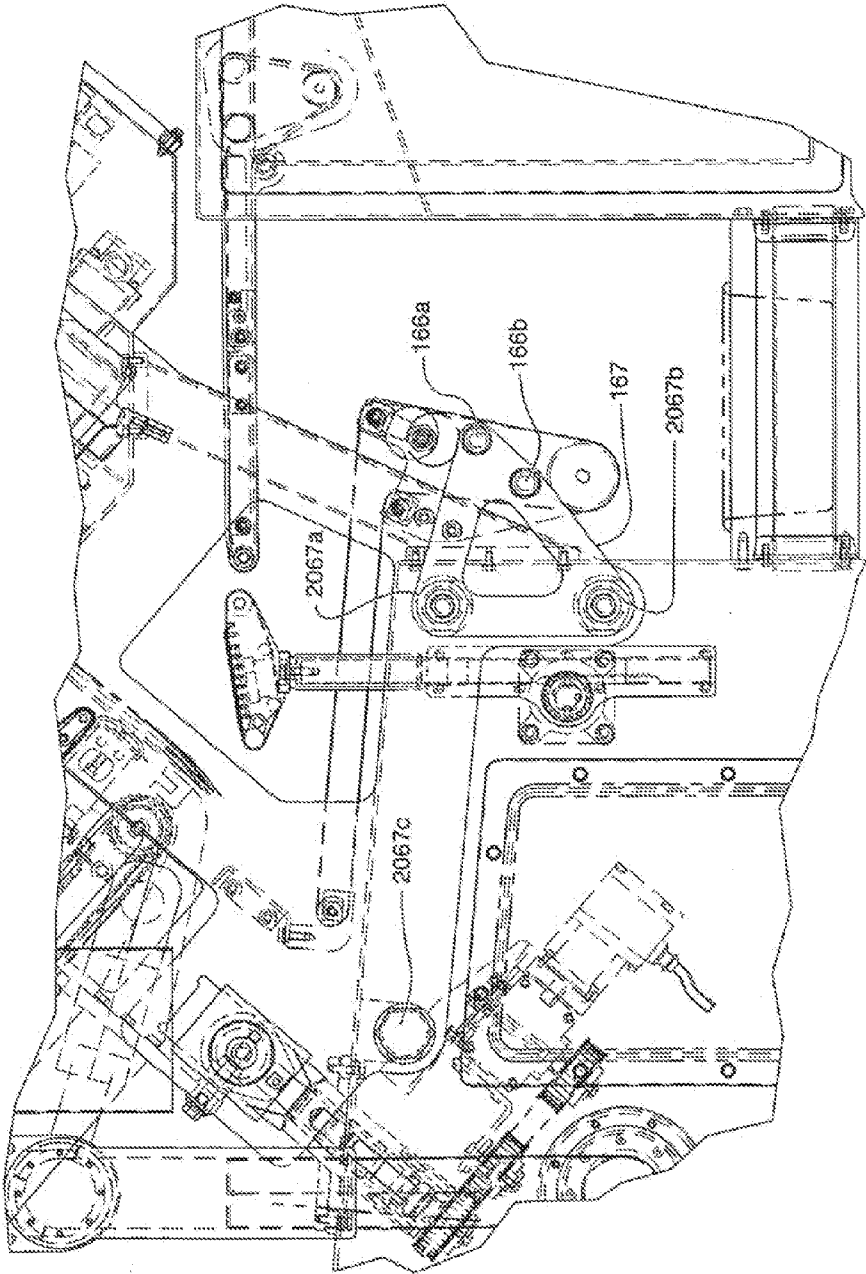


FIG. 48

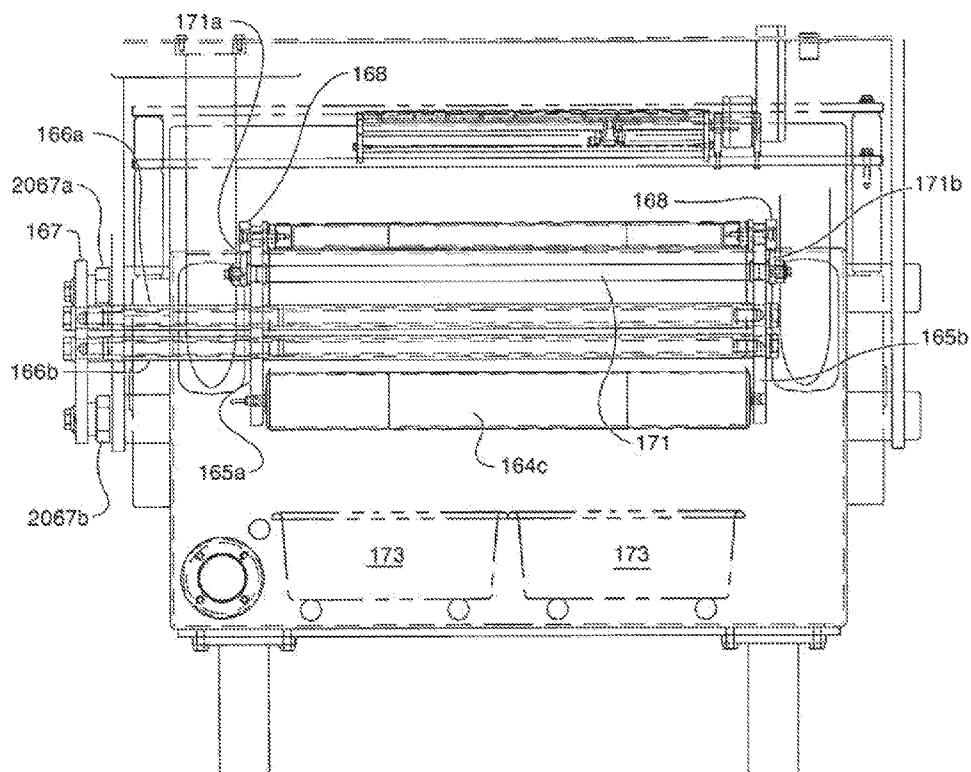


FIG. 49

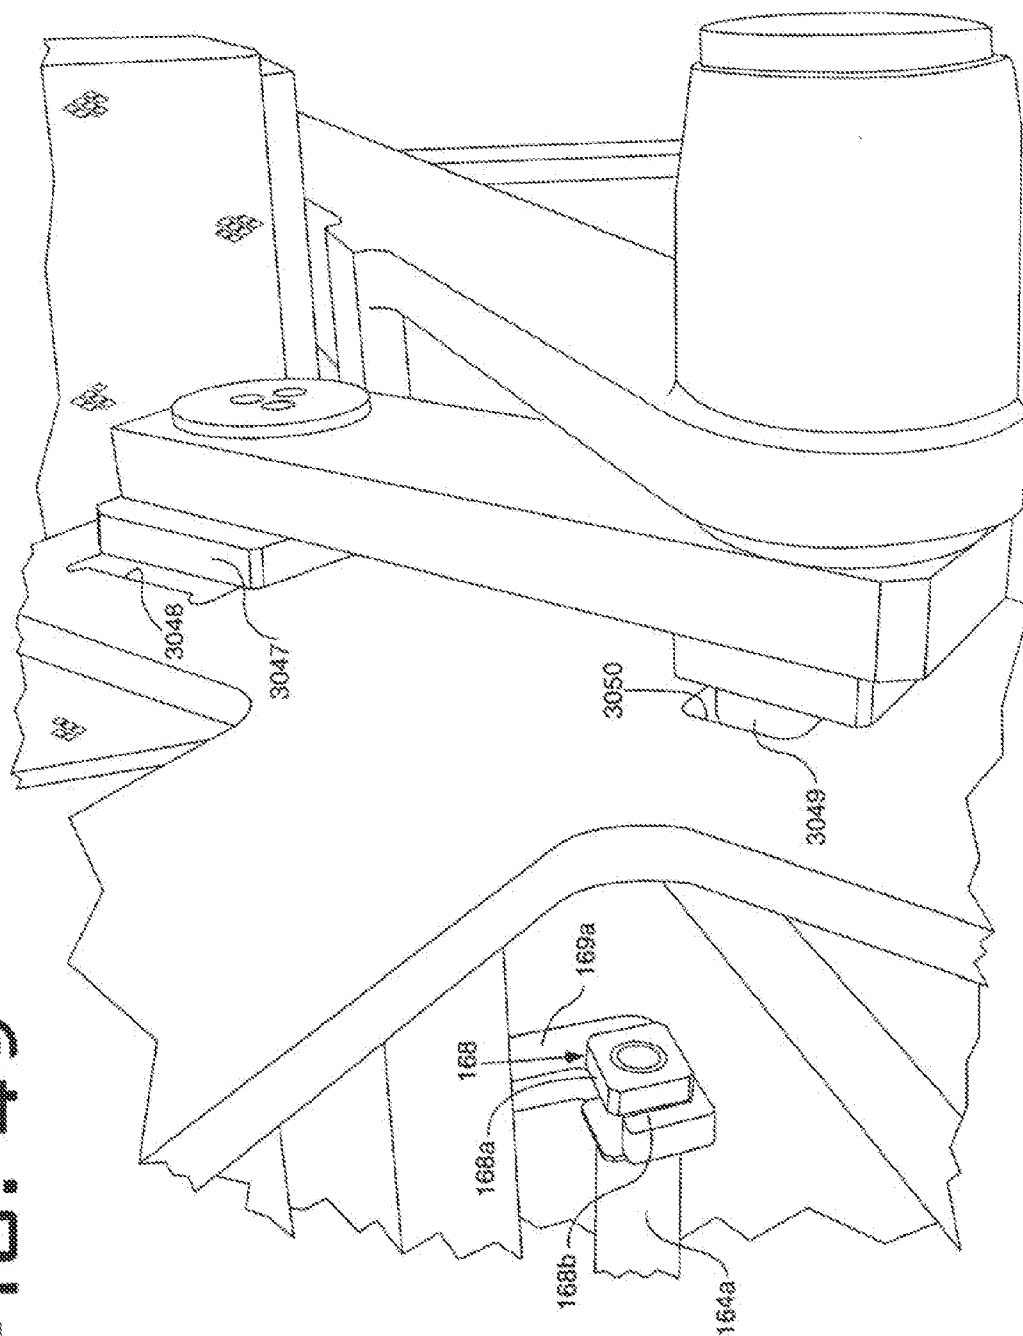


FIG. 50

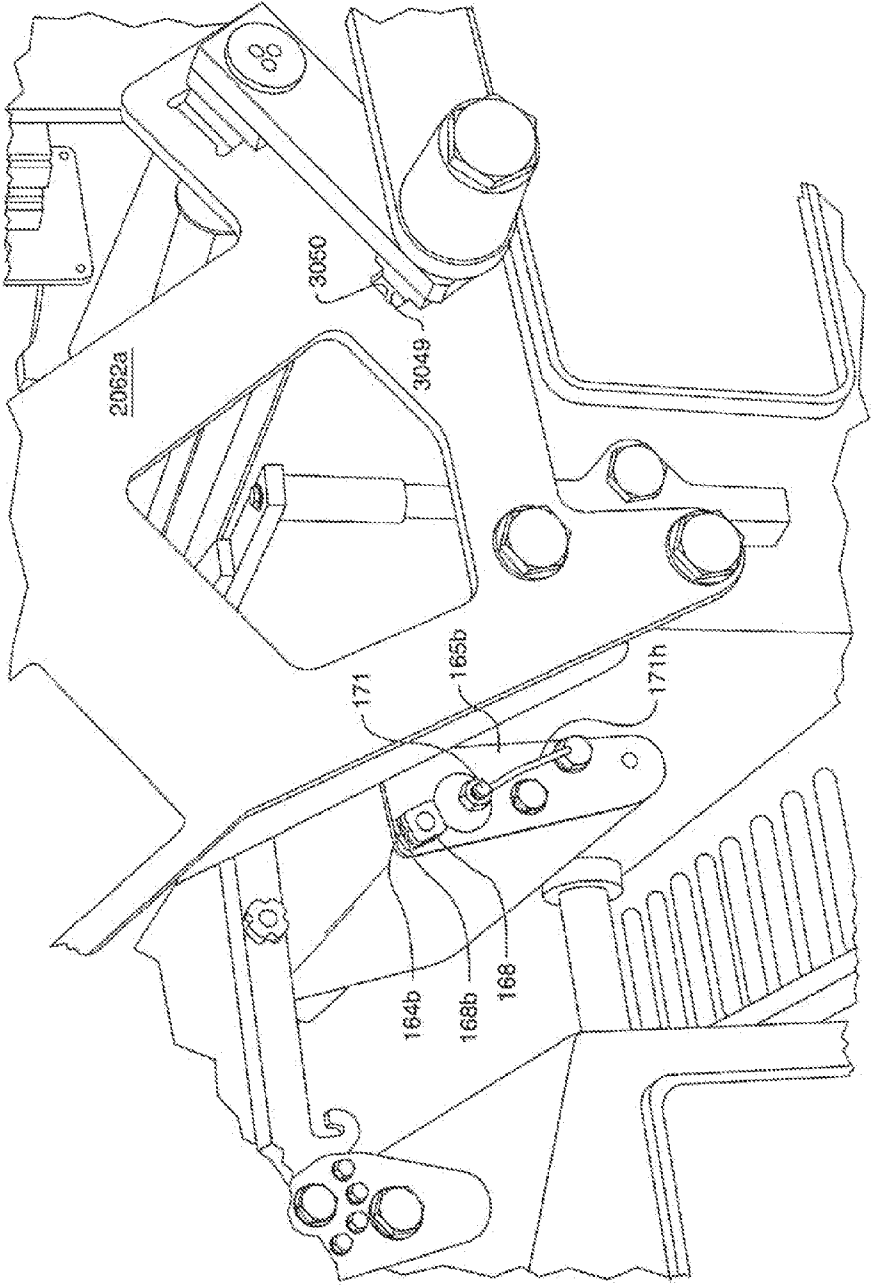


FIG. 51

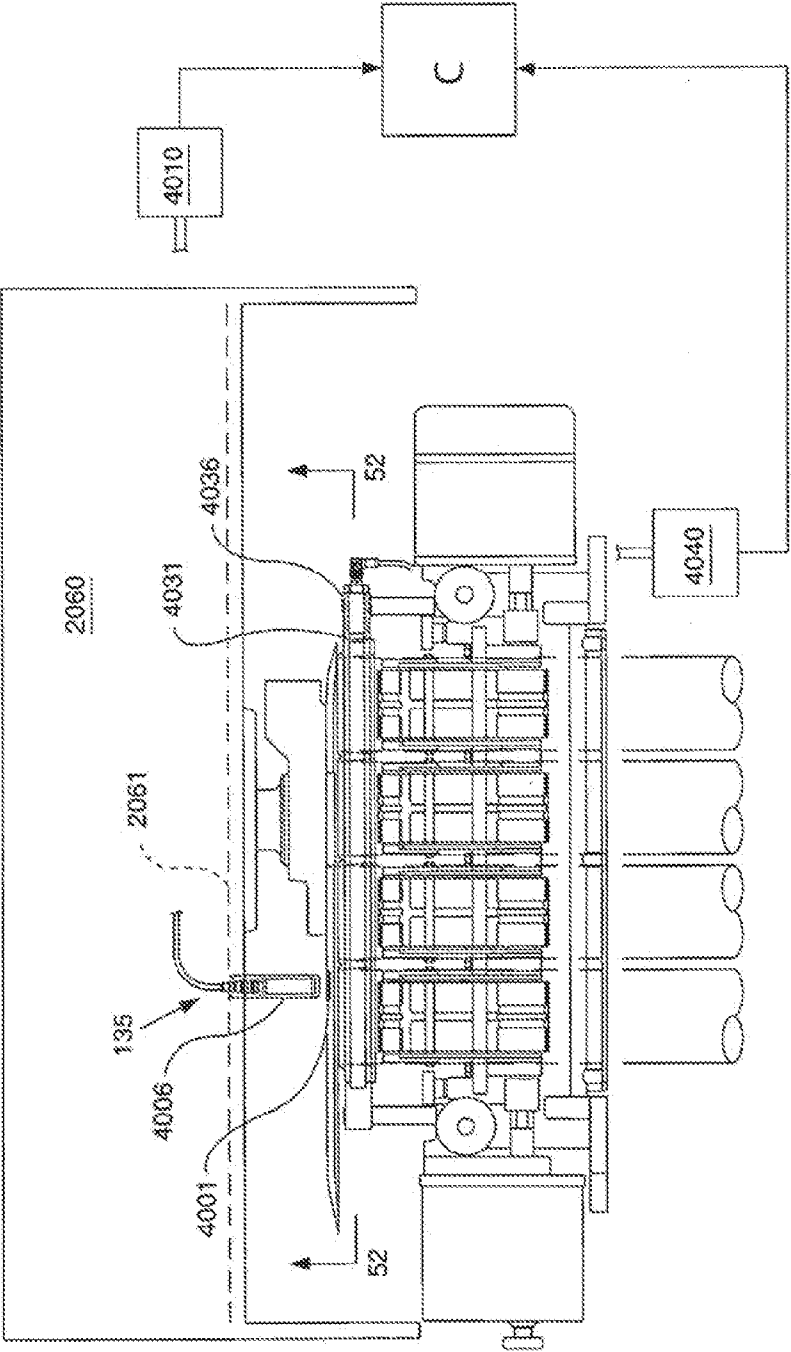


FIG. 52

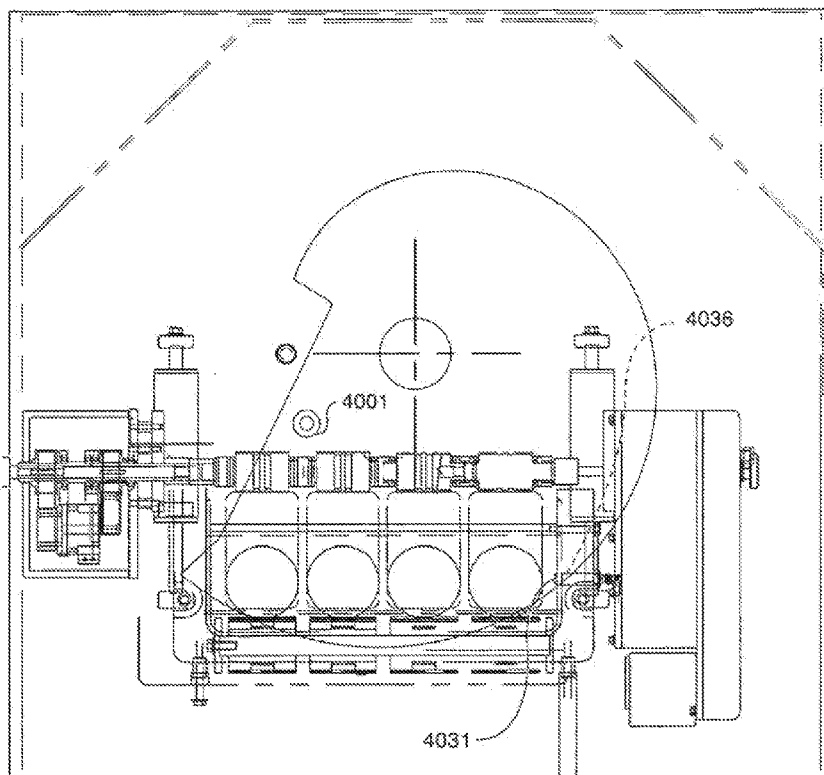


FIG. 53

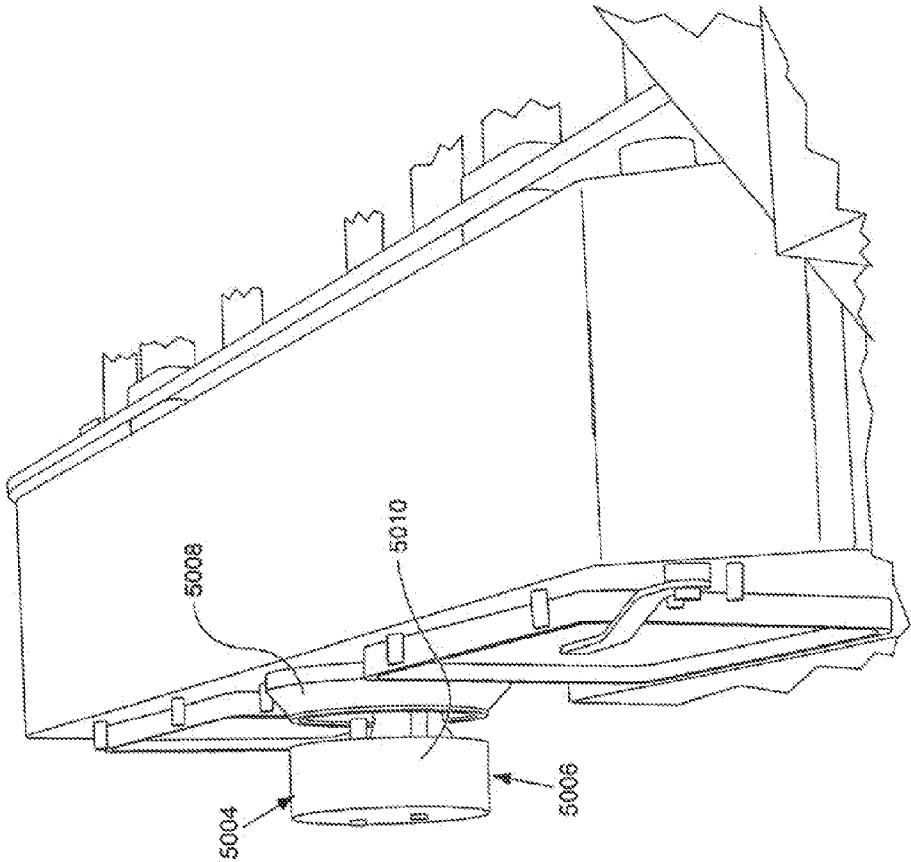


FIG. 54

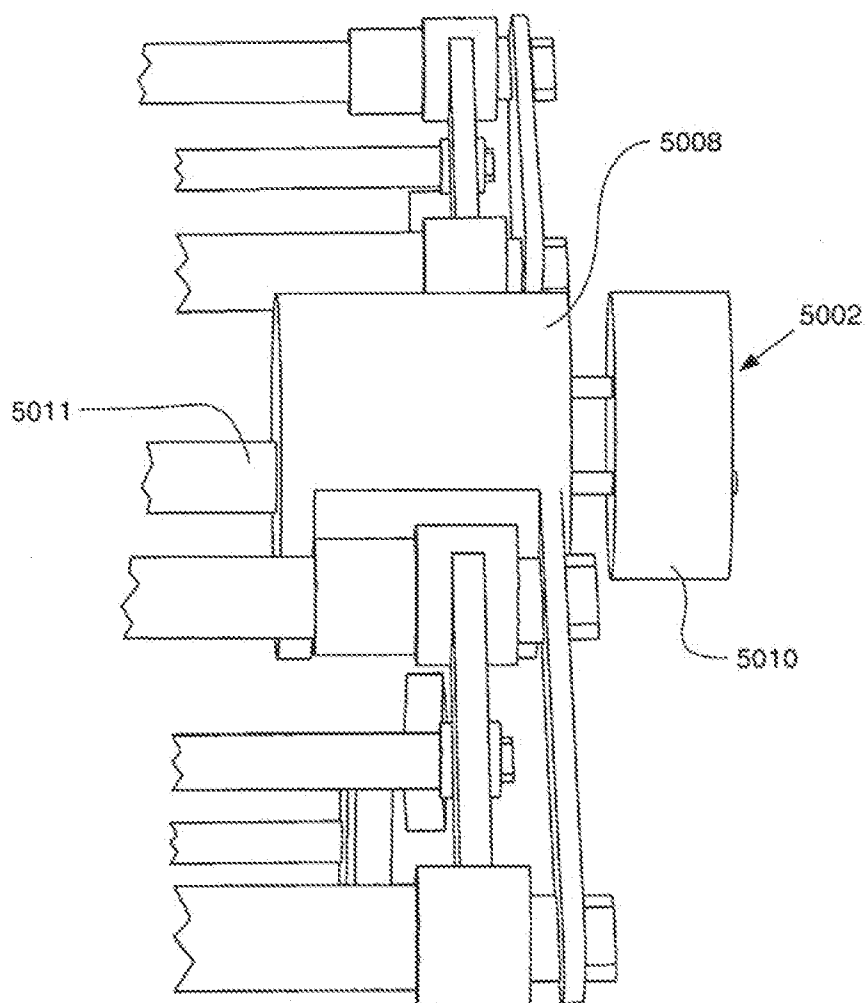


FIG. 55

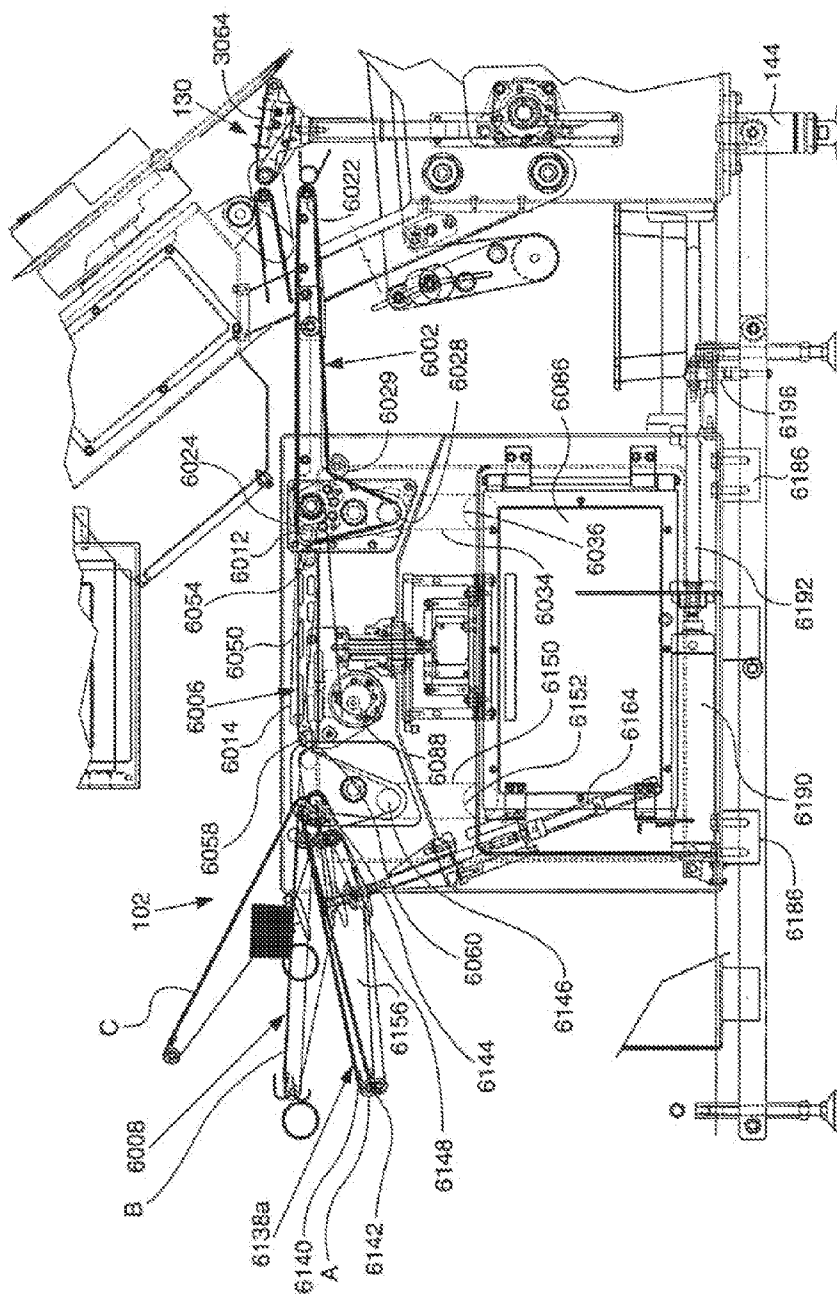


FIG. 56

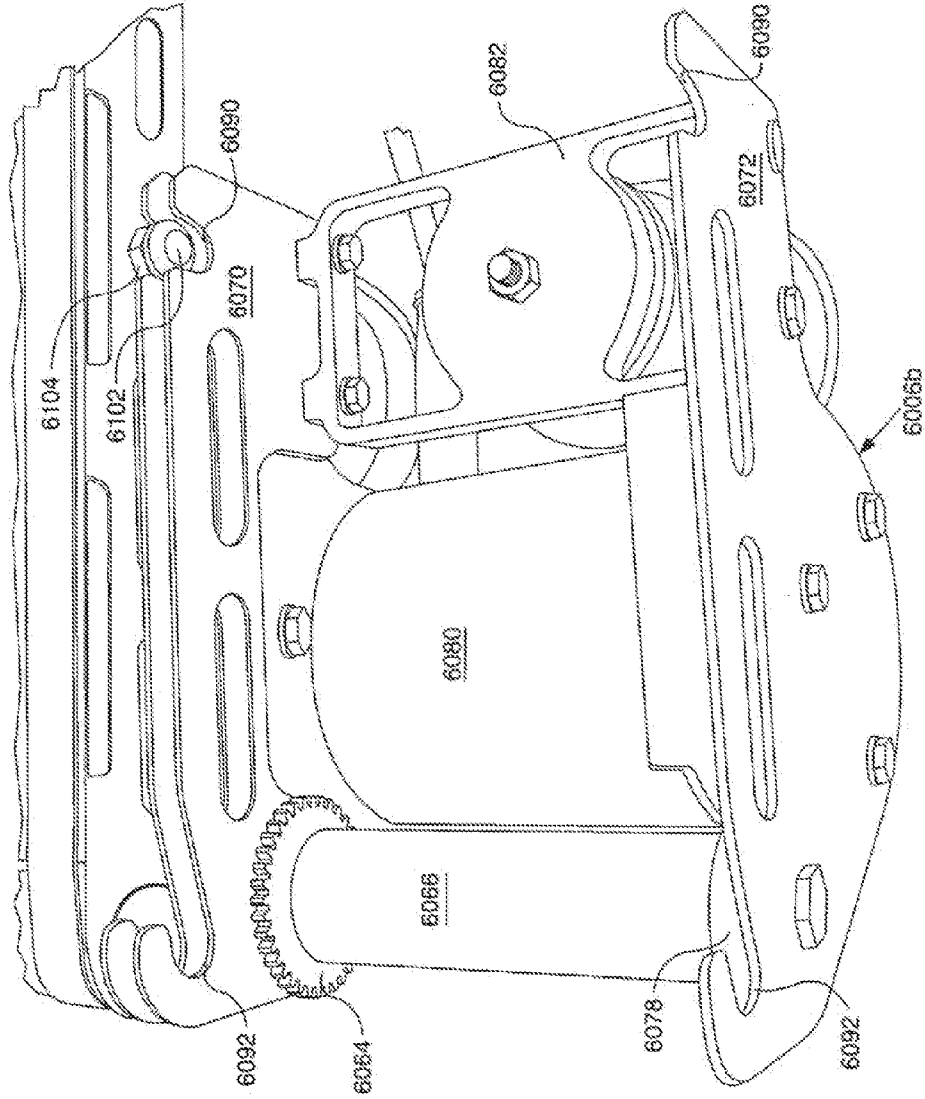


FIG. 57



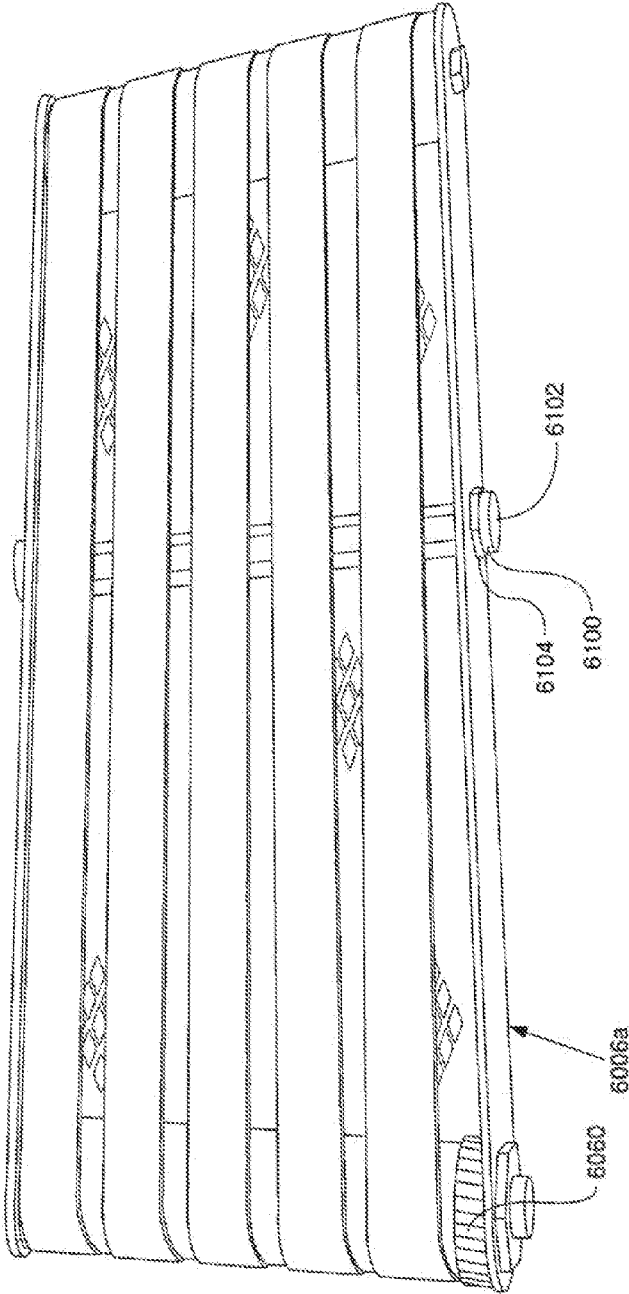


FIG. 58

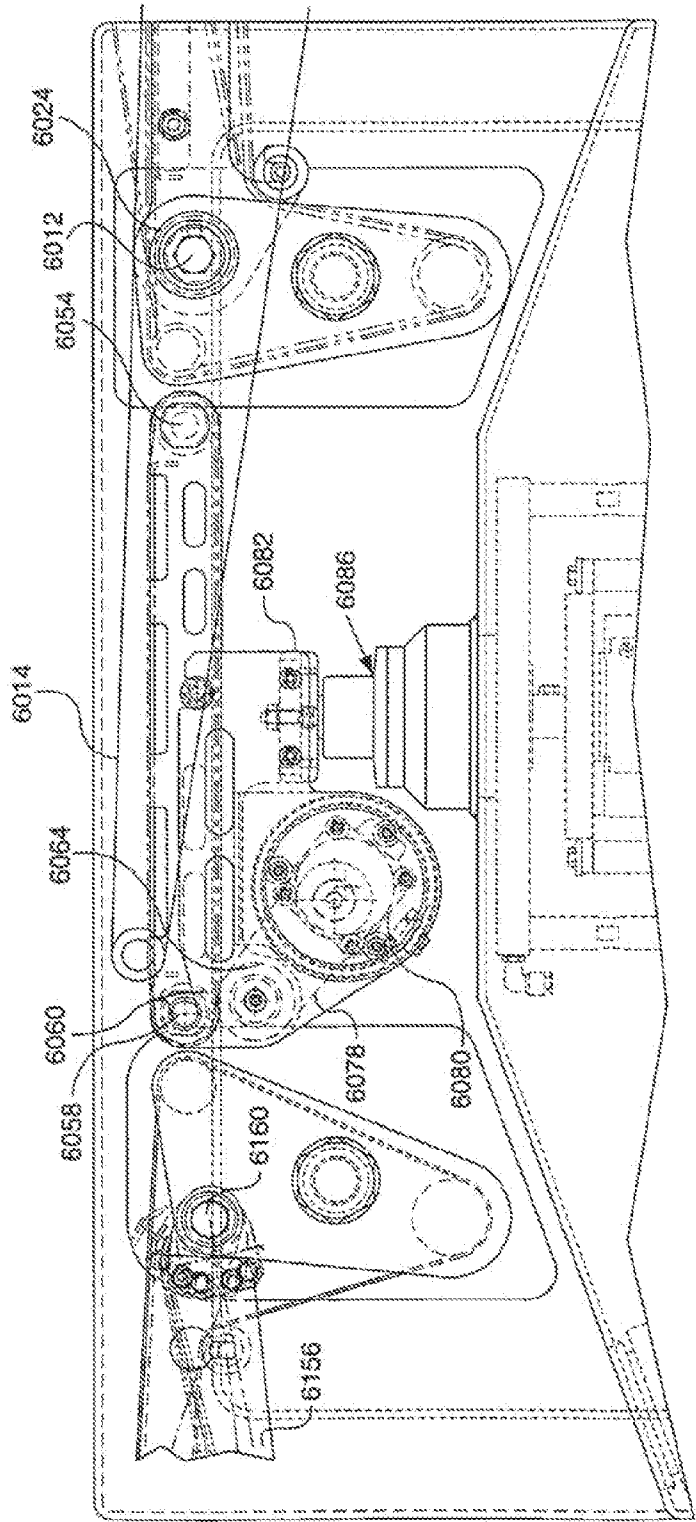

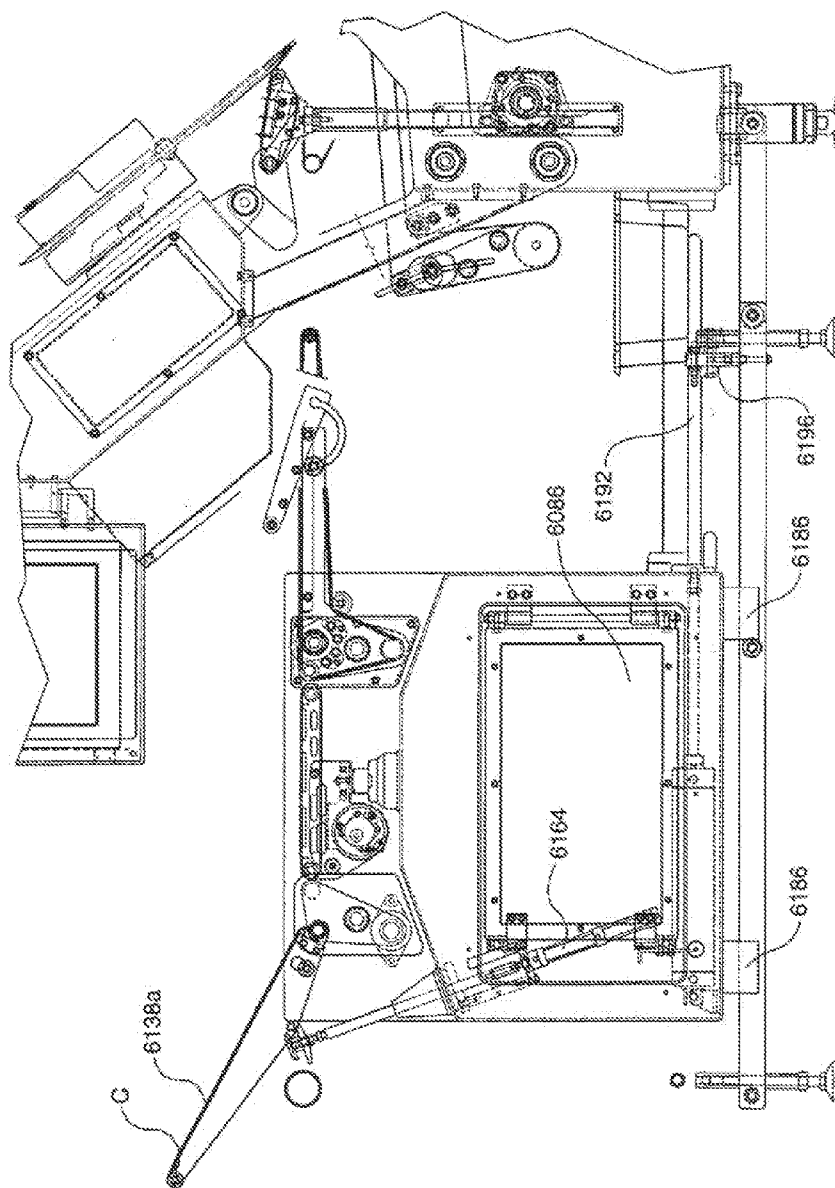

500

FIG. 60

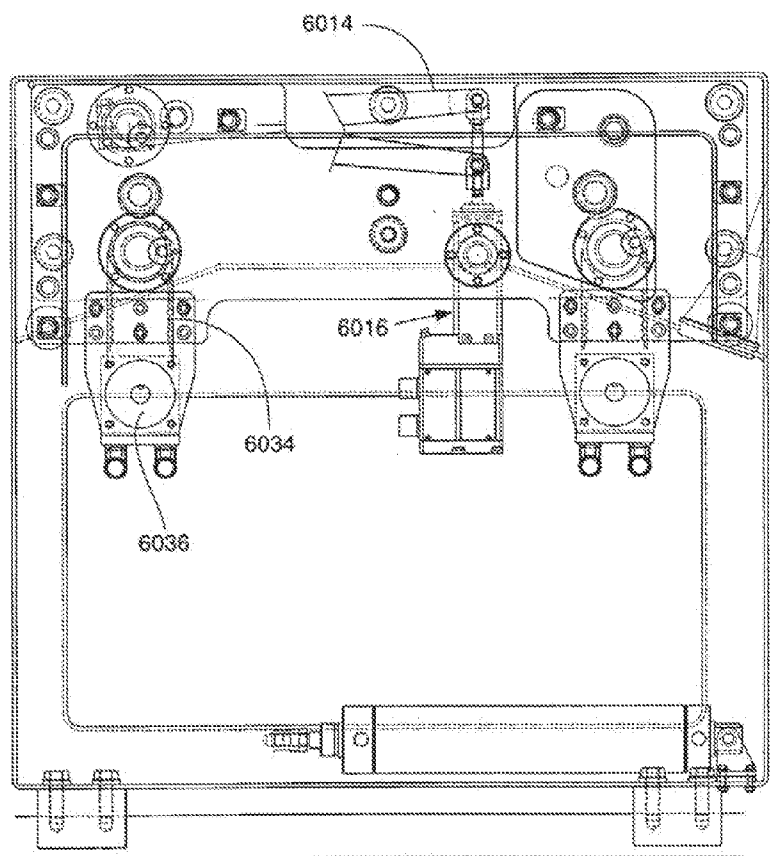


FIG. 60A

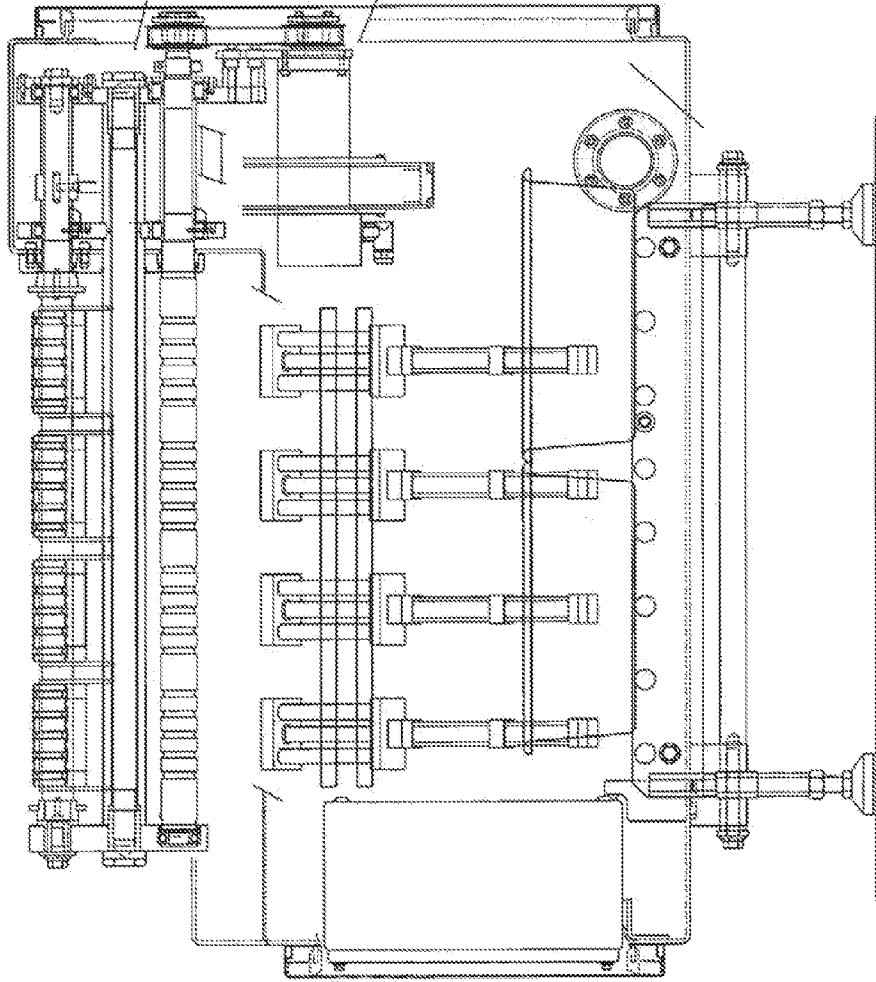


FIG. 60B

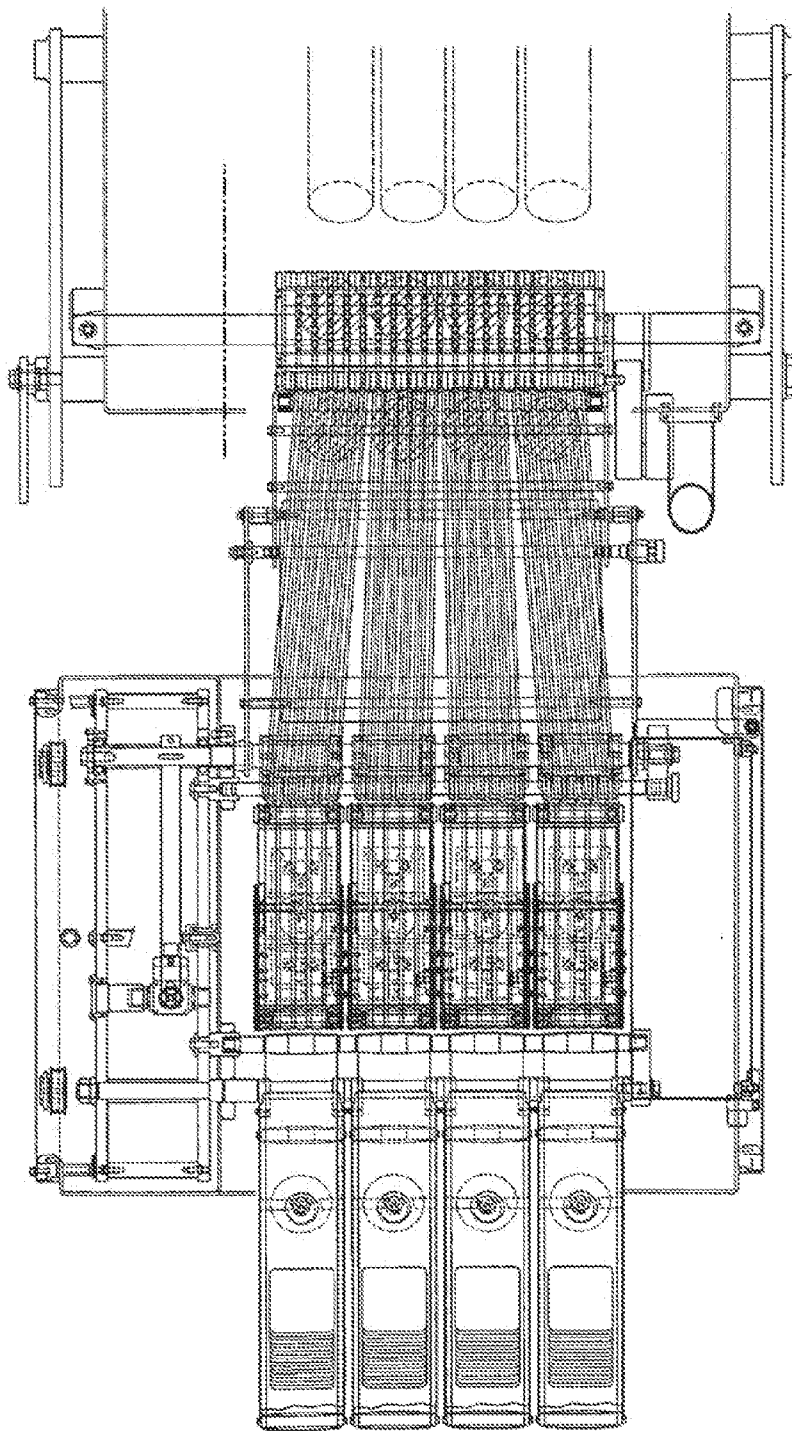


FIG. 61

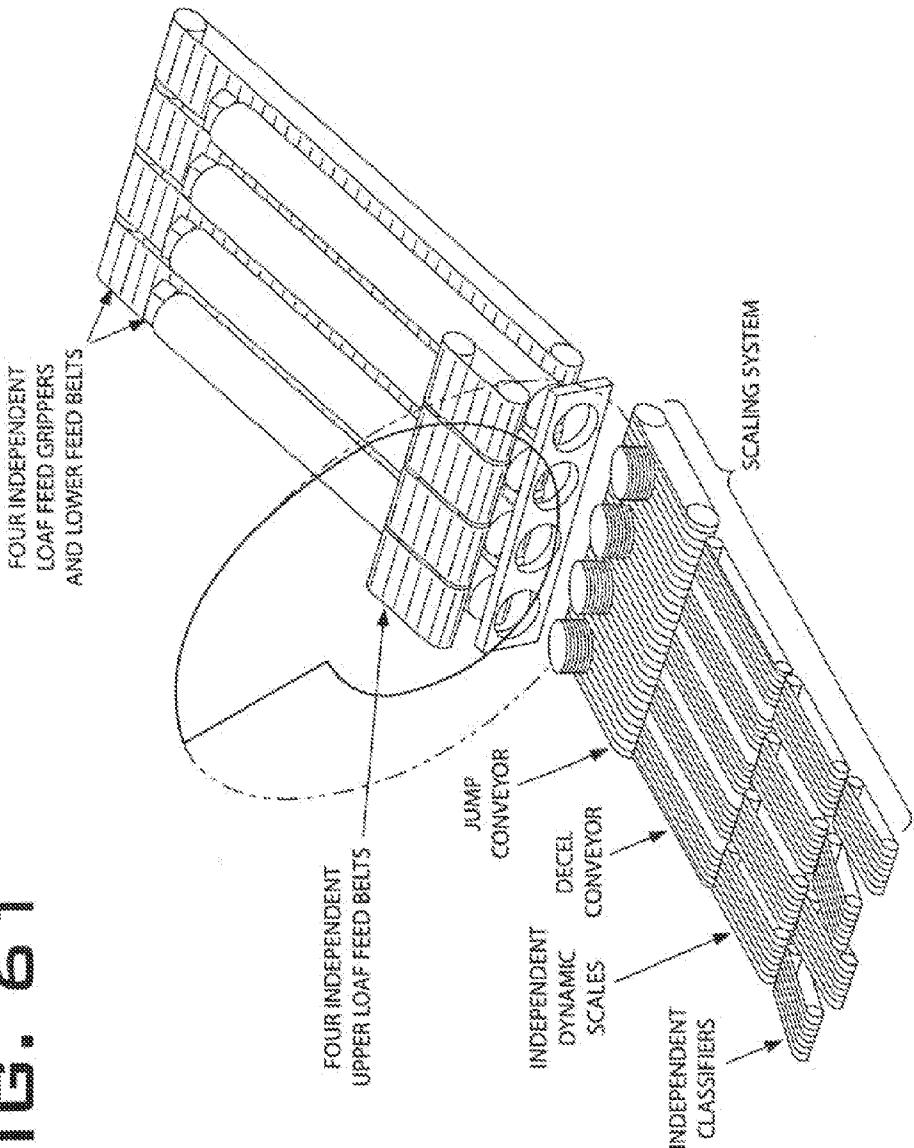


FIG. 62

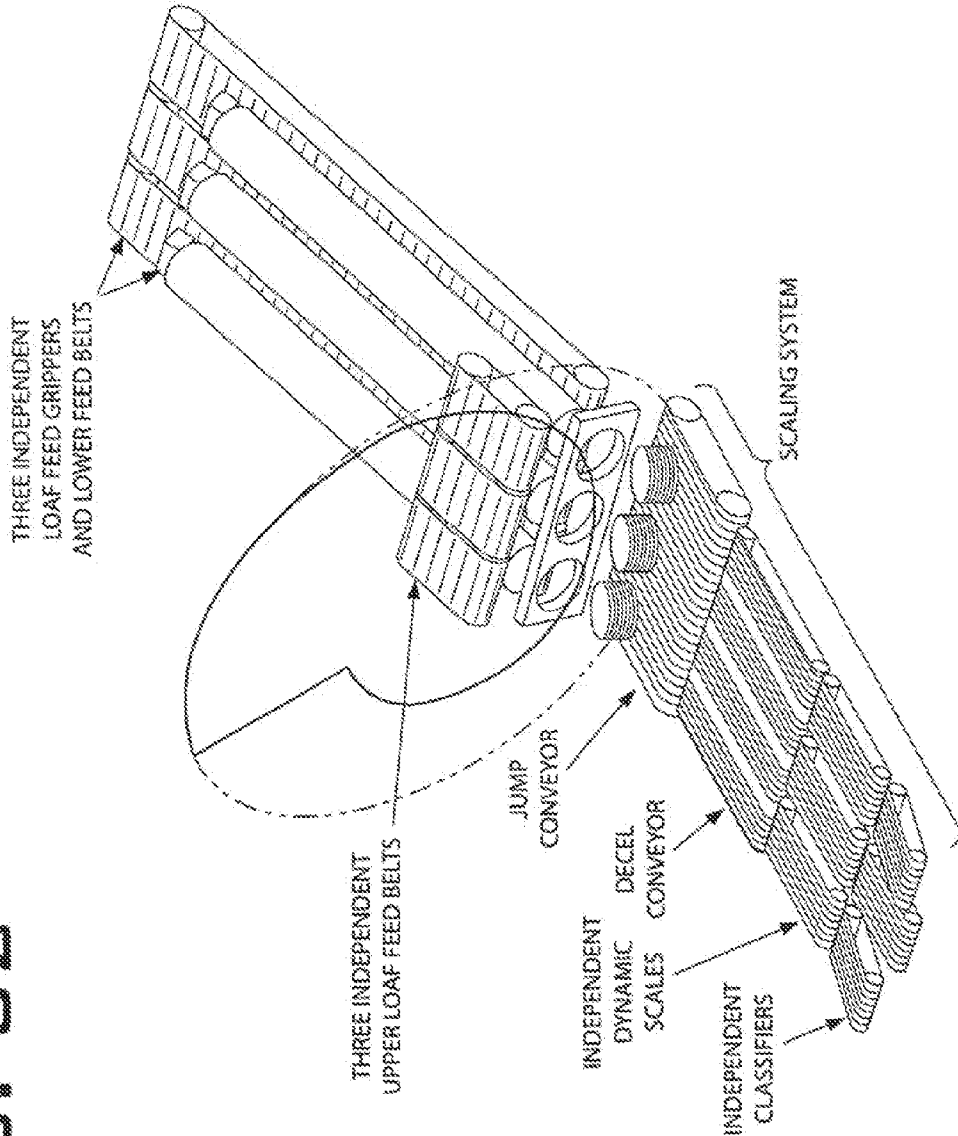


FIG. 63

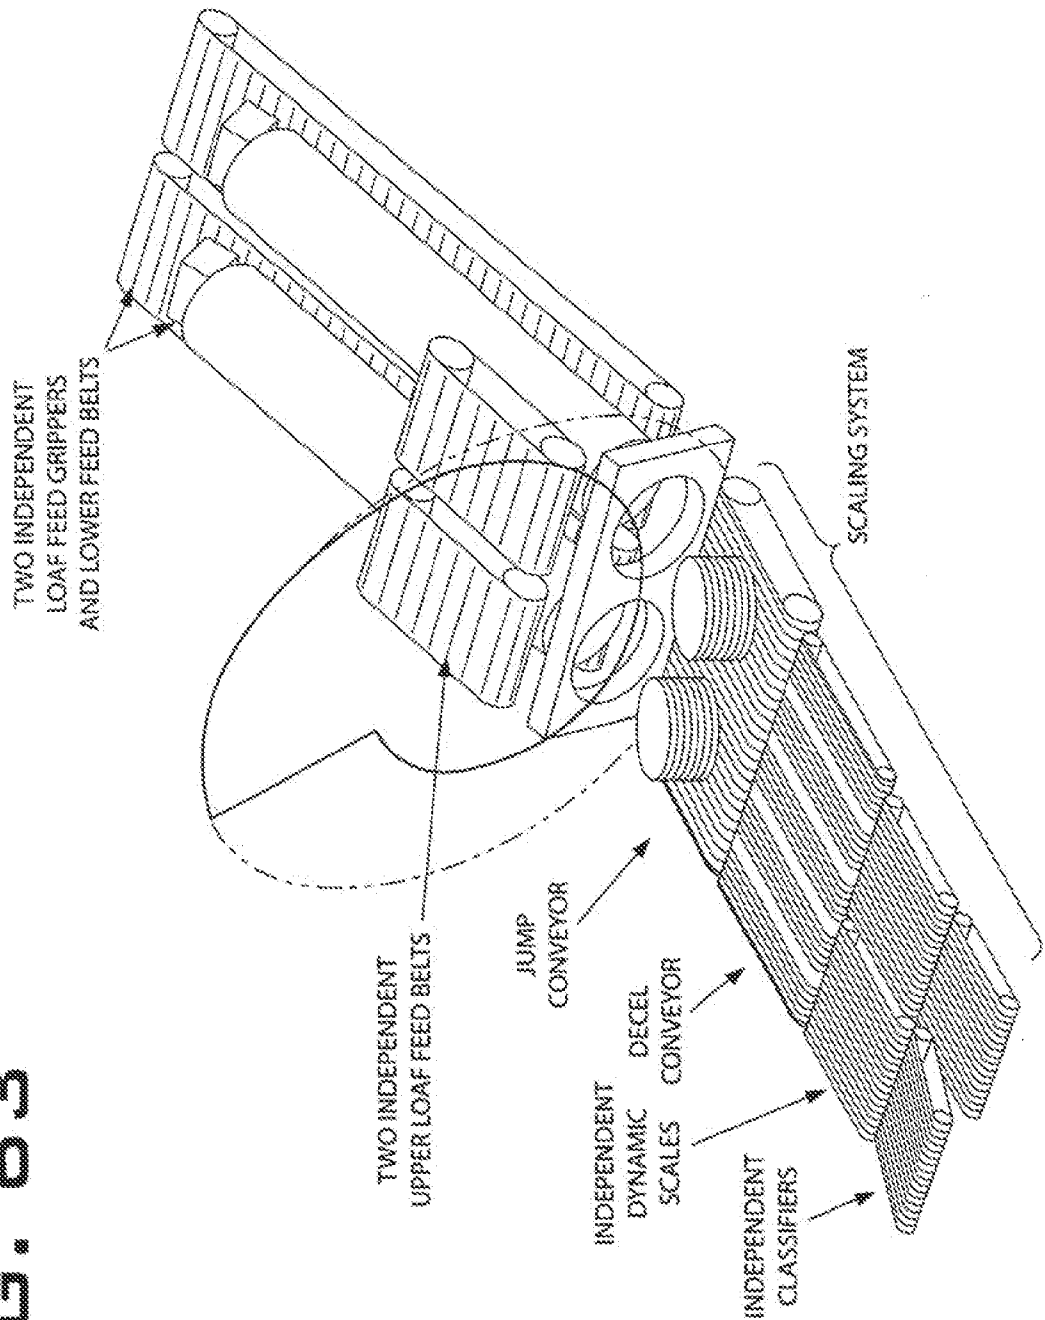


FIG. 64

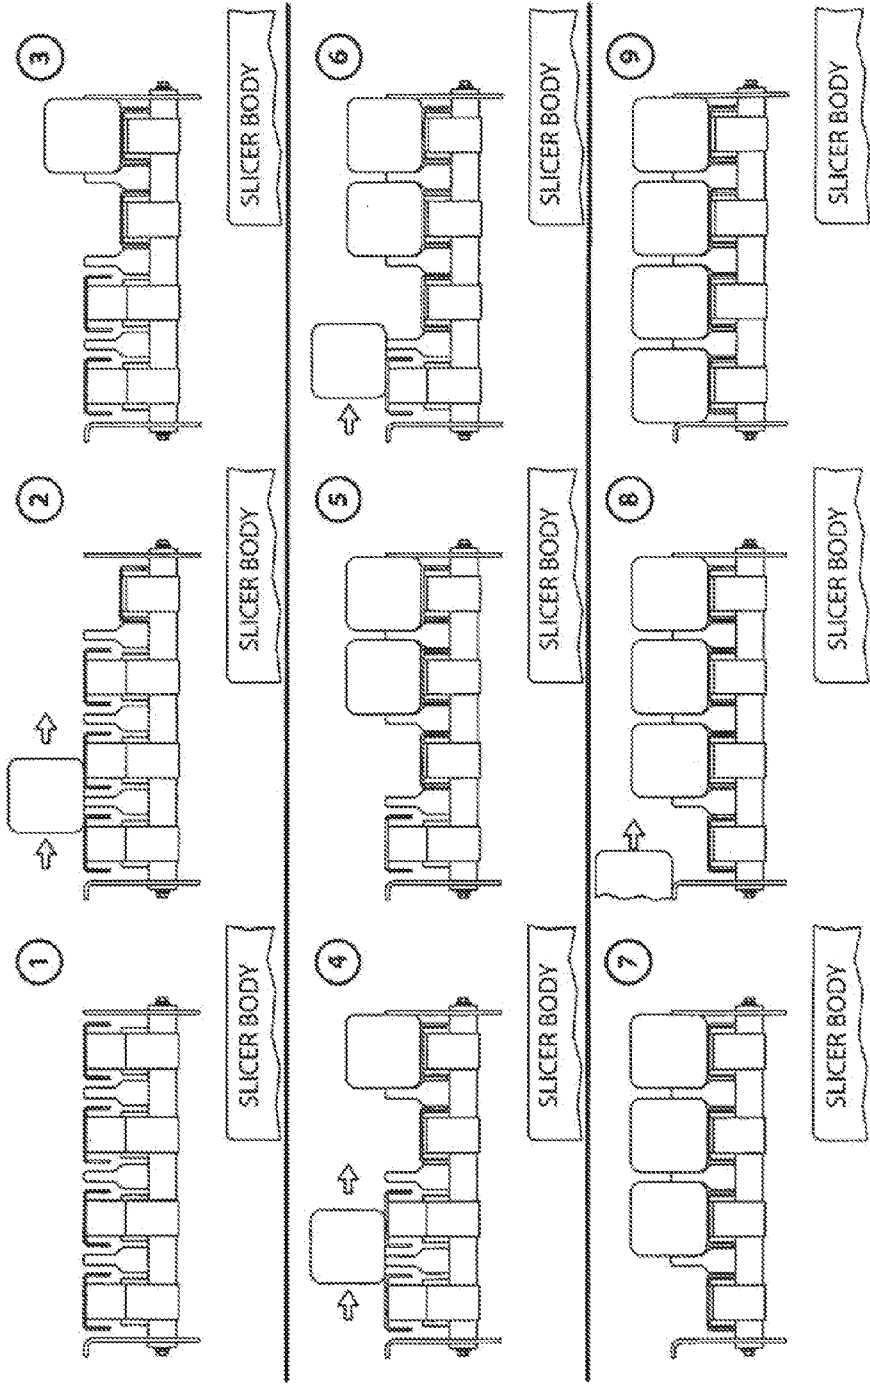


FIG. 65

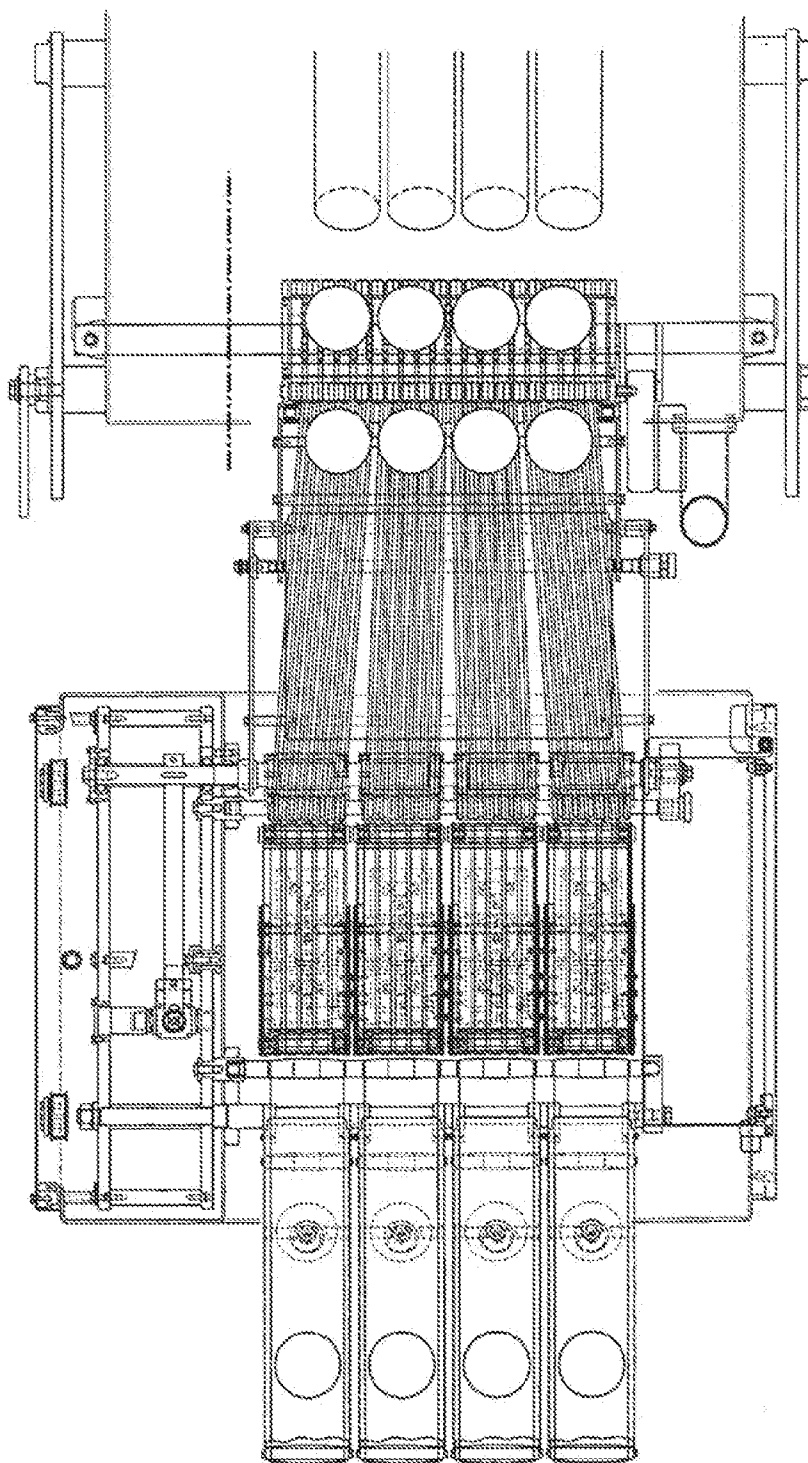


FIG. 66

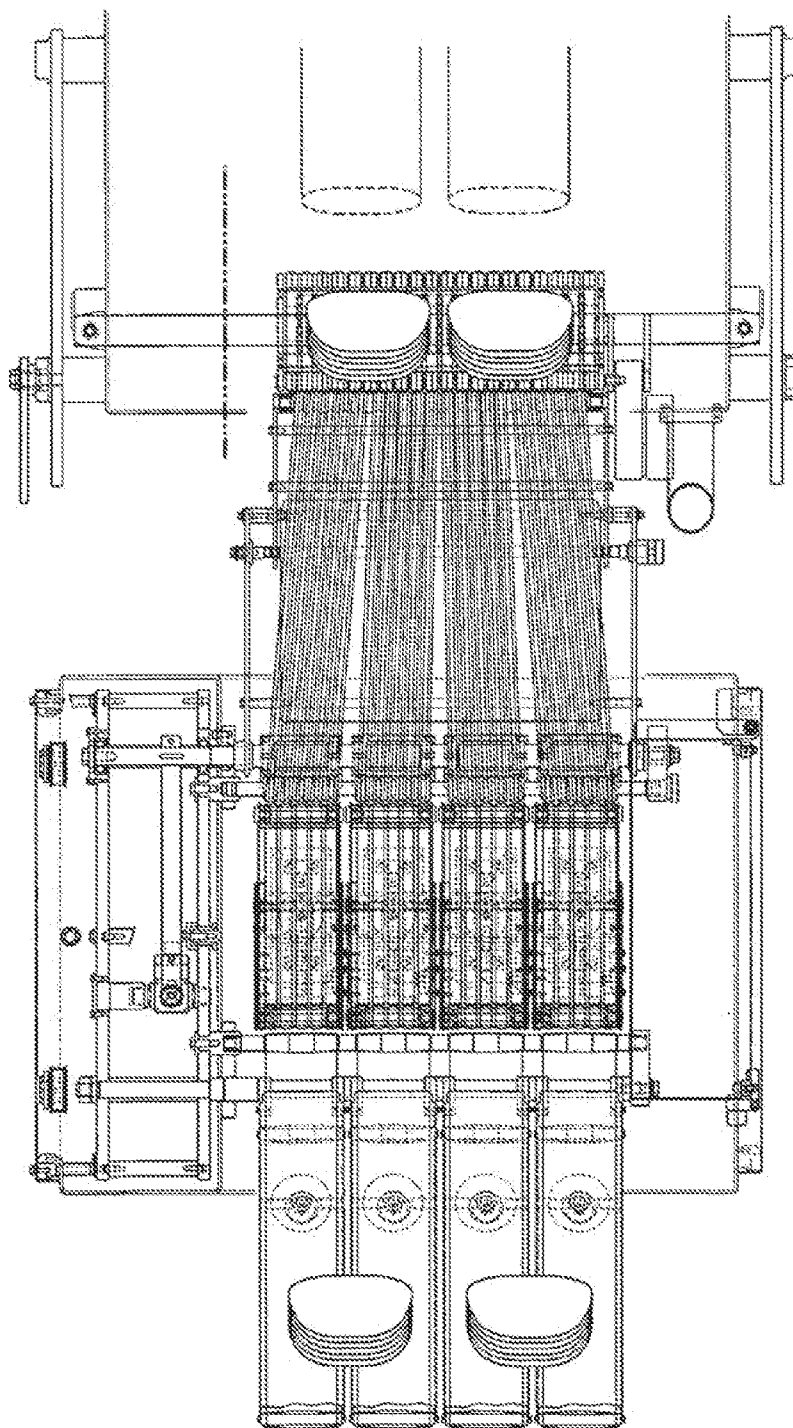


FIG. 67

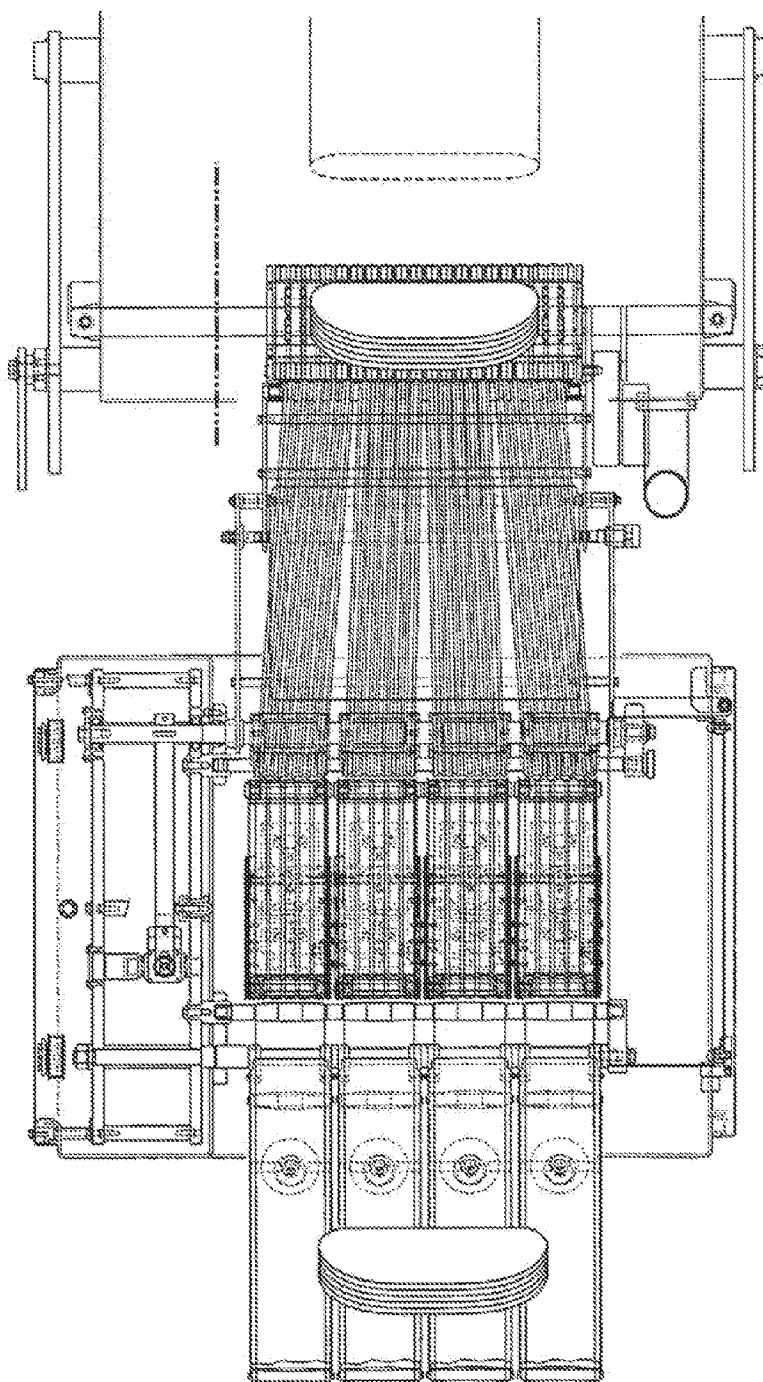


FIG. 68

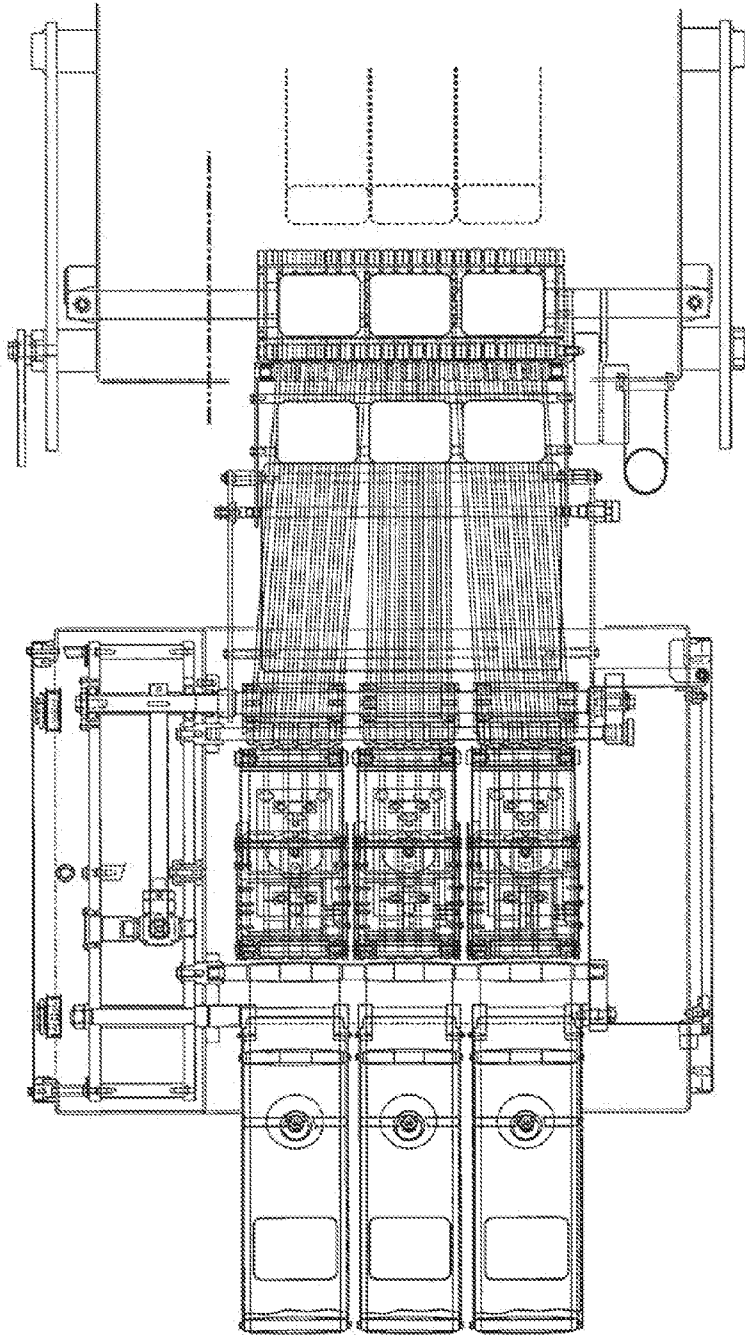


FIG. 69

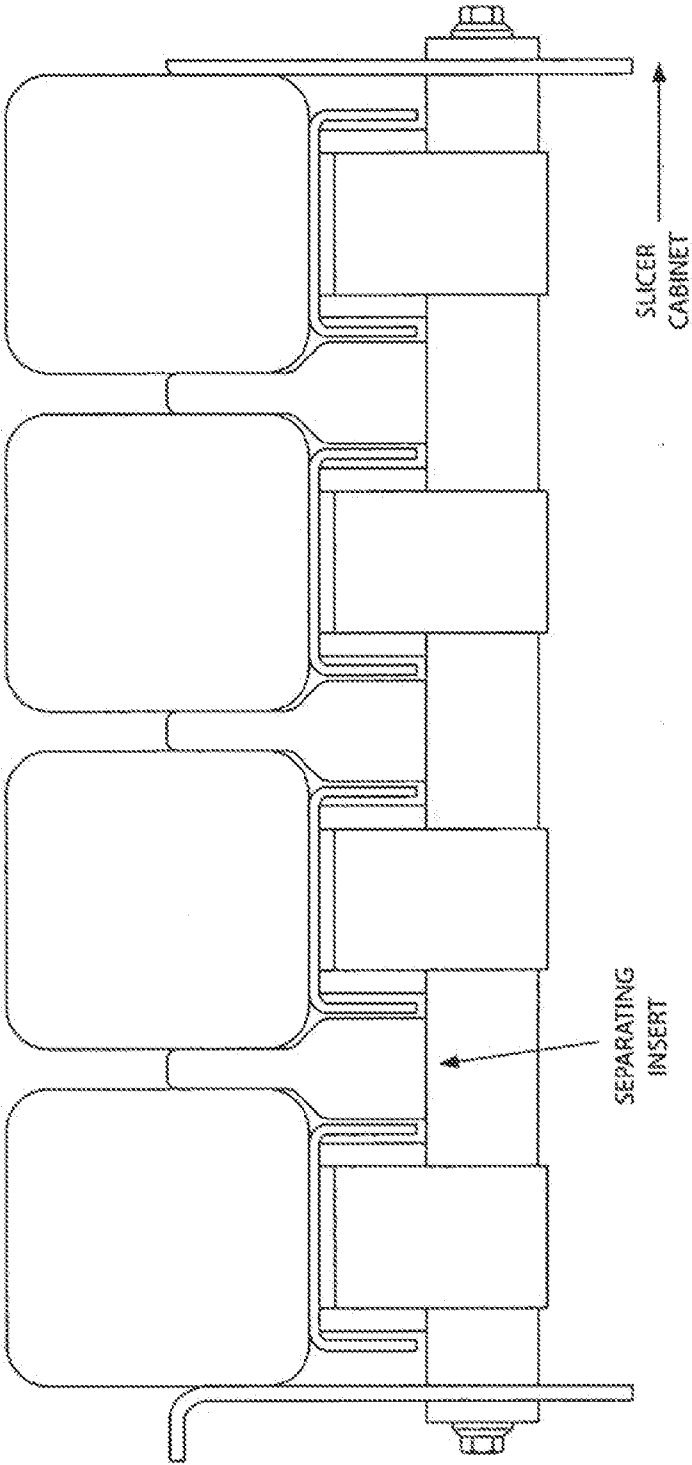


FIG. 70

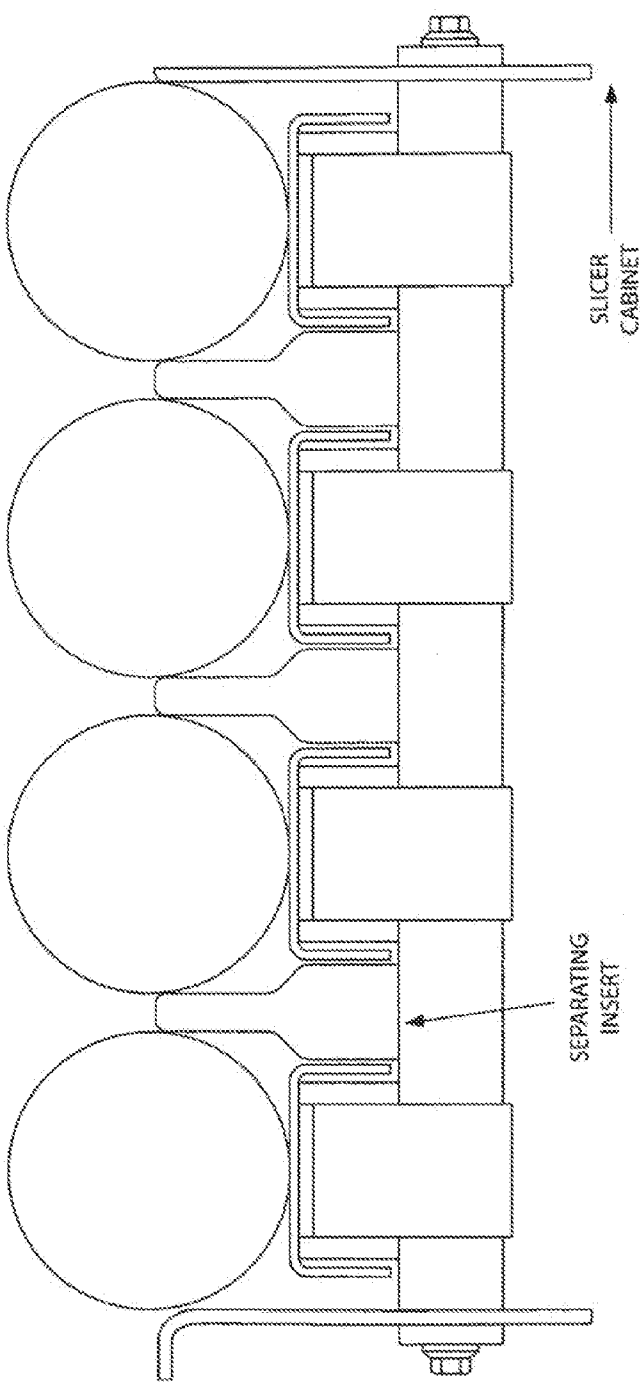


FIG. 71

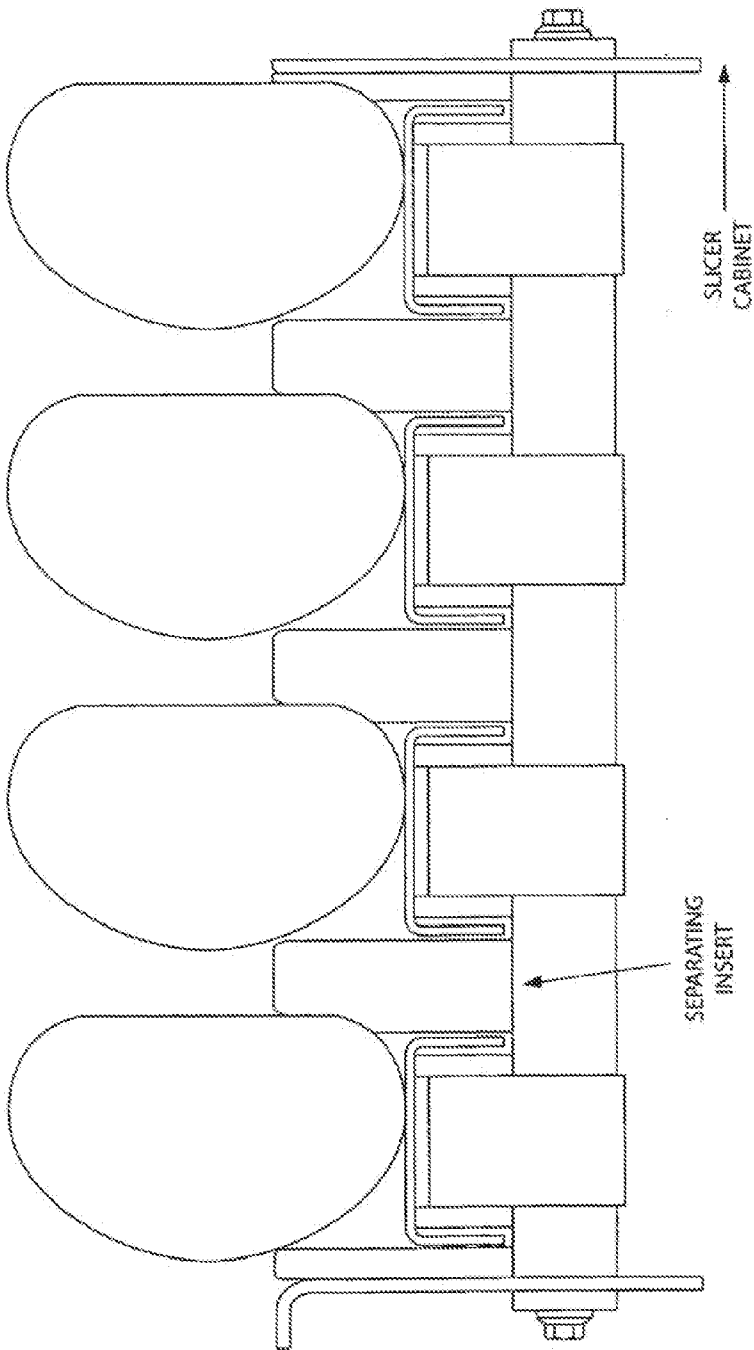


FIG. 72

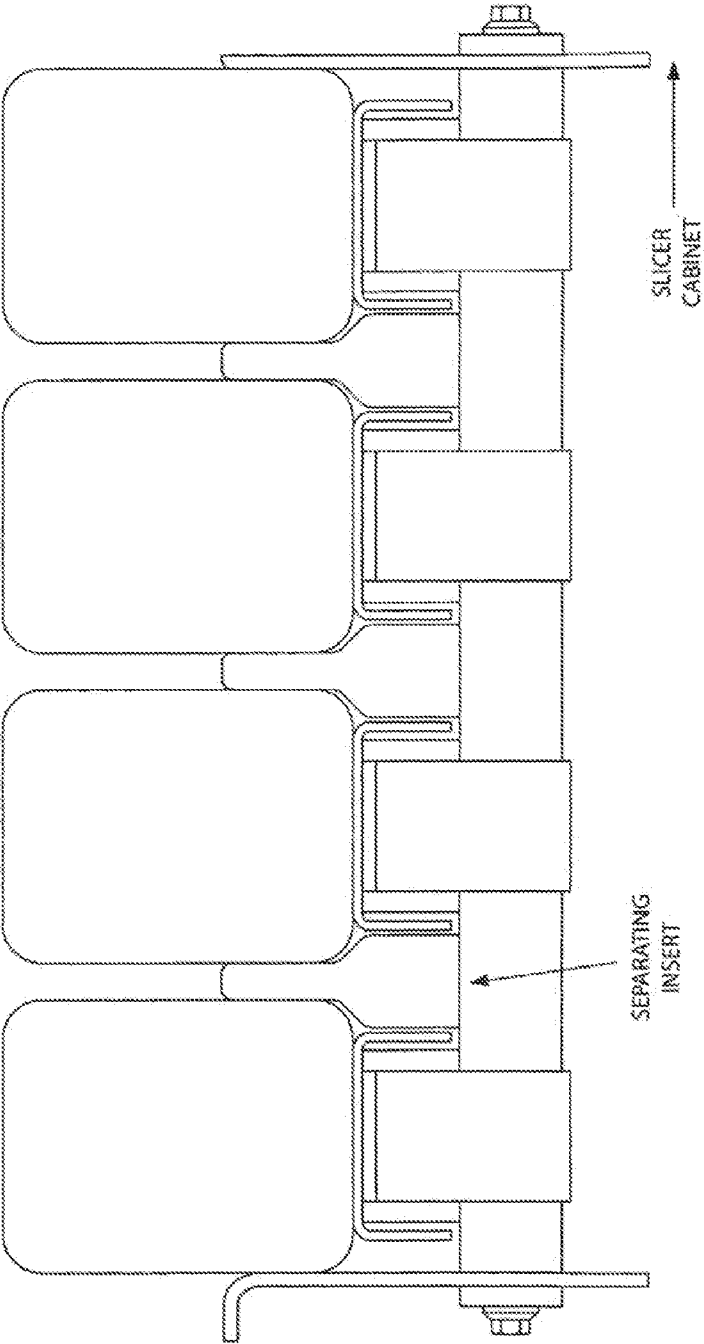


FIG. 73

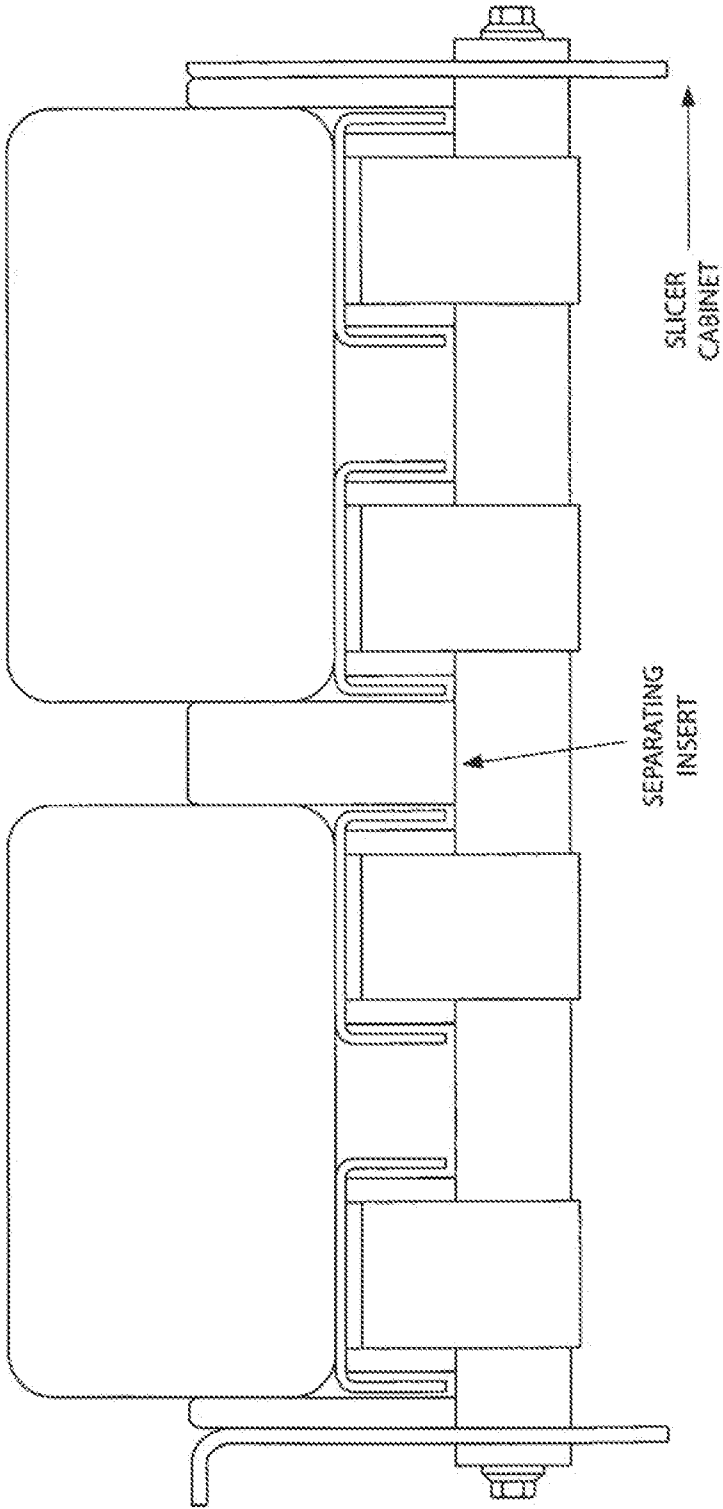


FIG. 74

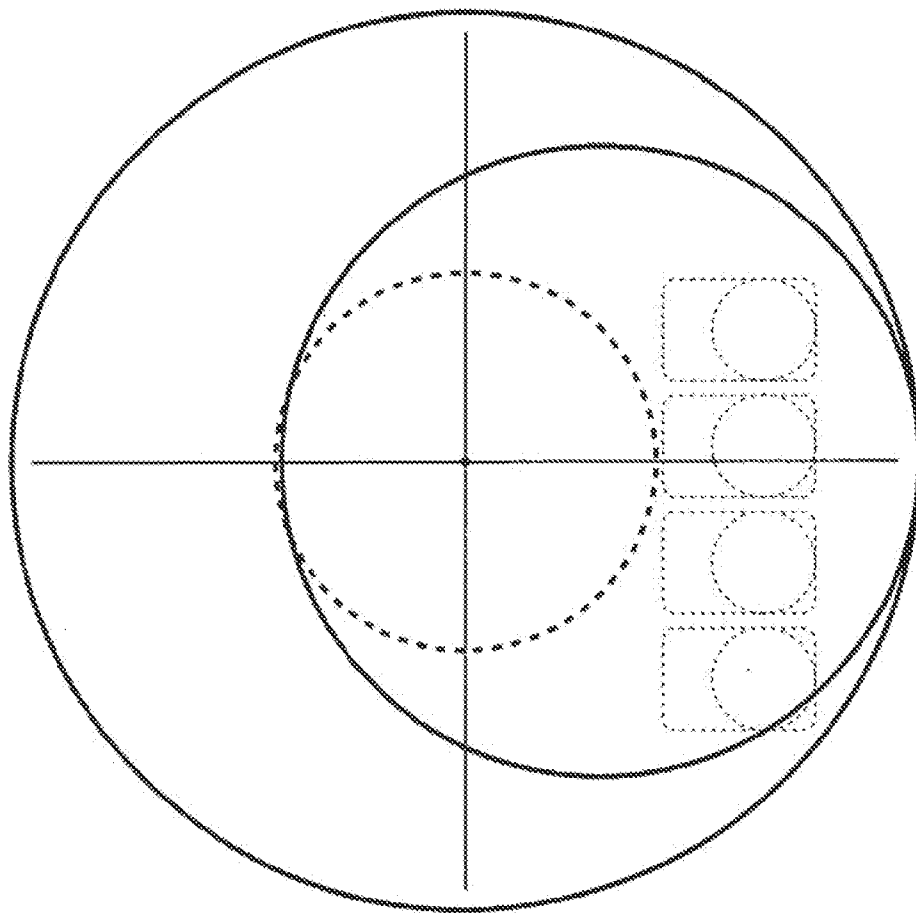


FIG. 75

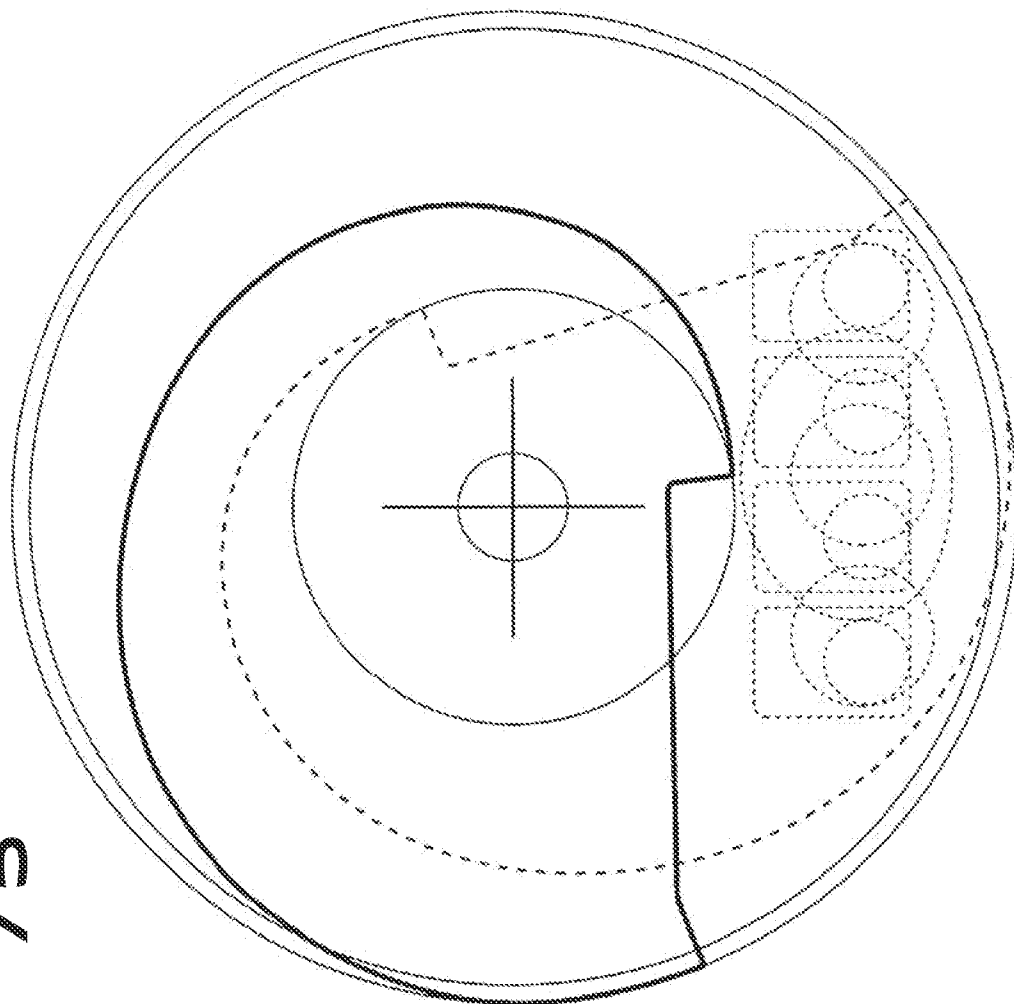


FIG. 76

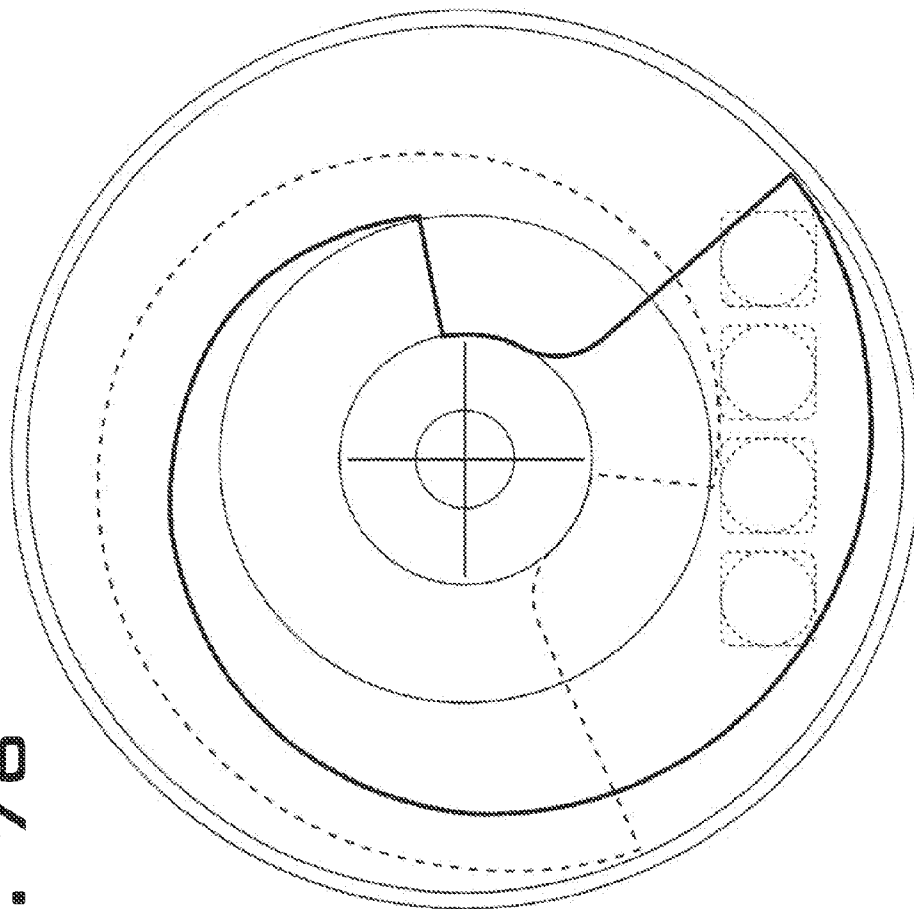


FIG. 77

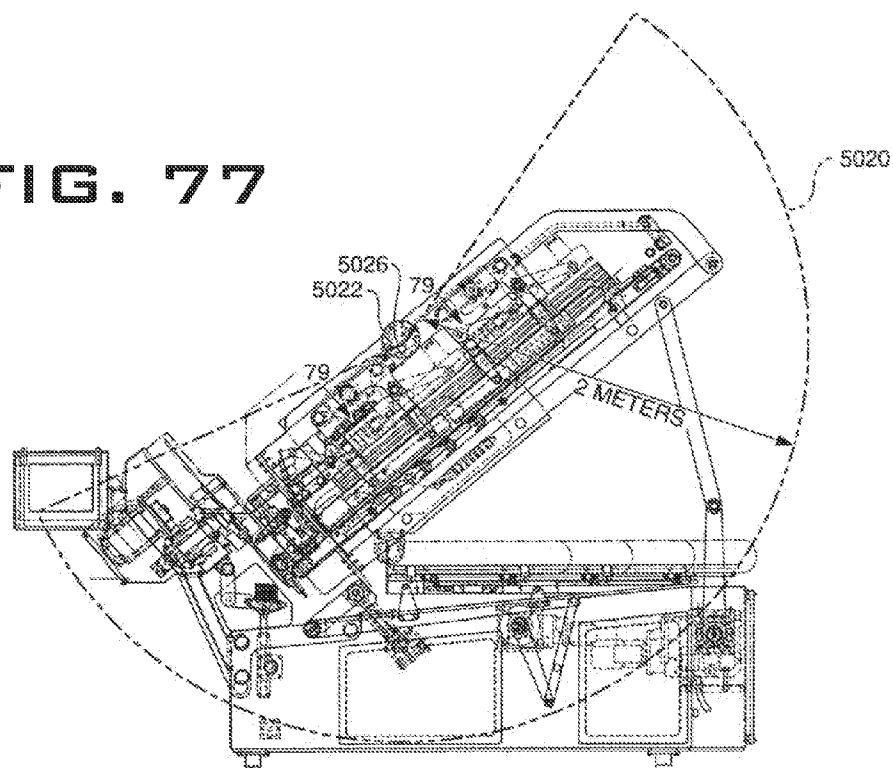


FIG. 78

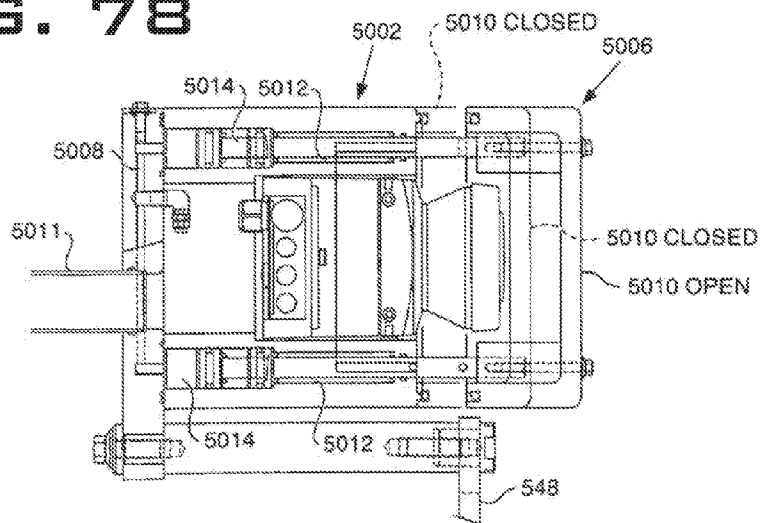


FIG. 79

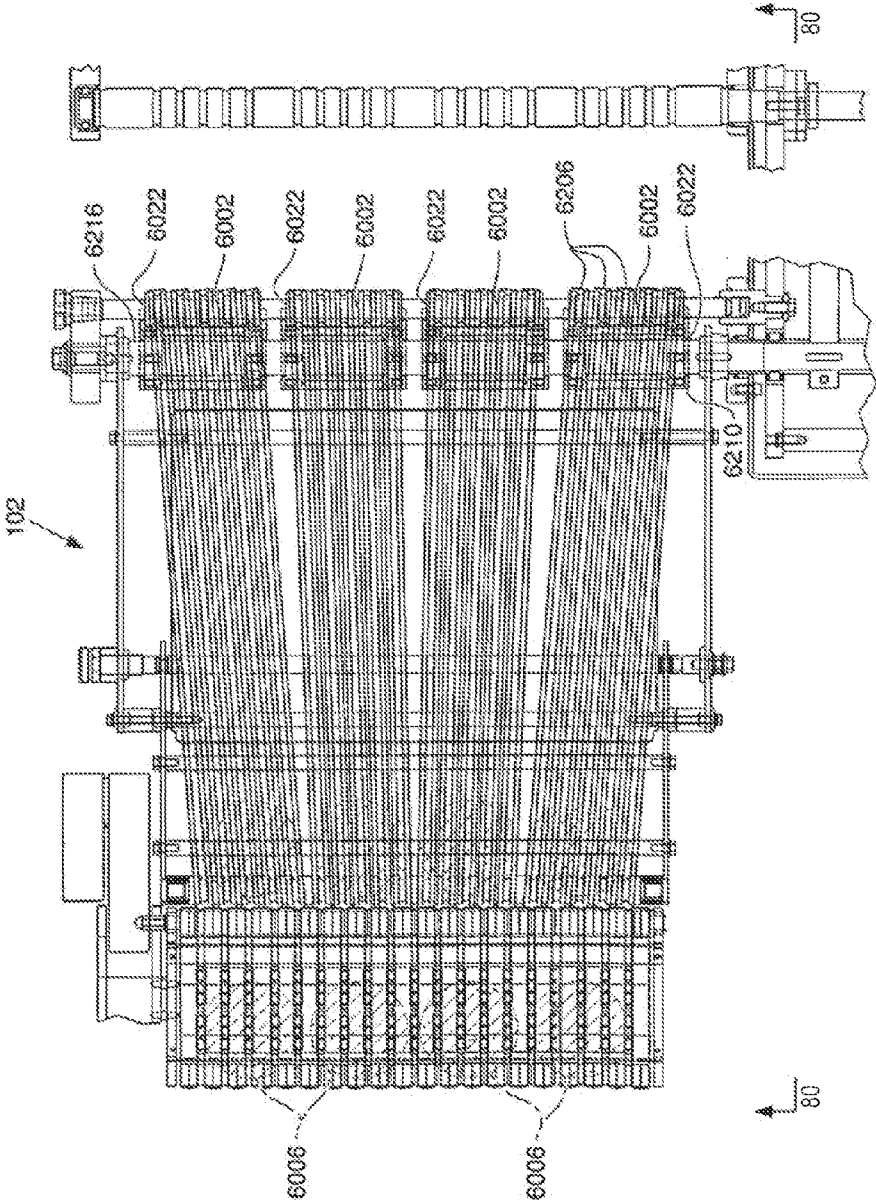


FIG. 80

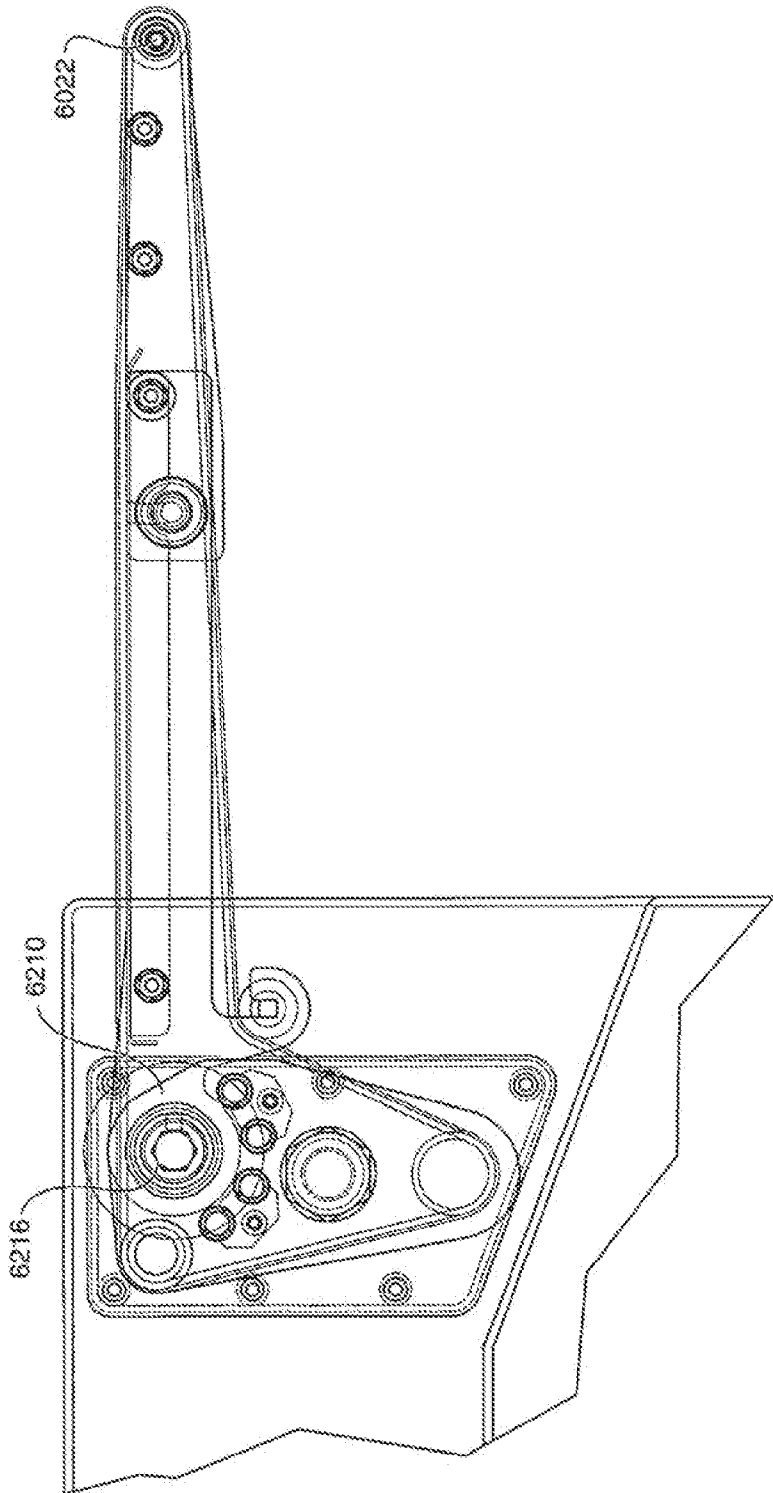


FIG. 81


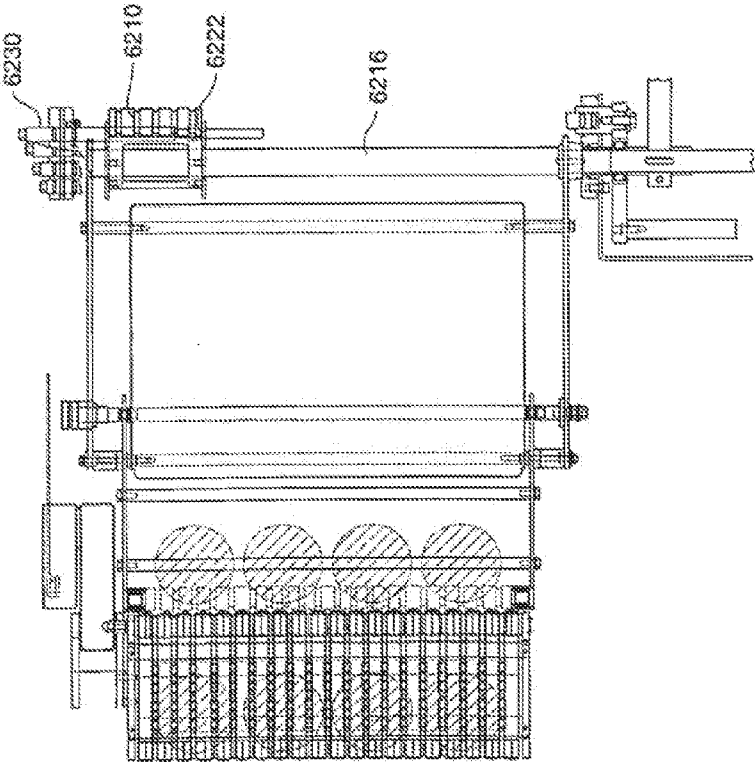


FIG. 82

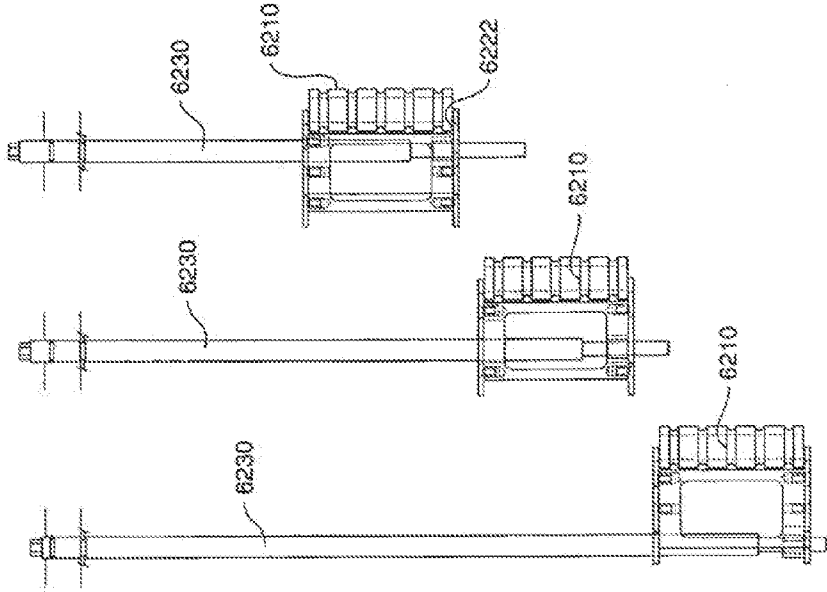

MAINTENANCE AND SAFETY SYSTEM FOR A FOOD ARTICLE SLICING MACHINE

[0001] The present application is a continuation of co-pending U.S. patent application Ser. No. 12/255,661, filed Oct. 21, 2008, which claims the benefit of U.S. Provisional Patent Application No. 60/999,961, filed on Oct. 22, 2007, and U.S. Provisional Patent Application No. 61/000,202 filed on Oct. 23, 2007, the contents of all of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] Many different kinds of food articles or food products, such as food slabs, food bellies, or food loaves are produced in a wide variety of shapes and sizes. There are meat loaves made from various meats, including ham, pork, beef, lamb, turkey, and fish. The meat in the food loaf may be in large pieces or may be thoroughly comminuted. These meat loaves come in different shapes (round, square, rectangular, oval, etc.) and in different lengths up to six feet (183 cm) even longer. The cross-sectional sizes of the loaves are quite different; the maximum transverse dimension may be as small as 1.5 inches (4 cm) or as large as ten inches (25.4 cm). Loaves of cheese or other foods conic in the same great ranges as to composition, shape, length, and transverse size.

[0003] Typically the food loaves are sliced, the slices are grouped in accordance with a particular weight requirement, and the groups of slices are packaged and sold at retail. The number of slices in a group may vary, depending on the size and consistency of the food article and the desire of the producer, the wholesaler, or the retailer. For some products, neatly aligned stacked slice groups are preferred. For others, the slices are shingled or folded so that a purchaser can see a part of every slice through a transparent package.

[0004] Food article scan be sliced on high speed slicing machines such as disclosed in U.S. Pat. Nos. 5,628,237 or 5,974,925 or as commercially available as the FX180® slicer available from Formax, Inc. of Mokena, Ill., USA.

[0005] The FX180® machine can be configured as an automatically loaded, continuous feed machine, or an automatically loaded, back-clamp or gripper type machine.

[0006] For an automatically loaded, continuous feed machine, side-by-side upper and lower conveyor pairs drive food articles into the cutting plane. A gate is located in front of the conveyors. The initial food articles are loaded with leading ends abutting the gate. The gate is lowered and the food articles proceed into the conveyors. When the initial food articles are sliced to the extent that the trailing ends of the food articles clear the gate, the gate is raised and new food articles are loaded in the feed paths, held back by the gate. Shortly thereafter the gate is lowered and new food articles slide down to where lead ends of the new food articles abut trailing ends of the initial food articles being sliced. The new food articles are driven into the cutting plane trailing the initial food articles. Food articles are sequentially and continuously loaded in this manner, lead end-to-trailing end, in abutting contact with the preceding food articles.

[0007] U.S. Pat. No. 5,628,237 and European patent EP 0 713 753 describe a back-clamp or gripper type slicing machine. According to this type of slicing machine, two food articles are loaded onto a lift tray and the lift tray is raised to a ready-to-sweep position. Two loaf grippers are retracted after the previous food articles are sliced. During retraction of the loaf grippers, loaf-to-slicing blade gate doors are closed

and ends of the previous food articles are dropped through a loaf end door. After the grippers have reached the retracted position or "home position" remote from the slicing blade, a loaf sweep mechanism is activated moving the food articles laterally together into the slicing position. A spacing mechanism moves down and spaces the food articles apart. The grippers then advance after it has been determined that the loaf sweep mechanism has moved the food articles to the slicing position. The grippers have onboard sensing mechanisms that are triggered by contact with the food articles. After sensing and gripping the food articles, the food articles are retracted slightly, and the loaf-to-slicing blade gate doors are opened and the food articles are advanced to the slicing plane of the slicing blade. The loaf sweep mechanism retracts and the loaf lift tray lowers, ready, for the next reload cycle. According to this design, in practice, the reload cycle is accomplished in about eight seconds. In a high volume slicing operation, reload cycle time can be a significant limitation to optimum production efficiency.

[0008] In either configuration the FX180® slicing machine has achieved great commercial success. However, the present inventors have recognized that it would be desirable to slice up to four food articles or more with independent feeding and weighing capabilities, with hygienic and operational enhancements.

SUMMARY OF THE INVENTION

[0009] The present invention provides a high speed slicing apparatus and a weighing and classifying conveyor combination that provides plural advantages in productivity, food hygiene, and operation.

[0010] The combination provides a mechanism and method for slicing multiple food articles with independency of feed rate and the ability to weigh each product group from each food article respectively to achieve optimal weight control and yield of each food article. The combination provides food hygiene advantages by the use of unit-body construction with minimal penetrations, double sealed door closures, and self draining angled surfaces. It also provides hygienic, round, sealed adjustable legs, and a hygienic configuration of a food article lift and sweep mechanism. Further, the combination provides an automated cleanup position wherein, the elevated food article feed mechanism can be collapsed to a more convenient plane or maintenance position, the weighing and classifying conveyor is oriented at a distance from the slicing apparatus for ease of cleanup and maintenance, and the slicing head cover is automatically lifted to an open cleanup position. Additionally, all product contact conveyor belts throughout the combination are easily removable.

[0011] Numerous other advantages and features of the present invention will become readily apparent from the following detailed description of the invention and the embodiments thereof, and from the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is a near side elevational view of a slicing machine and a weighing and classifying conveyor combination of the present invention;

[0013] FIG. 2 is an elevational view of the combination of FIG. 1 with some panels removed or made transparent illustrating some underlying components;

[0014] FIG. 3 is an elevational view of the combination of FIG. 1 with further panels removed or made transparent and underlying components revealed;

[0015] FIG. 4 is a rear view of the combination shown in FIG. 3;

[0016] FIG. 4A is an elevational view of the combination of FIG. 1 in a clean-up, non operational position;

[0017] FIG. 4B is a fragmentary, elevational, enlarged view of a portion of the slicing machine shown in FIG. 1;

[0018] FIG. 5 is a far side elevational view of the combination shown in FIG. 1;

[0019] FIG. 6 is a far side perspective view of the combination shown in FIG. 5;

[0020] FIG. 7 is a rear view of the combination shown in FIG. 3;

[0021] FIG. 8 is an enlarged, fragmentary near side elevational view of food article lift tray and food article positioning systems;

[0022] FIG. 8A is an enlarged fragmentary sectional view taken generally along line 8A-8A of FIG. 9;

[0023] FIG. 9 is a fragmentary plan view of a food article lift tray;

[0024] FIG. 10 is a rear view of the food article lift tray shown in FIG. 9;

[0025] FIG. 11 is a rear view of the food article lift tray and food article transfer apparatus;

[0026] FIG. 12 is a fragmentary perspective view of the food article lift tray and food article transfer apparatus;

[0027] FIG. 12A is an enlarged elevational view of the food article transfer apparatus;

[0028] FIG. 13 is a plan view of the food article transfer apparatus;

[0029] FIG. 14 is a plan view of the food article feed apparatus;

[0030] FIG. 15 is an elevational view of the food article feed apparatus shown in FIG. 14;

[0031] FIG. 15A is a sectional view taken generally along line 15A-15A;

[0032] FIG. 16 is an elevational view of the food article feed apparatus;

[0033] FIG. 17 is a plan view of a gripper taken from the food article feed apparatus of FIG. 16;

[0034] FIG. 17A is a front view of the gripper taken generally along line 17A-17A of FIG. 17;

[0035] FIG. 18 is a sectional view taken generally along line 18-18 of FIG. 17A;

[0036] FIG. 19 is a fragmentary perspective view of the food article feed apparatus;

[0037] FIG. 20 is an enlarged sectional view of the attachment of the gripper to the belt;

[0038] FIG. 21 is a sectional view taken generally along line 20-20 of FIG. 16;

[0039] FIG. 22 is a sectional view taken generally along line 22-22 of FIG. 21;

[0040] FIG. 23 is a sectional view taken generally along line 23-23 of FIG. 21;

[0041] FIG. 24 is a plan view taken along line 24-24 FIG. 21;

[0042] FIG. 25 is an elevational view taken generally along line 25-25 of FIG. 24;

[0043] FIG. 26 is a fragmentary elevational view of a food article gate mechanism;

[0044] FIG. 27 is a near side perspective view of the food article gate mechanism and a food article end removal mechanism in a first operative position;

[0045] FIG. 28 is a near side perspective view of the food article gate mechanism and the food article end removal mechanism in a second operative position;

[0046] FIG. 29 is a far side perspective view of the food article end removal mechanism;

[0047] FIG. 30 is a top far side perspective view of the food article end removal mechanism;

[0048] FIG. 31 is a far side elevation view of the food article gate mechanism and the food article end removal mechanism;

[0049] FIG. 32 is a sectional view taken generally along line 32-32 of FIG. 2;

[0050] FIG. 33 is a sectional view taken generally along line 33-31 of FIG. 32;

[0051] FIG. 33A is a sectional view taken generally along line 33A-33A of FIG. 33;

[0052] FIG. 34 is a perspective view of a portion of a slicing blade assembly taken from FIG. 32;

[0053] FIG. 35 is a sectional view taken generally along line 35-35 of FIG. 32;

[0054] FIG. 36 is a sectional view taken generally along line 36-36 of FIG. 32;

[0055] FIG. 37 is an enlarged fragmentary far side elevational view of the combination of FIG. 1 showing underlying components and features;

[0056] FIG. 38 is an enlarged fragmentary near side elevational view of the combination of FIG. 1 showing underlying components and features;

[0057] FIG. 39 is a plan view of mechanical components within the base section of the combination shown in FIG. 1;

[0058] FIG. 40 is a bottom perspective view of the lift tray and food article feed apparatus;

[0059] FIG. 41 is a far side perspective view of a front portion of the combination of FIG. 1;

[0060] FIG. 42 is a near side perspective view of a food article positioning apparatus and food article feed elevation adjusting apparatus;

[0061] FIG. 43 is a near side perspective view of a food article shear support;

[0062] FIG. 44 is a front elevational view of the shear support shown in FIG. 43;

[0063] FIG. 44A is a front elevational view of a slicing blade with respect to the shear support;

[0064] FIG. 44B is a sectional view taken generally along line 44B-44B of FIG. 44A;

[0065] FIG. 44C is a sectional view of a jump conveyor drive assembly taken generally along line 44C-44C of FIG. 35;

[0066] FIG. 45 is a front perspective view of the slicing apparatus with the weighing and classifying conveyor removed;

[0067] FIG. 46 is a near side perspective view of a front portion of the slicing apparatus with a cover removed to view inside components;

[0068] FIG. 46A is a near side elevational view of the slicing apparatus showing underlying components;

[0069] FIG. 47 is a far side elevational view of the slicing apparatus showing underlying components;

[0070] FIG. 48 is a front elevational view of the slicing apparatus with the weighing and classifying conveyor removed;

[0071] FIG. 49 is an enlarged near side perspective view of the slicing apparatus;

[0072] FIG. 50 is an enlarged near side perspective view of the slicing apparatus and weighing and classifying conveyor;

[0073] FIG. 51 is a diagrammatic plan view of an onboard information system according to one aspect of the invention;

[0074] FIG. 52 is a diagrammatic sectional view of the onboard information system taken generally along 52-52 of FIG. 51;

[0075] FIG. 53 is a far side perspective view of a laser guard system according to another aspect of the invention;

[0076] FIG. 54 is a near side perspective view of the laser guard system;

[0077] FIG. 55 is a near side elevation view of the weighing and classifying conveyor of FIG. 1 showing underlying components;

[0078] FIG. 56 is a perspective view of a portion of a weighing conveyor with the conveyor belt and rollers removed;

[0079] FIG. 57 is a bottom view of a weighing conveyor belt with frame and rollers removed from the weighing conveyor shown in FIG. 56;

[0080] FIG. 58 is an enlarged elevational view of a portion of the weighing and classifying conveyor;

[0081] FIG. 59 is a near side elevation view of the weighing and classifying conveyor shown in a clean-up position;

[0082] FIG. 60 is a far side elevational view of the weighing and classifying conveyor;

[0083] FIG. 60A is an end view of the weighing and classifying conveyor showing underlying components;

[0084] FIG. 60B is a plan view of the weighing and classifying conveyor;

[0085] FIG. 61 is a schematic representation of the combination of FIG. 1 showing a four food article set up;

[0086] FIG. 62 is a schematic representation of the combination of FIG. 1 showing a three food article set up;

[0087] FIG. 63 is a schematic representation of the combination of FIG. 1 showing a two food article set up;

[0088] FIG. 64 is a progressive schematic diagram showing the loading of four food articles onto a food article lift tray;

[0089] FIG. 65 is a schematic plan view showing the weighing and classifying conveyor configured for four lanes of sliced product;

[0090] FIG. 66 is a schematic plan view showing the weighing and classifying conveyor configured for two lanes of sliced product;

[0091] FIG. 67 is a schematic plan view showing the weighing and classifying conveyor configured for one lane of sliced product;

[0092] FIG. 68 is a schematic plan view showing the weighing and classifying conveyor configured for three lanes of sliced product;

[0093] FIG. 69 is a schematic rear end view of the food article lift tray showing the tray configured to hold four square cross section food articles;

[0094] FIG. 70 is a schematic rear end view of the food article lift tray showing the tray configured to hold four circular cross section food articles;

[0095] FIG. 71 is a schematic rear end view of the food article lift tray showing the tray configured to hold four large D-shaped food articles;

[0096] FIG. 72 is a schematic and view of the food article lift tray showing the tray configured to hold for large rectangular cross section food articles;

[0097] FIG. 73 is a schematic and view of the food article lift tray showing the tray configured to hold two large prone rectangular food articles;

[0098] FIG. 74 is a schematic devotional view of a round knife blade to be used with the apparatus of the present invention;

[0099] FIG. 75 is a schematic devotional view of an involute-shaped knife blade for slicing large food articles to be used with the apparatus of the present invention;

[0100] FIG. 76 is a schematic elevational view of an involute-shaped knife blade for slicing small food articles to be used with the apparatus the present invention;

[0101] FIG. 77 is a near side devotional view of a laser guard system of the present invention;

[0102] FIG. 78 is a sectional view taken generally along line 79-79 of FIG. 77;

[0103] FIG. 79 is a plan view of a rear portion of the weighing classifying conveyor;

[0104] FIG. 80 is in elevation view taken generally along line 80-80 of FIG. 79;

[0105] FIG. 81 is a plan view of the rear portion of the weighing and classifying conveyor of FIG. 79 with deceleration conveyor belts removed for clarity; and

[0106] FIG. 82 is an exploded view of a portion of the deceleration conveyor taken from FIG. 81.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0107] While this invention is susceptible of embodiment in many different forms, there are shown in the drawings, and will be described herein in detail, specific embodiments thereof with the understanding that the present disclosure, is to be considered as an exemplification of the principles of the invention and is not intended to limit the invention to the specific embodiments illustrated.

[0108] U.S. Patent Application No. 60/999,961 filed on Oct. 22, 2007 and U.S. Patent Application No. 61/000,202 filed on Oct. 23, 2007 are both herein incorporated by reference.

[0109] FIGS. 1-3 illustrate a high speed slicing apparatus 100 and a weighing and classifying conveyor or output conveyor 102 according to a preferred embodiment of the invention. The slicing apparatus 100 includes a base section 104, a collapsible frame 105, an automatic food article loading apparatus 108 that receives food articles 110 to be sliced, a food article feed apparatus 120, a food article feed elevation adjusting apparatus 121, a food article end removal apparatus 122 (FIG. 27), a laser safety guard system 123, a slicing head apparatus 124, and a slice receiving apparatus 130. The slicing apparatus also includes a computer display touch screen 131 that is pivotally mounted on and supported by a support 132.

[0110] The apparatus 100 can also include an onboard information carrier system 135 (FIGS. 51, 52) that allows installed parts to be tagged with an information read and write data carrier that can communicate control or maintenance or other information to machine control.

Base Section

[0111] The base section 104 includes a compartment 136 having side walls 138a, 138b, bottom wall 140, and an inclined top wall 142. The apparatus 100 is supported on four adjustable feet 144. The compartment 136 has a tapered side

profile from back to front wherein the top wall **142** slants down from back to front. The slanted orientation of the top wall **142** ensures water drainage off the top of the compartment **136**.

[0112] The adjustable feet **144** are shown in FIG. 4B. The feet include a cylinder **144a** that is bolted to the bottom wall **140**. The cylinder **144a** includes an internal threaded bore **144b** that receives a threaded portion **144f** of a shaft **144c** that is mounted on a foot base **144d**. The shaft **144c** includes a smooth portion **144g** of below the threaded portion **144f**. The smooth portion **144g** is sealed to the cylinder **144a** by an O-ring **144h** carried inside the cylinder **144a**. This design prevents threads from being exposed which can collect particles and spray water from clean up.

[0113] The compartment **136** includes near side doors **152**, **154**, far side doors **156**, **158** (FIG. 5), and a rear door **162** that permit access into the compartment or to modules normally within the compartment **136**. The compartment **136** typically affords an enclosure for a computer, motor control equipment, a low voltage supply, and a high voltage supply and other mechanisms as described below. The compartment may also include a pneumatic supply or a hydraulic supply, or both (not shown).

[0114] Base section **104** also includes a debris or scrap conveyor **170** that can be operated to slowly circulate at all times to remove food pieces or other debris that would otherwise collect on top of the top wall **142**, and delivers the debris to a collector bucket **173** located below an output end **170a** of the conveyor **170**.

[0115] The debris conveyor **170** is shown in FIGS. 45 and 47-50. The debris conveyor includes a belt **163** that circulates around a rear idle roller **164a**, a front tensioning roller **164b** and a drum motor roller **164c**. The belt circulates against a front idle roller **164d**. The rollers **164b** and **164c** are supported by side plates **165a**, **165b**. The side plates **165a**, **165b** are fixed to support shafts **166a**, **166b** which are attached in cantilever fashion to a far side of the machine by a triangular base plate **167** that is fastened to end nuts **2066a**, **2066b** of the tubular shafts **2067a**, **2067b** described below. The cantilever mounting allows for the belt to be removed off the rollers at a near side of the machine for cleaning.

[0116] Each of the rollers **164a**, **164b**, **164d** are rotatably carried on a pair of bearings **168** that have a block shaped outer contour **168a** with a recessed square block shaped region **168b**. The square block shaped region **168b** of each bearing **168** is configured to tightly fit within a respective support bracket **169a**, **169b**, **169c** to removably support the respective roller. The outer contour **168a** captures the respective support bracket **169a**, **169b**, **169c** by sandwiching both sides of the respective bracket **169a**, **169b**, **169c**. The support brackets **169a** are shaped hangers located on the far side and near side of the machine. The support brackets **169b**, **169b** are U-shaped brackets mounted to the side plate **165a** at the far side of the machine and to the front of the compartment **136** at a near side of the machine. The support brackets **169c**, **169c** are formed as part of the side plates **165a**, **165b** and are open upward.

[0117] A tensioning shaft **171** extends across the conveyor **170** below the roller **164b**. The shaft **171** is connected to cams **171a**, **171b** at positions adjacent to and outside of the side plates **165a**, **165b**. At a near side of the machine a handle **171b** is fixed to the shaft **171**. The cams **171a**, **171b** ride against bottoms **168c** of the rectangular block shaped contours **168a** of the bearings **168**. Each cam **171a**, **171b** has a substantially

flat portion **171c** on its cam surface that underlies the bottoms **168c** to lock the roller **164b** in an elevated position to tension the belt **173**.

[0118] To tension the belt **163**, the handle **171h** is turned from the pointing down position shown in FIG. 46A to the pointing up position shown in FIG. 46A, i.e., turned clockwise.

Collapsible Frame and Elevated Housings

[0119] The base section **104** supports the collapsible frame **105** as shown in FIGS. 1-4A. The collapsible frame **105** includes a foldable support mechanism **174** that supports a food article feed mechanism frame **190**.

[0120] The foldable support mechanism **174** includes a servomotor **175** that drives a gear reducer **176** having a drive shaft **178** that extends out of the gear reducer **176** at opposite ends. The drive shaft **178** is fixed to parallel levers **180a**, **180b** which swing out with a turning of the drive shaft **178**. The levers **180a**, **180b** are pivotally connected to parallel support columns **182a**, **182b** via an axle joint **184**. The columns **182a**, **182b** are pivotally connected to the frame **190** which pivotally supports the food article feed apparatus **120** on an axle **192**.

[0121] The food article feed mechanism frame **190** also supports a sweep mechanism housing **194**, a feed conveyor drive housing **196**, and an end disposal housing **198**, all on the far side of the apparatus, shown in FIGS. 5 and 6. The frame also supports the laser safety guard system **123**.

[0122] For cleaning and maintenance purposes, the collapsible frame **105** is collapsed down by actuating the servomotor **175** and gear reducer **176** to rotate the levers **180a**, **180b**, which draws down the columns **182a**, **182b** as the frame **190** rotates on the axle **192**. The frame **190**, and all equipment supported thereby, is lowered for more convenient maintenance and cleaning as illustrated in FIG. 4A. In some cases this eliminates the need for ladders or platforms when servicing the slicing apparatus **100**.

Automatic Food Article Loading Apparatus

[0123] As illustrated FIG. 7-9, the automatic food article loading apparatus **108** includes a lift tray assembly **220**, a lift tray positioning apparatus **228** and a food article lateral transfer apparatus **236**. The lift tray assembly **220** receives food articles to-be-sliced. The tray positioning apparatus **228** pivots the tray assembly **220** to be laterally adjacent to, and parallel with, the food article feed apparatus **120**. The food article lateral transfer apparatus **236** moves the food articles from the lift tray assembly **220** onto the food article feed apparatus **120**.

Lift Tray Positioning Apparatus

[0124] FIGS. 7, 9 and 10 illustrate the food article lift tray assembly **220** includes a frame **290** that supports four movable food article support plates **302**, **304**, **306**, **308**.

[0125] As illustrated in FIG. 8, the frame **290** is connected by a rear connection **330** and a front connection **332** to a lever **336**. The lever **336** is pivotally connected to a height adjustment bar **340** at a pivot connection **342**. A servomotor **350** drives a gear reducer **351** that has an output shaft **352** that is fixed to a crank arm **360**. The crank arm **360** is pivotally connected to a lift arm **362** at a pivot connection **364**. The lift arm **362** is pivotally connected to the lever **336** at a pivot connection **366**.

[0126] When the servomotor 350 turns the crank arm 360 via the gear reducer 351 the crank arm 360 is turned counter-clockwise in FIG. 8 and the left arm 362 is elevated to pivot the lever 336 about the pivot connection 342. This pivots and elevated the rear end of the frame 290 and the food article lift tray assembly 220.

Lift Tray Assembly

[0127] As illustrated in FIGS. 9 and 10, the support plates 302, 304 are separated by a divider 312. The support plates 304, 306 are separated by a divider 314. The support plates 306, 308 are separated by a divider 316. The dividers 312, 314, 316 are fixed with respect to the frame 290. The support plates 302, 304, 306, 308 are movable in a perpendicular direction “P” to a length direction of the frame 290 (FIG. 8). When the frame 290 is horizontally oriented, direction “P” is substantially vertical.

[0128] Each food article support plate 302, 304, 306, 308 is supported by a selective lift mechanism 326 described in FIGS. 8, 9 and 40. FIG. 8 discloses the selective lift mechanism 326 for the support plate 302 with the understanding that the selective lift mechanism 326 for each of the food article support plates 302, 304, 306, 308 is identical.

[0129] The support plate 302 is fastened to two parallel lift bars 370, 372. Three swing levers 380, 382, 384 are pivotally connected to transverse shafts 388, 400, 402 of the frame 290, at base ends 380a, 382a, 384a of the swing levers 380, 382, 384, respectively. Distal ends 380b, 382b, 384b of the swing levers 380, 382, 384, respectively, are pivotally connected to the two parallel lift bars 370, 372. A pneumatic cylinder 416 is pivotally connected at a first end 416a to a transverse strut 420 of the frame 290. The cylinder 416, particularly the cylinder rod 426, is pivotally connected at a second end 416b to the distal end 382b of the swing lever 382.

[0130] Each support plate is provided with an optical sensor or other proximity sensor 302s, 304s, 306s, 308s that is signal-connected to machine control. As illustrated in FIG. 8A, the sensors 302s, 304s, 306s, 308s beam light and receive reflected light through a hole 302f in the respective support plate. The proximity sensors 302s, 304s, 306s, 308s are configured to sense when a food article is loaded onto the respective support plate 302, 304, 306, 308.

[0131] Each support plate is also provided with fore and aft stationary hooks 302g, 302k that engage pins 302p spanning between the lift bars 370, 372 and which hooks are open facing forwardly, and a movable latch 302m that engages a pin 302p between the lift bars 370, 372. The latch 302m has a hook that is open rearward and can be disengaged by a finger pushed down through a hole. 302t in the respective support plate, and the support plate then moved rearwardly, to the rights in FIGS. 8A and 9, disengaging the hooks 302g, 302k to allow the support plate to be withdrawn from the lift tray for cleaning.

[0132] In operation, when the cylinder 416 is actuated pneumatically to elongate, i.e., the rod 426 is moved to the right in FIG. 8, the swing levers 380, 382, 384 will swing clockwise about their base ends 380a, 382a, 384a. The swing lever 382 will swing from direct force by the cylinder 416 and the swing levers 380, 384 will swing from the force from the parallel lift bars 370, 372 on the distal ends 380b, 384b, of the swing levers 380, 384.

[0133] Referring to FIG. 10, when the cylinders are elongated, the support plates 302, 304, 306, 308 are elevated from a lowered position indicated as 302a, 304a, 306a, 308a to an

elevated position indicated as 302b, 304b, 306b, 308b. The plates initially are all elevated. The innermost plate 308 is lowered first to receive a food article of the. Once the proximity sensor 308s senses a food article is present, the next plate 306 is lowered to receive the next food article. Once a food article is loaded onto the plate 306 and its presence is sensed by the sensor 306s, the next plate 304 is lowered. Once a food article is sensed on the plate 304, the plate 302 is lowered. This sequence is demonstrated in FIG. 64. In the case where less than four food articles are to be loaded onto the food article tray, machine control can change the sequencing and response to signals from the switches 302s, 304s, 306s, 308s.

[0134] Once the tray is loaded and lifted, the food articles 110 will be moved from the lowered position indicated at 110a wherein the food articles are guided in lateral position by the guides 312, 314, 316, to a raised position indicated as 110b, wherein the support plates 302, 304, 306, 308 are elevated to be flush with a top of the guides 312, 314, 316.

Food Article Lateral Transfer Apparatus

[0135] The food article lateral transfer apparatus 236 is illustrated in FIGS. 10-13. The apparatus 236 includes front and rear transfer sweeps 452, 454 (FIG. 12). The front and rear transfer sweeps are identically configured so only the front transfer sweep 452 will be described in detail.

[0136] The food article feed apparatus frame 190 includes an upper frame 520 and a lower frame 522. The upper frame comprises two parallel rails 534, 536, four tubular braces 539, 541, 542, 544 and two L-shaped frame extensions 548, 550 that are laterally spaced from the rear side rail 534. The frame extension 548 is fixed to ends of the tubular braces 539, 541, and the frame extension 550 is fixed to ends of the tubular braces 542, 544. The lower frame 522 comprises parallel straight rails 522a, 522b and two transverse struts 523a, 523b which connect the two straight rails 522a, 522b. At a front end of the food article feed mechanism frame 190, the rails 534, 536, 522a, 522b are fastened to a thick support plate 551 that is bolted to the axle 192.

[0137] The front sweep 452 comprises two vertical frames 556, 558 that are substantially mirror image identical. Each frame 556, 558 comprises front journals 560a, 560b and rear journals 562a, 562b that slide laterally on tubular braces 539, 541, respectively. A multi-lane spacer 570 is arranged below the frames 526, 558. The multi-lane spacer 570 comprises side plates 572, 574 and intermediate rectangular-shaped tubular spacers 576, 578, 580. The side plates 572, 574 and tubular spacers 576, 578, 580 are connected together by front and rear struts 582, 584, respectively that connect raised portions of each of the plates 572, 574 and spacers 576, 578, 580. The struts 582, 584 hold the plates 572, 574 and spacers 576, 578, 580 in a vertical, spaced-apart and parallel orientation. The relative positioning of the plates 572, 574 and spacers 576, 578, 580 define the desired spacing of four food articles to be carried on the food article feed apparatus to be sliced simultaneously by the slicing head apparatus.

[0138] The multi-lane spacer 570 is hung from the frames 556, 558 by links 584, 586, 588, 590. The front links 584, 588 are pivotally connected to the respective frames 556, 558 and pivotally connected to the side plates 572, 574 of the multi-lane spacer 570. The rear links 586, 590 are pivotally connected to the side plates 572, 574 and connected to slide bearings 600, 602 that each slidably receives a square cross section drive rod 606 in a fashion such that turning of the

square cross section drive rod 606 causes a turning of the rear links 586, 590. Turning of the rear links 586, 590 forcibly swings the rear links 386, 590, which swings the multi-lane spacer 570 rearward and upward. The square cross section drive rod 606 slides through the slide bearings 600, 602 during lateral sliding of the sweep 452. The square cross section drive rod 606 has a round end that is journaled for rotation in a bearing 610 carried by the frame extension 550.

[0139] FIG. 11 illustrates the sweep 452 in two positions. In a first position marked 432a, the sweep is above four food articles 110 that are positioned on the support plates 302, 304, 306, 308, with the support plates in a raised position flush with the dividers 312, 314, 316. From this position, the sweep 452 is moved to the right by a sweep transfer device 630 shown in FIG. 13. The multi-lane spacer 470 is positioned to be above the conveyor 530. The top surface of the conveyor 530 is flush with the top surface of the support plates 302, 304, 306, 308 so a smooth sliding transfer is enabled. The sweep 452 moves laterally with the journals 560a, 560b; 562a, 562b sliding along the tubular braces 539, 541.

[0140] FIG. 13 illustrates the transfer device 630 comprises a servomotor 636 that turns the operating mechanism of a screw drive 638 via a belt 642. The screw drive 638 is mounted within a tubular cover 540. A hollow rod 646 is fixed on an end thereof to the frame 556 and penetrates the cover 540. The rod 646 has internal threads, such as provided by a threaded nut or screw follower welded to the rod, and the screw drive 638 has an internal rod (not shown) with external threads which engage the internal threads. Thus, turning of the rod of the screw drive 638 in a pre-defined direction moves the nut along the rod and either extends or retracts the rod 646 from or into the cover 540.

[0141] To reload the conveyor or 530 with four new food articles 110, the multi-lane spacer 470 must be raised so as not to interfere with the food articles being sliced on the conveyor 530, and then moved outward (to the left in FIG. 11). To raise the multi-lane spacer 470, the square cross section rod 606 is turned, to swing the links 586, 590. A turning mechanism 720 is shown in FIG. 13 associated with identical sweep 454, with the understanding that an identical mechanism 720 would be used for the sweep 452. The turning mechanism 720 includes a linear actuator servomotor 726 pivotally fastened at a base end 726a to the frame 520 and having an extendable rod 730 pivotally connected to a lever 736. At an opposite end the lever 736 is connected to the square cross section rod 606. The rod 730 is connected to the lever 736 at a location eccentric to a centerline of the square cross section rod 606. The servomotor 726 turns an internal threaded rod or like device to extend or retract the rod 730 and this turn the lever 736 and the square cross section rod 606 in either direction, clockwise or counterclockwise about an axis of the rod 606. Thus, when the rod 730 is extended, the rod 606 is turned counterclockwise (as viewed in FIG. 12) and the multi-lane spacer 470 is raised.

[0142] The servomotor 636 then turns the screw drive 638 to extend the rod 646 to move the sweep 452 to the left position shown in FIG. 11 but raised above the lift tray 220. The linear actuator servomotor 726 then retracts the rod 730 to reverse rotate the square cross section rod 606 to lower the multi lane spacer 470 to the position indicated as 452a in FIG. 11. At this position, four new food articles 110 can be raised by the supports 302, 3204, 306, 308 to take the four lane positions between the side plates 570, 574 and the spacers 576, 578, 580.

[0143] As the food articles 110 are transferred from the support plates 302, 304 306, 308 a sensor 770 determines a location of the end 110d of each food article 110. According to the preferred embodiment, the sensor 770 comprises a laser distance sensor that uses a beam 770a to determine the distance between the sensor 770 and the back end 110d of each food article as the food articles pass by during transfer. This distance is recorded in the machine control and associated with each food article 110, particularly, associated with the food article 110 and the lane to be occupied by each food article during slicing. The machine control has instructions for calculating a length of each food article based on the distance value provided the sensor.

Food Article Feed Apparatus

[0144] The lower conveyor 330 of the food article feed apparatus 120 is shown in FIG. 14. The conveyor 530 includes four independently driven endless conveyor belts 802, 804, 806, 808. Each belt 802 804, 806, 808 is identically driven so only the drive for the belt 802 be described. A machine control "C" (FIG. 51) has instructions for ending machine slicing of all food articles on the food article feed apparatus when the shortest food article is sliced to a minimum length. The minimum length may be predefined, may be a food article length below which the machine can no longer slice a food article, or may be a food article length below which continued slicing will produce unacceptable scrap slices cause by slicing a food article end.

[0145] The belt 802 is wrapped around a toothed front drive roller or pulley 812 and a back idler roller or pulley 816. The belt 802 preferably has teeth that engage teeth of the two rollers 812, 816. Each drive roller 812 includes a toothed outer diameter 812a and a toothed, recessed diameter 812b. An endless drive belt 820 having a smaller width than the belt 802 wraps around the recessed diameter 812b. As shown in FIG. 15A, the smaller endless drive belt 820 operates within the larger operating path of the larger endless conveyor belt 802. The drive belt 820 also wraps around a drive roller 824 that is fixed to a drive shaft 828. The drive shaft 828 extends transversely to the belt 802 and is journaled for rotation within a bearing 830 mounted to a near side frame member 836.

[0146] The drive shaft 828 penetrates a far side frame member 838 and extends to a bearing 843, coupled to a gear reducer 842 mounted to a support frame 854. The gear reducer 842 is coupled to a servomotor 850 that is mounted to the support frame 854. The drive belt 820 circulates within the perimeter defined by the endless belt 802.

[0147] The servomotor 850 drives the drive shaft 828 which turns the roller 824 which circulates the belt 820 which rotates the roller 812 which circulates the belt 802.

[0148] A shown in FIGS. 14, 15, 15A, 19 and 20 the belt 802 is supported along its length by flat rails 860, 862 which underlie lateral edges of the belt 802. The rails 860, 862 (as well as rails for the belts 804, 806, 808) are supported by struts 870, 872, 874 and 876 which connect the near frame member 836 to the far frame member 838.

[0149] Each idler roller 816 is provided with a pneumatic belt tension adjustment mechanism 882 that is braced from a transverse bar 886 that is fastened between the frame members 836, 838. The pneumatic belt tensioning adjustment mechanism 882 has an internal piston which is acted upon by pneumatic air pressure to exert a constant force on tension

rods **882a** which exert a force on frame **883** of each idler roller **816** outwardly away from the transverse bar **886** to maintain tension on the belts.

[0150] FIG. 15-20 illustrate a gripper **894** used in cooperation with the belt **802**. The gripper **894** is mounted to a top run of the belt **802** and is translated along the food article path by the belt **802**. The gripper **894** is clamped to a belt joint block **896** by a screw **897**. The block **896** comprises an upper member **899** and a lower member **900** that include teeth **899a**, **900a** on members **899**, **900** that engage the upper and lower teeth of the belt **802** once the members **899**, **900** are clamped together to splice the free ends **802e**, **802f** of the belt **802**. For clamping, fasteners **902**, **904** are provided which are inserted from below the member **900** through plain holes in the member **900** and tightly threaded into threaded holes **902a**, **904a** in the member **899**.

[0151] The gripper **894** travels from the retracted home position shown in FIGS. 16 and 19, to the advanced, forward position, shown in FIGS. 15 and 20. The lower member **900** is size to slide between a lateral clearance **906** located between rails **860** **862** (FIG. 14).

[0152] The gripper **894** is pneumatically actuated via pressurized air hoses **912**, **913** (FIG. 16). The air hoses **912**, **913** are coupled to include free hanging supply loops **914**, **915** that includes a dead weight pulley **916** to prevent inadvertent tangling of the hoses with other equipment. Tube guides can also be provided on the back of the frame member **190** to guide the air hoses vertically to prevent tangling of the hoses with other equipment.

[0153] The gripper **894** includes an air cylinder **926** having a piston **930** therein. Air connectors **932**, **936** communicate air to/from opposite sides of the piston to control movement of the piston in either direction. As shown in FIG. 18, movement of a piston rod **938** connected to the piston **930** moves an annular rack **942** that is engaged to four pinion gears **944** of four claws **946**. Movement of the annular rack **942** away from the cylinder **926** opens the claws **946**, and movement of the annular rack **942** toward the cylinder **926** closes claws **946**.

Upper Conveyor

[0154] As illustrated in FIG. 21, at a front end of the food article feed apparatus **120**, above the lower feed conveyor **530** are four upper feed conveyors **992** **994**, **996**, **998** having endless belts **1002**, **1004**, **1006**, **1008**, respectively. The endless belts **1002**, **1004**, **1006**, **1008** are independently driven and are directly opposed to the lower conveyor belts **802**, **804**, **806**, **808**, respectively. The respective belt pairs, such as the upper belt **1002** and the lower belt **802** are circulated in opposite directions to drive a food article clamped there between into the slicing plane.

[0155] The near side upper conveyors **992**, **994** are configured in a mirror image fashion, across a longitudinal vertical center plane of the food article feed apparatus **120**, to the far side two conveyors **996**, **998** so that only the near side two conveyors **992**, **994** need be described.

[0156] FIG. 21 shows the conveyor **992** has a drive roller **1010** having a central hub **1012** with a center bore **1014**. The drive roller **1010** has tubular stub axles **1016**, **1018** extending from opposite ends of the central hub **1012**. The tubular stub axles **1016**, **1018** are journaled for rotation by bearings **1020**, **1022** that are fastened to carrier blocks **1023a**.

[0157] The conveyor **994** includes a drive roller **1038** having a central hub **1042** with a bore **1044**. The drive roller **1038** has tubular stub axles **1046** and **1048** extending from opposite

ends of the central hub **1042**. The tubular stub axles **1046**, **1048** are journaled by bearings **1050**, **1052** respectively that are attached to carrier blocks **1023b**.

[0158] A motor housing **1054**, including a baseplate **1054b** and a cover **1054a**, is mounted to an end of an upper conveyor support bar **1056**. The base plate **1054b** of each side of the machine is fastened to a linear actuator, such as a pneumatic cylinder **1055a** and **1055b** respectively. The cylinders **1055a**, **1055b** are connected together by the support bar **1056**. Each cylinder slides on a fixed vertical rod **1057a**, **1057b** respectively. Thus, controlled air to the cylinders **1055a**, **1055b** can be used to uniformly raise or lower the near side housing **1054** and the far side housing **1054** uniformly.

[0159] A spindle **1060** extends through the motor housing **1054**, through a sleeve **1064**, through a coupling **1065**, through the tubular stub axle **1016**, through the central bore **1014**, through the tubular stub axle **1018**, through the tubular stub axle **1046**, and partly into the bore **1044**. The spindle **1060** has a hexagonal cross-section base region **1070**, a round cross-section intermediate region **1072**, and a hexagonal cross-section distal region **1074**. The hexagonal cross-section base region **1070** is locked for rotation with a surrounding sleeve **1071** to rotate therewith.

[0160] The intermediate region **1072** is sized to pass through the sleeve **1064**, through tubular stub axle **1016**, through the central bore **1014**, and through the tubular stub axle **1018** to be freely rotatable therein. The distal region **1074** is configured to closely fit into a hexagonal shaped central channel **1078** of the tubular stub axle **1046** to be rotationally fixed with the tubular stub axle **1046** and the drive roller **1038**.

[0161] The sleeve **1064** includes a hexagonal perimeter end **1064a** that engages a hexagonal opening **1065a** of the coupling **1065**. The coupling **1065** includes an opposite hexagonal opening **1065a** that engages a hexagonal perimeter end **1016a** of the tubular stub axle **1016**. The coupling **1065** couples the sleeve **1064** and the stub axle **1016** for mutual rotation such that the sleeve **1064** and the drive roller **1010** are locked for rotation together, i.e. turning of the sleeve **1064** turns the drive roller **1010**.

[0162] Within the motor housing **1054** are two servomotors **1090**, **1092** mounted to the housing by fasteners. The servomotors each have a vertically oriented output shaft **1096** that rotates about a vertical axis connected to a worm gear **1098** that is in mesh with and drives a drive gear **1100** that rotates about a horizontal axis. The drive gear **1100** drives the sleeve **1071** that drives the region **1070** of the spindle to rotate the spindle **1060**. Rotation of the spindle **1060** rotates the drive roller **1038** via the hexagonal cross-section distal end region **1074**.

[0163] Adjacent to the servomotor **1090** is the servomotor **1092**. The servomotor **1092** is configured substantially identically with the servomotor **1090** except the worm gear **1098**, as shown in schematic form in FIGS. 22 and 23, of the servomotor **1092** drives a drive gear **1100** that drives the sleeve **1064** to rotate. The sleeve **1064** rotates independently of the round cross-section region **1072** of the spindle **1060**, and drives a stub axle **1016** to rotate, which rotates the drive roller **1010**.

[0164] The sleeves **107** and **1064** are journaled for rotation by bearings **1106**, **1108**; and **1110**, **1112**, respectively. The drive gears **1100**, **1100** are fastened to the respective sleeve **1071**, **1064** using fasteners **1116**.

[0165] The housings **1054**, via servomotors **1090**, **1092**, on both sides of the conveyors **992**, **994**, **996**, **998** support the

conveyors **992, 994, 996, 998**. By using the cylinders **1055a, 1055b** to raise and lower the housings **1054**, the conveyors can be raised or lowered to match a product size.

[0166] Each conveyor belt **1002, 1004, 1006, 1008** is wrapped around the respective drive roller and a front idle rollers **1134 1135, 1136, 1137** that is supported by respective side frames **1131, 1132**. The front rollers **1134, 1135, 1136, 1137** are vertically movable independently by pivoting of the conveyor about an axis of the respective drive roller.

[0167] Also, as shown in FIGS. **24** and **25**, the underside of the support bar **1056** carries pneumatic cylinders **1130**. Each pneumatic cylinder **1130** extends a piston rod to press down on side frames **1131, 1132** of each conveyor to pivots down a front end of each conveyor **992, 994, 996, 998** to lightly press down on a top of the product below. The inclination of each conveyor **992, 994, 996, 998** is set by upward pressure from the product and downward pressure from the pneumatic cylinders **1130**.

Food Article

[0168] As illustrated in FIG. **26**, at a front end of the food article feed apparatus **120** a food article gate **114** is movably positioned to provide a stop for food articles that are loaded onto the conveyor **530**. In order to commence slicing of the food articles, the food article gate **1140** must be displaced. FIGS. **26** and **27** show the gate **1140** in a lowered position marked **1140a**. FIGS. **26** and **28** show the gate **1140** in a raised position marked **1140b**. Guide plates **1146a, 1146b** are provided fixedly attached to the frame **190**, one on each lateral side of the gate **1140**. Each guide plate includes a slot **1148** that has a vertical portion **1148a** and a lower, inclined portion **1148b**. Two rollers **1150** are connected to a front side of the gate **1140**, one sliding within each slot **1148** of the two guide plates **1146a, 1146b** respectively. An axle **1154** is journaled at opposite ends by a frame portion **1158** and a back all **1160** of the sweep mechanism housing **194**, using bearings. Two levers **1164a, 1164b** are fixedly connected to the axle **1154** such as to swing when the axle **1154** is rotated about its axis. Each lever **1164a, 1164b** is pivotally connected to a lug **1166a, 1166b**, respectively. The lugs **1166a, 1166b** are welded to a backside of the gate **1140**.

[0169] Within the sweep mechanism housing **194** a linear actuator such as a pneumatic cylinder **1170** is pivotally connected at a base end **1170a** and pivotally connected at a rod end **1170b** to a turning lever **1172**. The turning lever **1172** is fixedly connected to the axle **1154**. Thus, when the pneumatic cylinder **1170** retracts the rod end **1170b** toward the cylinder **1170** the turning lever **1172** will be in the position marked **1172b** and the gate will be in the elevated position marked **1140b**. When the pneumatic cylinder **1170** extends the rod end **1170b** away from the cylinder **1170**, the turning lever **1172** will be in the position marked **1172a** and the gate will be in the lowered position marked **1140a**.

[0170] Advantageously, the gate **1140** follows the track **1148** in an outward and upward motion which generally releases the food articles in a forward direction toward the slicing plane for slicing.

Food Article End Disposal

[0171] FIGS. **10, 11** and **27-31** illustrate the food article end removal apparatus **122**. The apparatus **122** comprises a prone U-shaped transport **2000**. The transport **2000** is carried by near side beatings **2004** and far side bearings **2006**. The

bearings **2004, 2006** slide along parallel rails **2008, 2010** that are fixedly supported by the frame **190**. The transport **2000** can be moved from a position directly above the conveyor belts **802, 804, 806, 808** as shown in FIG. **27** to a position extended outside of the far side of the slicing apparatus **100** as shown in FIG. **28**. A servomotor **2016** located within the sweep mechanism housing **194** drives a shaft **2020** in rotation. The shaft turns a drive pulley **2024** which turns a belt **2026** which turns a driven pulley **2028** which drives a further pulley **2030** via a common shaft **2032**. A drive belts **2034** is wrapped around the further pulley **2030** and an idler pulley **2036**, the idler pulley **2036** being journaled on an idler shaft **2038**. A fixing block **2040** fixes a bottom run of the drive belt **2034** to the hearing **2006**. Thus, when the servomotor **2016** rotates the shaft **2020**, the belt **2026** is circulated by the pulley **2024** which circulates the drive belt **2034** via the pulley **2030** and the transport **2000** is moved by the fixing block **2040**.

[0172] FIG. **27** shows a movable paddle **2046** which can be inserted into the open cross-sectional space of the transport **2000**. The paddle **2046** is connected by an elongated handle **2048** that is pivotally connected to a front lever **2052** and to a rear lever **2056**. The front and rear levers **2052, 2056** are pivotally connected to the far side frame member **838** of the food article feed conveyor **530** at bearings **2052a, 2056a** respectively. The rear lever **2056** extends below the bearing **2056a** and is pivotally connected to a pneumatic cylinder **2064** at a rod end **2064a**. The pneumatic cylinder **2064** is pivotally connected to the frame **190** at an opposite end **2064b** within the food article feed drive housing **196**. Thus, extension of the rod end **2064a** away from the cylinder **2064** will retract the paddle **2046** as shown in FIG. **28**, and retraction of the rod end **2064a** toward the cylinder **2064** will cause the paddle **2046** to extend into the transport **2000** as shown in FIG. **27**.

[0173] In operation, after the food articles have been sliced completely leaving only ends gripped by the grippers, the grippers **894** are retracted toward the home position of the grippers but are halted temporarily a short distance along the food article path providing a clearance for the transport **2000**. The transport **2000** is driven by the servomotor **2016** from an extended-outward position as shown in FIGS. **10** and **28** to the inward position as shown in FIG. **27** with the paddle in the position shown in FIG. **27**. Any end portions that are on the transport **200** will be pushed off the transport **200** by the paddle **2046** during travel of the transport **200** onto the conveyor **530**. The grippers **894** then would release the ends which will fall or slide by gravity onto the transport **2000**. The grippers then continue up the food article feed paths to the gripper home position at the top of the feed mechanism. Before new food articles are loaded onto the feed mechanism **120**, the paddle **2046** is withdrawn to the position shown in FIG. **28** and then the transport **2000** is moved to the position shown in FIG. **28** carrying the end portions out of the food article feed mechanism and away from the conveyor **530**. The process is repeated after new food articles are sliced and grippers and ends proceed up the food article feed paths. The grippers are again halted at a position part way up the feed paths, the paddle is moved to the position shown in FIG. **27** and the transport **2000** is moved back onto the conveyor **530**. The paddle **2046** displaces the end portions off of the transport **2000** and into a bucket or other disposal mechanism, as the transport moves over the conveyor.

[0174] On a far side of the machine **100**, the transport **2000** is covered by a cover and chute arrangement **198** shown in

operating position in FIGS. 6 and 10 and pivoted about hinges 198a to be in a raised maintenance position shown in FIG. 29.

Slicing Head Section

[0175] FIGS. 2, 3, 5, 6 and 32-37 illustrate components and features of the slicing head section 124. The section 124 includes a housing 2060 having a thick top wall 2061 (FIG. 33), thick side walls 2062a, 2062b, an enclosing front skin 2063a, a top skin 2063b and a bottom wall 2064. The front skin 2063a can include a window 2063c closed by a cover 2063d that provides access to the motor within the housing 2060.

[0176] The side walls 2062a, 2062b are substantially similar. Each sidewall includes an upper window 2065a and a lower window 2065b. The upper windows are closed by covers 2065c. The side walls 2062a, 2062b extend outside of and down below the top wall 142 of the compartment 136 and are fastened through the compartment 136 by tubular braces 2067a, 2067b, 2067c traversing inside the compartment 136, welded to the sidewalls 138a, 138b and nuts 2066a, 2066b, 2066c on each side of the compartment tightened onto threaded rods (not visible) that are inserted through the tubular braces 2067a, 2067b, 2067c.

[0177] The thick top wall 2061 and thick side walls 2062a, 2062b form a rigid frame for the slicing head section 124.

[0178] A slicing head cover 2070 is provided to cover the moving slicing blade and openings near to the slicing blade during operation.

[0179] The slicing head cover 2070 is pivotally connected to the side walls 2062a, 2062b by a pair of articulated arms 2071a, 2071b that are, mirror image identical across a longitudinal, vertical center plane of the slicing head section 124. The slicing head cover 2070 is hinged to the top skin 2063b by hinges 2072a, 2072b.

[0180] The slicing head cover 2070 can be pivoted upwardly by the arms 2071a, 2071b moving from a folded state or closed state as shown in FIG. 2 to a substantially unfolded state or open state as shown progressively in FIG. 3, wherein the slicing head cover moves from position 2070a to 2070b to 2070c.

[0181] FIGS. 32 and 33 illustrate a mechanism 2172 used to move the arms 2071a, 2071b to raise and lower the slicing head cover 2070. The mechanism comprises a vertically oriented servomotor 2073 having an output shaft 2073a connected to a worm gear 2073b. The worm gear 2073b is in mesh hollow follower gear 2074a fixedly mounted on a transverse shaft 2074b. The shaft 2074b extends across the housing 2060 and exits side walls 2062a, 2062b through bearings 2075a, 2075b.

[0182] The shaft 2074b is fixed to pivot levers 2076a, 2076b that are respectively pivotally connected to swing levers 2077a, 2077b of the respective arms 2071a, 2071b. Ends of the swing levers 2077a, 2077b are pivotally connected to the slicing head cover 2070.

[0183] When the servomotor is turned in the select direction to open the slicing head cover 2070, the worm gear 2073b turns about its axis which turns the shaft 2074b about its axis. Turning of the shaft 2074b counterclockwise as viewed in FIGS. 2 and 3 pivots the lever arms 2076a, 2076b clockwise which thrusts the swing arms 2077a, 2077b upward to lift up the slicing head cover 2070.

[0184] The circle 2080 in FIG. 32 schematically illustrates the cutting path within a cutting plane 2081 of an involute-shaped blade 2082 (shown in FIG. 33). A rotary hub 2084 has

a fixed toothed annular surface 2084a that is rotated by a toothed belt 2088 that is circulated by a drive pulley 2094 that is driven by a servomotor 2098. The rotary hub 2084 is carried by a stationary hub 2130. The stationary hub 2130 includes a flange 2131 that is fastened to the thick top wall 2061.

[0185] A linear servo actuator 2102 has a trunion mount 2106 that is fastened to the top wall 2061 of the housing 2060. The cylinder has an extendable rod 2110 that is connected to a vertical link 2114 that is pivotally connected at its opposite ends to base ends of parallel pivot bars 2116, 2118. For clarity, the lower pivot bar 2118 is not shown in FIG. 33. The pivot bars 2116, 2118 are both pivotally and slidably attached at distal ends about an axis 2121 to opposite sides of a bearing hub 2120 that is arranged for sliding movement only in the axial direction "X" (FIG. 33), within the stationary hub 2130. The pivot bars 2116, 2118 are also both pivotally attached at an intermediate location about a pivot axis 2128 to a flange 2126 formed on the stationary hub 2130. The pivot axis 2128 is located between the base ends and distal ends of the pivot bars 2116, 2118.

[0186] As shown in FIGS. 33A and 34, since the stationary hub surrounds the bearing hub 2120, enlarged or oblong holes 2130c are provided through the stationary hub 2130 to allow a pair of pins 2130d, each having a smaller diameter than the respective oblong or enlarged hole 2130c to pass through the stationary hub 2130 on opposite sides, to be fixed to the bearing hub 2120. The oblong or enlarged holes 2130c allow for some clearance for the sliding movement of the bearing hub 2120 with respect to the stationary hub 2130.

[0187] Rectangular sliding lugs 2116t/ 2118t are fit within elongated rectangular holes 2116v, 2118v in the pivot bars 2116, 2118. The lugs 2116t, 2118t and holes 2116v, 2118v allow sliding movement of the lugs 2116t, 2118t in the direction "T" during pivoting of the pivot bars 116, 2118. The lugs 2116t, 2118t are rotatably fastened to the pins 2130d and cover with caps 2130f wherein oil or grease can be filled in under the caps.

[0188] The pivot axis 2128 is provided by a pivot pin 2128a, with threaded end holes, that locks the pivot bars 116, 2118 together by bolt caps 2128b.

[0189] A blade drive shaft 2132 is splined to the rotary hub 2084 by a gear 2136 engaged to a plurality of inner teeth 2140 on the inside of the rotary hub 2084. Thus, the rotary hub 2084 is fixed for rotation with the blade drive shaft 2132. The rotary drive shaft 2132 is journaled for rotation by base tapered roller bearings or thrust bearings 2144 and distal tapered roller bearings or thrust bearings 2148 in order for the rotary drive shaft 2132 to rotate with respect to the non-rotating bearing hub 2120.

[0190] The blade drive shaft 2132 includes a lower counterweight mount 2133 that permits a lower counterweight 2135a to be fastened directly to the blade drive shaft 2132 using fasteners 2134 threaded into threaded holes provided in the blade drive shaft 2132. Upper counterweight 2135b for balancing the involute-shaped blade 2082 is fastened to the involute-shaped blade 2082 using fasteners 2136.

[0191] When the rod 2110 is extended with respect to the actuator 2102, the pivot bars 2116, 2118 rotate counterclockwise (as viewed in FIG. 33) about the pivot axis 2128 and thrust the pivot axis 2121 in a direction away from the cutting plane 2081 (down in FIG. 33). The bearing block 2120 slides within the stationary hub 2130. The cutting blade 2082 becomes offset by a small amount away from the cutting plane 2081.

[0192] When the actuator **2102** reverses the direction of the rod **2110**, i.e., the rod is retracted, the pivot bars **2116**, **2118** rotate clockwise (as viewed in FIG. 33) about the pivot axis **2128** and the pivot bars **1116**, **2118** thrust the axis **2121** in a direction toward the cutting plane **2081**. The bearing block **2120** slides toward the cutting plane **2081** (up in FIG. 33), and the blade **2082** returns to being coplanar with the cutting plane **2081**.

[0193] A disc **2160** is fastened to the rotary hub **2084** with fasteners to rotate therewith. As shown in FIGS. 33A and 34, a pair of disc brakes **2162**, **2164** are provided having calipers **2162a**, **2164a**, respectively. The calipers **2162a**, **2164a** are fixedly mounted to a mounting bar **2166** and fit over opposite sides of the disc **2160**. The mounting bar **2166** is mounted to the stationary hub **2130** by fasteners **2168** and tubular spacers **2170**. Each disc brake **2162**, **2164** includes movable, opposing friction pads within the calipers **2162a**, **2164a** (not seen) that face opposite sides of the disc **2160** and are subject to air pressure within the calipers **2162a**, **2164a** to squeeze the rotating disc **2160** and bring the rotating disc **2160** and the rotary hub **2084**, the drive shaft **2132** and the blade **2082** to a rapid and safe stop.

Food Article Feed Elevation Adjusting Apparatus

[0194] It is an advantage of the or present invention that the height of the conveyor **530** at the front and back ends thereof can be precisely set depending on the product size to be cut. Accordingly, a food article feed elevation adjusting apparatus **3000** is provided and illustrated in FIGS. 37-39. The adjusting apparatus **3000** also includes the foldable support mechanism **174** previously described in the control thereof. The adjusting apparatus **3000** includes a servomotor **3002** that is mounted within the enclosure **136** by a bracket **3006** that is secured to the transverse strut **2067c**. The servomotor **3002** includes an output shaft **3005** that drives an output pulley **3008**. A toothed belt **3010** surrounds the output pulley **3008** and two adjustment pulleys **3016**, **3018**. A tension pulley **3020** maintains a constant tension on the belt **3010**, and causes the belt to wrap more teeth on each of the adjustment pulleys **3016**, **3018**. Each adjustment pulley **3016**, **3018** is connected to an input shaft **3030a**, **3032a** of a time movement screw adjusting cylinder or actuator **3030**, **3032**, respectively. Thus, when the servomotor **3002** turns, the pulleys **3008**, **3016**, **3018**, **3020** causes fine, precise movement of the output end **3030b**, **3032b** of the adjusting cylinders **3030**, **3032**. The adjusting cylinders **3030**, **3032** are set at an angle that is substantially perpendicular to the conveying surface of the conveyor **530**, as shown in FIG. 27, and is substantially parallel to the cutting plane so that any adjusted change in elevation by the adjusting cylinders **3030**, **3032**, with a corresponding change in elevation of the foldable support mechanism **174** through a controlled movement of a servomotor **175**, will not change the angle of slice through food articles carried on the conveyor **530**.

[0195] FIG. 40 shows the adjusting cylinders **3030**, **3032** extending above the top wall **142** of the compartment. The cylinders **3030**, **3032** are, fixed with respect to the top wall **142** but the output ends **3030b**, **3032b** can be raised and lowered by the servomotor **3002**. The output ends **3030b**, **3032b** are rotatably connected to the axle **192** by rings **3030c**, **3032c** that are connected to the output end **3030b**, **3032b**, and encircle the axle **192** but allow free rotation of the axle **192** within the rings **3030c**, **3032c**.

[0196] FIG. 41 illustrates the axle **192** journaled by a bearing **3040** that is mounted to a slide block **3041** that is slidably carried by the side wall **2062b** along a slot **3042** that is elongated along the same angle as the adjustment direction of the cylinders **3030**, **3032**. FIG. 42 shows the axle **192** journaled by a bearing **3046** that is mounted to a slide block **3047** that is slidably carried by the side wall **2062a** along a slot **3048** that is elongated along the same angle as the adjustment direction of the cylinders **3030**, **3032**.

[0197] Also, for adjusting the elevation of the food article lift tray positioning apparatus, the pivot point **342** (FIG. 5) is also guided by a bearing **3049** slidable within a slot **3050** in the side wall **2062a** (FIGS. 42 and 50), the slots **3048** and **3050** being parallel in elongation.

Shear Support

[0198] A shear support **3060** is shown in FIGS. 43 and 44. The shear support guides the food articles being sliced into the slicing plane wherein the rotating slicing blade is arranged to come within a close tolerance of the shear support. The shear support illustrated has four rectangular openings, although any number of openings or size and shape of openings is encompassed by the invention. The present embodiment of the invention could accommodate four or less openings of variable shapes and sizes. The shear support **3060** fits down into a U-shaped frame **3068** that is fastened by upper bracket **3069a** and lower bracket **3069b** at each side of the frame **3068** to the front plate **551** of the food article feed frame **190** as shown in FIGS. 44A and 44B.

[0199] The upright members **3070a**, **3070b** of the frame **3068** have a plurality of plain holes **3072** therethrough. Once the shear support **3060** is set down into the frame **3068** a top cross bar **3076** (shown in FIG. 44, not installed in FIG. 43) is placed over the shear support between the upright members and bolted to the upright members using a pair of plain holes **3072** aligned across the frame **3068**, depending on the height of the shear support **3060**, that allow the top cross bar **3076** to fit down snugly on the shear support **3060**, and threaded holes **3078** provided into the cross bar, to complete a rectangular frame that surrounds the shear support on four sides.

[0200] The shear support **3060** is preferably composed of non-metallic material.

Slice Receiving Apparatus

[0201] The slice delivery apparatus **130** comprises a slice accumulation conveyor or jump conveyor **3064**.

[0202] The conveyor **3064** is shown in FIGS. 37 and 55. The conveyor **3064** is carried on a transverse bar **3100** that is supported at opposite ends by a raising apparatus **3106**. The raising apparatus **3106** is shown in FIGS. 37, 39 and 46. The raising apparatus **3106** comprises a servomotor **3110** that drives a gearbox **3111** that drives a sprocket **3114** that drives a belt (or multiple belt elements) **3118**. The belt is wrapped around a driven sprocket **3120** that is fixed on a shaft **3124**. The shaft **3124** is journaled by bearings **3126**, **3128** and penetrates through the side walls **138a**, **138b** of the compartment **136** and into vertically arranged rack and pinion assemblies **3130**, **3132** located outside the side skins across the compartment **136**. The shaft **3124** is fixed to a pinion **3136** within each rack and pinion assembly, wherein the pinion is in mesh with teeth on a vertical rack **3138**. When the pinions **3136** are rotated by the shaft **3124** the racks **3138** are raised or

lowered an equal amount. The transverse bar **3100** is supported at its opposite ends by one of the racks **3138**.

[0203] In operation, as the blade cuts slices from the food articles **110**, the slices accumulate on the conveyor **3064** in a straight stack or a shingled drafts or other style presentation as is known. As the stack accumulates the raising mechanism **3106** lowers the conveyor so that each slice falls an equal distance onto the stack. This helps form a neat stack.

[0204] A jump conveyor drive **3141** is shown in FIGS. **32**, **33**, **35**, **36** and **44C**. A servomotor **3142** drives a gearbox **3144** that has an output shaft **3146** that drives a pulley **3148**. The pulley **3148** drives a belt **3150** that rotates a driven pulley **3152**. The driven pulley **3152** drives an axially aligned gear **3156** that drives a series of counter-rotating, enmeshed gears **3158**, **3160**, **3162**. The last gear **3162** drives an axially arranged gear **3166** that is enmeshed with a counter-rotating gear **3168**. The counter-rotating gear **3168** is enmeshing with a final gear **3170** that chives a drive roller **3172** of the conveyor **3064**. This arrangement allows relative axial pivoting between the pulley/gear **3152**, **3156** and gear pairs **3162**, **3166** to adjust the length of the drive. **3141** by “folding” the drive to adapt to changing elevations of the jump conveyor **3064**.

[0205] Sometime during slicing, food articles are exhausted (completely sliced) when the current accumulated stacks or drafts are only partially completed on the jump conveyor **3064**. According to one advantage of the combination of the present invention, the partially completed stacks or drafts are moved from the jump conveyor onto the weighing and classifying conveyor **102** to be held in a standby position on the weighing and classifying conveyor **102**. New food articles are loaded onto the machine **100** and initial slicing begins. However, initial slicing produces scrap pieces which must be removed from the salable product. The jump conveyor **3064** collects the scrap pieces and conveys the scrap pieces in a reverse direction to dump the scrap pieces off the back end of the jump conveyor down onto the scrap accumulating conveyor **170** where the pieces are removed with any other scrap on the conveyor. Alternatively, the jump conveyor **3064** can be lowered a small amount using the raising mechanism **3106**, and the jump conveyor **3064** conveys the scrap pieces in a forward direction to dump the scrap pieces of the front end of the jump conveyor down onto the scrap accumulating conveyor **170** where the pieces are removed with any other scrap on the conveyor.

[0206] The jump conveyor can also be configured as described in U.S. Ser. No. 11/449,574 filed Jun. 8, 2006 herein incorporated by reference.

Onboard Information Carrier System

[0207] As another feature of the invention, the onboard information carrier system **135** can be incorporated into removable parts such as the slicing blade **2082** and the shear support **3060**.

[0208] The onboard information carrier system preferably incorporates radio frequency identification technology (IMP). The system can be incorporated into the exemplary embodiment of the present invention or other slicers as well, such as the FX180® slicer available from Formax, Inc. of Mokena, Ill., USA and slicers described in U.S. Pat. No. 5,628,237 and European patent EP 0 713 753, herein incorporated by reference.

[0209] FIGS. **51** and **52** illustrate the system **135** comprises a data carrier **4001** embedded into the blade **2082** for storing data from which data can be read and to which data can be

written, a read/write head **4006** mounted to the top **2061** of the housing **2060** that reads/writes data from/to the data carrier **4001**, a controller or interface **4010** located within the housing **2060** or the base compartment **136** (shown schematically communicating between the read/write head **4006** and machine control C. The data carriers are passive in that they do not have a battery. When the data carrier is within the range of the read/write head, power is transferred inductively and the data transfer initiated.

[0210] The data carrier **4001** can have stored thereon the type and size of blade, the time between re-sharpening, and the maximum speed allowable. This information will be communicated to machine control via the read/write head **4006** and the interface **4010**. The machine control C can write onto the data carrier **4001**, via the data interface **4010** and the read/write head **4006**, how often this blade is used, how long the blade is in use, the number of revolutions, the average speed, etc.

[0211] The system **135** can also comprise a data carrier **4031** embedded into the shear support for storing data from which data can be read and to which data can be written, a read/write head **4036** mounted to the far side upstanding wall of the shear support frame that reads/writes data front/to the data carrier **4031**, a controller or interface **4040** located within the base compartment **136** (shown schematically) and communicating between the read/write head **4036** and machine control C. The data carrier **4031** can have stored thereon the number of food articles to be sliced simultaneously, size of each food article, gripper quantity and size to be used, food article tray height required, and food article lift tray tooling required. This data will be used for informing the operator which gripper and food article tray tooling should be used. The data carrier **4031** can also have stored thereon the amount of degrees the blade will need to slice the product (useful for timing the start/stop feed of the product), and information needed to automatically adjust the food article tray height position.

[0212] This information will be communicated to machine control via the read/write head **4036** and the interface **4040**.

[0213] The machine control C can write onto the data carrier **4031**, via the data interface **4040** and the read/write head **4036**, how often this shear bar is used, how long in use, number of pounds produced, etc.

[0214] Preferably, the data carrier **4001** is a BL IDENT model TW-R30-B128 and the data carrier **4031** is a BL IDENT model TW-R20-B128 from Turck Inc. of Minneapolis, Minn., US. The read with heads **4006**, **4036** can be a model TB-M18-H1147 from Turck Inc. of Minneapolis, Minn., US. The interface **4010**, **4040** can also be obtained from Turck Inc. of Minneapolis, Minn., US to be compatible with the read/write head and the particular machine control.

[0215] The system **135** can also be incorporated into the grippers and any other part where operation or maintenance information or instructions could be advantageously located.

Laser Safety Guard System

[0216] The laser safety guard system **123** is illustrated in FIGS. **53** and **54**. The system comprises a near side laser sensor **5002** and a far side laser sensor **5004**. Each sensor containing a laser emitter **5022** and a laser receiver **5026**. Each sensor is protected in a housing **3006** that includes a base **5008** and an openable lid **5010**. As shown in FIG. **78** springs **3012** are provided within the housing to urge the lid closed to the base **5008**. Air cylinders **5014** are provided

within the housing that, when supplied with pressurized air, opens the lid. Upon loss of electrical power, such as occurs during routine spray washing of the equipment, the lids are closed by force of the springs to seal the sensors within the housing to protect the sensors from spray wash and dirt.

[0217] The housing **5006** for far side sensor **3004** is mounted to the sweep mechanism housing **194** and the housing **5006** for the near side sensor **5002** is mounted to frame extension **548**. As shown in FIG. **78**, a conduit **5011** extends from the housing base **5008** of the clear side sensor **5002** to the sweep mechanism housing **194**. The conduit **5011** carries electrical cables and pressurized air to the sensor **5002**.

[0218] With the lid open, a laser curtain **5020**, as shown in FIG. **77**, of infrared laser beams is projected down from a laser emitter **5022** about 2 meters in depth and with a sweep of about 270°. A laser receiver **5026** senses any interference in the curtain caused by an intrusion. The laser beam emitter/receiver works on the principle of time of flight measurement. The emitter sends out very short pulses of light. When the light is incident on an object, it is reflected back and received by the receiver. The sensor calculates the time between sending the pulse and receiving the reflection to calculate the distance of the object.

[0219] The interference is communicated from the sensor to machine control C. Upon sensing the intrusion, a corresponding operating mechanism of the apparatus is halted. For example, if the lift tray is being lifted and an operator puts his hand through the laser curtain, the machine control halts movement of the lift tray mechanism. The laser curtains protect personnel on both the far side and near side of the apparatus **100**.

[0220] The sensors **5002**, **5004** are preferably model **5300** SAFETY LASER SCANNER available from Sick AG of Germany.

Weighing and Classifying Conveyor

[0221] The weighing and classifying conveyor or output conveyor **102** is illustrated in FIGS. **55-60B** and **79-81**. The conveyor **102** includes four lanes for receiving up to four product groups in a row from the jump conveyor **3064**. Each lane includes an input or deceleration conveyor **6002**, a weighing scale conveyor **6006**, and a classifying conveyor **6008**.

[0222] The deceleration conveyor **6002** is pivotal about an axis **6012** under force from a lever **6014** that is moved by a linear actuator, such as a servomotor screw drive **6016**. The deceleration conveyor **6002** is controllably pivotal to match the changing elevation of the jump conveyor **3064**. Each conveyor **6002** comprises a belt **6020** that circulates around idle rollers **6022**, **6024** and a drive roller **6028**, and against roller **6029**. The drive roller **6028** is driven by a drive belt **6034** driven by a servomotor **6036**. All four lanes are driven together by a single motor.

[0223] Each weighing conveyor **6006** includes a removable carrying unit **6006a** and a drive unit **6006b**. The carrying unit **6006a** includes a belt **6050** that circulates around two rollers **6054**, **6058**. The roller **6058** includes a driven gear **6060** that is in mesh with a drive gear **6064**. The drive gear **6064** is part of a drive unit **6006b**. The drive gear is mounted on axle **6066** that is mounted for rotation to side frame members **6070**, **6072** of the drive unit **6006b**. The axle **6066** is driven by a belt **6078** that is circulated by a servomotor **6080**. The side frame members **6070**, **6072** are connected to a transverse member **6082** that is fastened to a load cell **6086**.

[0224] The load cell can be as described in U.S. patent application Ser. No. 11/454143 filed on Jun. 15, 2006, herein incorporated by reference. The four load cells **6086** are preferably viscous damped load cells for vibration resistance.

[0225] The removable carrying unit **6006a** is easily separated from the side frame members **6070**, **6072** of the drive unit **6006b** for cleaning as demonstrated in FIGS. **56** and **57**. Each side frame member **6070**, **6072** includes two slots **6090**, **6092** that each receive a stub axle **6100** of the conveyor and the side frame members are captured between a cap **6102** of the stub axle and a base **6104** of the stub axle.

[0226] The four scale conveyors, one in each lane, are driven independently by four motors **6080** as described.

[0227] The classifier conveyor **6008** includes four conveyors **6138a**, **6138b**, **6138c**, **6138d**. Each conveyor, such as **6138a**, includes a conveyor belt **6140** that is circulated around idle rollers **6142**, **6144** and drive roller **6146** and against roller **6148**. The drive roller **6146** is driven in rotation by a belt **6150** driven by a servomotor **6152**. All four conveyor belts **6140** are driven by the common servomotor **6152**. Each conveyor, such as **6138a**, includes pivotal frame member **6156** that is pivotal about an axis **6160**. A linear actuator, such as a pneumatic cylinder **6164** is actuatable to pivot up or down the pivotal frame member **6156**. The pivotal frame member carries the roller **6142** so pivoting of the frame member **6156** pivots the conveyor belt **6140** as well. Each conveyor **6138a**, **6138b**, **6138c**, **6138d** is individually pivotable by corresponding pneumatic cylinders **6164**.

[0228] The conveyors **6138a**, **6138b**, **6138c**, **6138d** are pivotal from a down tilted angle position "A" corresponding to delivering off weight product to an off-weight conveyor (not shown), to a horizontal position "B" which is for on weight, acceptable product, and to a cleanup position "C". The cleanup position "C" is important in order to avoid interference with a downstream conveyor (not shown) when the weighing and classifying conveyor **102** is translated out to the cleanup position of FIG. **59**.

[0229] The weighing and classifying conveyor **102** is supported on a pair of rails **6180**, **6182** that are connected to be bottom wall **140** of the base section **104** of the apparatus **100**. The conveyor **102** is fastened to four slide bearings **6186** that slide on the rails **6180**, **6182**. A linear actuator or pneumatic cylinder **6190** is fastened to the conveyor housing and includes a rod **61** that extends rearward through the housing and is fastened to a stop **6196** provided on the rails between the conveyor **102** and the apparatus **100**. When the rod **6192** is forced by air pressure delivered into the cylinder to extend, the conveyor **102** slides away from the apparatus **100** to a clean up position as shown in FIG. **59**. While a pneumatic cylinder is shown, any other means to move the conveyor away from the apparatus, including a motor, a screw drive, or human force, could be used in place of the pneumatic cylinder.

[0230] FIGS. **79-82** illustrates a position adjustment feature of the weighing and classifying conveyor **102**. Each of the belts **6020** of the four deceleration conveyors **6002** comprises a plurality of belt elements **6206** that encircle the rollers **6022**, **6024**, and drive roller **6028**. The rollers **6022** are each carried on a slidable carriage **6210**. The slidable carriages **6210** are slidable along a support tube **6216**. Each carriage **6210** has a threaded hole **6222** that receives a single threaded adjustment rod **6230** that is fixed to a frame of the conveyor but allowed to rotate. Each carriage **6210** has a dedicated single adjustment rod **6230** for moment all that

dedicated carriage **6210**. The rod **6230** allows fine positioning of the ends of the four deceleration conveyors **6002**. This is particularly advantageous to ensure that slices delivered from the deceleration conveyors **6002** are perfectly centered when passing across the weighing conveyors **6006** for accurate weighing. Depending on conditions, the product slice from the food articles may not land precisely on the jump conveyor **3064** so that this adjustment is advantageous. Although a manual adjustment is described, it is readily understood that an automatic adjustment such as with a linear actuator, servomotor or servo screw drive could be used as well.

[0231] The conveyor **6002** comprises a belt **6020** that circulates around idle rollers **6022**, **6024** and a drive roller **6028**, and against roller **6029**. The drive roller **6028** is driven by a drive belt **6034** driven by a servomotor **6036**. All four lanes are driven together by a single motor.

[0232] Because various compartments within the combination **100/102** must be compatible with the moving with respect to other compartments, accommodations must be made for differential movement and rotation with regard to conduits for signal and power cables and pneumatic tubing. A conduit **8000** shown in FIG. 5 is provided with a telescopic slide joint **8002** and upper rotary joint **8004** and a lower rotary joint **8006** to accommodate the relative pivoting motion between the food article feed drive compartment **196** and the base compartment **136**. A conduit **8010** between the weighing and classifying conveyor **102** and the base compartment **136** requires a sliding joint **8012** wherein some excess conduit length is provided within the weighing and classifying conveyor **102**.

Servomotors

[0233] The servomotors used within the combination apparatus **100/102** are air cooled except for the servomotor **2098** which is preferably water cooled. All the servomotors and other actuators are precisely controlled for movement and position by the machine control, so that conveyor movements, lift tray movements, sweep movements, elevation adjusting movements, food article end removal apparatus movements, food article feed movements, blade movements, clean up position movements, etc. are all coordinated for optimal machine performance.

The invention claimed is:

1. A food article slicing machine, comprising:

a slicing station comprising a knife blade and a knife blade drive driving the blade in a cutting plane;

a machine base that includes panels that encloses electronic equipment and includes a base top panel;

a food article feed apparatus supporting one or more food articles for longitudinal movement along one or more corresponding food article paths intersecting the cutting plane, wherein the food article feed apparatus is moveable between a raised position, in which the one or more food article paths have an inclined orientation with an elevated end raised above the machine base and a lower end adjacent to the cutting plane, and a lowered position, in which the elevated end is lower than when in the raised position;

a light beam emitting device connected to and moveable with the food article feed apparatus, wherein the light beam emitting device generates a safety curtain by a sweep of light beams across an arc, the safety curtain of light beams oriented to substantially cover a vertical

space between the food article paths and the machine base on at least one lateral side of the machine; and

a sensor connected to and moveable with the food article feed apparatus, wherein the sensor is responsive to intrusions by an object into the safety curtain,

wherein when a light beam is incident on the object, the light beam is reflected back and received by the sensor, and the sensor calculates the time between sending the light beam and receiving the reflection to calculate the distance of the object to determine the presence of an intrusion.

2. The food article slicing machine of claim 1, wherein said sensor communicates an intrusion condition to a slicing machine control when said sensor detects an intrusion into said safety curtain.

3. The food article slicing machine of claim 1, comprising a machine control, and wherein the sensor communicates an intrusion condition to the machine control when said sensor detects an intrusion into the safety curtain, the machine control configured to stop the operation of the machine based on the intrusion condition.

4. The food article slicing machine of claim 1, wherein the sensor is configured to detect an intrusion into the food article feed apparatus area of the machine.

5. A food article slicing machine, comprising:

a slicing station comprising a knife blade and a knife blade drive driving the blade in a cutting plane;

a food article feed apparatus supported from a machine base and supporting one or more food articles for longitudinal movement along corresponding food article paths intersecting the cutting plane, an end of the food article feed apparatus remote from the cutting plane being elevated above the machine base, and

a first side safety sensor that emits a first sweep of light beams across an arc to detect an external, laterally directed intrusion on a first longitudinal lateral side of the machine and a second side safety sensor that emits a second sweep of light beams across an arc to detect an external, laterally directed intrusion on an opposite second longitudinal lateral side of the machine, wherein the first and second side safety sensors are elevated and direct the first and second sweeps of light beams downwardly between the food article feed apparatus and the machine base;

wherein each of said first and second safety sensors comprises a light beam emitter and a light beam receiver mounted in a common housing that operate together to calculate distances of objects that are impinged by light beams emitted by the emitter on a time-of-flight basis to detect said respective external, laterally directed intrusions.

6. The food article slicing machine of claim 5, wherein each said sweep of light beams forms a safety curtain that has a longitudinal length, each emitter broadcasts the safety curtain along the respective longitudinal sides of the machine.

7. The food article slicing machine of claim 5, wherein the first beam of the first side safety sensor extends along the first longitudinal side of the machine, which is transverse to the cutting plane.

8. The food article slicing machine of claim 5, wherein the first sweep of light beams of the first side safety sensor extends along the first longitudinal side of the machine, which is substantially parallel to the food article paths.

9. The food article slicing machine of claim 5, wherein each of the sensors are configured to communicate an intrusion condition to a slicing machine control when the sensor detects an intrusion into said safety curtain.

10. The food article slicing machine of claim 5, comprising a machine control, and wherein each of the sensors is configured to communicate an intrusion condition to the slicing machine control when the sensor detects an intrusion into the safety curtain, the machine control is configured to stop the operation of the machine based on the intrusion condition.

11. The food article slicing machine of claim 5, wherein the second sweep of light beams of the second side safety sensor is substantially parallel to the food article paths.

12. A food article slicing machine, comprising:

a frame having a front, a back, a first longitudinal side, an opposite second longitudinal side and a machine base top wall,

a slicing station connected to the frame comprising a knife blade and a knife blade drive driving the blade along a cutting path in a cutting plane;

a food article feed apparatus connected to the frame supporting one or more food articles for longitudinal move-

ment along corresponding food article paths intersecting the cutting plane, an end of the food article feed apparatus remote from the cutting plane being elevated above the top wall, and

a safety guard system for detecting an external intrusion into the operating area of the machine, the safety guard system comprising an emitter projecting beams through an angle of sweep from the emitter to form a sensing curtain and a receiver for detecting an intrusion into the sensing curtain, said emitter and said receiver both located adjacent an apex of said sensing curtain, wherein the emitter is elevated and directs the projecting beams downwardly between the feed apparatus and the machine base top wall.

13. The food article slicing machine of claim 12, wherein the beams are emitted through an angle of sweep of about 270 degrees.

14. The food article slicing machine of claim 13, wherein the beams are emitted at a depth of about 2 meters.

* * * * *