



(22) Date de dépôt/Filing Date: 2001/08/24

(41) Mise à la disp. pub./Open to Public Insp.: 2002/02/28

(30) Priorité/Priority: 2000/08/31 (2000-262655) JP


(51) Cl.Int.⁷/Int.Cl.⁷ B32B 5/04, B32B 5/08

(71) Demandeur/Applicant:
UNI-CHARM CORPORATION, JP

(72) Inventeur/Inventor:
TANGE, SATORU, JP


(74) Agent: SWABEY OGILVY RENAULT

(54) Titre : PROCESSUS DE FABRICATION DE FEUILLES COMPOSITES POUVANT S'ETIRER ET SE CONTRACTER
(54) Title: PROCESS FOR MANUFACTURING ELASTICALLY STRETCHABLE AND CONTRACTIBLE COMPOSITE SHEET

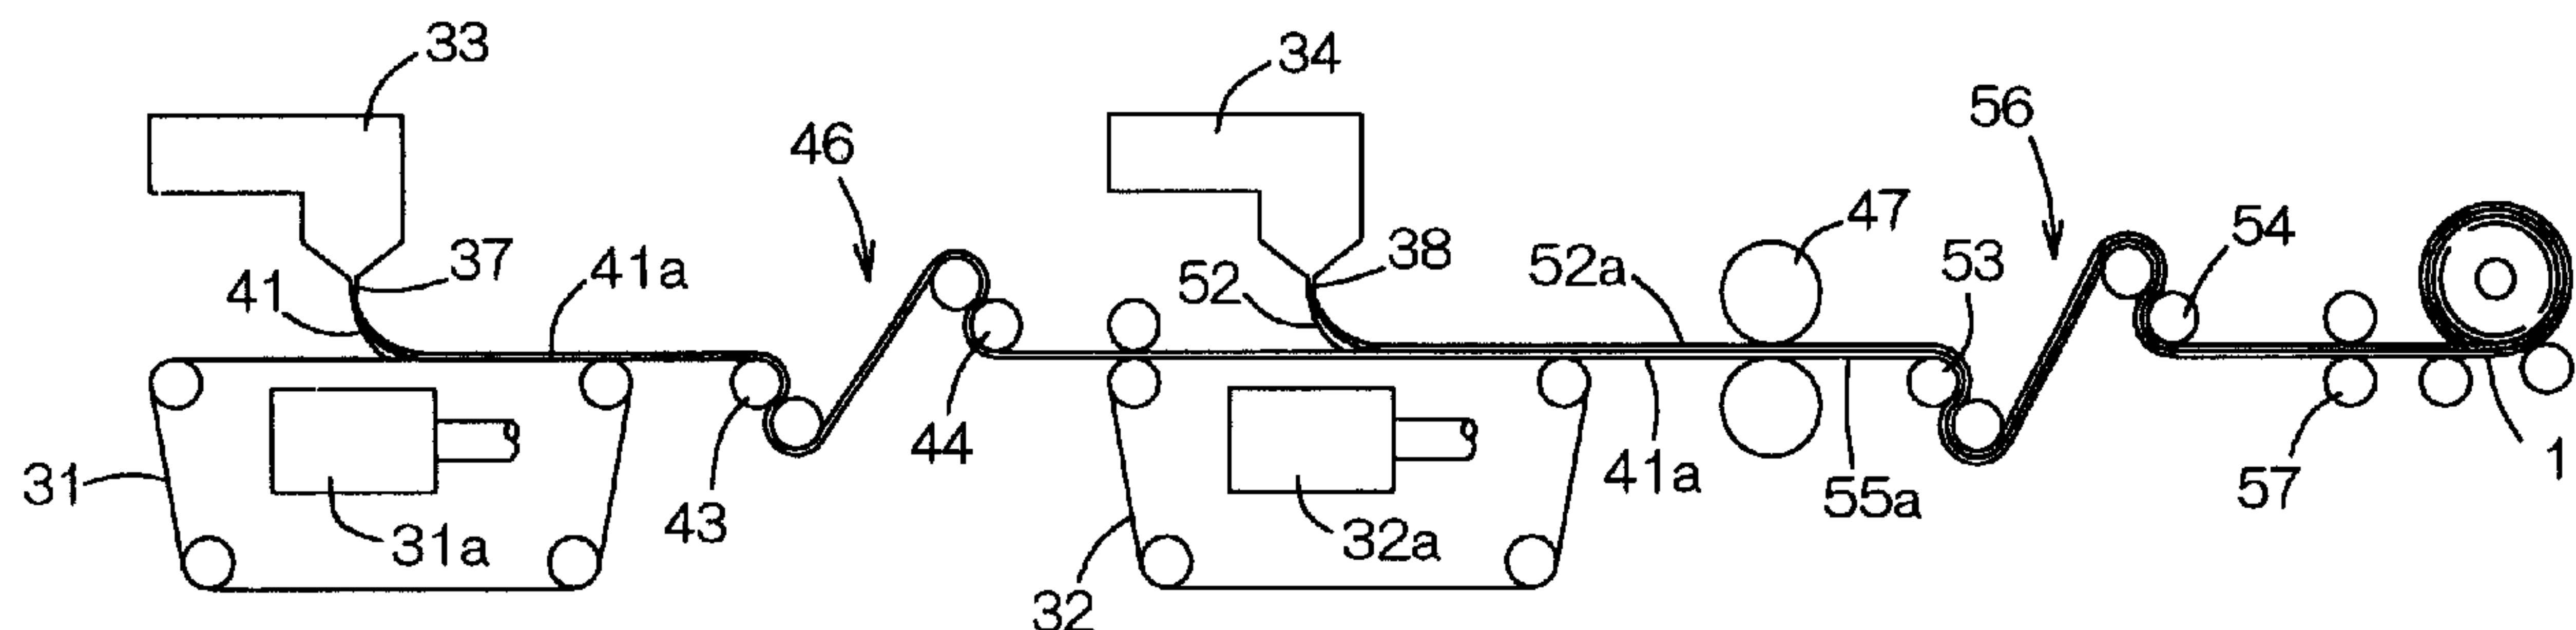

(57) Abrégé/Abstract:

A process for manufacturing a composite sheet 1 by joining a second web 52a made of thermoplastic synthetic fiber and capable of inelastic extension to at least one surface of a first web 41a capable of elastic stretch and contraction in an intermittent manner, includes a step of extending the first web 41a, a step of joining the second web 52a to the extended first web 41a and a step of extending the joined first and second webs 41a, 52a.

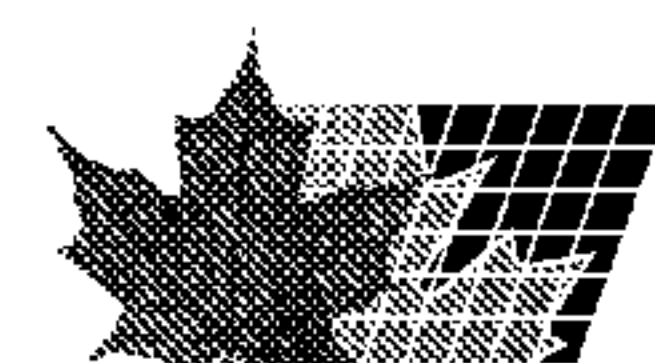

2000-262655

A B S T R A C T

PROCESS FOR MANUFACTURING ELASTICALLY
STRETCHABLE AND CONTRACTIBLE COMPOSITE SHEET

5

A process for manufacturing a composite sheet 1 by joining a second web 52a made of thermoplastic synthetic fiber and capable of inelastic extension to at least one surface of a first web 41a capable of elastic stretch and contraction in an intermittent manner, includes a step of extending the first web 41a, a step of joining the second web 52a to the extended first web 41a and a step of extending the joined first and second webs 41a, 52a.

2000-262655

- 1 -

PROCESS FOR MANUFACTURING ELASTICALLY
STRETCHABLE AND CONTRACTIBLE COMPOSITE SHEET

The present invention relates to a process for
5 manufacturing a composite sheet comprising a web capable of
elastic stretch and contraction and a fibrous web capable of
inelastic extension.

Japanese Patent Publication No. 1996-504693A discloses
a multi-layered elastic panel, as one example of this type of
10 composite sheet, and a process of manufacturing the same. The
disclosed manufacturing process of a multi-layered elastic
panel involves arranging a rubber elastic layer and an inelastic
fibrous layer, one over another, joining them intermittently,
extending the combination up to the vicinity of a breaking
15 extension limit of the inelastic fibrous layer and finally
relaxing the combination from tension.

In the composite sheet (elastic panel) obtained via the
above-specified known manufacturing process, the rubber
elastic layer after removal of the tension is unable to return
20 to its original dimension. The resulting difference in
dimension sometimes produces a permanent strain in the
composite sheet. Such a permanent strain is a first factor that
makes the composite sheet larger in dimension along a direction

2000-262655

- 2 -

of extension than before it is subjected to extension. Also,
the inelastic fibrous layer when extended undergoes plastic
deformation so that its dimension after extension is made larger
than before extension. When the rubber layer is relaxed from
5 the tension, this dimensional difference causes the inelastic
fibrous layer to increase its apparent bulk. The increased bulk
then becomes a second factor that makes the composite sheet
larger in dimension than before it is extended by restraining
the rubber elastic layer from relaxing, i.e., by restricting
10 elastic contraction thereof. By these first and second factors,
the composite sheet when again extended to the vicinity of a
breaking extension limit of the inelastic fibrous layer shows
a lower percentage extension than when initially extended to
the vicinity of the breaking extension limit of the inelastic
15 fibrous layer.

The composite sheet provides a soft skin contact when the
aforementioned inelastic fibrous layer is reduced in diameter
and increased in apparent bulk due to elongation of constituting
fibers as a result of plastic deformation. On the other hand,
20 the increasing influence of the second factor lowers the
percentage elastic extension of the composite sheet and thus
narrows its possible range of elastic stretch and contraction,
so that the composite sheet is made less elastically stretchable

2000-262655

- 3 -

and contractible.

It is an object of the present invention to provide a process for manufacturing a composite sheet which can reduce
5 the influence of the above-described second factor encountered in the known manufacturing process and thus widen the range that permits elastic stretch and contraction of the sheet.

To achieve this object, the present invention is directed to a process for manufacturing a composite sheet capable of
10 elastic stretch and contract in one direction, which includes the steps of continuously feeding a first web capable of elastic stretch and contraction in the one direction and having a top surface and a bottom surface, continuously feeding a second web capable of inelastic extension and composed of thermoplastic
15 synthetic fibers on at least one surface of the first web, and joining the first and second webs in an intermittent manner along the one direction.

The manufacturing process further includes the following steps:

20 a. a first extension step wherein the first web is fed in a continuous manner in the one direction and extended in the one direction within the range that permits elastic stretch and contraction of the first web;

2000-262655

- 4 -

b. a step wherein the second web is superimposed on at least one surface of the first web and joined thereto in an intermittent manner along the one direction to provide a composite web;

5 c. a second extension step wherein the composite web is extended in the one direction within the range that permits elastic stretch and contraction of the first web; and

d. a step wherein, after the second extension step, the extended composite web is allowed to retract by an elastic
10 contraction force of the first web to thereby obtain the composite sheet.

Fig. 1 is a perspective view of a composite sheet;

Fig. 2 is a view showing an exemplary process for
15 manufacturing the composite sheet;

Fig. 3 is a view for explaining stretch-contraction behaviors of the composite sheet; and

Fig. 4 is a view showing another exemplary process, different from the process of Figure 2, for manufacturing the
20 composite sheet.

The process for manufacturing an elastically stretchable and contractible composite sheet in accordance with the present

2000-262655

- 5 -

invention is below described in detail with reference to the attached drawings.

Figure 1 is a perspective view of an elastically stretchable and contractible composite sheet 1 manufactured by the practice of the method according to the present invention. The composite sheet 1 is suitable for use as a liquid permeable or impermeable facing material of a disposable wearing article such as a disposable diaper, a sanitary napkin, a disposable medical gown or the like, and has an upper layer 2 and a lower layer 3 united together at bond areas 4 by fusion. The composite sheet 1 is elastically stretchable and contractible at least in the Y-Y direction, out of mutually-perpendicular double-headed arrows X-X and Y-Y, as shown by chain lines.

The upper layer 2 of the composite sheet 1 is capable of inelastic extension at least in the Y-Y direction, out of the X-X and Y-Y directions. Such an upper layer 2 comprises a mass of thermoplastic synthetic fibers extending continuously between bond areas 4 and 4, preferably long fibers, more preferably a mass of continuous fibers 6. In the preferred upper layer 2, the fibers 6 are fused to each other at bond areas 4 but are individualized between bond areas 4 such that they are neither fused nor mechanically entangled tightly with each other. The length of a portion of the individual fiber 6 that

2000-262655

- 6 -

extends between adjacent bond areas 4, e.g., the length of a portion of the fiber 6a that extends between bond areas 4a and 4a is larger than a linear distance between the bond areas 4a and 4a. That is, the fiber 6 extends over an upper surface of the lower layer 3 while describing the shown irregular curves. When the composite sheet 1 is extended in the Y-Y direction, the fibers 6 change their orientations between the bond areas 4 and 4 to extend linearly along the Y-Y direction. As the composite sheet 1 retracts, the fibers 6 describe curves again.

10 The lower layer 3 of the composite sheet 1 is elastically stretchable and contractible in the Y-Y direction, preferably in both the X-X and Y-Y directions. The lower layer 3 comprises a mass of short, long or continuous fibers made of elastic materials such as thermoplastic elastomers, or alternatively, 15 comprises a film or the like made of such elastic materials. In the case of fibers, the lower layer takes the form of a non-woven or woven fabric, preferably via integration of fibers by fusion or mechanical entanglement. The lower layer 3 operates such that it extends elastically as the composite sheet 20 1 is extended in the Y-Y direction by an external force and causes the composite sheet 1 to retract as the composite sheet 1 is freed from the force.

Figure 2 is a diagram illustrating a manufacturing

2000-262655

- 7 -

process of the composite sheet 1 shown in Figure 1. On the left side of the drawing, a first endless belt 31 and a second endless belt 32 are juxtaposed to both run toward the right. A first extruder 33 and a second extruder 34 are disposed over the
5 endless belts 31 and 32, respectively. The extruder 33, 34 have a plurality of nozzles 37, 38 arranged in a row and transverse to the endless belt 31, 32. A suction duct 31a, 32a is disposed right under the extruder 33, 34 through the endless belt 31, 32.

10 First continuous fibers 41, made of a thermoplastic elastomer and capable of elastic stretch and contraction, are discharged from the nozzles 37 of the first extruder 33 and directed onto the first endless belt 31 under the suction action of the duct 31a. The first continuous fibers 41 are preferably
15 fused to each other over the first endless belt 31 and rendered into a first web 41a having the form of a non-woven fabric. The first web is transported in a machine direction and then subjected to a first extension step 46, involving a pair of first rolls 43 and a pair of second rolls 44, where it is subjected
20 to extension in the machine direction at a specific stretch ratio as required. In the first extension step 46, the second roll 44 rotates at a higher speed than the first roll 43. The first web 41a while in an extended state advances toward the

2000-262655

- 8 -

second endless belt 32. Plural streams of second continuous fibers 52, made of a thermoplastic synthetic resin and capable of inelastic extension, are discharged from the nozzles 38 of the second extruder 34 and directed onto the first web 41a while
5 in the extended state under the suction action of the duct 32a to form a second web 52a.

The superimposed first and second webs 41a and 52a are brought between a pair of hot emboss rolls 47 and united together by fusion at bond areas 4 (see Figure 1) arranged at intervals
10 in the machine direction to form a composite web 55a. The composite web 55a is controlled to further advance in the machine direction and then subjected to a second extension step 56, involving a pair of third rolls 53 and a pair of fourth rolls 54, where it is further extended in the machine direction at
15 another specific stretch ratio as required. In the second extension step, the fourth roll 54 rotates with a faster peripheral speed than the third roll 53.

After passage between the fourth rolls 54, the composite web 55a is allowed to further advance and enter between a pair
20 of carrying rolls 57 which rotate with almost the same peripheral speed as the first rolls 43. The composite web 55a extended in the first and second extension steps 46, 56 is released from tension in a path between the fourth roll 54 and

2000-262655

- 9 -

the carrying roll 57, contracts by the action of the elastic force of the first web 41 and is then wound round a roll as the composite sheet 1.

In the process of the composite sheet 1, SEPS or the like
5 may be used, for example, for the thermoplastic elastomer which is raw material of the first continuous fibers 41. The use of first continuous fibers 41 having a fiber diameter of 18 μm results in the first web 41a having a basis weight of 31.9 g/m². This first web 41a has a machine-direction breaking strength
10 of 2.35 N per width of 50 mm and a breaking extension of 447 %. In the first and second extension steps 46, 56, extension is performed within the range that permits elastic stretch and contraction of the first web 41a and within an extension limit of the second web 52a. For example, the first web 41a is
15 extended in both extension steps 46, 56 by 50 % per each, i.e., overall, by 100 % of its original length prior to extension. In other words, the first web 41a is extended to 150 % of its original length in the first extension step 46 and to 200 % of its original length in the second extension step.

20 Examples of thermoplastic synthetic resins for use as raw material of the second continuous fibers 52 include polypropylene; a 60:40 (by weight) mixture of polypropylene and a terpolymer of propylene, ethylene and butene; polyester;

2000-262655

- 10 -

polyethylene and the like. As an example, the aforementioned mixture of polypropylene and terpolymer can be used to form the second continuous fibers 52 having a diameter of $17.5\ \mu\text{m}$ and an extensibility of 311 % and then form the second web 52a having a basis weight of $15.0\ \text{g/m}^2$ from the fibers 52. In the second extension step 56, the second web 52a is extended in an inelastic manner by approximately 33 % as the first web 41 is extended in an elastic manner by 50 % (refer to Figure 3). After passage through the fourth rolls 54, the extended second web 52a retracts in the machine direction responsive to elastic contraction of the first web 41a, while forming folds between bonded areas 4 and 4 arranged at intervals along the machine direction. The composite sheet 1 obtained in such a manner is shown in Figure 1. The first web 41a and second web 52a are rendered by extension to take the forms of the lower layer 3 and upper layer 2 shown in Figure 1. Formation of the bonded areas 4 shown in Figure 1 is accomplished by passing the first and second webs 41a, 52a between the emboss rolls 47.

Figure 3 diagrammatically shows the stretch-contraction behaviors at stages of a manufacturing process for the composite sheet 1 and a comparative stretchable composite sheet 71 obtained using a conventional process. In the case of composite sheet 1 shown in (I) of Figure 3, a continuously-fed first web

2000-262655

- 11 -

41a is extended by 50 mm per length of 100 mm to a length of 150 mm, a 150 mm long second web 52 b is placed over the first web, and both webs 41a, 52a are joined to each other at locations 4 and thereafter further extended by 50 mm. In total, the first web 41a is extended by 100 %. The second web 52a is extended by 33 %. These both webs 41a, 52a when untensioned provides the composite sheet 1. For the composite sheet 1, a permanent strain in length of p is produced when the 100 mm long first web 41a is extended by the length of 100 mm. Also, folds 60 are formed over an entire region of the second web 52a as the second web 52a is allowed to retract after it has been extended in an inelastic manner from its original length of 150 mm by the length of 50 mm. These folds 60 limit the elastic contraction of the first web 41a by the length of q. The composite sheet 1 has a length L_0 of $(100 + p + q)$ and never returns to the original length of first web 41a that is 100 mm.

On the other hand, in the manufacture of the conventional stretchable sheet 71 shown in (II) of Figure 3, the 100 mm long second web 52a is brought to overlies the 100 mm long first web 41a. These two webs 41a, 52a are joined to each other and then extended by 100 % for each. These webs 41a, 52a when untensioned provide the stretchable sheet 71. A permanent strain in length of p is produced when the first web 41a is extended from its

2000-262655

- 12 -

original length of 100 mm by the length of 100 mm and left to remain in the stretchable sheet 71. Also, when the second web 52a is allowed to retract after it has been extended by the length of 100 mm, folds 60 are formed therein to restrict the elastic contraction of the first web 41a by the length of r which also remains in the stretchable sheet 71. The resulting stretchable sheet 71 thus has a length L_1 of $(100 + p + r)$. Although the composite sheet 1 and stretchable sheet 71 both use the 100 mm long first web 41a as a starting material, the extension of the second web 52a during the manufacture of the stretchable sheet is made relatively large. Accordingly, the second continuous fibers 52 constituting the second web 52a elongate to such an extent that causes the second web 52a to increase its apparent bulk when it retracts. This increase in bulk increases the length r that limits contraction of the first web 41a. The length r is thus made larger in dimension than the length q . The length L_0 of the composite sheet 1 then becomes smaller in dimension than the length L_1 of the conventional stretchable sheet 71 and measures a value closer to the original length of the first web 41a, 100 mm. In an exemplary case where the resulting composite sheet 1 and stretchable sheet 71 are extended again to a length of 200 mm, as shown in Figure 3, the composite sheet 1 shows a higher percentage extension.

2000-262655

- 13 -

Accordingly, the composite sheet 1 can be said to be stretchable and contractible over a wider range than the stretchable sheet 71.

Also, in (I) of Figure 3, if the permanent strain p of the first web 41a is smaller, the second web 52a fed at the length of 150 mm and then combined into the composite sheet 1 becomes possible to retract to less than 150 mm. The composite sheet 1 when extended again to a length of 200 mm shows a percentage extension higher than 33 % which is a value obtained when the second web 52a was initially extended. That is, the second web 52a puckered in the composite sheet 1 shows an apparent percentage extension higher than 33 % which is an initial percentage extension of the web 52a. On the other hand, in accordance with the conventional case shown in (II) of Figure 3 where the stretchable sheet 71 is obtained via extension to 200 mm and subsequent retraction, the second web 52a initially fed at the length of 100 mm is maintained not to exceed 100 mm. Accordingly, when the stretchable sheet 71 is extended again to a length of 200 mm, the second web shows a percentage extension of less than 100 % which is a value obtained when it was initially extended. As clear from this comparison, in accordance with the process of this invention for manufacturing the composite sheet 1, the second web 52a if incorporated in the composite

2000-262655

- 14 -

sheet 1 can be made stretchable and contractible over a wider range. If stated additionally, the composite sheet 1 can also be extended to the point at which the second web 52a reaches a length of 300 mm, i.e., by 100 % of the original dimension
5 of the second web 52a.

As similar to Figure 2, Figure 4 shows an exemplary embodiment of this invention. In the shown process, the second continuous fibers 52 discharged from the second extruder 34 are formed, over the second endless belt 32, into the second web
10 52a which subsequently advances toward the right in the drawing. The first web 41a in this example is fed in the form of a film made of a thermoplastic elastomer. This film is subjected to the first extension step 46, involving a pair of first rolls 43 and a pair of second rolls 44, in which it is extended at
15 a specific extension ratio as required. The first web 41a while in an extended state is placed on the second web 52a and united therewith between a pair of emboss rolls 47 and 47, resulting in the formation of the composite web 55a. The composite web 55a is further extended in the second extension process 56
20 involving a pair of third rolls 53 and a pair of fourth rolls 54. After passage between the fourth rolls 54, the composite web 55a is allowed to retract in an area between the fourth roll 54 and the carrying roll 57 by the elastic retraction force of

2000-262655

- 15 -

the first web 41a. The resulting composite sheet 1 is then wound round a roll. The process shown in Figure 4 is similar to that of Figure 1, with the exception that the film is used for the first web 41a.

5 In the manufacturing process of a composite sheet in accordance with this invention, the second web 52a capable of inelastic extension is used having a breaking extension of 40 % or higher, preferably 70 % or higher, more preferably 100 % or higher, at least in the machine direction, out of the machine
10 and cross directions. The first web 41a capable of elastic stretch and contraction preferably has a breaking extension higher than that of the second web 52a. More preferably, the first web sustains its elastic stretchability even at the breaking extension of the second web 52a. In the manufacture
15 of the composite sheet 1, the composite web 55a comprising the first web 41a and second web 52a can be extended up to the vicinity of the breaking extension limit of the second web 52a. In the case where the constituent fibers 52 of the second web 52a are engaged with each other by mechanical entanglement or
20 fusion bond, it is preferred that the second continuous fibers 52 are largely freed from the engagement and individualized in the second extension step 56. This increases a bulk of the second web 52a as it retracts, thereby providing a softer skin

2000-262655

- 16 -

contact.

In this invention, the composite sheet 1 can be rendered into a three-layer structure by placing the second web 52a on top and bottom surface of the first web 41a. In such a case, 5 the second webs 52a, 52a joined to the top and bottom surfaces of the first web 41a may be of the same properties or made different from each other in any of the following properties; basis weight, density, type of the thermoplastic synthetic resin used to form the continuous fibers 52, fiber diameter and 10 fiber length. The first and second continuous fibers 41, 52 used in the preceding embodiments may be altered to short fibers with a length of 50 mm or less, or to long fibers having a length in the approximate range of 50 - 300 mm. Long fibers with a length of 100 mm or greater can also be used.

15 In the manufacturing process of a composite sheet in accordance with this invention, a web capable of elastic stretch and contraction is first extended, another web capable of inelastic extension is placed on the web while in an extended state, the two webs are united together and thereafter extended 20 again in a machine direction. Accordingly, the composite sheet that results when the combination is freed from the tension exhibits a higher percentage of elastic stretch compared to stretchable sheets made by a conventional process which

2000-262655

- 17 -

involves superimposing a web capable of elastic extension and a web capable of inelastic extension, uniting them together and then subjecting the combination to extension.

2000-262655

- 18 -

WHAT IS CLAIMED IS:

1. A process for manufacturing a composite sheet capable of elastic stretch and contract in one direction by continuously feeding, in the one direction, a first web capable of elastic stretch and contraction and having a top surface and a bottom surface, continuously feeding a second web capable of inelastic extension and composed of thermoplastic fibers on at least one surface of the first web and joining the first and second webs in an intermittent manner along the one direction;

said manufacturing process including the following steps:

(a) a first extension step wherein said first web is continuously fed in the one direction and extended in the one direction within the range that permits elastic stretch and contraction of the first web;

(b) a step wherein said second web is superimposed on at least one surface of the extended first web and joined to the first web in an intermittent manner along the one direction to provide a composite web;

(c) a second extension step wherein the composite web is extended in the one direction within the range that permits elastic stretch and contraction of the first web; and

2000-262655

- 19 -

(d) a step wherein, after the second extension step, the extended composite web is allowed to retract by an elastic contraction force of the first web to thereby obtain said composite sheet.

5

2. The process of Claim 1, wherein said thermoplastic synthetic fibers in the second web are engaged with each other by mechanical entanglement or fusion bond and, in the step (c), the fibers are partly freed from the engagement to the extent
10 that they are individualized.

3. The process of Claim 1, wherein the second web is joined to top and bottom surfaces of the first web, and the second webs respectively joined to the top and bottom surfaces of the first
15 web are distinguished from each other in any of properties, including a basis weight and density of the second web, a type of the thermoplastic synthetic resin, and a diameter and length of the fibers.

20 4. The process of Claims 1, wherein said first web is either in the form of an elastically stretchable non-woven or woven fabric composed of thermoplastic synthetic fibers or in the form of an elastically stretchable film made of a thermoplastic

2000-262655

- 20 -

synthetic resin.

5. The process of Claim 1, wherein said thermoplastic synthetic fibers in the second web are continuous, long or short
5 fibers.

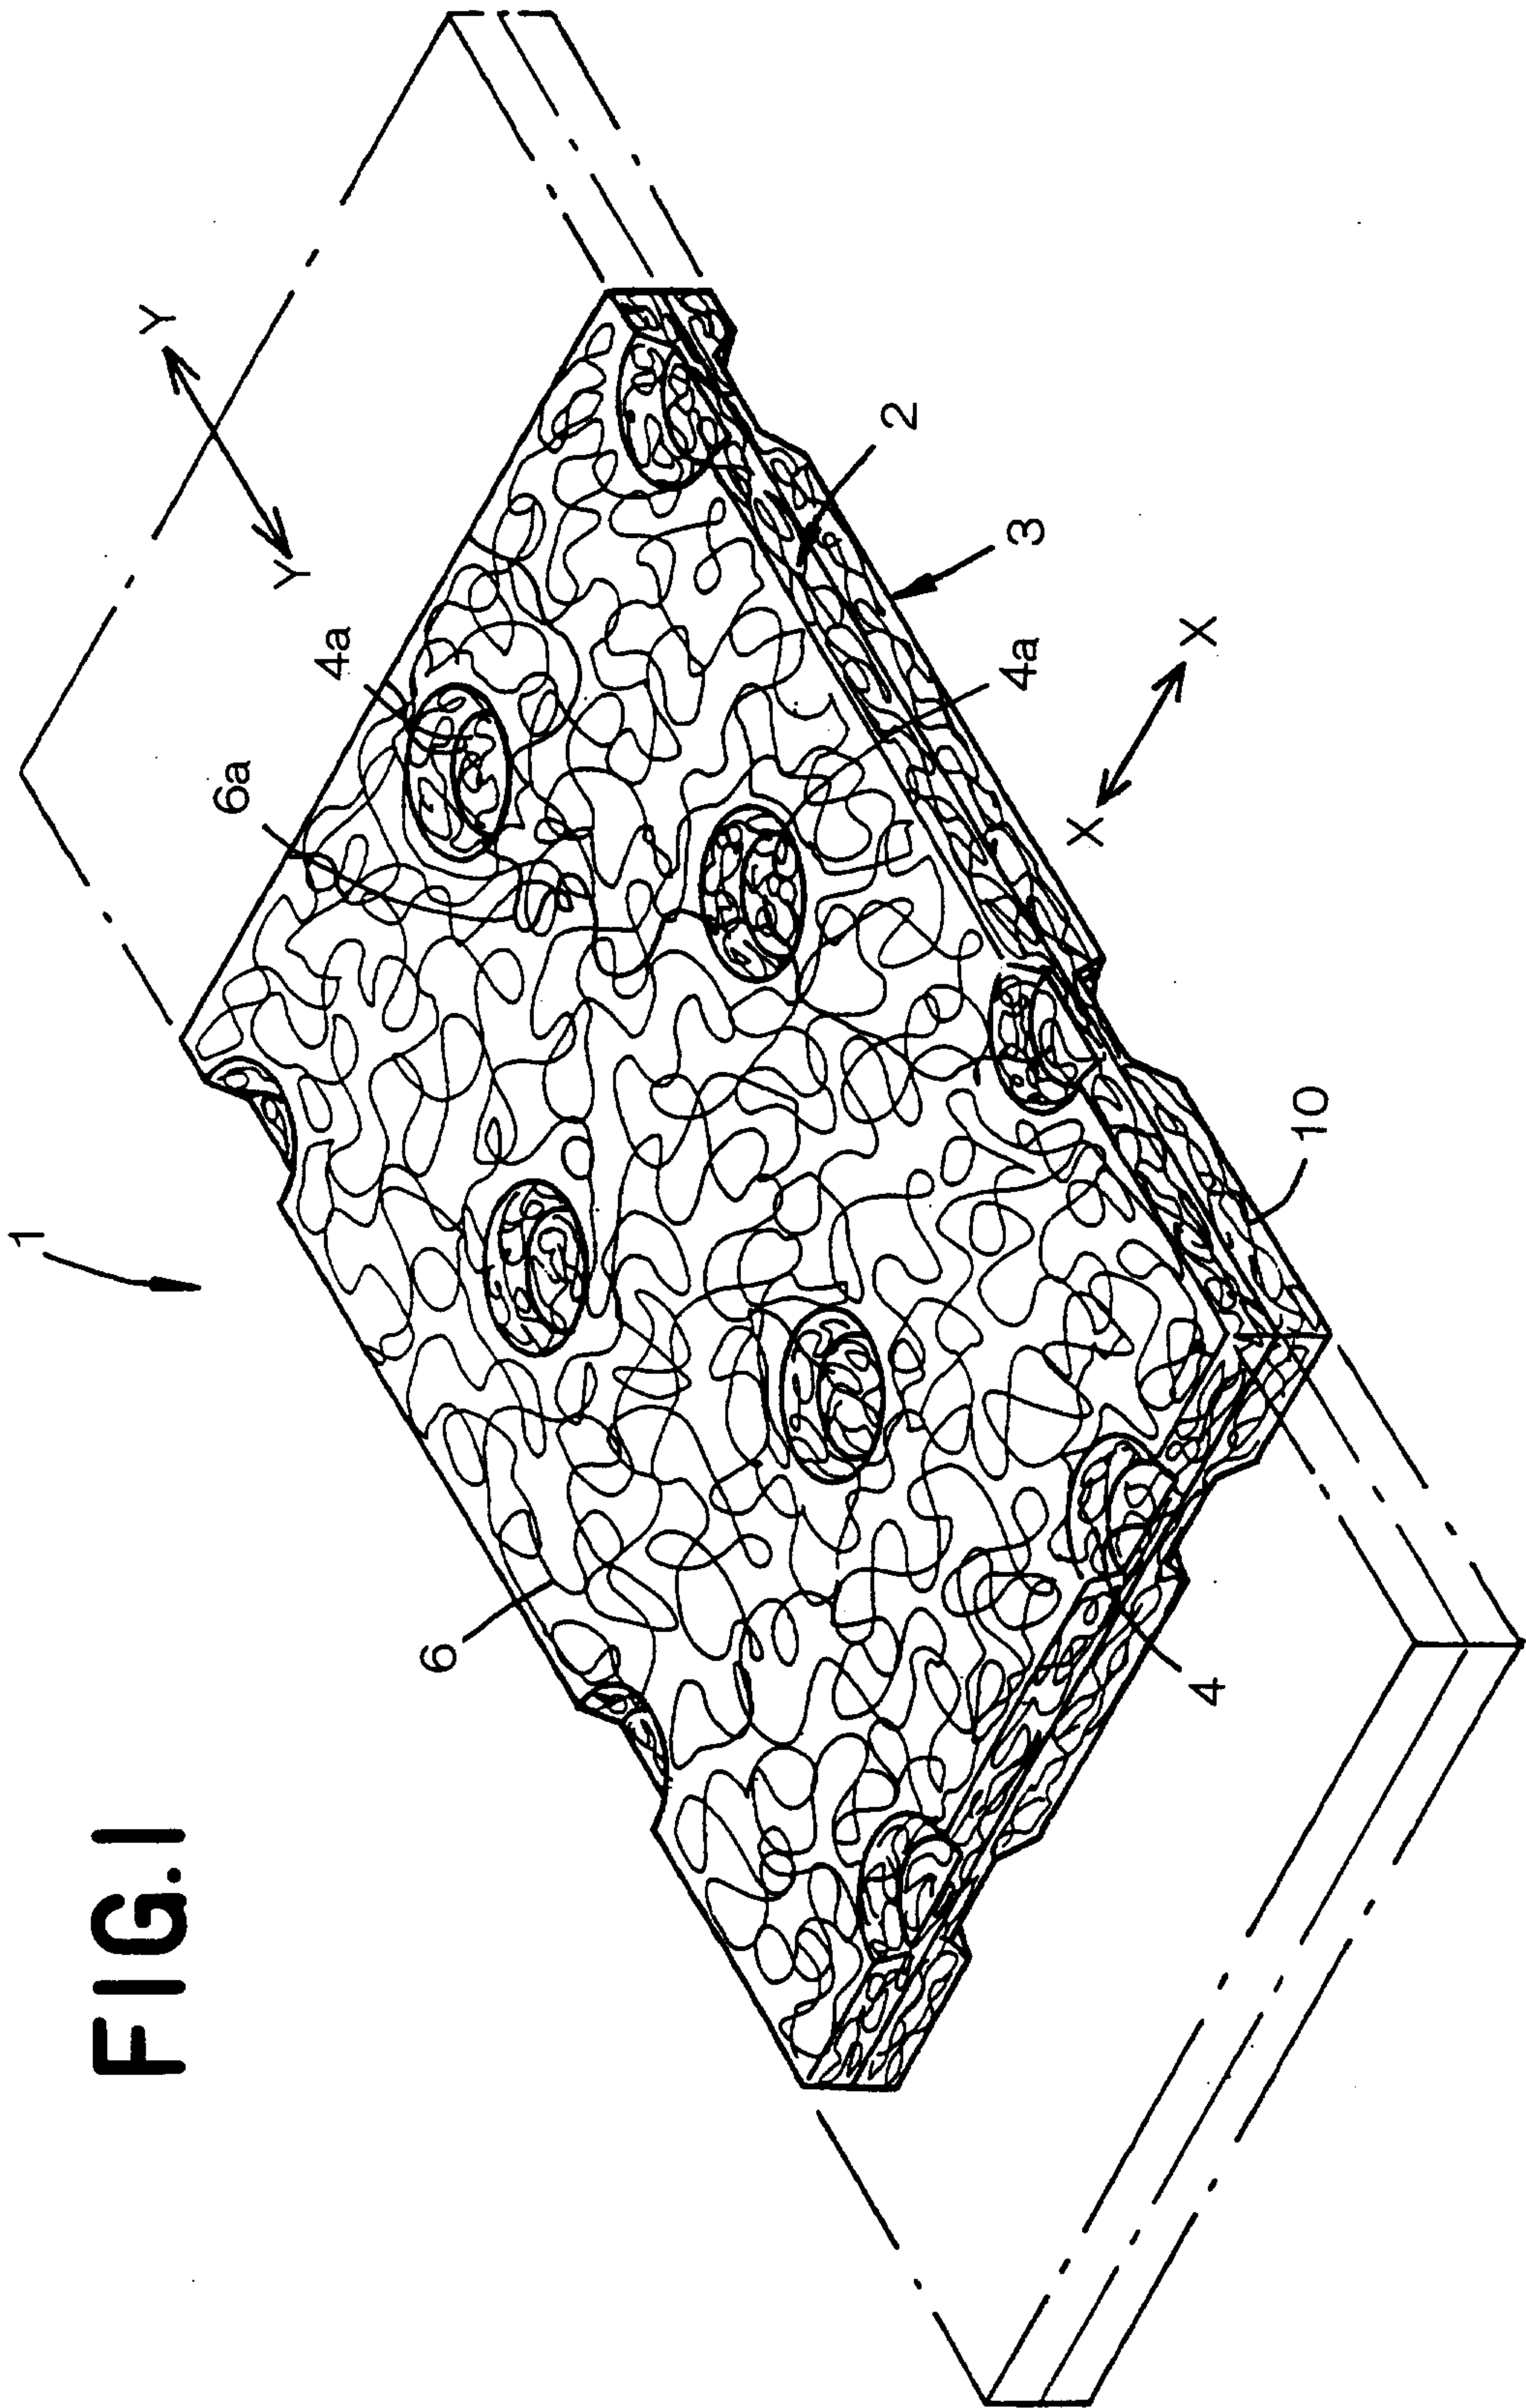


FIG. 1

FIG.3

