




US 20120253467A1

(19) **United States**(12) **Patent Application Publication**
Frankle(10) **Pub. No.: US 2012/0253467 A1**(43) **Pub. Date: Oct. 4, 2012**(54) **SHOULDER ARTHROPLASTY SYSTEMS
AND CONFIGURATIONS FOR
COMPONENTS THEREOF****Publication Classification**(51) **Int. Cl.**
A61F 2/40 (2006.01)(52) **U.S. Cl.** **623/19.11**(57) **ABSTRACT**

Shoulder arthroplasty systems and configurations for components thereof are described. For example, implant systems for a total shoulder arthroplasty (TSA), hemi shoulder arthroplasty, and reverse shoulder arthroplasty (RSA) are described. In addition, exemplary configurations for baseplates, glenoid components, glenosphere components, humeral components, humeral head components, humerosocket components, connectors, and adaptors, are described.

(76) **Inventor: Mark Frankle, Tampa, FL (US)**(21) **Appl. No.: 13/239,228**(22) **Filed: Sep. 21, 2011****Related U.S. Application Data**

(60) Provisional application No. 61/442,272, filed on Feb. 13, 2011, provisional application No. 61/476,263, filed on Apr. 16, 2011.

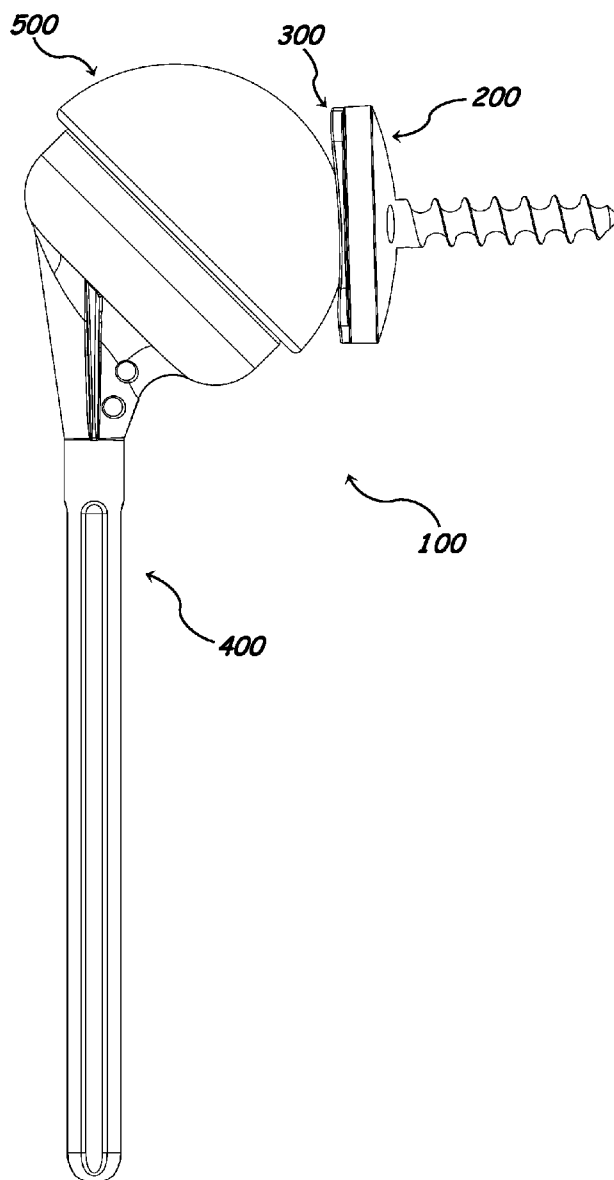

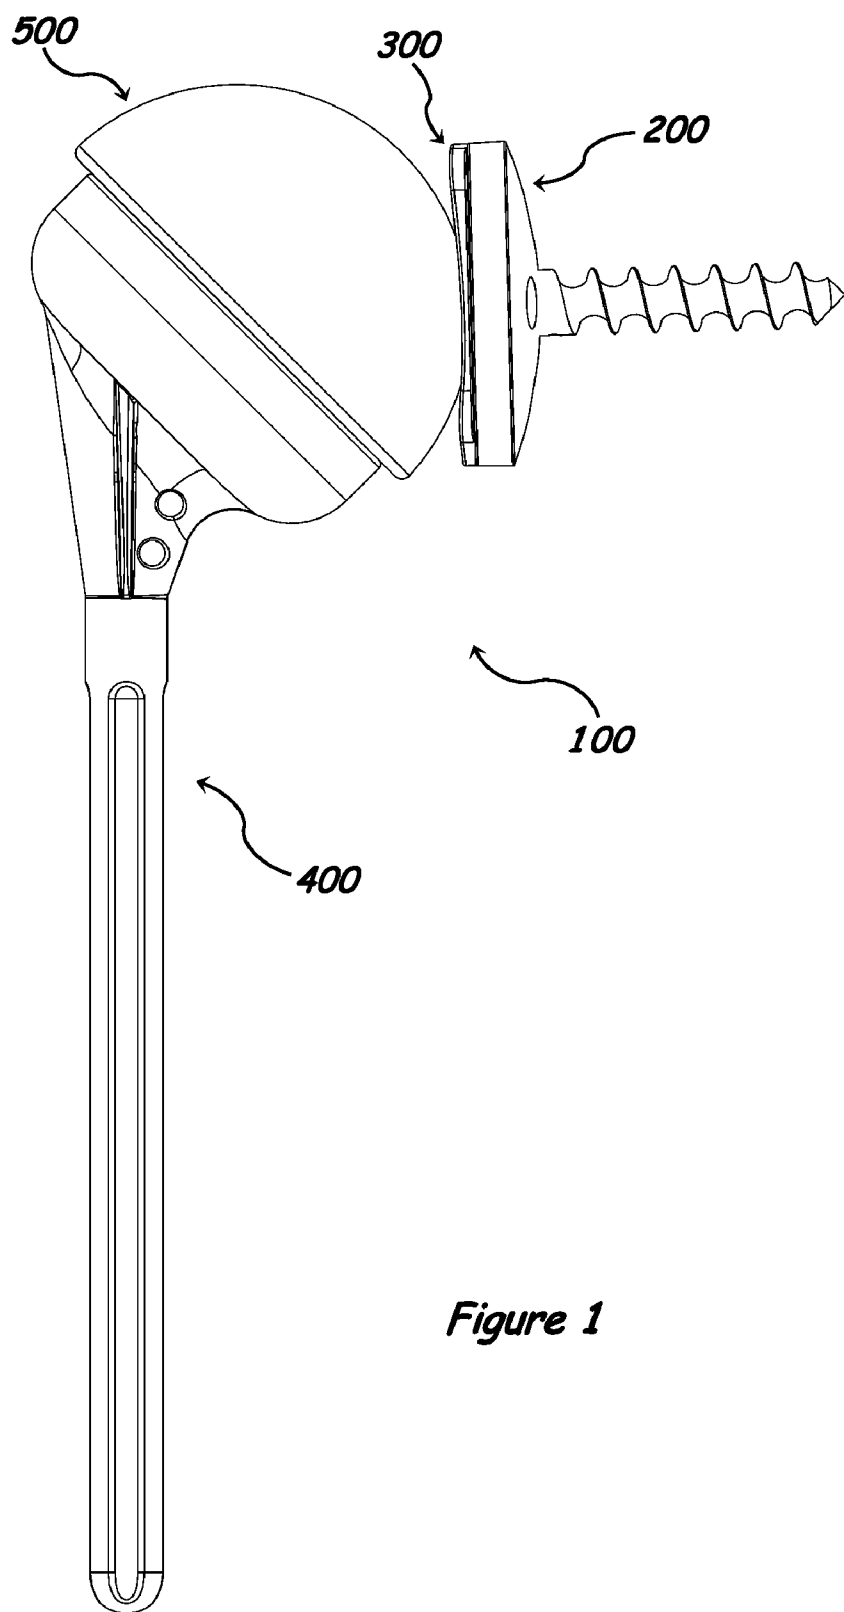


Figure 1

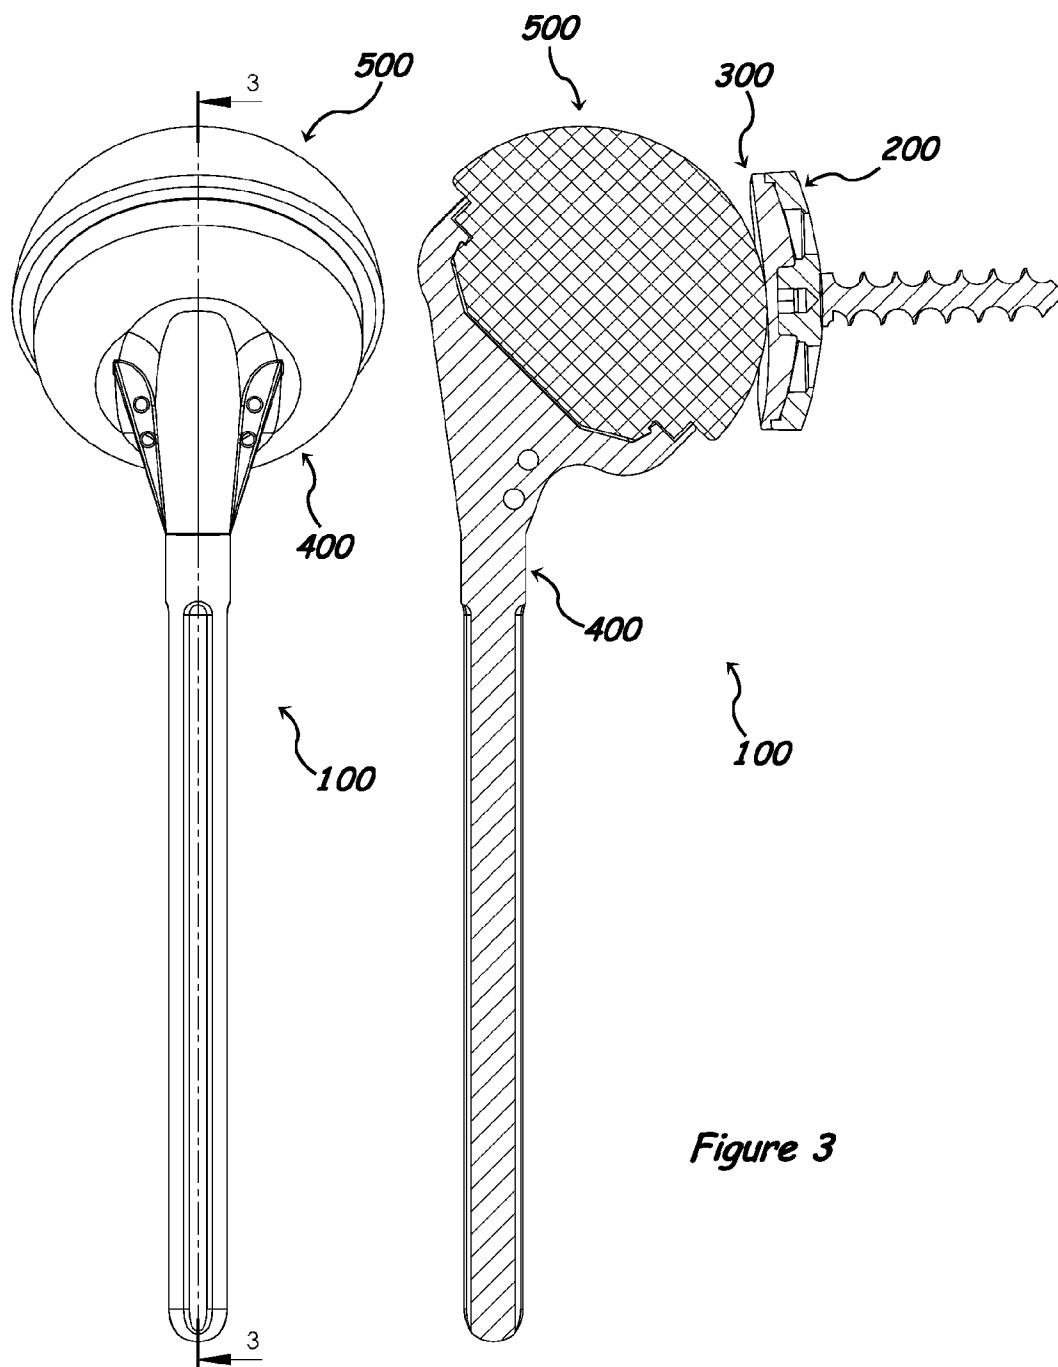


Figure 3

Figure 2

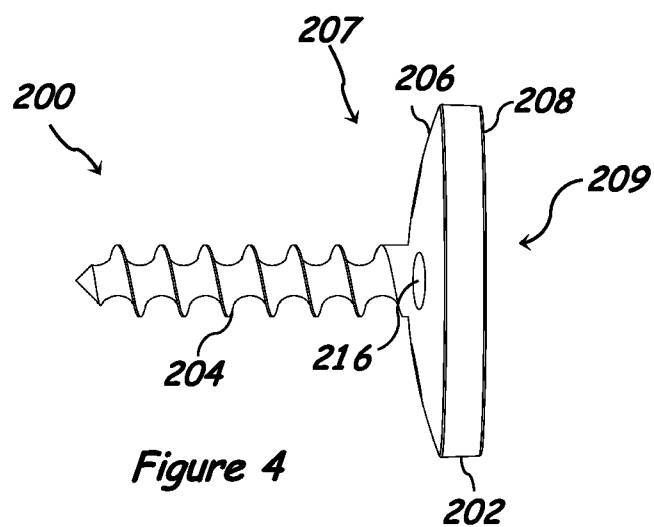


Figure 4

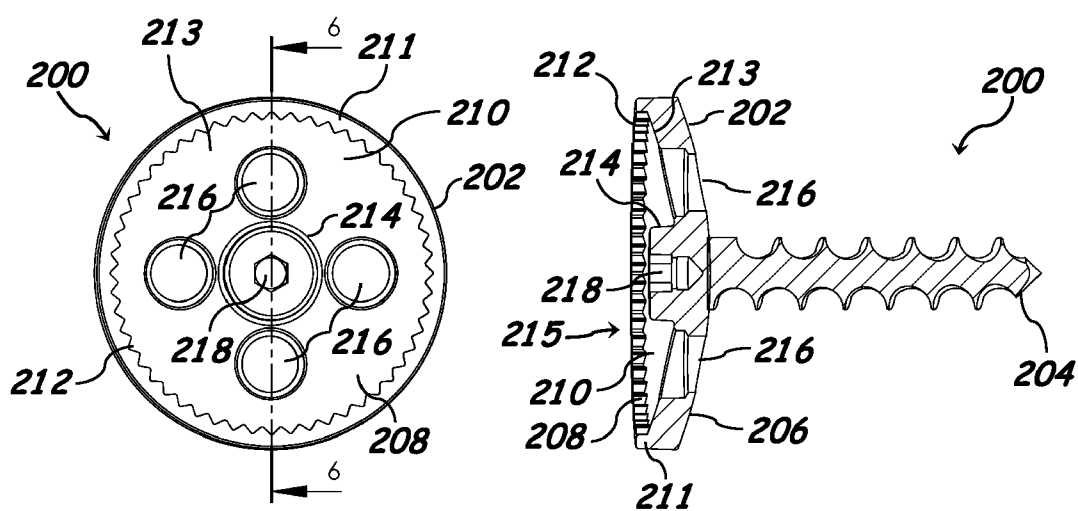


Figure 5

Figure 6

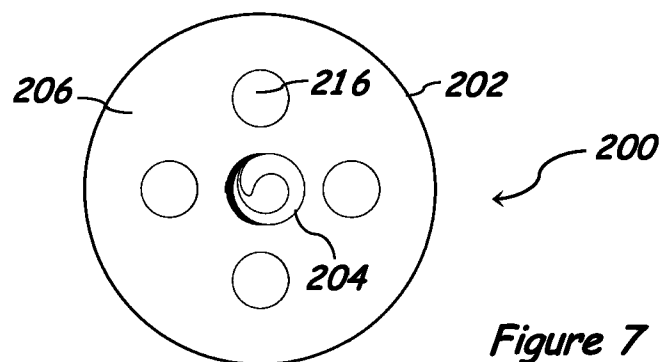


Figure 7

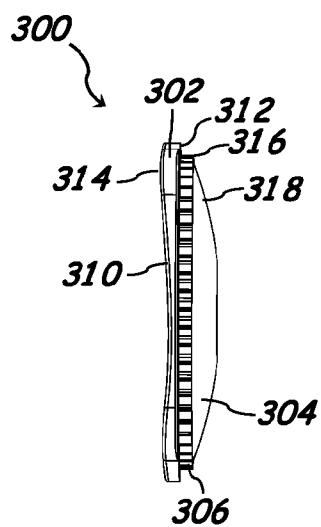


Figure 8

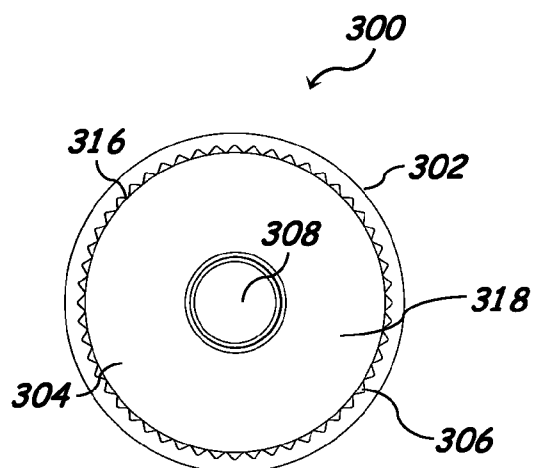


Figure 9

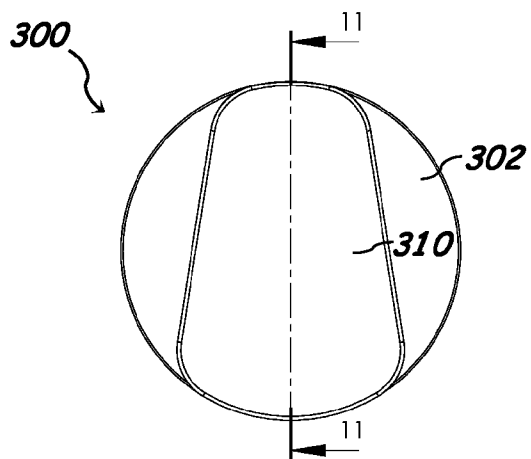


Figure 10

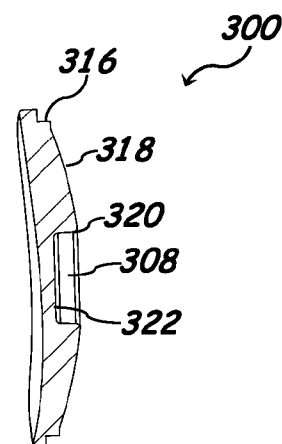


Figure 11

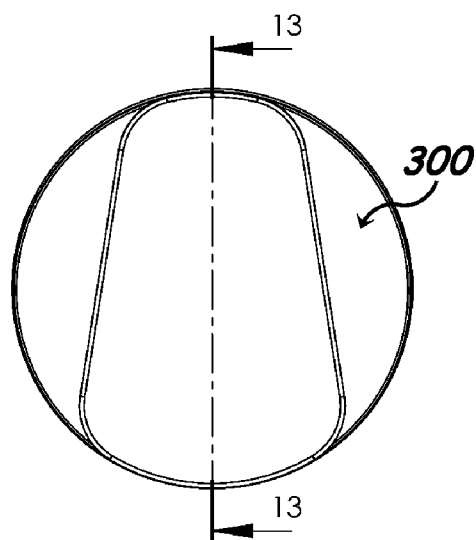


Figure 12

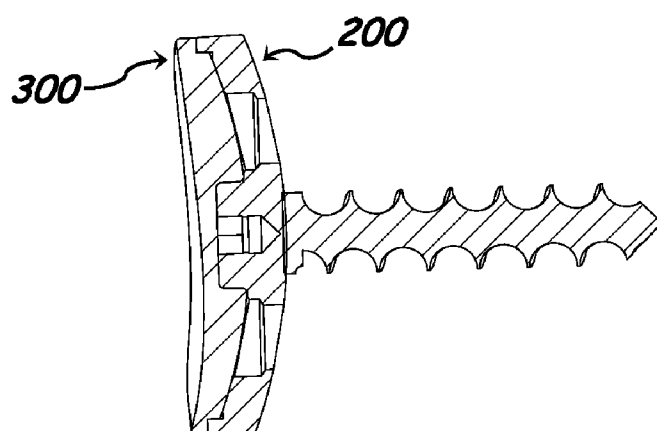


Figure 13

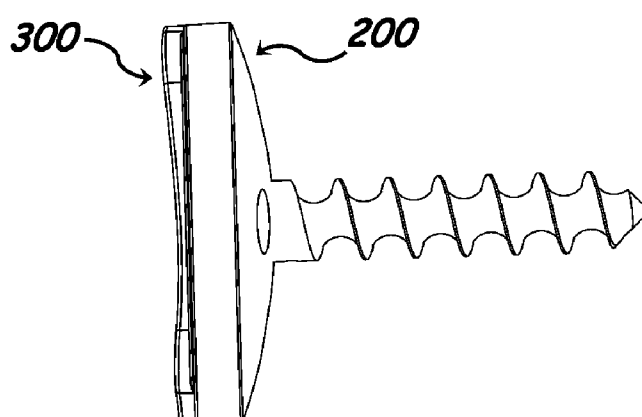
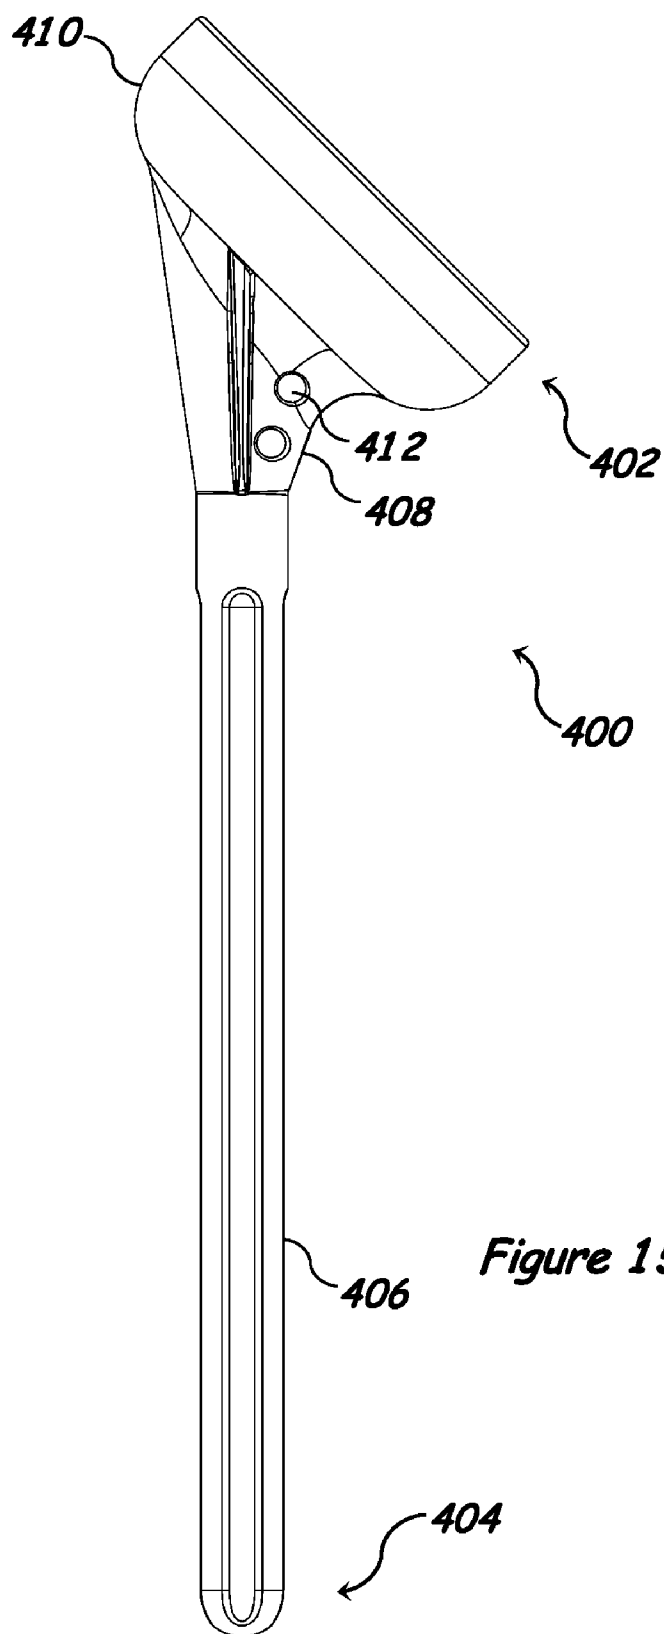


Figure 14



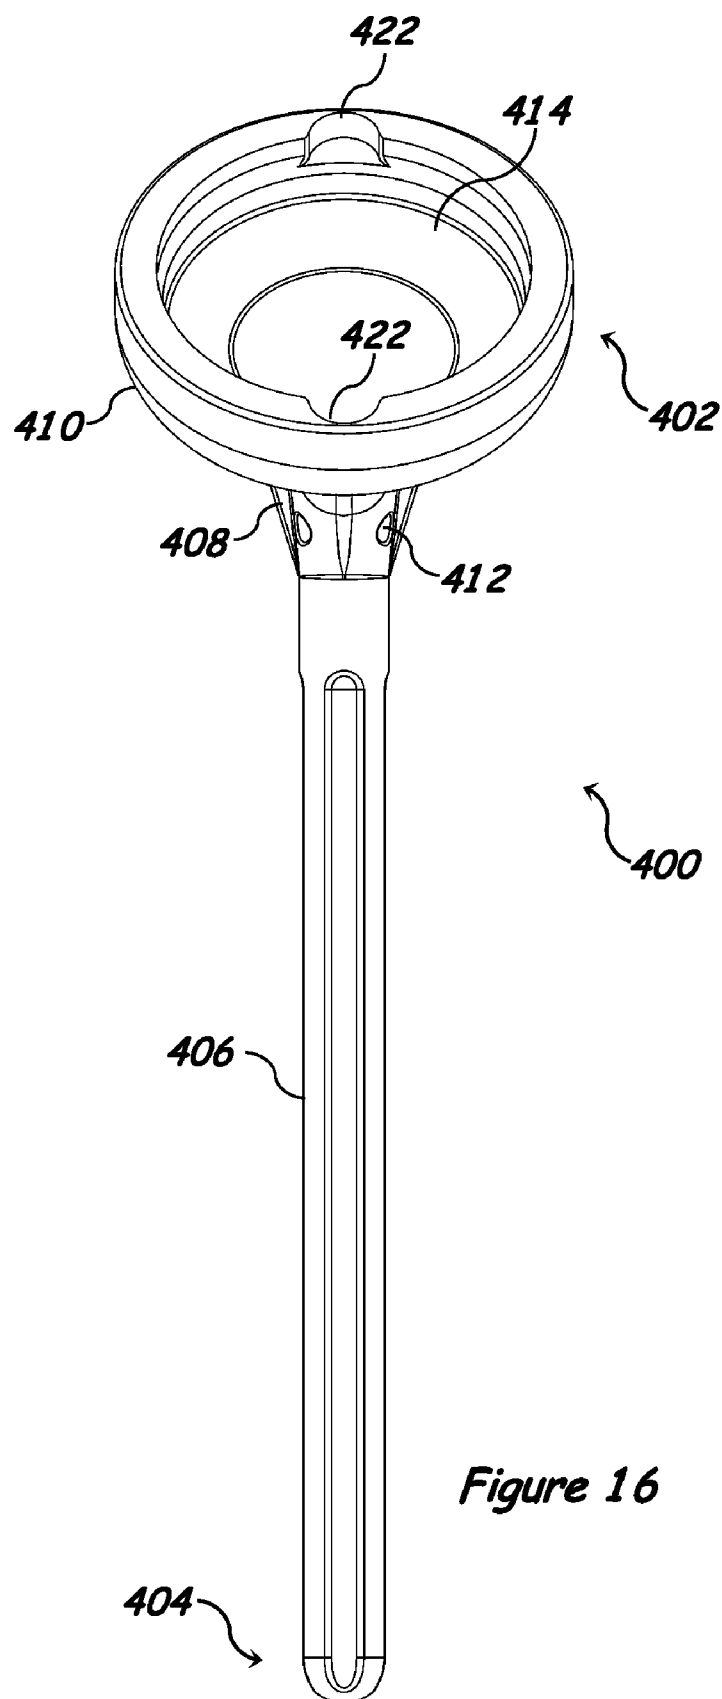
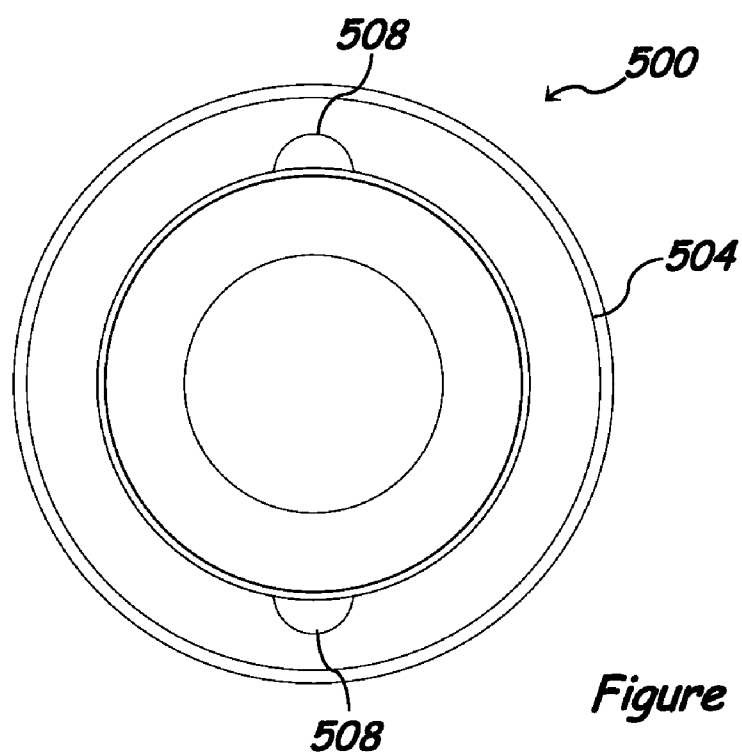
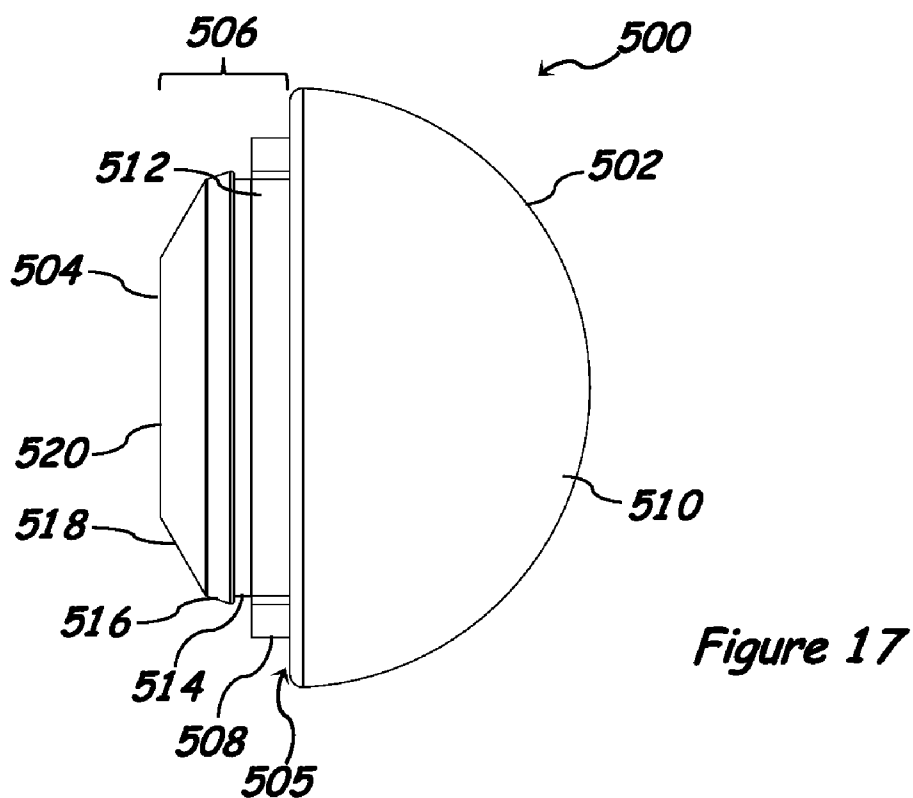


Figure 16



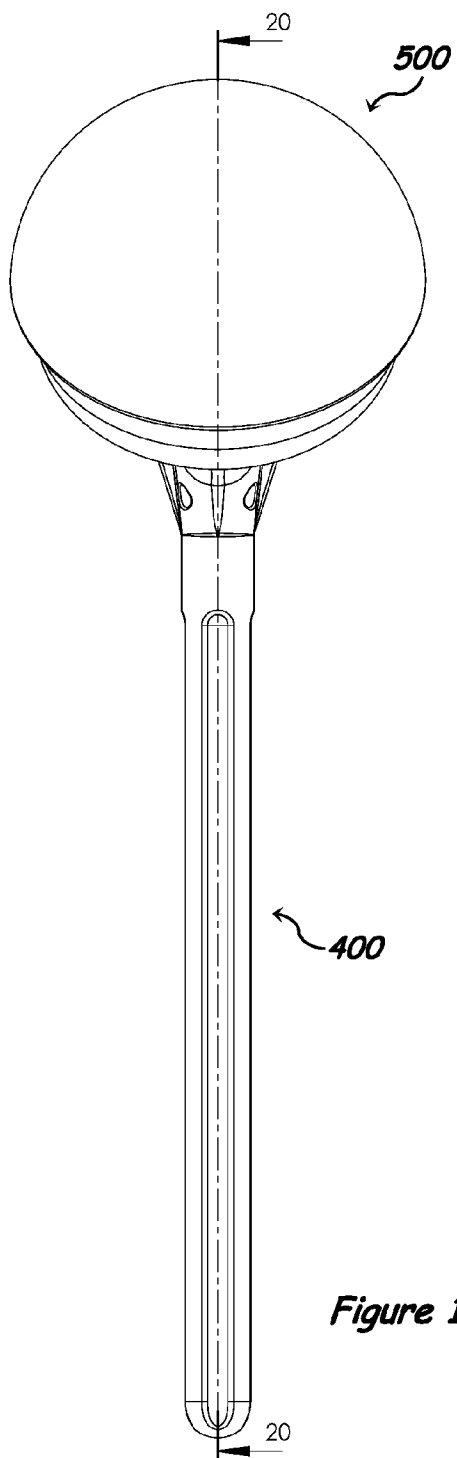


Figure 19

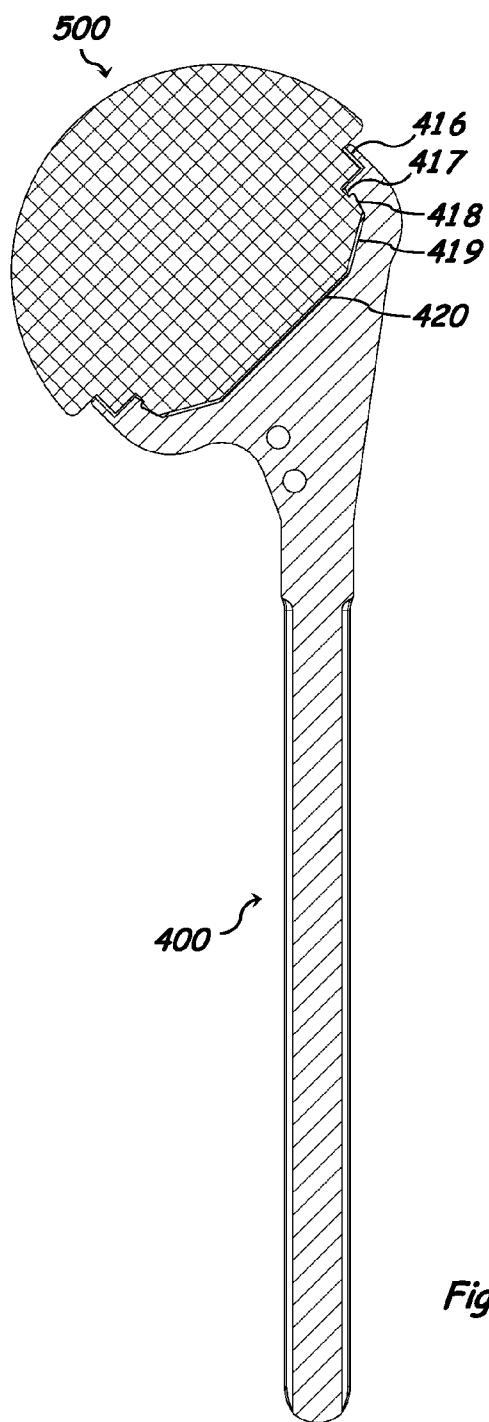


Figure 20

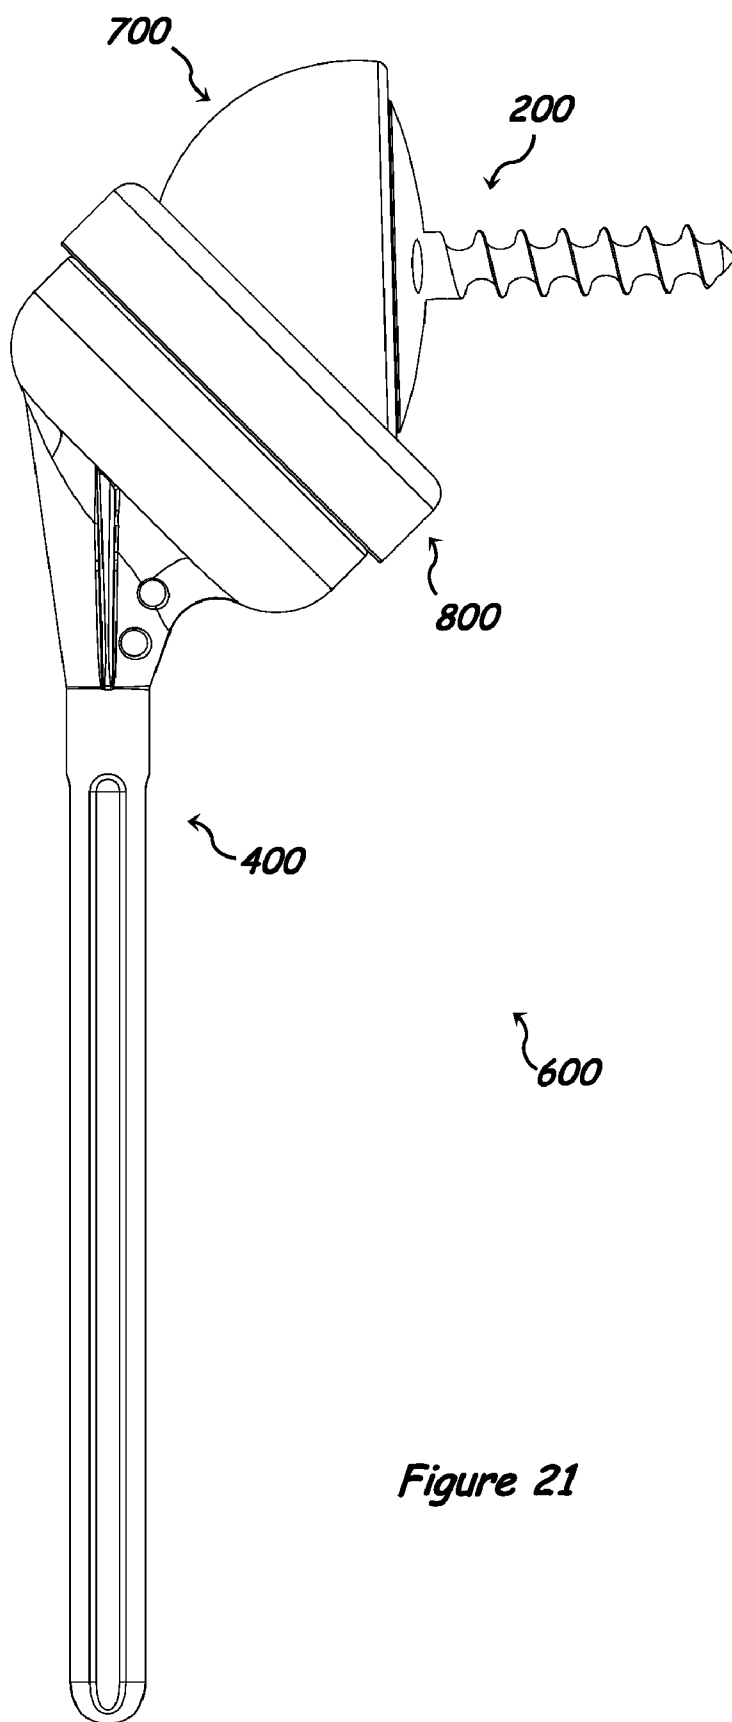


Figure 21

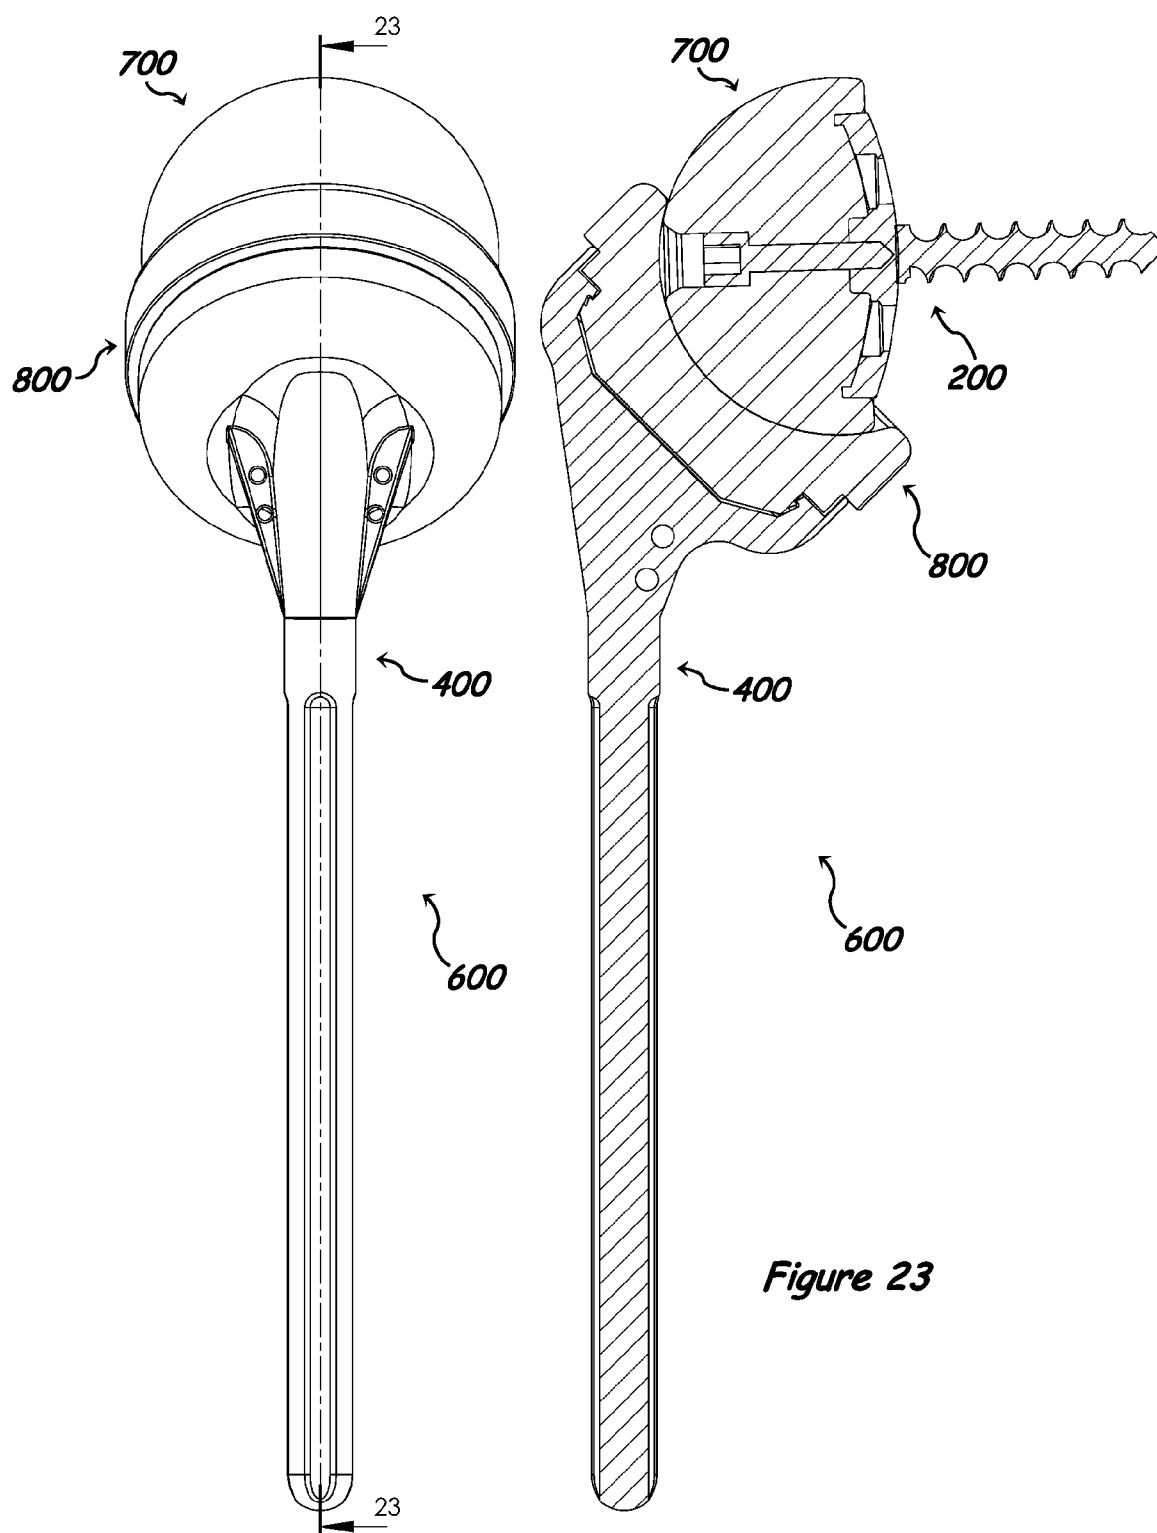


Figure 22

Figure 23

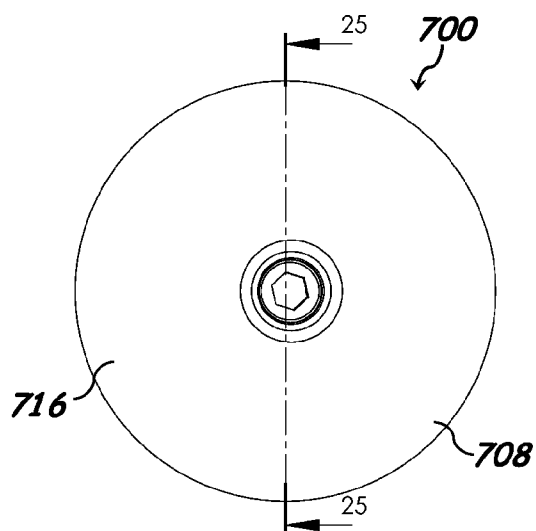


Figure 24

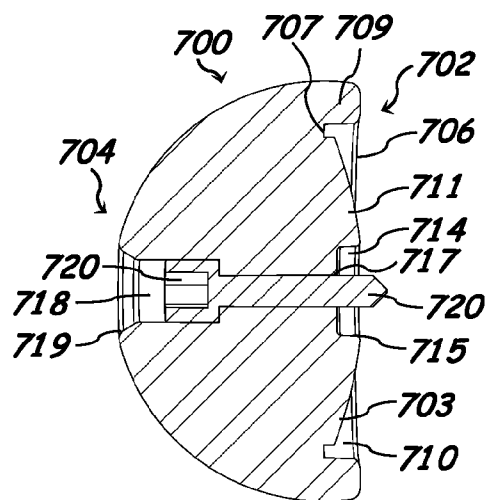


Figure 25

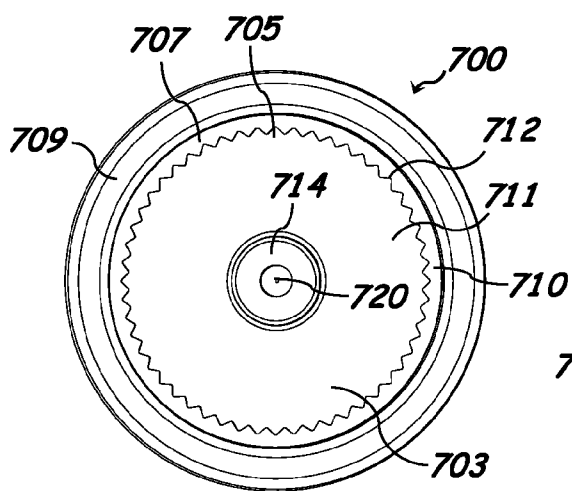


Figure 26

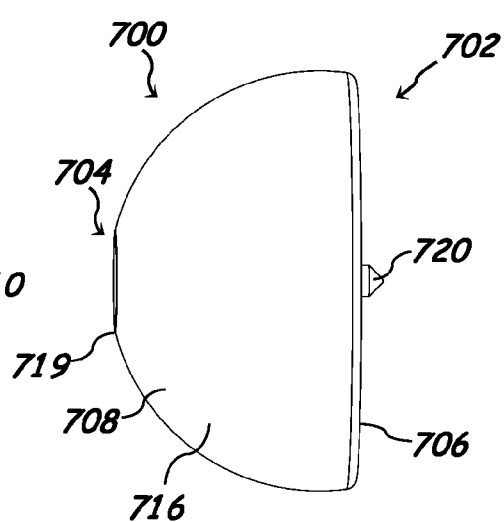


Figure 27

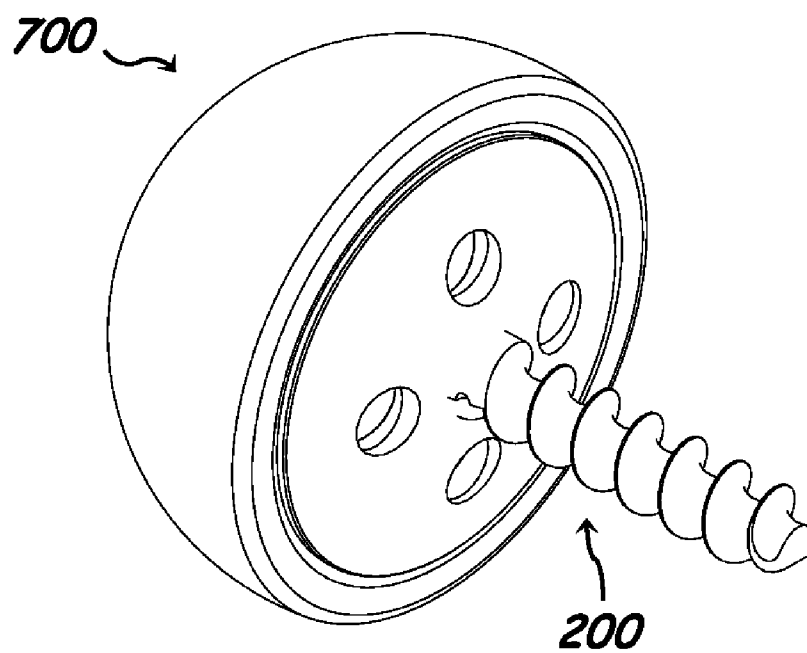


Figure 28

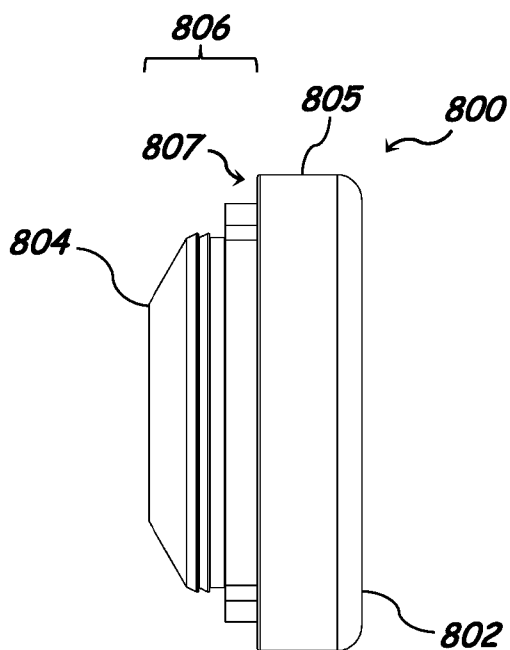


Figure 29

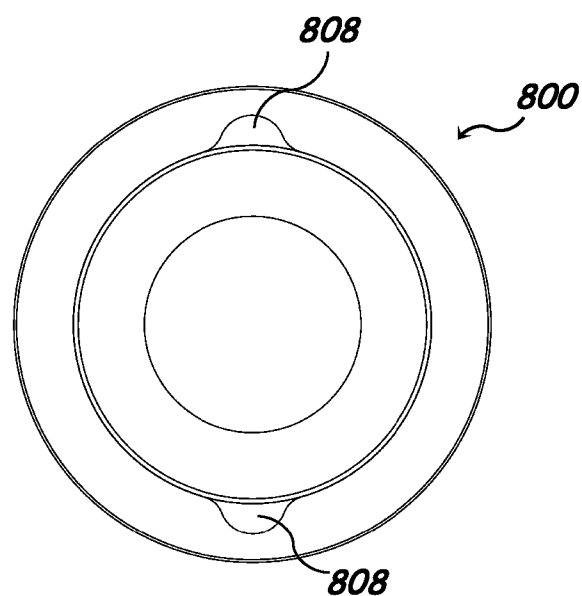


Figure 30

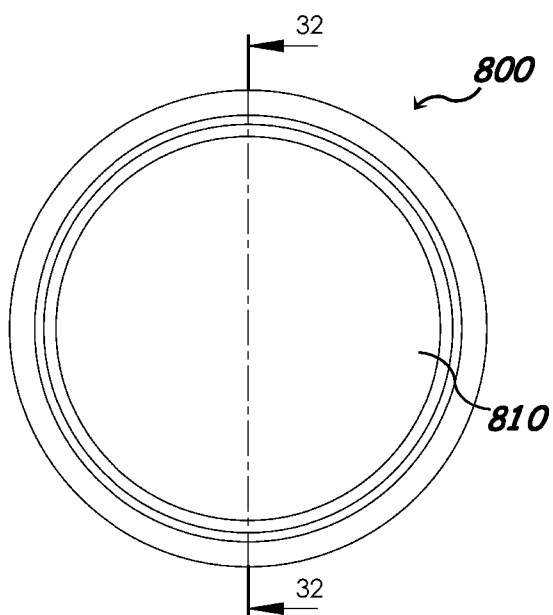


Figure 31

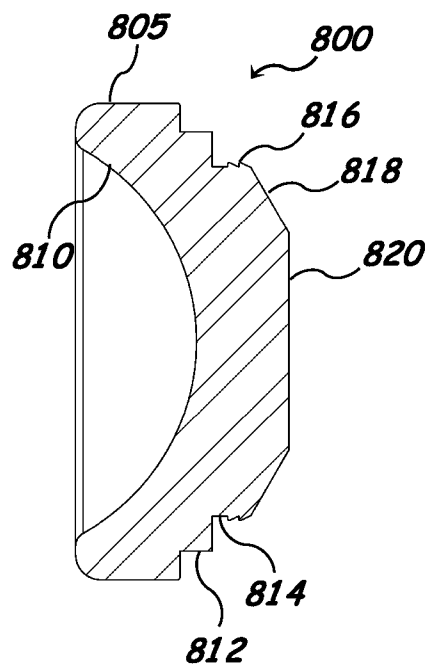


Figure 32

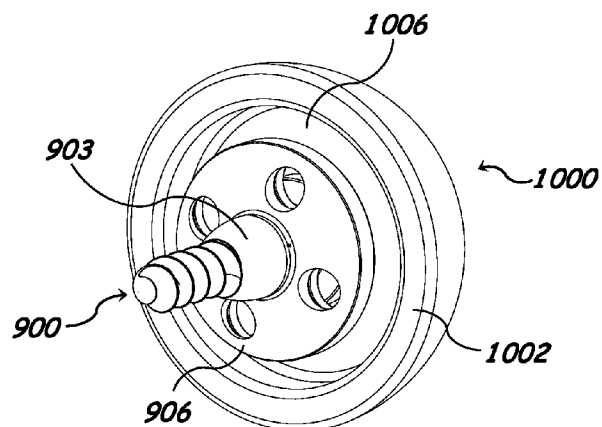


Figure 33

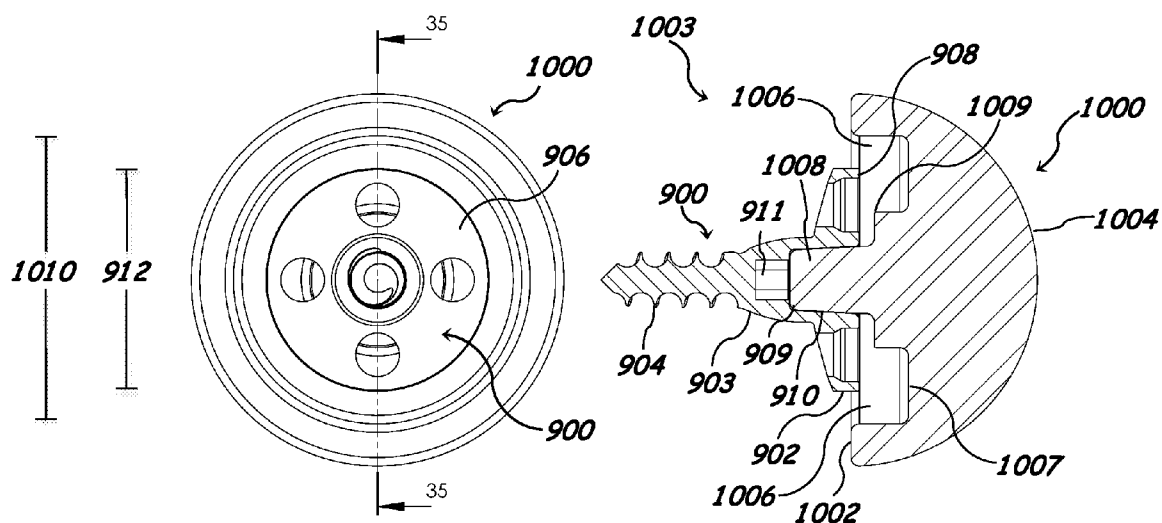


Figure 34

Figure 35

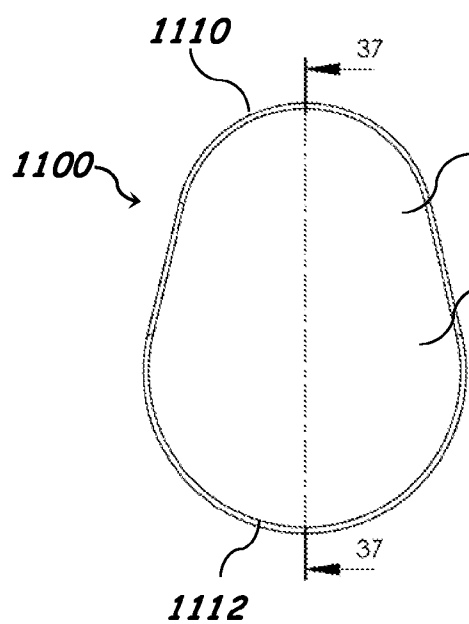


Figure 36

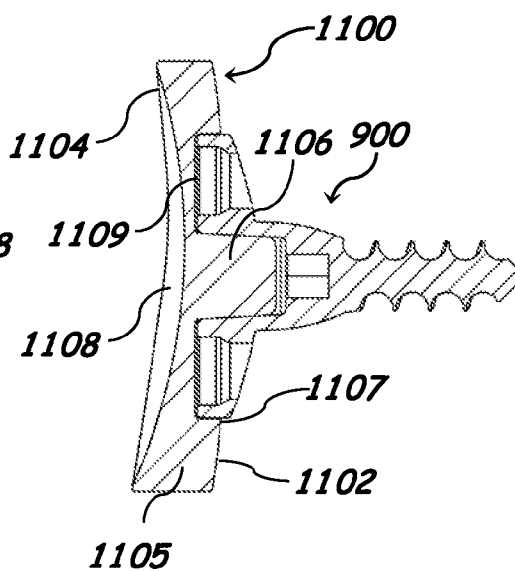


Figure 37

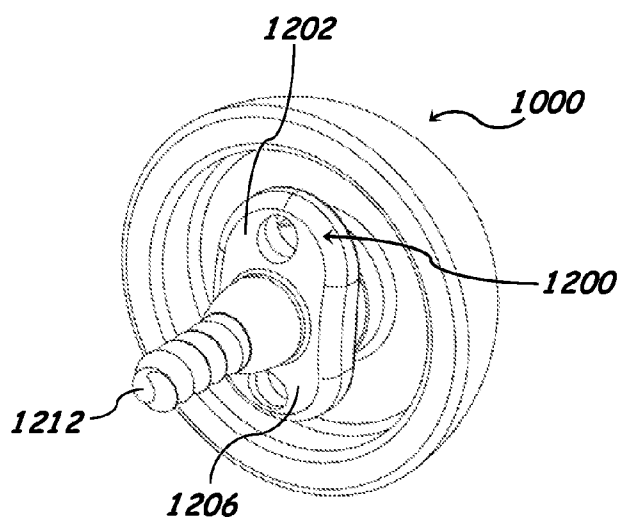


Figure 38

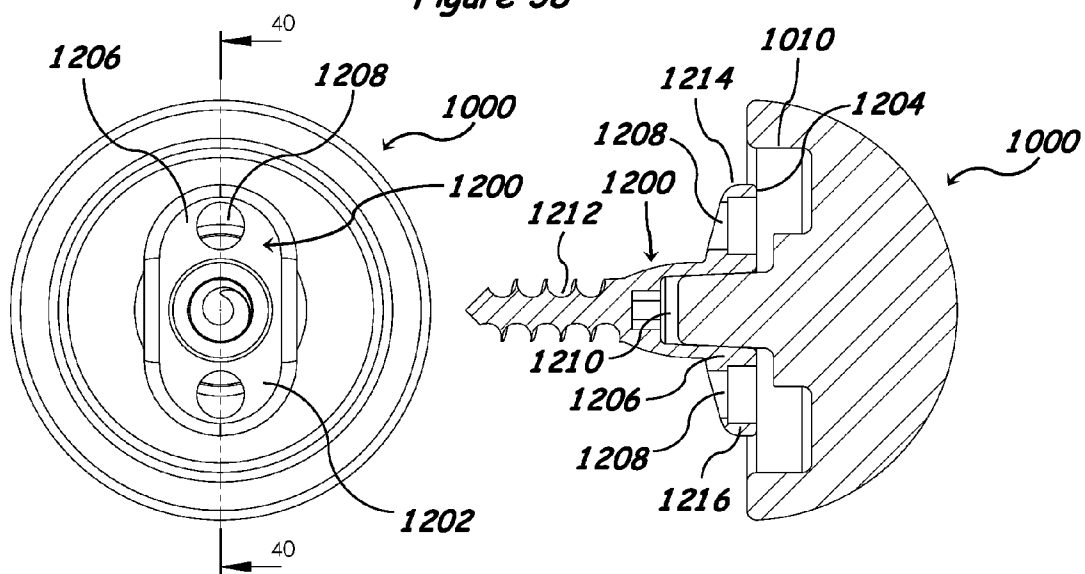


Figure 39

Figure 40

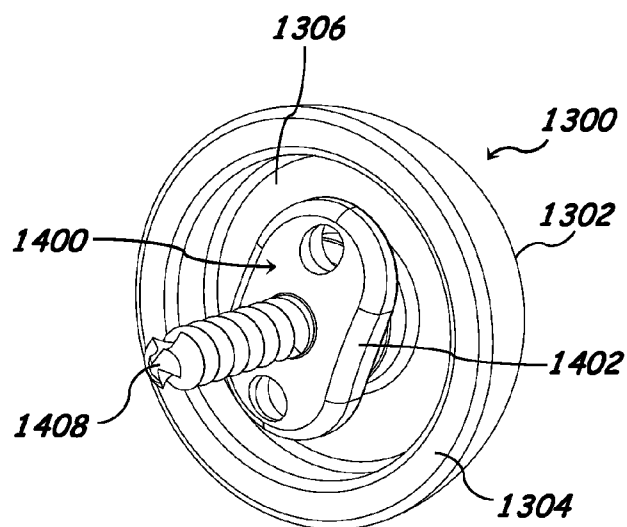


Figure 41

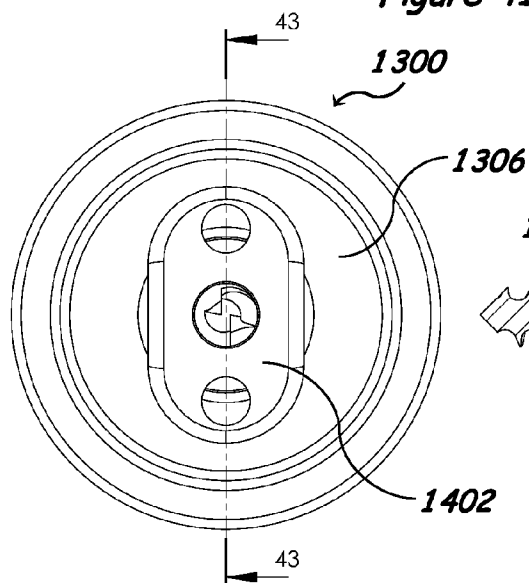


Figure 42

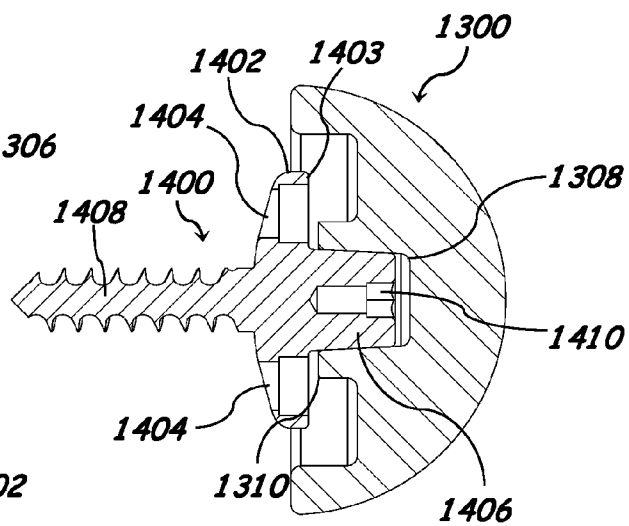


Figure 43

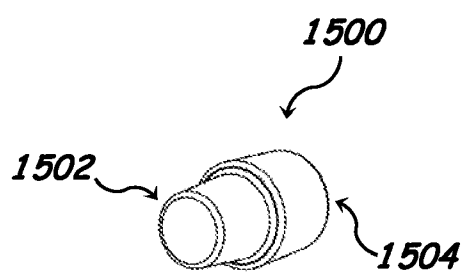


Figure 44

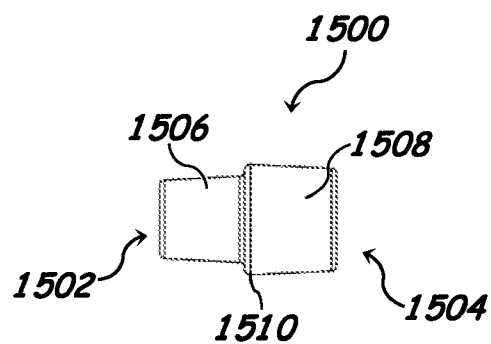


Figure 45

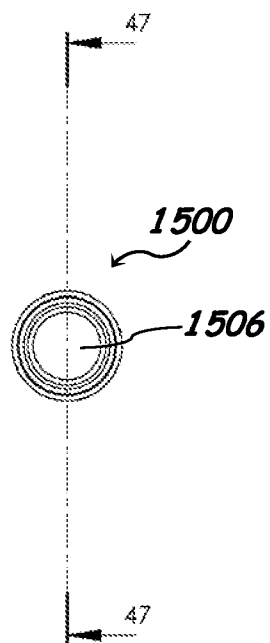


Figure 46

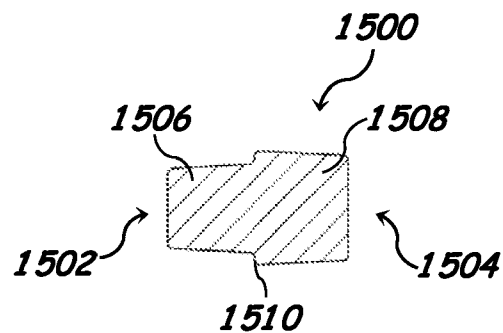


Figure 47

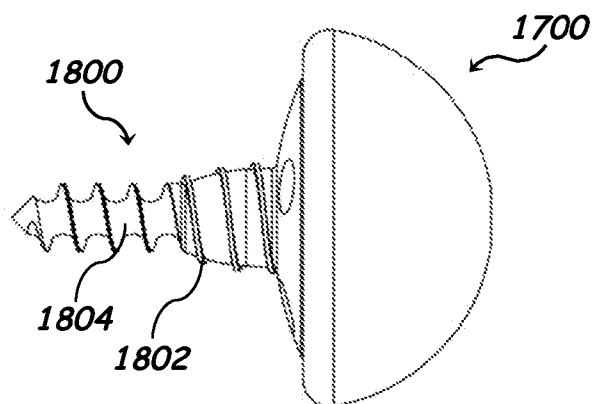


Figure 51

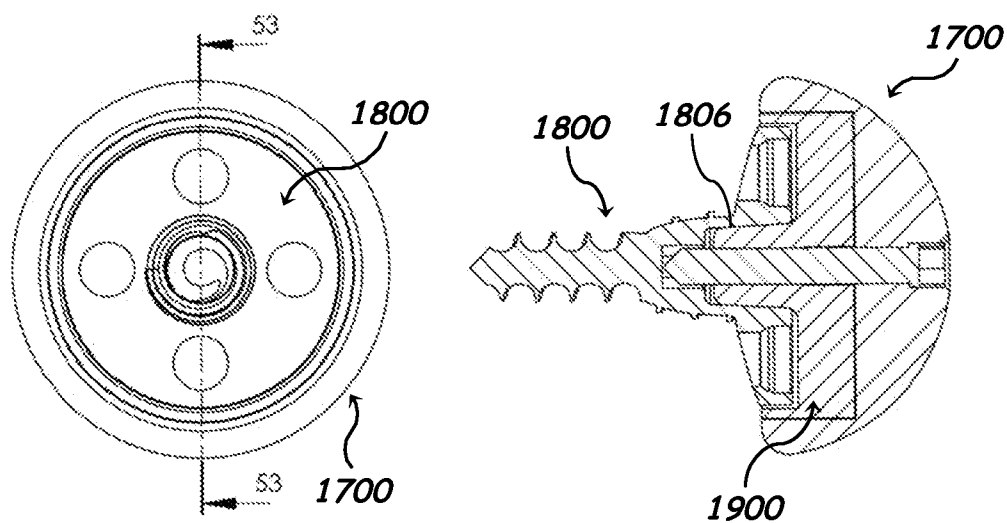


Figure 52

Figure 53

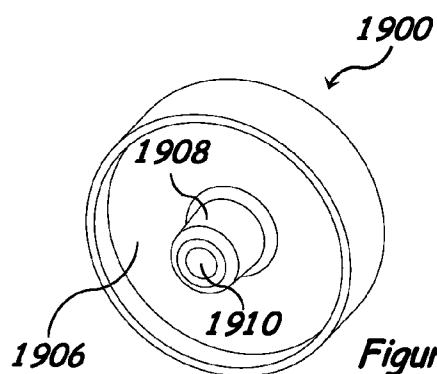


Figure 54

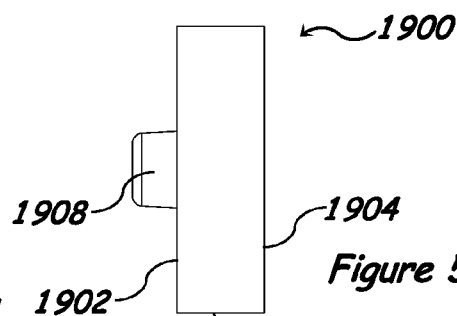


Figure 55

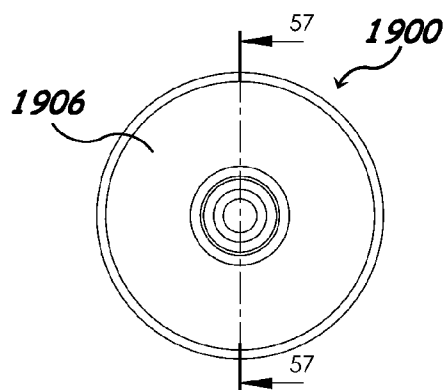


Figure 56

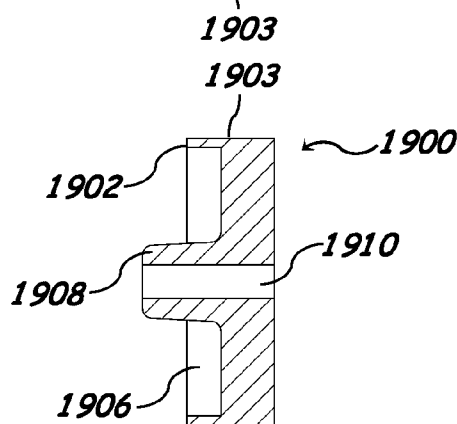


Figure 57

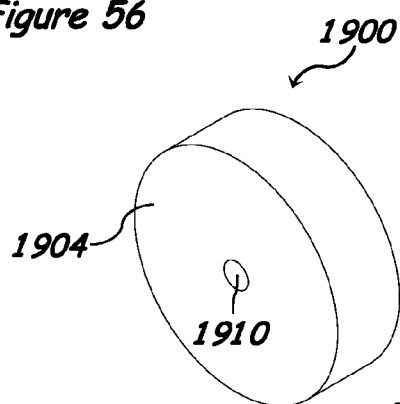


Figure 58

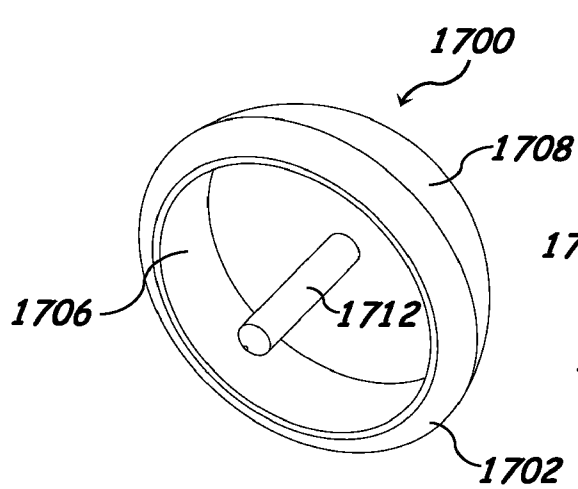


Figure 59

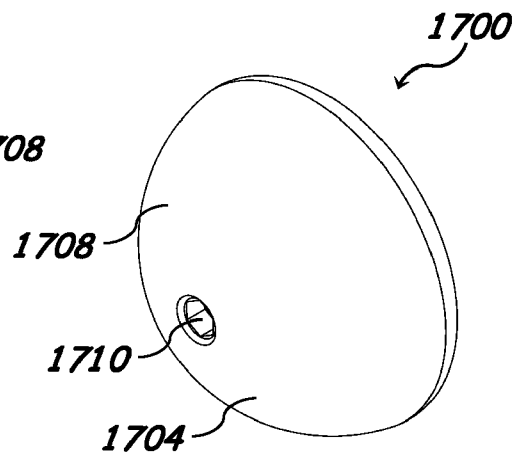


Figure 60

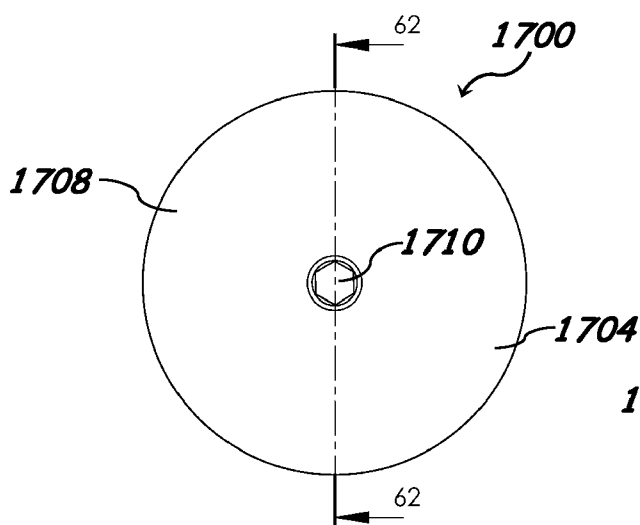


Figure 61

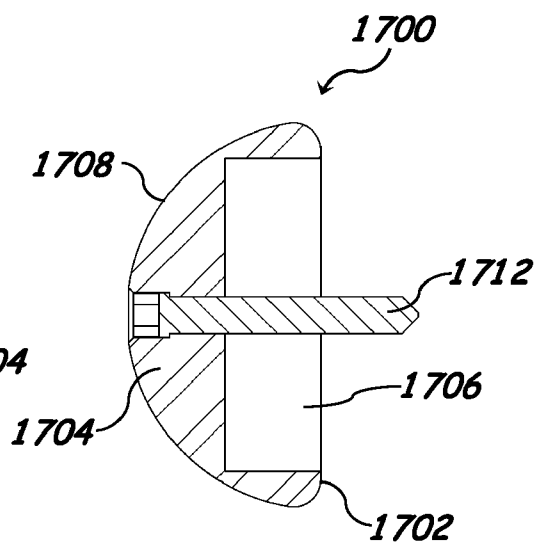


Figure 62

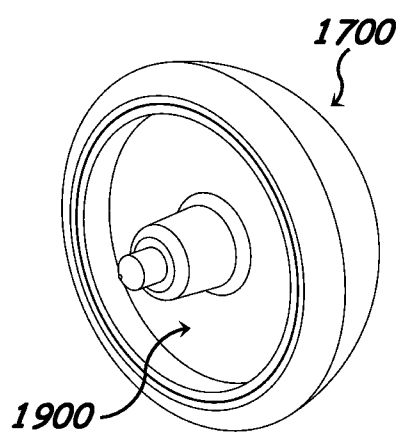


Figure 63

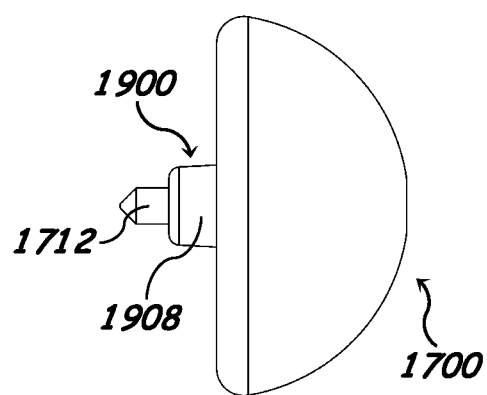


Figure 64

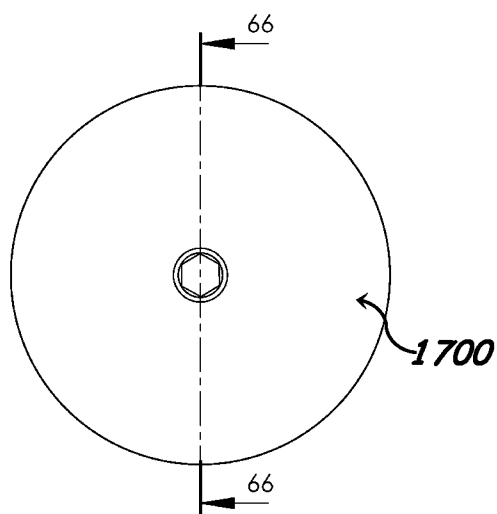


Figure 65

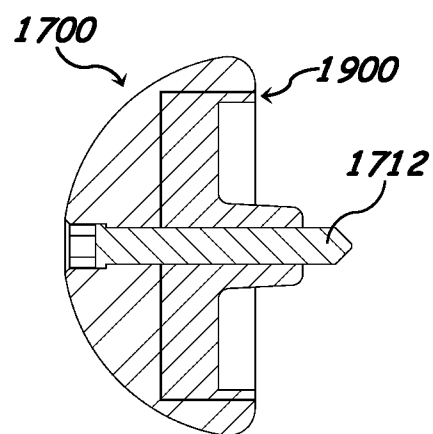


Figure 66

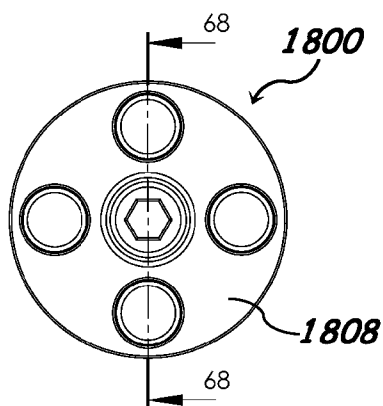


Figure 67

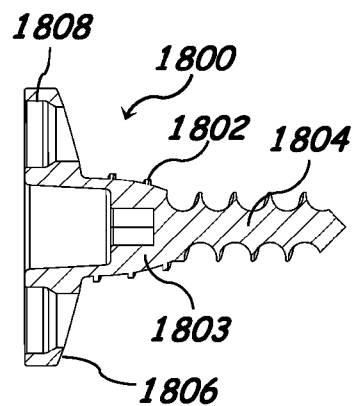


Figure 68

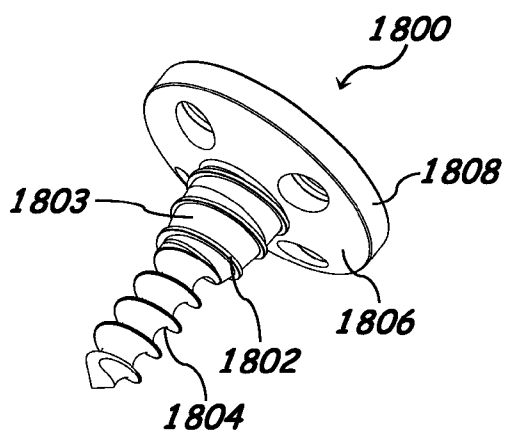


Figure 69

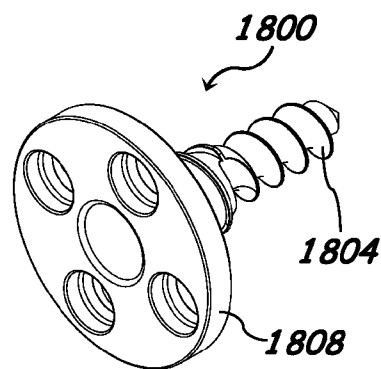


Figure 70

SHOULDER ARTHROPLASTY SYSTEMS AND CONFIGURATIONS FOR COMPONENTS THEREOF

PRIORITY/CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 61/442,272 filed on Feb. 13, 2011 titled "Unique Convertible Design for Total Shoulder Arthroplasty" and U.S. Provisional Application No. 61/476,263 filed on Apr. 16, 2011 titled "Unique Baseplate, Glenosphere and Replacement Humeral Head Designs for Reverse, Total or Hemi Shoulder Arthroplasty." Each of these applications is hereby incorporated by reference into this disclosure in its entirety.

FIELD

[0002] The invention relates generally to surgical implant systems. More particularly, the invention relates to shoulder arthroplasty systems and configurations for the components thereof.

BACKGROUND

[0003] It has become common to perform a shoulder arthroplasty to repair a patient's shoulder joint that has become dysfunctional due to disease or trauma. In a healthy shoulder, the humeral head is generally ball-shaped, and articulates within a socket formed by the scapula, called the glenoid cavity, to form the shoulder joint. Conventional implant systems for the total replacement of the shoulder joint (e.g., total shoulder arthroplasty (TSA)) generally replicate the natural anatomy of the shoulder, and include a metal humeral component having a stem which fits within the humeral canal, and an articulating head which articulates within the socket of a plastic glenoid component implanted within the glenoid of the scapula. The glenoid component can be either a single piece component that is attached to the glenoid, or a two-piece component having a plastic glenoid component attached to a metal baseplate, which is attached to the glenoid. In some cases, however, it is only necessary to replace a part of the shoulder joint, for example, by replacing the humeral head (e.g., a hemi shoulder arthroplasty (HAS)) with a prosthetic humeral head to articulate within the natural glenoid cavity of the scapula.

[0004] Recently, "reverse" type implant systems (e.g., total reverse shoulder arthroplasty (RSA)) have been developed in which the conventional ball-and-socket configuration that replicates the natural anatomy of the shoulder is reversed, such that a concave recessed articulating component is provided at the proximal end of the humeral component which articulates against a convex portion of a glenoid component. Such reverse shoulder implant systems are thought to provide an increased range of motion for treatment of glenoid humeral arthritis associated with irreparable rotator cuff damage, for example, by moving the center of rotation between the humeral component and the glenoid component to allow the deltoid muscles to exert a greater lever arm on the humerus.

[0005] It is sometimes necessary to convert from one type of implant system (e.g., TSA) to the other type of implant system (e.g., RSA), for example, when a patient does not react positively to an initially implanted system. Furthermore, it is sometimes necessary to replace components that

have been implanted and are not functioning properly. Therefore, a need exists for arthroplasty systems and configurations of the components thereof.

SUMMARY

[0006] Various shoulder arthroplasty systems are described herein. For example, an exemplary baseplate and humeral component are described which allow for the conversion between a TSA to an RSA, or vice versa. In addition, exemplary configurations for a baseplate, glenoid component, glenosphere component, humeral component, humeral head component, humerosocket component, connector, and adaptor are described. Furthermore, exemplary positioning of osteoinductive material is described to assist in the stability of the components.

[0007] Additional understanding of the systems and configurations contemplated and/or claimed by the inventor can be gained by reviewing the detailed description of exemplary embodiments, presented below, and the referenced drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a side elevation view of an exemplary TSA system.

[0009] FIG. 2 is a rear elevation view of the TSA system illustrated in FIG. 1.

[0010] FIG. 3 is a cross-sectional view of the TSA system illustrated in FIG. 1, taken along line 3-3 in FIG. 2.

[0011] FIG. 4 is a side elevation view of an exemplary baseplate.

[0012] FIG. 5 is a front elevation view of the baseplate illustrated in FIG. 4.

[0013] FIG. 6 is a cross-sectional view of the baseplate illustrated in FIG. 4, taken along line 6-6 in FIG. 5.

[0014] FIG. 7 is a rear elevation view of the baseplate illustrated in FIG. 4.

[0015] FIG. 8 is a side elevation view of an exemplary glenoid component.

[0016] FIG. 9 is a rear elevation view of the glenoid component illustrated in FIG. 8.

[0017] FIG. 10 is a front elevation view of the glenoid component illustrated in FIG. 8.

[0018] FIG. 11 is a cross-sectional view of the glenoid component illustrated in FIG. 8, taken along line 11-11 in FIG. 10.

[0019] FIG. 12 is a front elevation view of the glenoid component illustrated in FIG. 8 attached to the baseplate illustrated in FIG. 4.

[0020] FIG. 13 is a cross-sectional view of the glenoid component illustrated in FIG. 8 attached to the baseplate illustrated in FIG. 4, taken along line 13-13 in FIG. 12.

[0021] FIG. 14 is a side elevation view of the glenoid component illustrated in FIG. 8 attached to the baseplate illustrated in FIG. 4.

[0022] FIG. 15 is a side elevation view of an exemplary humeral component.

[0023] FIG. 16 is a front elevation view of the humeral component illustrated in FIG. 15.

[0024] FIG. 17 is a side elevation view of an exemplary humeral head component.

[0025] FIG. 18 is a rear elevation view of the humeral head component illustrated in FIG. 17.

[0026] FIG. 19 is a front elevation view of the humeral head component illustrated in FIG. 17 attached to the humeral component illustrated in FIG. 15.

[0027] FIG. 20 is a cross-sectional view of the humeral head component illustrated in FIG. 17 attached to the humeral component illustrated in FIG. 15, taken along line 20-20 in FIG. 19.

[0028] FIG. 21 is a side elevation view of an exemplary RSA system.

[0029] FIG. 22 is a rear elevation view of the RSA system illustrated in FIG. 21.

[0030] FIG. 23 is a cross-sectional view of the RSA system illustrated in FIG. 21, taken along line 23-23 in FIG. 22.

[0031] FIG. 24 is a front elevation view of an exemplary glenosphere component.

[0032] FIG. 25 is a cross-sectional view of the glenosphere component illustrated in FIG. 24, taken along line 25-25 in FIG. 24.

[0033] FIG. 26 is a rear elevation view of the glenosphere component illustrated in FIG. 24.

[0034] FIG. 27 is a side elevation view of the glenosphere component illustrated in FIG. 24.

[0035] FIG. 28 is a perspective view of the glenosphere component illustrated in FIG. 24 attached to the baseplate illustrated in FIG. 4.

[0036] FIG. 29 is a side elevation view of an exemplary humerosocket component.

[0037] FIG. 30 is a rear elevation view of the humerosocket component illustrated in FIG. 29.

[0038] FIG. 31 is a front elevation view of the humerosocket component illustrated in FIG. 29.

[0039] FIG. 32 is a cross-sectional view of the humerosocket component illustrated in FIG. 29, taken along line 32-32 in FIG. 31.

[0040] FIG. 33 is a perspective view of another exemplary glenosphere component attached to another exemplary baseplate.

[0041] FIG. 34 is a rear elevation view of the glenosphere component illustrated in FIG. 33 attached to the baseplate illustrated in FIG. 33.

[0042] FIG. 35 is a cross-sectional view of the glenosphere component illustrated in FIG. 33 attached to the baseplate illustrated in FIG. 33, taken along line 35-35 in FIG. 34.

[0043] FIG. 36 is a front elevation view of another exemplary glenoid component attached to the baseplate illustrated in FIG. 33.

[0044] FIG. 37 is a cross-sectional view of the glenoid component illustrated in FIG. 36 attached to the baseplate illustrated in FIG. 33, taken along line 37-37 in FIG. 36.

[0045] FIG. 38 is a perspective view of the glenosphere component illustrated in FIG. 33 attached to another exemplary baseplate.

[0046] FIG. 39 is a rear elevation view of the glenosphere component illustrated in FIG. 33 attached to the baseplate illustrated in FIG. 38.

[0047] FIG. 40 is a cross-sectional view of the glenosphere component illustrated in FIG. 33 attached to the baseplate illustrated in FIG. 38, taken along line 40-40 in FIG. 39.

[0048] FIG. 41 is a perspective view of another exemplary glenosphere component attached to another exemplary baseplate.

[0049] FIG. 42 is a rear elevation view of the glenosphere component illustrated in FIG. 41 attached to the baseplate illustrated in FIG. 41.

[0050] FIG. 43 is a cross-sectional view of the glenosphere component illustrated in FIG. 41 attached to the baseplate illustrated in FIG. 41, taken along line 43-43 in FIG. 42.

[0051] FIG. 44 is a perspective view of an exemplary connector.

[0052] FIG. 45 is a side elevation view of the connector illustrated in FIG. 44.

[0053] FIG. 46 is a rear elevation view of the connector illustrated in FIG. 44.

[0054] FIG. 47 is a cross-sectional view of the connector illustrated in FIG. 44, taken along line 47-47 in FIG. 46.

[0055] FIG. 48 is a perspective view of another exemplary glenosphere component attached to the baseplate illustrated in FIG. 33 using the connector illustrated in FIG. 44.

[0056] FIG. 49 is a rear elevation view of the glenosphere component illustrated in FIG. 48 attached to the baseplate illustrated in FIG. 33 using the connector illustrated in FIG. 44.

[0057] FIG. 50 is a cross-sectional view of the glenosphere component illustrated in FIG. 48 attached to the baseplate illustrated in FIG. 33 using the connector illustrated in FIG. 44, taken along line 50-50 in FIG. 49.

[0058] FIG. 51 is a side elevation view of another exemplary glenosphere component attached to another exemplary baseplate using an exemplary adaptor.

[0059] FIG. 52 is a rear elevation view of the glenosphere component illustrated in FIG. 51 attached to the baseplate illustrated in FIG. 51 using an exemplary adaptor.

[0060] FIG. 53 is a cross-sectional view of the glenosphere component illustrated in FIG. 51 attached to the baseplate illustrated in FIG. 51 using an exemplary adaptor, taken along line 53-53 in FIG. 52.

[0061] FIG. 54 is a perspective view of the adaptor illustrated in FIG. 53.

[0062] FIG. 55 is a side elevation of the adaptor illustrated in FIG. 53.

[0063] FIG. 56 is a rear elevation of the adaptor illustrated in FIG. 53.

[0064] FIG. 57 is a cross-sectional view of the adaptor illustrated in FIG. 53, taken along line 57-57 in FIG. 56.

[0065] FIG. 58 is another perspective view of the adaptor illustrated in FIG. 53.

[0066] FIG. 59 is a perspective view of the glenosphere component illustrated in FIG. 51.

[0067] FIG. 60 is another perspective view of the glenosphere component illustrated in FIG. 51.

[0068] FIG. 61 is a front elevation view of the glenosphere component illustrated in FIG. 51.

[0069] FIG. 62 is a cross-sectional view of the glenosphere component illustrated in FIG. 51, taken along line 62-62 in FIG. 61.

[0070] FIG. 63 is a perspective view of the glenosphere component illustrated in FIG. 51 attached to the adaptor illustrated in FIG. 53.

[0071] FIG. 64 is a side elevation view of the glenosphere component illustrated in FIG. 51 attached to the adaptor illustrated in FIG. 53.

[0072] FIG. 65 is a front elevation view of the glenosphere component illustrated in FIG. 51 attached to the adaptor illustrated in FIG. 53.

[0073] FIG. 66 is a cross-sectional view of the glenosphere component illustrated in FIG. 51 attached to the adaptor illustrated in FIG. 53, taken along line 66-66 in FIG. 65.

[0074] FIG. 67 is a front elevation view of the baseplate illustrated in FIG. 51.

[0075] FIG. 68 is a cross-sectional view of the baseplate illustrated in FIG. 51, taken along line 68-68 in FIG. 67.

[0076] FIG. 69 is a perspective view of the baseplate illustrated in FIG. 51.

[0077] FIG. 70 is another perspective view of the baseplate illustrated in FIG. 51.

DETAILED DESCRIPTION

[0078] The following detailed description and the appended figures are provided to describe and illustrate exemplary embodiments of the invention for the purpose of enabling one of ordinary skill in the relevant art to make and use the invention. The description and figures are not intended to limit the scope of the invention, or its protection, in any manner.

[0079] As used herein the terms “proximal” and “distal” are used to describe opposing axial ends of the particular elements, components, or features being described. The term “attached” refers to the fixed, releasable, or integrated association of two or more elements, components, and/or devices. The term “attached” includes releasably attaching or fixedly attaching two or more elements, components, and/or devices. The terms “medial” and “lateral” are used to describe opposing sides of the particular elements, components, or features being described. The singular forms “a,” “an,” and “the” include plural referents unless the context clearly dictates otherwise.

[0080] FIGS. 1 through 3 illustrate an exemplary TSA system 100 comprising a baseplate 200, a glenoid component 300, a humeral component 400, and a humeral head component 500. The baseplate 200 is configured to be received by, and attached to, a previously prepared scapula of a patient and the glenoid component 300 is configured to be received by, and attached to, the baseplate 200. The humeral component 400 is configured to be received by, and attached to, a previously prepared humerus of a patient and the humeral head component 500 is configured to be received by, and attached to, the humeral component 400.

[0081] FIGS. 4 through 7 illustrate an exemplary baseplate 200 comprising a body 202 and a threaded component 204. The body 202 is generally circular, has a thickness, and comprises a medial side 206, lateral side 208, proximal end 207, distal end 209, recess 210, circumferential, or substantially circumferential, wall 211, toothed geometry 212, base 213, tapered trunnion 214, and bores 216. The medial side 206 of the body 202 is convex, or substantially convex, and has threaded component 204 attached thereto. Both the medial side 206 of the baseplate 200 and the threaded component 204, or portions thereof, are adapted to be received by, and attached to, a previously prepared scapula of a patient. While the medial side 206 has been described and illustrated as convex, or substantially convex, any suitable geometry can be used, and skilled artisans will be able to select an appropriate geometry for a particular embodiment based on various considerations, including the size and condition of the patient's scapula, among others. Examples of suitable geometries include flat, concave, and varying surfaces.

[0082] Optionally, a portion, or the entirety of, the medial side 206 of the body 202 can include a textured surface, and/or osteoinductive surface, (not shown) to increase the strength, fixation, stability, and securement of the baseplate 200 to the scapula of a patient. The textured surface can

include one or more protuberances, bumps, groves, and/or a roughened surface in any configuration and/or combination.

[0083] The threaded component 204 comprises a threaded shank that extends proximally, and away, from the lateral side 208 of the body 202. The threads can be formed on the shank and extend from the proximal end to the distal end of the threaded component 204. Alternatively, the threads can begin at a point between the proximal end and the distal end of the threaded component 204 and extend to the proximal end of the threaded component 204. In a further alternative, the threaded component 204 can include an enlarged distal end (e.g., shaft 903 of baseplate 900) to assist with attachment of the component to the scapula of a patient.

[0084] The threaded component 204 can have any suitable length, diameter, number of threads, and can be positioned in any suitable location and at any suitable angle on the medial side 206 of the body 202, and skilled artisans will be able to select an appropriate threaded component, position, and angle according to a particular embodiment based on various considerations, including the size and condition of the patient's scapula, among others. In addition, while a threaded component 204 has been illustrated as attached to the medial side 206 of the body 202, any suitable attachment mechanism suitable for securing the baseplate 200 to a scapula can be utilized (e.g., attachment pegs, Morse taper). The threaded component 204 can be attached, fixedly attached, removably attached, integral with, or separate from the baseplate 200. It is considered advantageous to provide a threaded component 204 that is integral with the baseplate 200 to increase the structural stability of the baseplate 200 and its attachment to the scapula of a patient.

[0085] The wall 211 and base 213 cooperatively define recess 210 that extends proximally into the thickness of the body 202 from the lateral side 208 towards the medial side 206. The wall 211 forms toothed geometry 212 that extends about the entirety, or a portion of, the wall 211 and radially inward towards the center of the baseplate 200. Base 213 has a concave, or substantially concave, configuration and extends from the wall 211 towards the medial side 206.

[0086] While the wall 211 has been described as circumferential, or substantially circumferential, other configurations are considered suitable, and skilled artisans will be able to select an appropriate configuration according to a particular embodiment based on various considerations, such as the configuration of the glenoid component 300, among others. An example of a configuration of wall that is considered suitable includes a wall that partially extends around the circumference of the body of the baseplate. In addition, while the toothed geometry 212 has been described as extending into recess 210, other configurations are considered suitable, and the depth and length provided between each tooth of the toothed geometry 212, the number of teeth, and the angle at which the teeth are disposed on the wall 211 of the recessed portion 210 can vary, and skilled artisans will be able to select an appropriate configuration according to a particular embodiment based on various considerations, including the size and/or configuration of the baseplate and glenoid component. Furthermore, while base 213 has been described and illustrated as being concave, or substantially concave, any suitable geometry can be used, and skilled artisans will be able to select an appropriate geometry for a particular embodiment based on various considerations, including the geometry of the medial side of the body, and/or the geometry

of the medial side of the glenoid component, among others. Examples of suitable geometries include flat, convex, and varying surfaces.

[0087] Tapered trunnion **214** (e.g., Morse taper) is disposed on the base **213** of the body **202**, extends from the base **213** towards the first lateral side, and tapers from its base to its distal end **215**. The tapered trunnion **214** defines a hexagonal recess **218** at, or near, the center of the distal end **215**, which extends proximally into the tapered trunnion **214** away from the lateral side **208**, and is adapted to receive a tool used to assist with installing the baseplate **200** into the scapula of a patient. The tapered trunnion **214** can include one or more annular ribs, protuberances, and/or raised surfaces (not shown) to increase stability of the component when another component is attached thereto. While a hexagonal recess **218** has been illustrated as defined by the tapered trunnion **214**, any suitable geometrical shape can be defined by the tapered trunnion **214**, and skilled artisans will be able to select an appropriate geometrical shape for a particular embodiment based on various considerations, such as the depth of the tapered trunnion, among others.

[0088] Bores **216** are positioned between the tapered trunnion **214** and toothed geometry **212** and extend through the thickness of the body **202** from the medial side **206** to the lateral side **208**. The bores **216** are equidistantly spaced about the tapered trunnion **214** and allow for one or more fasteners to have a length inserted through the bores **216** and into the scapula of a patient, assisting with securing the baseplate **200** to the scapula of a patient. While four bores **216** have been illustrated equidistantly spaced about the tapered trunnion, any suitable number of bores and configuration can be incorporated into the baseplate, and skilled artisans will be able to select an appropriate number of bores for a particular embodiment based on various considerations, such as the size of the scapula, among others. Examples of suitable numbers of bores include one, two, three, four, five, six and any number determined suitable for a particular application. Alternatively, bores **216** can be omitted.

[0089] The baseplate **200** is formed of a metal, alloy, or any other suitable biocompatible material. Exemplary materials considered suitable for the baseplate include titanium (Ti), cobalt-chromium-molybdenum (CoCrMo) and other cobalt alloys (e.g., cobalt-chromium (CoCr). The baseplate **200** advantageously provides a component that serves as a universal platform that may be used with various modular components (e.g., glenoid component **300**, glenosphere component **700**) in the manner described herein to configure the baseplate **200** for use in a TSA or a RSA. Thus, once the baseplate **200** is implanted onto the scapula of a patient, the baseplate **200** can be configured for a TSA as illustrated in FIGS. 1 through 3, or a RSA as illustrated in FIGS. 21 through 23. While the baseplate **200** has been described as formed of a metal, alloy, or other suitable biocompatible material, other materials are considered suitable, and skilled artisans will be able to select an appropriate material according to a particular embodiment based on various considerations, such as the intended use of the baseplate, among others.

[0090] FIGS. 8 through 11 illustrate an exemplary glenoid component **300** comprising a generally circular body **302**, raised geometry **304**, toothed geometry **306**, tapered cavity **308** and an articulating surface **310**. The body **302** has a medial side **312** and a lateral side **314** defining an articulating surface **310**. The raised geometry **304** is disposed on the medial side **312** of the body **302**, extends away from the

lateral side **314** of the body **302**, and has an outer circumferential, or substantially circumferential, perimeter **316** and a convex, or substantially convex, portion **318** that extends from the outer perimeter **316** and away from the lateral side **314**. The toothed geometry **306** is formed on the outer perimeter **316** and extends about the entirety of, or a portion of, the perimeter **316** and radially outward away from the raised geometry **304**.

[0091] The raised geometry **304** has a configuration that compliments the configuration of the recess **210** of the baseplate **200**, and is adapted to be received by, and engage with, the geometry of the recess **210** of the baseplate **200**. The toothed geometry **306** of the glenoid component **300** is configured to compliment the toothed geometry **212** of the baseplate **200** and is adapted to be received by, and engage with, the toothed geometry **212** of the baseplate **200**. The depth and length provided between each tooth of the toothed geometry **306**, the number of teeth, and the angle at which the teeth are disposed on the perimeter **316** of the raised geometry **304** can vary, and skilled artisans will be able to select an appropriate configuration according to a particular embodiment based on various considerations, including the size of the baseplate and glenoid component. While portion **318** has been described and illustrated as being convex, or substantially convex, any suitable geometry can be used, and skilled artisans will be able to select an appropriate geometry for a particular embodiment based on various considerations, including the geometry of the lateral side of the body of the baseplate, among others. Examples of suitable geometries include flat, concave, and varying surfaces.

[0092] In addition, while the raised geometry **304** is described as having a circumferential, or substantially circumferential, perimeter **316**, other configurations are considered suitable, and skilled artisans will be able to select an appropriate configuration according to a particular embodiment based on various considerations, such as the configuration of the baseplate **200**, among others. An example of a configuration for the raised geometry, and/or perimeter, that is considered suitable includes a raised geometry, and/or perimeter, that partially extends around the circumference of the body of the glenoid component.

[0093] The raised geometry **304** defines tapered cavity **308** which has an opening **320** defined on the convex, or substantially convex, portion **318**. The tapered cavity **308** extends distally from the opening **320** into the raised geometry **304** and is tapered from the opening **320** to the base **322** of the tapered cavity **308**. The tapered cavity **308** is adapted to receive the tapered trunnion **214** of the baseplate **200** (e.g., Morse taper) to attach the glenoid component **300** to the baseplate **200**, and has a configuration complimentary to the tapered trunnion **214** of the baseplate **200**.

[0094] The lateral side **314** of the glenoid component **300** defines a raised anatomically shaped articulating surface **310** configured to articulate with a humeral head (e.g., prosthetic or natural) of a patient. The articulating surface **310** is generally smooth, uninterrupted, and concave or substantially concave. The geometry of the articulating surface **310** is configured to approximate, and/or replicate, the anatomy and structure of the glenoid cavity of a patient (e.g., radius, thickness, length, width).

[0095] The glenoid component **300** is formed of a ceramic, metal, or other suitable biocompatible material. Exemplary materials considered suitable for the glenoid component **300** include titanium (Ti), and cobalt alloys (e.g., cobalt-chro-

mium (CoCr), cobalt-chromium-molybdenum (CoCrMo)). It is considered advantageous to provide a glenoid component **300** formed of a metal to provide enhanced wear properties of the component. The glenoid component **300** is configured to be attached to the baseplate **200** using an impact instrument that impacts the tapered trunnion **214** of the baseplate **200** into the tapered cavity **308** of the glenoid component **300** creating a cold weld between the two components. The articulating surface **310**, glenoid component **300**, and/or baseplate **200**, can be provided in a variety of different radii and/or sizes, such as with varying diameters, heights, and widths to enable a surgeon to select an optimal articulating surface **310**, glenoid component **300** and/or baseplate **200** needed for the anatomy of a particular patient. While the glenoid component **300** has been described as formed of a ceramic, metal, or other suitable biocompatible material, other materials are considered suitable, and skilled artisans will be able to select an appropriate material according to a particular embodiment based on various considerations, such as the intended use of the glenoid component, among others.

[0096] The toothed geometry **212** of the baseplate **200** and/or the toothed geometry **306** of the glenoid component **300** are adapted to receive one another, and include a tolerance sufficient to allow the components to properly engage with one another and become securely engaged, as illustrated in FIGS. **12** through **14**, which advantageously provides a combination of components (e.g., glenoid implant) that prevents, or substantially limits, rotation subsequent to installation. In addition, the configuration of the toothed geometry **212** of the baseplate **200** and/or the toothed geometry **306** of the glenoid component **300** advantageously provide for rotationally variable positioning of the glenoid component **300** within the baseplate **200** when the two components are being attached to one another.

[0097] While the baseplate **200** and the glenoid component **300**, or portions thereof, have been illustrated as circular, or substantially circular, other shapes are considered suitable, and skilled artisans will be able to select an appropriate shape for a baseplate and glenoid component according to a particular embodiment based on various considerations, including the anatomy of the patient, among others. Examples of shapes considered suitable include oval, oblong, rectangular and any shape determined suitable for a particular application.

[0098] FIGS. **15** and **16** illustrate an exemplary humeral component **400** comprising a proximal end **402**, distal end **404**, distal stem **406**, transition region **408**, and proximal head **410**. The distal stem **406** extends from the distal end **404** to the transition region **408** and is adapted to be fitted within a prepared proximal end and canal of the humerus of a patient. The transition region **408** flares outwardly, and away, from the distal stem **406** and includes apertures **412** that extend through a portion of the transition region **408** of the humeral component **400**. Sutures may be threaded through the apertures **412** to aid in reducing humeral fractures, or as otherwise needed. For example, the apertures **412** may be used by a physician to reconstruct the proximal humerus in the event of humeral fractures, for the attachment of soft tissue, and/or for the attachment of tuberosity fragments. The number of apertures **412** can vary, and skilled artisans will be able to select an appropriate number of apertures for a particular embodiment based on various considerations, including the intended use of the apertures, among others. Examples of suitable numbers

of apertures include one, two, three, four, five, six, seven, eight, nine, ten and any number determined suitable for a particular application.

[0099] Proximal head **410** is substantially enlarged with respect to the distal stem **406**, flares outwardly from the transition region **408**, and extends to the proximal end **402** of the humeral component **400**. The proximal head **410** defines cavity **414** that extends distally into the proximal head **410** from the proximal end **402** of the humeral component **400**. The cavity **414** has a first annular portion **416**, lip **417**, second annular portion **418**, tapered portion **419**, and base **420**, as shown in FIG. **20**. The first annular portion **416** is located at the proximal end of the cavity and extends distally into the proximal head **410** from the proximal end **402** of the humeral component **400** to lip **417**, which extends radially inward towards the center of the internal cavity **414** and away from the wall of the proximal head **410**. Distal to the lip **417** is second annular portion **418** that tapers from its proximal end at lip **417**, which has a smaller outside diameter than the first annular portion **416**, to its distal end at tapered portion **419**. Tapered portion **419** is tapered from its proximal end to its distal end and extends distally to the base **420**, which is perpendicular, or substantially perpendicular, to the first annular portion **416**.

[0100] The proximal head **410** defines two recessed notches **422** that extend radially outward from the first annular portion **416** and away from the center of the cavity **414** and distally into the proximal head **410**. The recessed notches **422** advantageously provide for substantially limiting, and/or substantially eliminating, the rotation of the humeral head component **500** when it is attached to the humeral component **400**, as illustrated in FIGS. **19** and **20**. While two recessed notches **422** having a substantially curved perimeter have been described and illustrated, any suitable number of recessed notches and configurations can be used, and skilled artisans will be able to select a suitable number of recessed notches, and configurations for the recessed notches, according to a particular embodiment based on various considerations, including the size of the humeral head component being used in conjunction with the humeral component, among others. Examples of suitable numbers of recessed notches include one, two, three, four, five and any number determined suitable for a particular application.

[0101] The humeral component **400** is formed of a ceramic, metal, or other suitable biocompatible material. Exemplary materials considered suitable for the humeral component **400** include titanium (Ti), and cobalt alloys (e.g., cobalt-chromium (CoCr), cobalt-chromium-molybdenum (CoCrMo)). The humeral component **400** can comprise a single component. Alternatively, the humeral component **400** can comprise one or more components attached to one another. The humeral component **400** advantageously provides a component that serves as a universal platform that may be used with various modular components in the manner described herein to configure the humeral component **400** for use in a TSA or a RSA. Thus, once the humeral component **400** is implanted within a prepared proximal humerus of a patient, the humeral component **400** can be configured for a TSA as illustrated in FIGS. **1** through **3**, a RSA as illustrated in FIGS. **21** through **23**, or a hemi shoulder arthroplasty.

[0102] FIGS. **17** and **18** illustrate an exemplary humeral head component **500** comprising a medial side **502**, lateral side **504**, projection **506**, protuberances **508**, and an articulating surface **510**. The projection **506** is positioned on the

lateral side **504** of the humeral head component **500**, extends distally from the distal end **505** of the articulating surface **510**, and comprises a first annular portion **512**, recess **514**, second annular portion **516**, tapered portion **518**, and base **520**. The first annular portion **516** extends distally from the distal end **505** of the articulating surface **510** to recess **514**, which extends radially inward towards the center of the projection **506**. Distal to the recess **514** is second annular portion **516** that tapers from its proximal end at recess **514**, which has a larger outside diameter than recess **514**, to its distal end at tapered portion **518**. Tapered portion **518** is tapered from its proximal end to its distal end and extends distally to the base **520** of the projection **506**, which is perpendicular, or substantially perpendicular, to the first annular portion **512**. Protuberances **508** extend outwardly from the first annular portion **512**, away from the center of the projection **506**, and are configured to be received by, and engage with, the recessed notches **422** of the humeral component **400**.

[0103] The humeral head component **500** defines a convex anatomically shaped articulating surface **510** on the medial side **502** that articulates with the articulating surface **310** of the glenoid component **300** or with a natural glenoid. The articulating surface **510** can be provided in a variety of different radii and sizes, such as with varying diameters and varying heights to enable a surgeon to select an optimal humeral head component **500** needed for the anatomy of a particular patient. The articulating surface **510** is generally smooth, uninterrupted, and convex, or substantially convex. The geometry of the articulating surface **510** is configured to approximate, or replicate, the anatomy and structure of the head of a humerus of a patient (e.g., radius, thickness, length, width).

[0104] The humeral head component **500** is formed of ceramic, polyethylene or any other suitable biocompatible material. An exemplary material considered suitable for the humeral head component **500** is ultra-high-molecular-weight polyethylene (UHMWPE). While the humeral head component **500** has been described as formed of a ceramic, polyethylene, or other suitable biocompatible material, other materials are considered suitable, and skilled artisans will be able to select an appropriate material according to a particular embodiment based on various considerations, such as the intended use of the humeral head component, among others.

[0105] During use, the humeral head component **500** is attached to the humeral component **400** by using an interference fit between the projection **506** and cavity **414** with, or without, the use of cement. Protuberances **508** advantageously provide for substantially limiting, and/or substantially eliminating, the rotation of the humeral head component **500** when attached to the humeral component **400**, as illustrated in FIGS. 19 and 20. While particular geometries have been described and illustrated with respect to the cavity **414** and projection **506**, other geometries can be used, and skilled artisans will be able to select an appropriate geometry for a particular embodiment based on various considerations, including the geometry of the internal cavity of the humeral component and/or the geometry of the projection of the humeral head component. Examples of geometries considered suitable for the lateral side, projection, and/or protuberances of the humeral head component include geometries that mirror or substantially mirror the geometry of the internal cavity and recessed notches of the humeral component, and vice versa.

[0106] FIGS. 21 through 23 illustrate an exemplary RSA system **600** comprising a baseplate **200**, a glenosphere component **700**, a humeral component **400**, and a humerosocket component **800**. The baseplate **200** is similar to that described above with respect to FIGS. 4 through 7 and the humeral component **400** is similar to that described above with respect to FIGS. 15 and 16, unless otherwise described below. The baseplate **200** is configured to be received by, and attached to, a previously prepared glenoid of a patient and the glenosphere component **700** is configured to be received by, and attached to, the baseplate **200**. The humeral component **400** is configured to be received by, and attached to, a previously prepared humerus of a patient and the humerosocket component **800** is configured to be received by, and attached to, the humeral component **400**.

[0107] FIGS. 24 through 27 illustrate an exemplary glenosphere component **700** comprising proximal end **702**, distal end **704**, medial side **706**, lateral side **708**, base **707**, circumferential, or substantially circumferential, wall **709**, recess **710**, raised geometry **711**, toothed geometry **712**, tapered cavity **714**, articulating surface **716**, bore **718**, and retaining screw **720**. On the medial side **706**, the wall **709** and the base **707** cooperatively define a circumferential, or substantially circumferential, recess **710** extending from the medial side **706** towards the lateral side **708** and into the glenosphere component **700**. The raised geometry **711** is disposed within recess **710**, extends from the base **707** towards the medial side **706**, and has an outer circumferential, or substantially circumferential, perimeter **705**. The raised geometry **711** forms a toothed geometry **712** that extends about the entirety, or a portion, of the perimeter **705** and radially outward away from the center of the glenosphere component **700**.

[0108] The toothed geometry **712** of the glenosphere component **700** is adapted to be received by, and engage with, the toothed geometry **212** of the baseplate **200** and is configured to complement the toothed geometry of the **212** of the baseplate. The depth and length provided between each tooth of the toothed geometry **712**, the number of teeth, and the angle at which the teeth are disposed on the perimeter **705** of the raised geometry **711** can vary, and skilled artisans will be able to select an appropriate configuration according to a particular embodiment based on various considerations, including the size of the baseplate and glenoid component.

[0109] The raised geometry **711** also has a convex, or substantially convex, portion **703** that extends proximally from the perimeter **705** and away from the base **707**. The raised geometry **711** of the glenosphere component is adapted to be received by, and engage with, the geometry of the recess **210** of the baseplate **200**. While portion **703** of the raised geometry **711** has been described and illustrated as being convex or substantially convex, the recess **710** has been described as being circumferential in configuration, and the raised geometry has been described as circumferential in configuration, any suitable geometry can be used, and skilled artisans will be able to select an appropriate geometry for a particular embodiment based on various considerations, including the geometry of the recess of the baseplate and/or the recess of the glenosphere component, among others. Examples of suitable geometries include flat, convex, and varying surfaces, among others. Examples of configurations for the recess, raised geometry, and/or outer perimeter that are considered suitable include a recess, raised geometry, and/or outer perimeter that partially extend around the circumference of the glenosphere component.

[0110] In addition, while the glenosphere component 700, or portions thereof, have been illustrated as circular, or substantially circular, other shapes are considered suitable, and skilled artisans will be able to select an appropriate shape for a glenosphere component according to a particular embodiment based on various considerations, including the anatomy of the patient, among others. Examples of shapes considered suitable include oval, oblong, rectangular and any shape determined suitable for a particular application.

[0111] The raised geometry 711 defines tapered cavity 714 and opening 715 of the tapered cavity 714 on portion 703. The tapered cavity 714 extends distally into the raised geometry 711 from opening 715 defined by raised geometry 711, defines a taper from the opening 715 to its base 717, and is adapted to receive the tapered trunnion 214 of the baseplate 200 (e.g., Morse taper) to attach the glenosphere component 700 to the baseplate 200. The tapered cavity 714 has a configuration complimentary to the tapered trunnion 214 of the baseplate 200.

[0112] The glenosphere component 700 defines an anatomically shaped, generally convex, articulating surface 716 on the lateral side 708 configured to articulate with a humerosocket component (e.g., 800). The articulating surface 716 defines a first opening 719 to bore 718, which extends through the glenosphere component 700 to tapered cavity 714 allowing for the glenosphere component 700 to be attached to the baseplate 200 by retaining screw 720. The retaining screw 720 can be attached to, or provided separately from, the glenosphere component 700, and acts as a secondary means of attachment between the glenosphere component 700 and the baseplate 200. The proximal end of the retaining screw 720 is adapted to receive a tool used to assist with installing the baseplate 200 and/or glenosphere component 700 into the scapula of a patient.

[0113] The articulating surface 716 is generally smooth, uninterrupted, and convex, or substantially convex. The geometry of the articulating surface 716 can be provided in a variety of different radii and sizes, such as with varying diameters and varying heights to enable a surgeon to select an optimal glenosphere component 700 needed for the anatomy of a particular patient.

[0114] The toothed geometry 212 of the baseplate 200 and the toothed geometry 712 of the glenosphere component 700 are adapted to receive one another, and include a tolerance sufficient to allow the components to properly engage with one another, as illustrated in FIG. 28, which advantageously provides a combination of components (e.g., glenoid implant) that prevents rotation of the glenosphere component 700 when attached to the baseplate 200. In addition, the configuration of the toothed geometry 212 of the baseplate 200 and/or the toothed geometry 711 of the glenosphere component 700 advantageously provides for rotationally variable positioning of the glenosphere component 700 within the baseplate 200 when the two components are attached to one another.

[0115] The glenosphere component 700 is formed of a ceramic, metal, or other suitable biocompatible material. Exemplary materials considered suitable for the glenosphere component 700 include titanium (Ti), and cobalt alloys (e.g., cobalt-chromium (CoCr), cobalt-chromium-molybdenum (CoCrMo)). The glenosphere component 700 is configured to be attached to the baseplate 200 using an impact instrument that impacts the tapered trunnion 214 of the baseplate 200 into the tapered cavity 714 of the glenosphere component 700 creating a cold weld between the two components.

[0116] FIGS. 29 through 32 illustrate an exemplary humerosocket component 800 comprising a medial side 802, lateral side 804, first annular portion 805, projection 806, protuberances 808, and articulating face 810. The projection 806 is positioned on the lateral side 804 of the humerosocket component 800, extends distally from the distal end 807 of the first annular portion 805, and comprises a second annular portion 812, recess 814, ridges 816, tapered portion 818, and base 820. The second annular portion 812 extends distally from the distal end 807 of the first annular portion 805 to recess 814, which extends radially inward towards the center of the projection 806. Distal to the recess 814, and proximal to the tapered portion 818, are ridges 816 that extend outwardly away from the center of the projection 806 and are configured to provide a friction fit between the humerosocket component 800 and the humeral component 400 when the humerosocket component 800 is attached to the humeral component 400. Tapered portion 818 is tapered from its proximal end to its distal end and extends from the last ridge, or near the last ridge, distally to the base 820 of the projection 806, which is perpendicular or substantially perpendicular to the first annular portion 812. The protuberances 808 extend outwardly from the second annular portion 812, away from the center of the projection 806, and are configured to be received by the recessed notches 422 of the humeral component 400.

[0117] The humerosocket component 800 defines a concave articulating face 810 on medial side 802 that articulates with the articulating surface 716 of the glenosphere component 700. The articulating face 716 extends from the medial side 802 into the humerosocket component 800 towards the lateral side 804. The articulating face 810 can be provided in a variety of different radii and sizes, such as with varying diameters and varying heights to enable a surgeon to select an optimal humerosocket component 800 needed for the anatomy of a particular patient. The articulating surface 810 is generally smooth, uninterrupted, and concave, or substantially concave.

[0118] The humerosocket component 800 is formed of ceramic, polyethylene or any other suitable biocompatible material. An exemplary material considered suitable for the humerosocket component 800 is UHMWPE. While the humerosocket component 800 has been described as formed of a ceramic, polyethylene, or other suitable biocompatible material, other materials are considered suitable, and skilled artisans will be able to select an appropriate material according to a particular embodiment based on various considerations, such as the intended use of the humeral head component, among others.

[0119] During use, the humerosocket component 800 is attached to the humeral component 400 with, or without, the use of cement to provide a humeral implant. Protuberances 808 advantageously provide for substantially limiting, and/or substantially eliminating, the rotation of the humerosocket component 800 when attached to the humeral component 400, as illustrated in FIGS. 21 through 23. Furthermore, while particular geometries have been described and illustrated with respect to the projection 806, other geometries can be used, and skilled artisans will be able to select an appropriate geometry for a particular embodiment based on various considerations, including the geometry of the internal cavity of the humeral component. Examples of geometries considered suitable for the lateral side, projection, and/or protuberances

include geometries that mirror or substantially mirror the geometry of the internal cavity and recessed notches of the humeral component.

[0120] The baseplate 200 advantageously provides for attaching either of the glenoid component 300 or glenosphere component 700 and humeral component 400 advantageously provides for attaching either of the humeral head component 500 or humerosocket component 800. The convertibility of the components allows for transitioning between a TSA and RSA system without requiring the replacement of the humeral component 400 and/or baseplate 200, providing for a procedure that is less complex, and requires less time to complete.

[0121] It is considered advantageous to provide a glenoid component 300 and/or glenosphere component 700 formed of metal (e.g., CoCrMo) to articulate with a humeral head component 500 and/or humerosocket component 800 formed of a plastic (e.g., UHMWPE) to provide improved wear properties of the components. For example, the inventor has determined that providing a humeral head component (e.g., humeral head component 500) formed of plastic (e.g., UHMWPE) is particularly well suited for use in a TSA or hemi shoulder arthroplasty at least because this material provides improved wear properties and reduces the likelihood of metal components coming into contact with other metal components. In addition, it is considered advantageous to provide a glenoid component 300 formed of metal (e.g., CoCrMo) to articulate with any form of humeral head component (e.g., natural, prosthetic) to provide improved wear properties of the components.

[0122] While various configurations have been described with respect to baseplate 200, glenoid component 300, and glenosphere component 700, it should be understood that other configurations are considered suitable. For example, inverting the configurations described with respect to baseplate 200, glenoid component 300, and glenosphere component 700 is considered suitable (e.g., the baseplate having a raised geometry with an outer circumferential perimeter forming a toothed geometry and the glenoid and/or glenosphere component having a circumferential wall forming a toothed geometry).

[0123] FIGS. 33 through 35 illustrate another exemplary glenosphere component 1000 similar to glenosphere component 700, except as described below, attached to another exemplary baseplate 900, similar to baseplate 200, except as described below. Baseplate 900 comprises a body 902, shaft 903, and threaded component 904. The body 902 is generally circular and comprises a medial side 906, lateral side 908, and defines a tapered cavity 910. The tapered cavity 910 extends from the lateral side 908 of the body 902 and into the body 902 towards the medial side 906, into a portion of shaft 903, and forms a taper from the lateral side 908 to the base 909 of the tapered cavity 910. The base 909 of the tapered cavity 910 defines a hexagonal recess 911, which is adapted to receive a tool used to assist with installing the baseplate 900 into the scapula of a patient. The shaft 903 has a diameter greater than the diameter of the threaded component 904 to assist with attachment of the component to the scapula of a patient.

[0124] The glenosphere component 1000 comprises medial side 1002, lateral side 1004, recess 1006, and tapered trunnion 1008. The glenoid component 1000 defines a circumferential, or substantially circumferential, recess 1006 on the medial side 1002 of the glenosphere component 1000 that extends into the glenosphere component 1000 from the proxi-

mal end 1003 of the glenosphere component 1000, and surrounds the tapered trunnion 1008. The tapered trunnion 1008 extends from the base 1007 of the recess 1006 and tapers as it extends away from the base 1007 of the recess 1006. The tapered trunnion 1008 is adapted to be received by and attach to the tapered cavity 910 of the baseplate 900 and includes ridge 1009 that is disposed along the length of the tapered trunnion 1008 and extends radially away from tapered trunnion 1008. It should be noted that ridge 1009 could be omitted.

[0125] While a particular geometry for recess 1006 and glenosphere component 1000 have been described and illustrated, skilled artisans will be able to select an appropriate geometry for the recess of the glenosphere component and glenosphere component according to a particular embodiment based on various considerations, including the geometry of the baseplate, among others. Examples of shapes considered suitable include oval, oblong, rectangular and any shape determined suitable for a particular application. An example of a configuration for recess 1006 considered suitable includes a recess that extends around a portion of the circumference of the glenosphere component 1000.

[0126] The baseplate 900 and the glenosphere component 1000 are attached to one another through a cold weld between the components when the tapered trunnion 1008 of the glenosphere 1000 is received by, and attached to, the tapered cavity 910 of the baseplate 900. Optionally, a bore (not illustrated) can be provided to allow a length of a retaining screw to be inserted through the bore and provide a secondary means for attaching the glenosphere component 1000 to the baseplate 900.

[0127] The outside diameter 912 of the body 902 of the baseplate is configured to be smaller than the outside diameter 1010 of the recess 1006 so that bone grafting material can be inserted into the recess 1006 and assist with attaching the component to the scapula of a patient. This is considered advantageous because it allows for the bone grafting material that has been inserted within recess 1006 to become incorporated into the host bone, which aids in the stability of the components when implanted. Current RSA glenosphere components utilize a flat medial side which does not allow for additional bone grafting material to be incorporated into the component, such as glenosphere 1000. The depth of recess 1006 can vary, and skilled artisans will be able to select an appropriate depth according to a particular embodiment based on various considerations, including the configuration of the baseplate, among others.

[0128] A portion, or the entirety of, the medial side 906 of the baseplate 900, medial side 1002 of the glenosphere component 1000, and recess 1006 of the glenosphere component 1000 can be covered and/or filled with an osteoinductive material 1014. The osteoinductive material 1014 can comprise a highly porous biomaterial useful as a bone substitute and/or cell and tissue receptive material for promotion of bone in-growth to aid in the osseointegration of baseplate 900 and/or glenosphere component 1000 within the scapula of a patient and aids in the stability of the baseplate 900 and glenosphere component 1000. Such a material may be formed from a reticulated vitreous carbon foam substrate that is infiltrated and coated with a biocompatible metal (e.g., tantalum.) Osteoinductive material can be incorporated into any of the herein described components. For example, the humeral component (e.g., 400), humerosocket component (e.g., 800), humeral head component (e.g., 500), glenoid component

(e.g., **300**), glenosphere component (e.g., **700**), and baseplate (e.g., **200**) can all include osteoinductive material, and/or an osteoinductive surface (e.g., hydroxyapatite coating, trabecular metal), on a portion of, or the entirety of, the medial and/or lateral side of the component.

[0129] Glenosphere **1000** can alternatively be utilized as a humeral head component for a TSA or HSA. Current TSA and HSA humeral head replacements utilize a flat medial side which does not allow for additional bone grafting material to be incorporated into the component, such as glenosphere **1000**. Skilled artisans will be able to select an appropriate use for the glenosphere component, and an appropriate means of attachment between the glenosphere and a humeral component, as described herein (e.g., tapered trunnion, tapered cavity), for integrating bone grafting material within the recess **1006** to provide for additional stability of the components.

[0130] In an alternative, glenosphere **1000** can be utilized as a glenoid implant without use of baseplate **900**. For example, the tapered trunnion **1008** of the glenosphere component **1000** can be directly attached to a previously prepared scapula of a patient (e.g., a scapula having a tapered cavity with a recess slightly smaller than the size of the tapered trunnion of the glenosphere component), with, or without, the use of cement. In this example, the medial side **1002** of the glenosphere, and/or tapered trunnion **1008**, can include a textured surface (e.g., one or more protuberances, bumps, grooves, roughened surface), and/or an osteoinductive surface, in any configuration and/or combination to enhance the attachment, and/or bone ingrowth, of the glenosphere **1000** to the scapula of a patient. Furthermore, recess **1006** can be utilized to increase stability of the attachment to the scapula of a patient (e.g., by preparing the scapula to have portions thereof received within recess **1006**), or recess **1006** can be omitted. In another example, the tapered trunnion **1008** can include one or more annular ribs, protuberances, and/or raised surfaces (not shown) to increase stability of the component when attached to a previously prepared scapula of a patient. In a further example, the tapered trunnion **1008** can be replaced by another means of attachment (e.g., threaded component, attachment peg).

[0131] FIGS. **36** and **37** illustrate another exemplary glenoid component **1100**, which is similar to glenoid component **300**, except as described below, attached to baseplate **900**. The glenoid component **1100** comprises a medial side **1102**, lateral side **1104**, body **1105**, tapered trunnion **1106**, recess **1107** and an articulating surface **1108**. The body **1105** of the glenoid component **1100** has a generally oval shape with a first end **1110** having a radius that is smaller than the radius of an opposing second end **1112**. Body **1105** defines circumferential, or substantially circumferential, recess **1107** which extends from the medial side **1102** towards the lateral side **1104**. The tapered trunnion **1106** extends from the base **1109** of recess **1107** towards the medial side **1102**, tapers from base **1009** to its proximal end, and is adapted to be received and attached to the tapered cavity **910** of the baseplate **900**. Recess **1107** is adapted to receive a portion, or the entirety of, the body **902** of the baseplate **900**. The medial side **906** of the baseplate and medial side **1102** of the glenoid component **1100** can comprise an osteoinductive surface and/or material to assist with glenoid fixation.

[0132] In an alternative, glenoid component **1100** can be utilized as a glenoid implant without use of baseplate **900**. For example, the tapered trunnion **1106** of the glenoid component **1100** can be directly attached to a previously prepared scapula

of a patient (e.g., a scapula having a tapered cavity with a recess slightly smaller than the size of the tapered trunnion of the glenoid component), with, or without, the use of cement. In this example, the medial side **1102** of the glenoid component, and/or tapered trunnion **1106**, can include a textured surface (e.g., one or more protuberances, bumps, grooves, roughened surface), and/or an osteoinductive surface, in any configuration and/or combination to enhance the attachment, and/or bone ingrowth, of the glenoid component **1100** to the scapula of a patient. Furthermore, recess **1107** can be utilized to increase stability of the attachment to the scapula of a patient (e.g., by preparing the scapula to have portions thereof received within recess **1107**), or recess **1107** can be omitted. In another example, the tapered trunnion **1106** can include one or more annular ribs, protuberances, and/or raised surfaces (not shown) to increase stability of the component when attached to a previously prepared scapula of a patient. In a further example, the tapered trunnion **1106** can be replaced by another means of attachment (e.g., threaded component, attachment peg).

[0133] The distance from about the outside diameter of the medial side **906** of the body **902** to about the center of concavity of the articulating surface **1108** can vary according to the desired result of the procedure being conducted, and the amount of the baseplate received within the recess of the glenoid component can also vary, and skilled artisans will be able to select an appropriate distance according to a particular embodiment based on various considerations, such as the anatomy of the patient. Exemplary distances considered suitable between about the center of the concavity of the articulating surface **1108** and about the outer diameter of the medial side **906** of the body **902** include distances in the range from about 1 mm to about 6 mm. Additional exemplary distances considered suitable between about the center of the concavity of the articulating surface **1108** and about the outer diameter of the medial side **906** of the body **902** include distances in the range from about 2 mm to about 5 mm. Further exemplary distances considered suitable between about the center of the concavity of the articulating surface **1108** and about the outer diameter of the medial side **906** of the body **902** include distances in the range from about 2.5 mm to about 4.5 mm. Additional exemplary distances considered suitable between about the center of the concavity of the articulating surface **1108** and about the outer diameter of the medial side **906** of the body **902** include distances about 3 mm. The distances described above can alternatively be calculated from the about the proximal end of the glenoid component **1100**, or the medial side **906** of the outside diameter **912** of the body **902** when the glenoid component **1100** is attached to the baseplate **900**, to about the center of the concavity of the articulating surface **1108**. In addition, the distances described above can apply to the glenoid implant illustrated in FIGS. **12** through **14**.

[0134] FIGS. **38** through **40** illustrate glenosphere component **1000** attached to another exemplary baseplate **1200**, which is similar to baseplate **1100**, except as described below. The baseplate **1200** comprises a medial side **1202**, lateral side **1204**, body **1206**, bores **1208**, internal cavity **1210**, and threaded component **1212**. The body **1206** comprises an oblong configuration having a first end **1214** and an opposably positioned second end **1216**. The distance between the first end **1214** and the second end **1216** is smaller than the outside diameter **1010** of the recess **1006** of the glenosphere component **1000** so that bone grafting material can be

inserted into the recess **1006** and attach to the scapula of a patient. The medial side **906** of the baseplate and medial side **1202** of the glenoid component **1200** can comprise an osteoinductive surface and/or material to assist with glenoid fixation.

[0135] It is considered advantageous to provide an oblong configuration to maximize the amount of bone grafting material that can be incorporated into the recess **1006** of the glenosphere component and increase the surface area of the osteoinductive material that can contact the prepared scapula of a patient allowing for increased stability of the components. Furthermore, the oblong configuration advantageously simplifies the procedure associated with attaching the baseplate **1100** to a prepared scapula of a patient.

[0136] FIGS. **41** through **43** illustrate another exemplary glenosphere component **1300**, which is similar to glenosphere component **1000**, except as described below, attached to another exemplary baseplate **1400**, which is similar to baseplate **1200**, except as described below.

[0137] The glenosphere component **1300** comprises a medial side **1302**, lateral side **1304**, recess **1306**, and tapered cavity **1308**. The medial side **1302** defines recess **1306** and further defines tapered cavity **1308** within recess **1306**. As an alternative to the tapered trunnion **1008** of glenosphere **1000**, glenosphere **1300** defines a tapered cavity **1308** defined by the body of the glenosphere **1300**, which extends from ridge **1310** into glenosphere component **1300**, and is adapted to receive the tapered trunnion **1408** of the baseplate. Alternatively, ridge **1310** can be omitted and tapered cavity **1308** can extend from the base of the recess **1306** into the glenosphere component **1300**.

[0138] Glenosphere **1300** can alternatively be utilized as a humeral head component for a TSA or HSA. Current TSA and HSA humeral head replacements utilize a flat medial side which does not provide recess **1306** allowing for additional bone grafting material to be utilized. Skilled artisans will be able to select an appropriate use for the glenosphere component, and an appropriate means of attachment between the glenosphere and a humeral component, as described herein (e.g., tapered trunnion, tapered cavity), for integrating bone grafting material within the recess **1306** to provide for additional stability of the components.

[0139] Baseplate **1400** comprises a body **1402**, bores **1404**, tapered trunnion **1406**, and threaded component **1408**. As an alternative to the tapered cavity **910** in baseplate **900** and internal cavity **1205** in baseplate **1200**, the body **1402** of baseplate **1400** defines a tapered trunnion **1406** that extends distally from the lateral side **1403** of the body **1402**. The tapered trunnion **1406** defines a hexagonal recess **1410** used to attach the baseplate **1400** to a prepared scapula of a patient. The tapered trunnion **1408** is adapted to be received by, and attached to, the tapered cavity **1308** of the glenosphere component **1300**.

[0140] Each of the baseplates, glenoid components, and/or glenosphere components described herein can include a tapered trunnion, tapered cavity, and/or bore to attached the component to a baseplate. For example, a baseplate can comprise a tapered trunnion and an associated glenoid component or glenosphere component can comprise a tapered cavity. In another example, a baseplate can comprise a tapered cavity and an associated glenoid component or glenosphere component can comprise a tapered trunnion. In another example, the baseplate can comprise a tapered cavity and an associated glenoid component or glenosphere component can comprise

a tapered cavity and a connector can be used to attached the components, as described below.

[0141] FIGS. **44** through **47** illustrate an exemplary connector **1500** comprising a proximal end **1502**, distal end **1504**, first portion **1506**, second portion **1508**, and lip **1510**. The first portion **1506** extends from the proximal end **1502** to the lip **1510** and is tapered from the lip **1510** to the proximal end **1502**. The second portion **1508** extends from the distal end **1504** to the lip **1510** and is tapered from the lip **1510** to the distal end **1504**. The outside diameter of the second portion **1508** at lip **1510** is larger than the outside diameter of the first portion **1506** at lip **1510**. While the outside diameter of the second portion **1508** at lip **1510** is described and illustrated as larger than the outside diameter of the first portion **1506** at lip **1510**, the outside diameter of the first portion and second portion can be equal and the lip can define an outside diameter larger than the outside diameter of the first and second portion. Skilled artisans will be able to select an appropriate size for the first portion, second portion, and/or lip according to a particular embodiment based on various considerations, including the configuration of the tapered cavity for which the connector will be used.

[0142] The connector **1500** advantageously provides a double trunnion connector, which can be used to attach one or more of the various components described herein, or other various components (e.g., off the shelf components). For example, the connector **1500** can be used to attach glenosphere component **1300** having tapered cavity **1308** to baseplate **900** having tapered cavity **910**. In another example, the connector **1400** can be used to attach a glenoid component having a tapered cavity to a baseplate **900** having a tapered cavity **910**. The connector **1500** is adapted to be received by and create a cold weld with the tapered cavity of the component that will be attached thereto.

[0143] FIGS. **48** through **50** illustrate another exemplary glenosphere component **1600** attached to baseplate **900** using connector **1500**. Glenosphere **1600** is similar to glenosphere **1000**, except as described below. Glenosphere **1600** comprises medial side **1602**, lateral side **1604**, recess **1606**, circumferential, or substantially circumferential, wall **1607**, tapered cavity **1608**, and articulating surface **1610**. The body **1605** of the glenosphere component **1600** defines recess **1606**, which extends from medial side **1602** towards the lateral side **1604**, and is adapted to receive a portion of, or the entirety of, body **902** of the baseplate **900**. Wall **1607** is configured to surround a portion of, or the entirety of, body **902** of the baseplate **900**. Tapered cavity **1608** is defined by body **1605** within recess **1606**, extends from the base of recess **1606** towards lateral side **1604**, and is adapted to receive a portion of the connector **1500**. The opposing end of the connector is received by the tapered cavity **910** of the baseplate **900**. Connector **1500** advantageously provides for use with an off the shelf component, such as an off the shelf glenosphere component.

[0144] FIGS. **51** through **53** illustrate another exemplary glenosphere component **1700** attached to another exemplary baseplate **1800** using an exemplary adaptor **1900**. Glenosphere component **1700**, illustrated in FIGS. **59** through **62**, comprises medial side **1702**, lateral side **1704**, body **1703**, recess **1706**, articulating surface **1708**, bore **1710**, and retaining screw **1712**. The body **1703** of the glenosphere component **1700** defines a circumferential, or substantially circumferential, recess that extends from the medial side **1702** towards the lateral side **1704**, and is adapted to receive a

portion of, or the entirety of, adaptor **1900**. Bore **1710** extends through glenosphere component **1700** from the lateral side **1704** to the medial side **1702** and allows for securing the retaining screw **1712** to the baseplate **1800**.

[0145] Baseplate **1800**, illustrated in FIGS. **67** through **70**, is similar to baseplate **900**, except that threads **1802** are provided along the entire, or substantially the entirety of, shaft **1803** of the threaded component **1804**. The threads extend from the medial side **1806** of the body **1808** to the proximal end of the threaded component **1804**. This configuration advantageously assists with securing the baseplate **1800** to the prepared scapula of a patient.

[0146] Adaptor **1900**, illustrated in FIGS. **54** through **58**, comprises medial side **1902**, lateral side **1904**, recess **1906**, tapered trunnion **1908**, and bore **1910**. The body **1903** of the adaptor **1900** is generally circular and has an outside diameter that is adapted to be received by the recess **1706** of the glenosphere component **1700**. The body **1903** of the adaptor **1900** defines a circumferential, or substantially circumferential, recess **1706** that extends distally into the body of the adaptor **1900** from the medial side **1902** towards the lateral side **1904**, and is adapted to receive a portion of, or the entirety of, the body **1808** of the baseplate **1800**. Tapered trunnion **1908** is defined by the body **1903**, extends proximally from the base of the recess **1906**, defines a taper from the base of the recess **1906** to its proximal end, and is adapted to be received by the tapered cavity **1806** of the baseplate **1800**. Bore **1910** extends through body **1903** of the adaptor **1900** and tapered trunnion **1908**, and is adapted to receive a length of retaining screw **1712**. Adaptor **1900** advantageously provides for use with an off the shelf component, such as an off the shelf glenosphere component.

[0147] While the adaptor **1900**, or portions thereof, have been illustrated as circular, or substantially circular, other shapes are considered suitable, and skilled artisans will be able to select an appropriate shape for an adaptor according to a particular embodiment based on various considerations, including the geometry of the baseplate, among others. Examples of shapes considered suitable include oval, oblong, rectangular and any shape determined suitable for a particular application.

[0148] The foregoing disclosure includes the best mode of the inventor for practicing the invention. It is apparent, however, that those skilled in the relevant art will recognize variations of the invention that are not described herein. While the invention is defined by the appended claims, the invention is not limited to the literal meaning of the claims, but also includes these variations.

What is claimed is:

1. A glenoid implant for use in a total shoulder arthroplasty, the glenoid implant comprising:

a baseplate comprising a first medial side, a first lateral side, a circumferential wall, a base, and a tapered trunnion;

the circumferential wall and the base cooperatively defining a recess extending from the first lateral side towards the first medial side;

the tapered trunnion disposed on the base and extending from the base towards the first lateral side;

a glenoid component comprising a body and a raised geometry having an outer circumferential perimeter;

the body having a second medial side and a second lateral side defining an articulating surface;

the raised geometry disposed on the second medial side of the body and extending away from the second lateral side, the raised geometry forming a second toothed geometry on the outer circumferential perimeter and defining a tapered cavity extending into the raised geometry;

wherein the second toothed geometry has a configuration complimentary to the first toothed geometry and is adapted to be received by the first toothed geometry; and wherein the raised geometry of the glenoid component is adapted to be received by the recess of the baseplate.

2. The glenoid implant of claim 1, wherein the base of the baseplate is concave or substantially concave.

3. The glenoid implant of claim 2, wherein the raised geometry defines a convex or substantially convex portion extending from the outer circumferential perimeter and away from the second lateral side; and

wherein the raised geometry of the glenoid component has a configuration complimentary to the recess of the baseplate.

4. The glenoid implant of claim 1, wherein the articulating surface is concave or substantially concave.

5. The glenoid implant of claim 1, wherein the medial side of the baseplate is convex or substantially convex.

6. The glenoid implant of claim 1, wherein the medial side of the baseplate is textured.

7. The glenoid implant of claim 1, wherein the baseplate is formed of a metal.

8. The glenoid implant of claim 1, wherein the glenoid component is formed of a metal.

9. The glenoid implant of claim 1, wherein the baseplate further comprises one or more bores extending through the body of the baseplate from the first medial side to the first lateral side.

10. The glenoid implant of claim 1, wherein the baseplate further comprises a threaded component attached to the first medial side of the baseplate and extending away from the first lateral side.

11. A glenoid implant for use in a total shoulder arthroplasty, the glenoid implant comprising:

a baseplate comprising a first medial side, a first lateral side, a circumferential wall, a concave or substantially concave base, and a tapered trunnion;

the circumferential wall and the base cooperatively defining a recess extending from the first lateral side towards the first medial side;

the tapered trunnion disposed on the base and extending from the base towards the first lateral side;

a glenoid component comprising a body and a raised geometry having an outer circumferential perimeter;

the body having a second medial side and a second lateral side defining a concave or substantially concave articulating surface;

the raised geometry disposed on the second medial side of the body and extending away from the second lateral side, the raised geometry forming a second toothed geometry on the outer circumferential perimeter, a convex or substantially convex portion extending from the outer circumferential perimeter away from the second lateral side, and defining a tapered cavity extending into the raised geometry;

wherein the second toothed geometry has a configuration complimentary to the first toothed geometry and is adapted to be received by the first toothed geometry; and

wherein the raised geometry of the glenoid component has a configuration complimentary to the recess of the baseplate and is adapted to be received by the recess of the baseplate.

12. The glenoid implant of claim **11**, wherein the medial side of the baseplate is convex or substantially convex.

13. The glenoid implant of claim **11**, wherein the medial side of the baseplate is textured.

14. The glenoid implant of claim **11**, wherein the baseplate is formed of a metal.

15. The glenoid implant of claim **11**, wherein the glenoid component is formed of a metal.

16. The glenoid implant of claim **11**, wherein the baseplate further comprises one or more bores extending through the body of the baseplate from the first medial side to the first lateral side.

17. The glenoid implant of claim **11**, wherein the baseplate further comprises a threaded component attached to the first medial side of the baseplate and extending away from the first lateral side.

18. A glenoid implant for use in a total shoulder arthroplasty, the glenoid implant comprising:

a baseplate comprising a first body and a threaded component;

the first body having a first medial side, a first lateral side, a circumferential wall, a concave or substantially concave base, and a tapered trunnion;

the circumferential wall and the base cooperatively defining a recess extending from the first lateral side towards the first medial side;

the tapered trunnion disposed on the base and extending from the base towards the first lateral side;

the threaded component attached to the first medial side of the first body and extending away from the first lateral side;

a glenoid component comprising a second body and a raised geometry having an outer circumferential perimeter;

the second body having a second medial side and a second lateral side defining a concave or substantially concave articulating surface;

the raised geometry disposed on the second medial side of the second body and extending away from the second lateral side, the raised geometry forming a second toothed geometry on the outer circumferential perimeter, a convex or substantially convex portion extending from the outer circumferential perimeter away from the second lateral side, and defining a tapered cavity extending into the raised geometry;

wherein the second toothed geometry has a configuration complimentary to the first toothed geometry and is adapted to be received by the first toothed geometry; and wherein the raised geometry of the glenoid component has a configuration complimentary to the recess of the baseplate and is adapted to be received by the recess of the baseplate.

19. The glenoid implant of claim **18**, wherein the medial side of the baseplate is textured.

20. The glenoid implant of claim **18**, wherein the glenoid component is formed of a metal.

* * * * *