

(19)
(12)

(KR)
(A)

(51) 。 Int. Cl. ⁷
B26B 27/00

(11)
(43)

2002 - 0006434
2002 01 19

(21) 10 - 2001 - 0040613
(22) 2001 07 07

(30)	09/613,316	2000 07 11	(US)
------	------------	------------	------

(71)

3600

(72)

60047,	6
60060,	21286

(74)

• •

(54)

가 . - , 가 (pusher) ,
 , 가
 , 가

1

1

, 가 , .

2 1 .

3 2 (end) .

4 2 4 - 4 , 2 .

5 2 5 - 5 , 2 .

6 2 6 - 6 , 2 .

7 1 .

8 7 .

9 7 9 - 9 , 7 .

10 7 10 - 10 , 7 .

11 1 (pusher) .

12 1 .

13 1 - (blade) .

14 13 - .

< >

10: 12:

14: 18: 1

20: 22: (pusher element)

26: 28: (slot)

30: 2 32:

34: (base) 36:

38: (web) 40: (boss)

42,56: 44:

46: (recessed) 48,68:

50: 64:

66: 가 72:

82: 86:

84: (rib) 96:

98:

, , 가 (strapping)
, , (compact),
(sever)

, (blade) 가 가 -

, 가 (cumbersome). 가

가

가 -

가 ,

, 가,
(ergonomically) 가

, 가

, (severing) 가
(edge)가

가

가 , 가 , 가

가 , , ,

(slot) 가 (upstanding web) (rib) (base)
(foundation)

(biasing) 가 (pusher)

가

가

< >

1 가 , 가 10 (10)
가 (10)
(14) 16 가 (12) 1 (18) (12) (14)
(14) (10)가 - 1 (14) 24 (biased).
(20) (12)

가 (22) (10) (28)

26 (12) (26) (I) (26) (26) 2 (30) (28)

(20) (14) (22) (22)

(26) (28) (22) (26) (22) 2 (26) (28) (22)

(30) (26) (22) (22) (30) (22)

1 (26) (22) (22) (14) 1 (2

(U - D) (14) (I - O) (22) (26)

0) (32) (26)

2 6 (12) (12) (34) (34) (rib) (36) (36) (38)

(26) (28) (38) (40) (14)

(14) 가 (38) (36) (18) (34)

(12) (38) (14) (42) (38) (10)가 (26) 가

recessed socket) (26) (28) (44) (34) (46)

(20) 가 (48) (46)

(adjustment) (38)

7 10 (14) 가 (8) 가

(14) (54) (56)

(50,52) (bifurcated) (18) (58,60)

(54) 1 (50,52) (58,60) 가

(58,60) (40) (14) 16

(12) 가 (14) (50,52) (I - O)

(62) (14) (12)

가 (38) (64)
 (14) (12) (14) 가 , 가
 (66) (12) (38) (12)
 (10)가 (36) (50,52) (70) (72) (14) 가
 (68) , (12) (38) , 70
 , (14) 가
 .

7 9 , (14) , 8 9 가 , (7
 (74,76) (skirt) , (78)
 4,76) , 1 (22)가 (74,76)
 . 7 ,
 , 80 (22)가 24 (14) 가
 (14) (82,82)가
 (22) 2 (30,30) 1 (18)
 가 , 2 (30,30) (30,30) (22) ,
 (74,76) .

11 12 , (22)가 , 1 3, 5, 6
 가 , (34) , (38)
 (38) (28) ,
 (84) (14) (I - O) (I) (12)
 (22)가 (ride) , (34) (86) (84)가
 . , (22) (22)가 (14) 가 , (22)
 . 12 가 , (22) , (90)
 , (88,88) . (88,
 88)가 (84)가 가
 (92) (90) , 24 (14) 가 .
 (94)가

11 가 , (22) (88,88) , (96)
 (98) , (96,98)
 (angular orientation) . , (96) 25 ° ,
 (98) 65 ° , 1 가 , ((22)가 (14) 가 , (96,96) (34) (86)
 (86) (98,98) (34) (26) (88,88)
 (20) (32) (26)
 (98,98) (84) (straddle)
 (34) (34) (86) 가 , (26) (34) (86)

, (22) .

13 14 , (20)가 . ,
 (20) (32) (beveled) (100)
 . 가 , (20) , (fastener)가
 (104) , (nut) (102) (38)
 - (48) . (20) (extent)
 (38) (34) (46)
 . (20) (20) (3
 2) , 가 , (20)가 , (32) , (26)
 , (20) , (28)

가 , 가 , 가
 가 , 가
 가 , 가
 가 .

가 가 . ,

가 , , 가 ,
 가 가 가 .

(57)

1.

(strip) ,

,

(blade) ,

1 , 2
 가
 ,

2.

1

(base)

(upstanding web)

가

3.

2

1

1

가

2

가

2

(pusher element)

4.

1

1

(biasing)

5.

3

2

2

6.

2

2

가

1

(bifurcated)

7.

3

(rib)

1

2

가

(side portion)

8.


1 , 가 가 , 가
 ,
 , .

9.


1 , 가 (fingergrasp portion) ,
 - ,
 , .

10.


4 , ,
 , 2 1 1 ,
 ,
 .

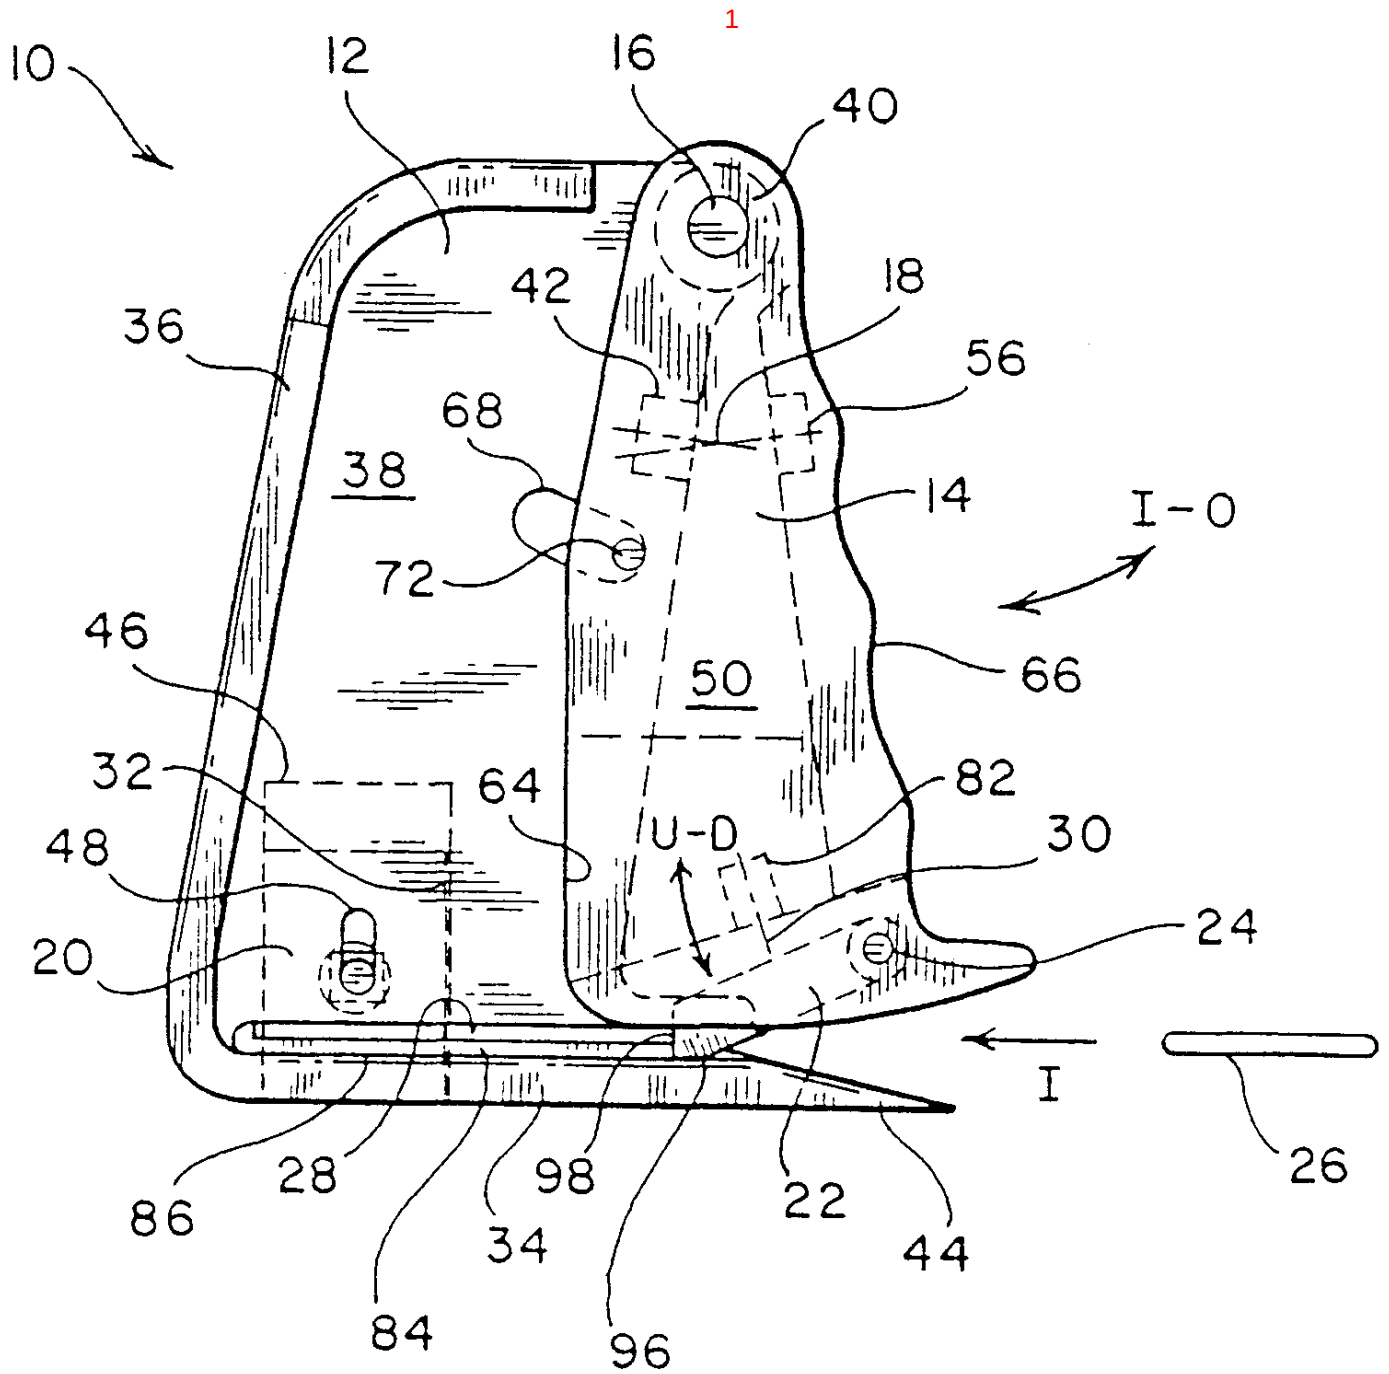


2

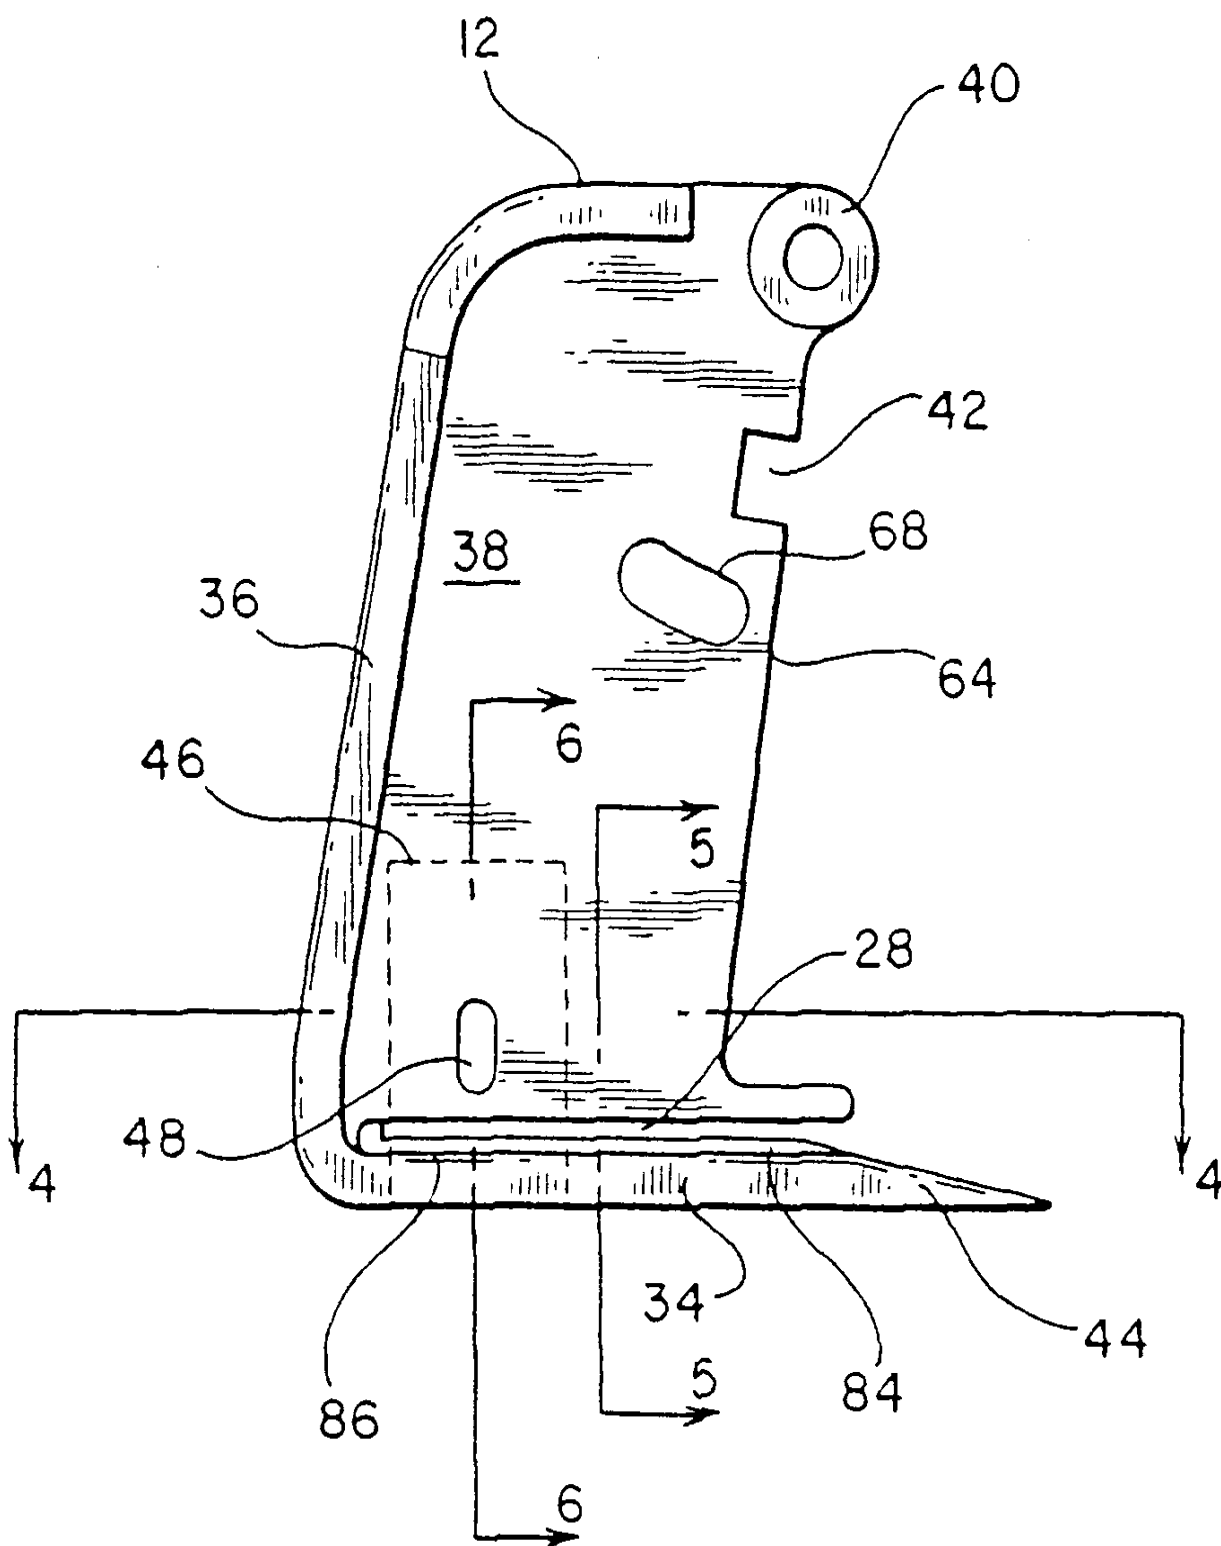


3

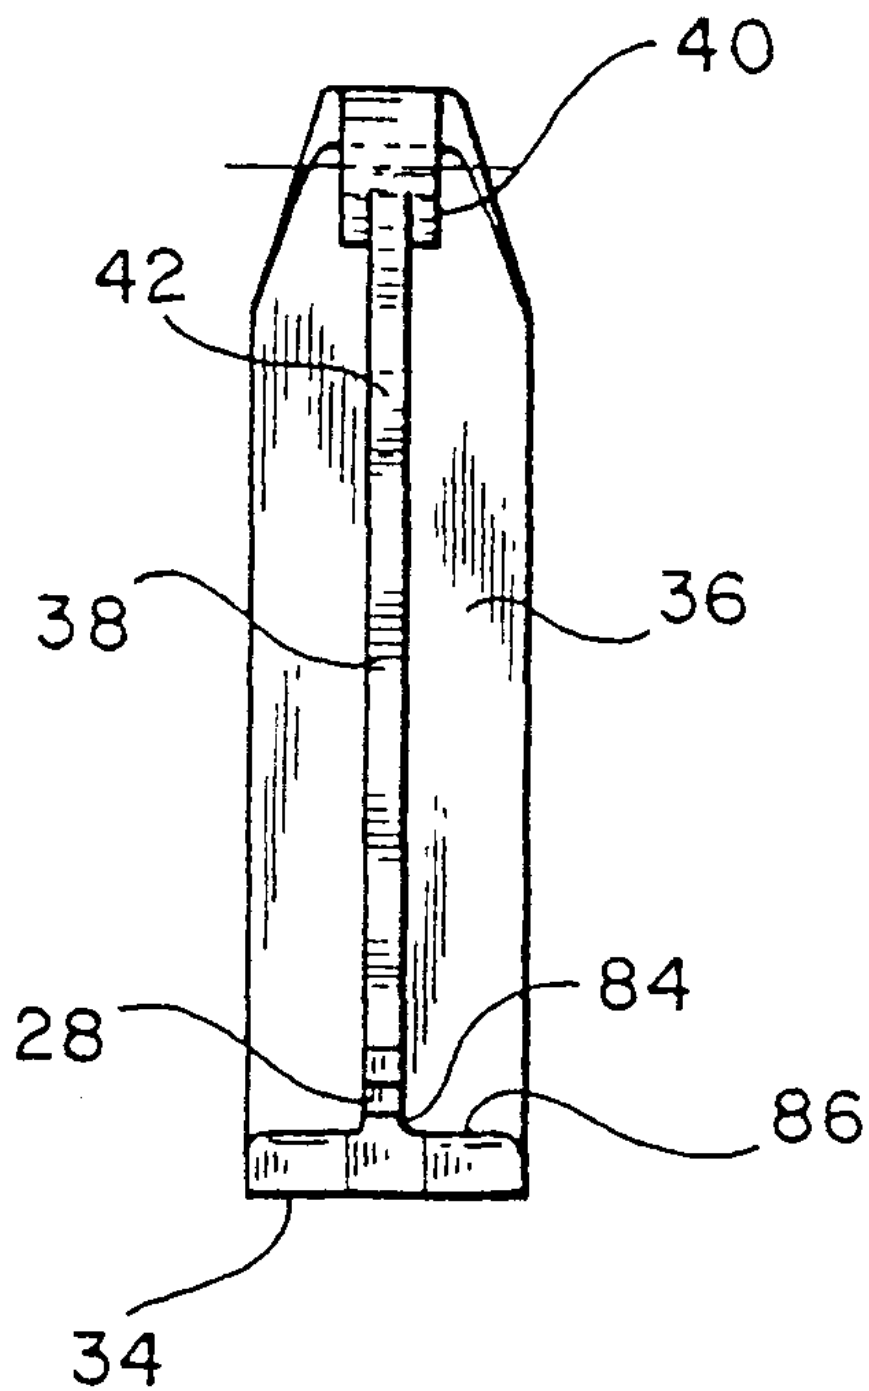


4

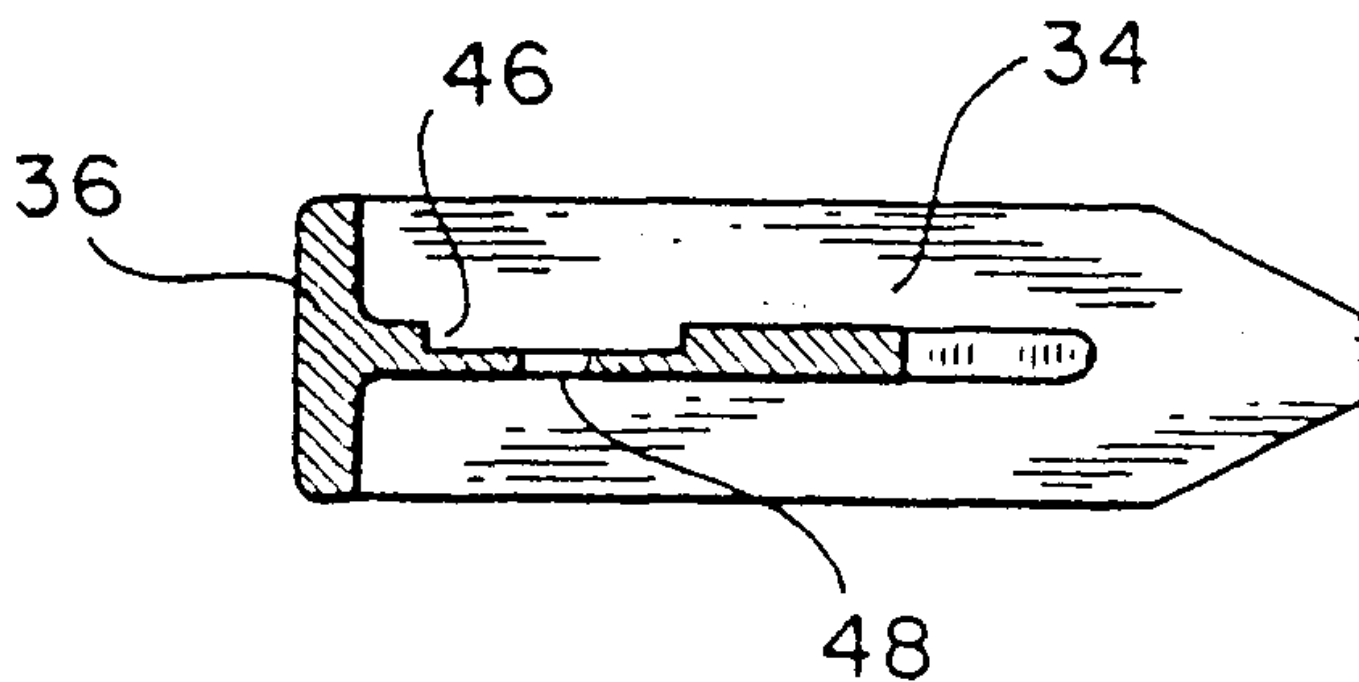


5

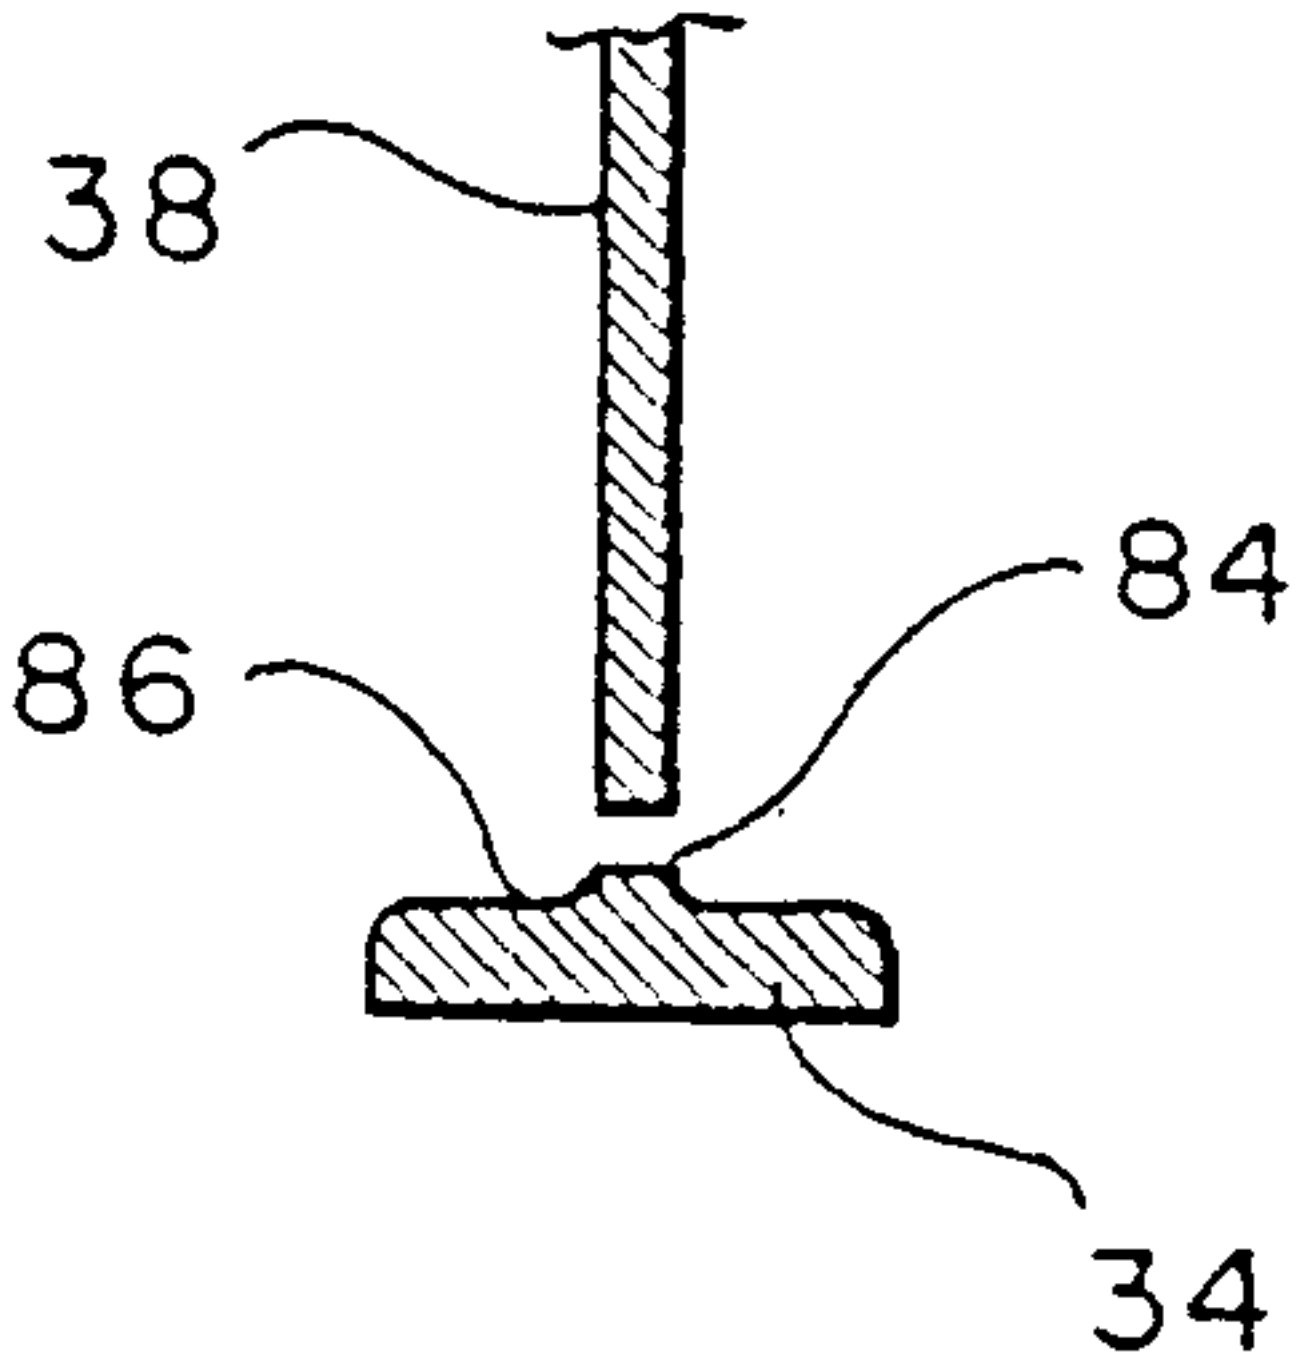


6

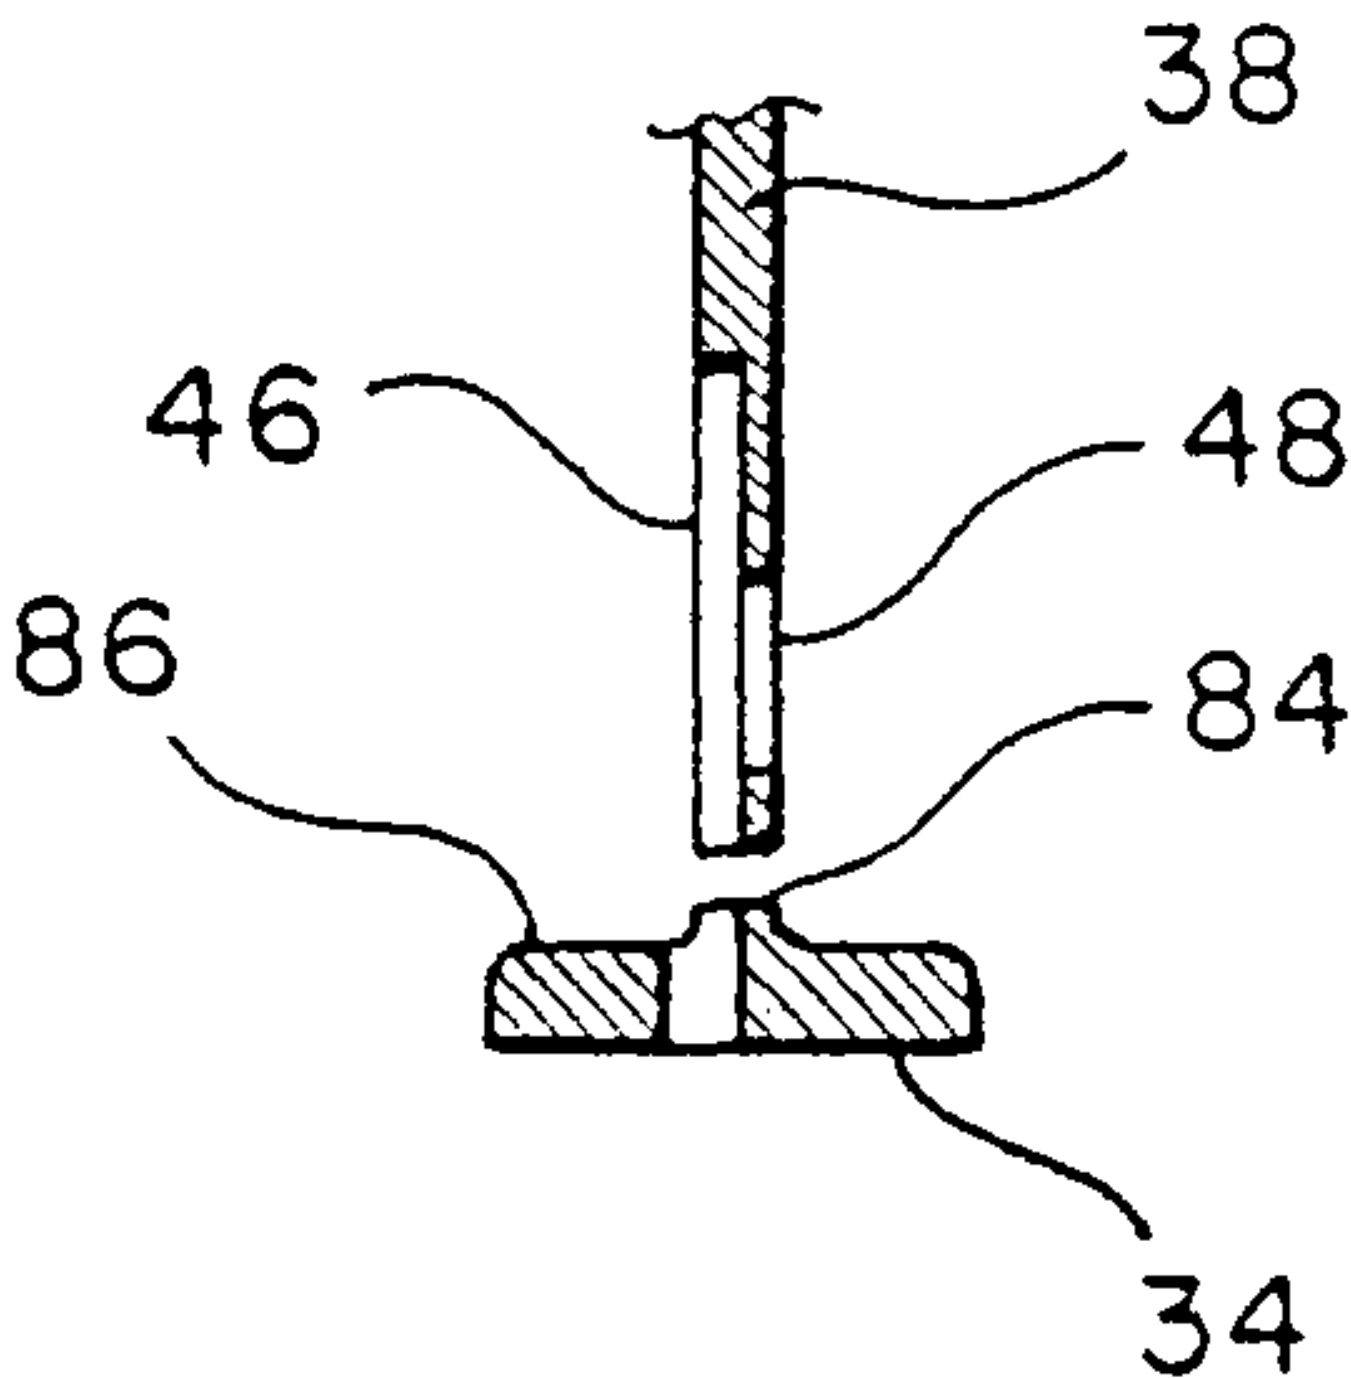


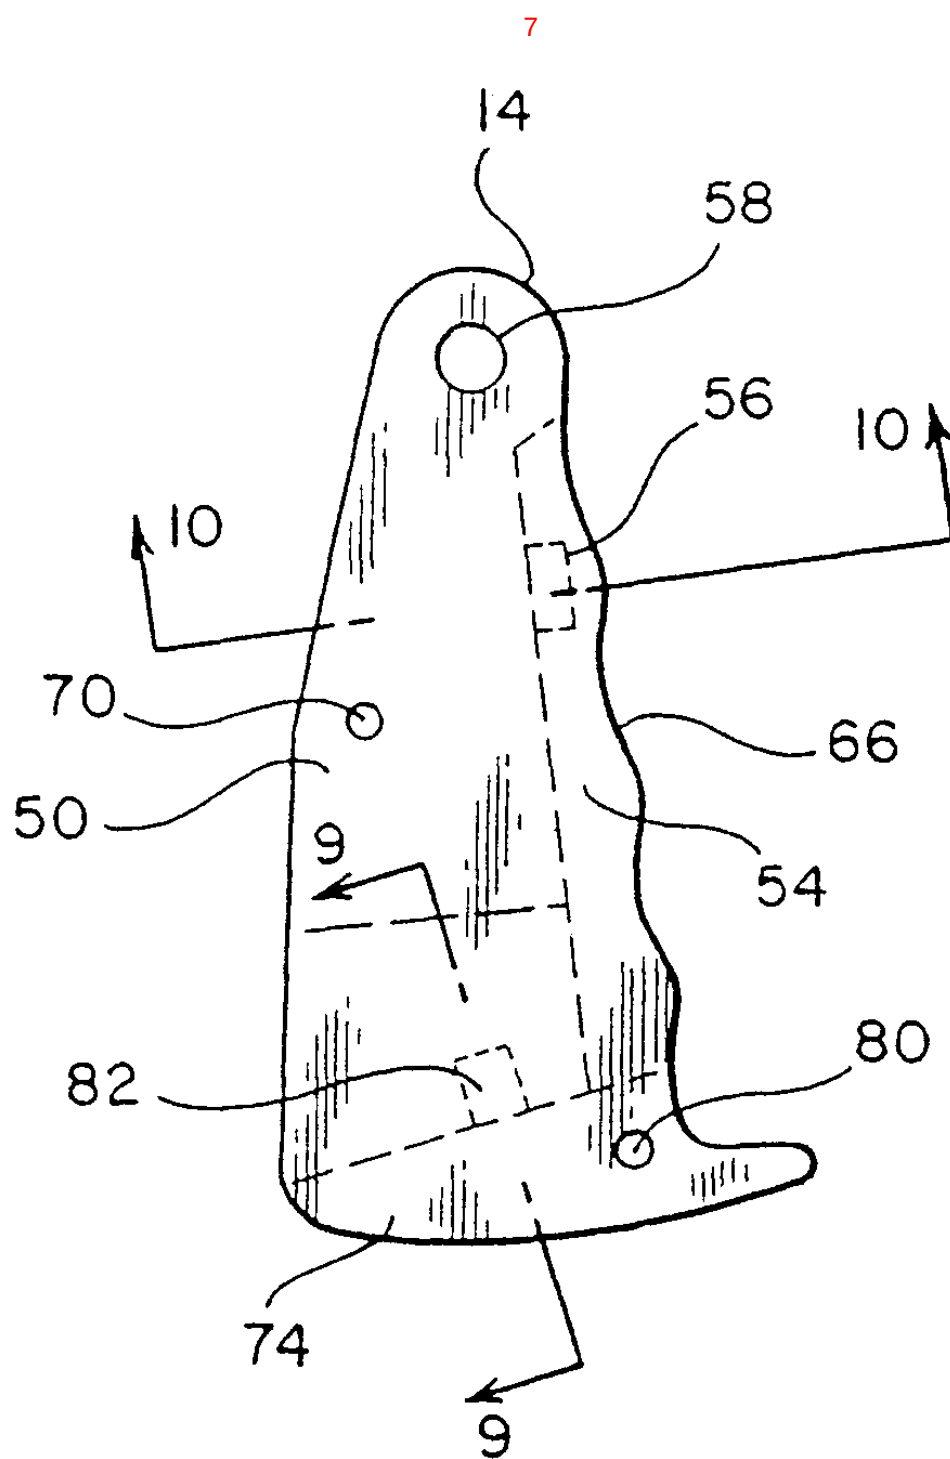


8

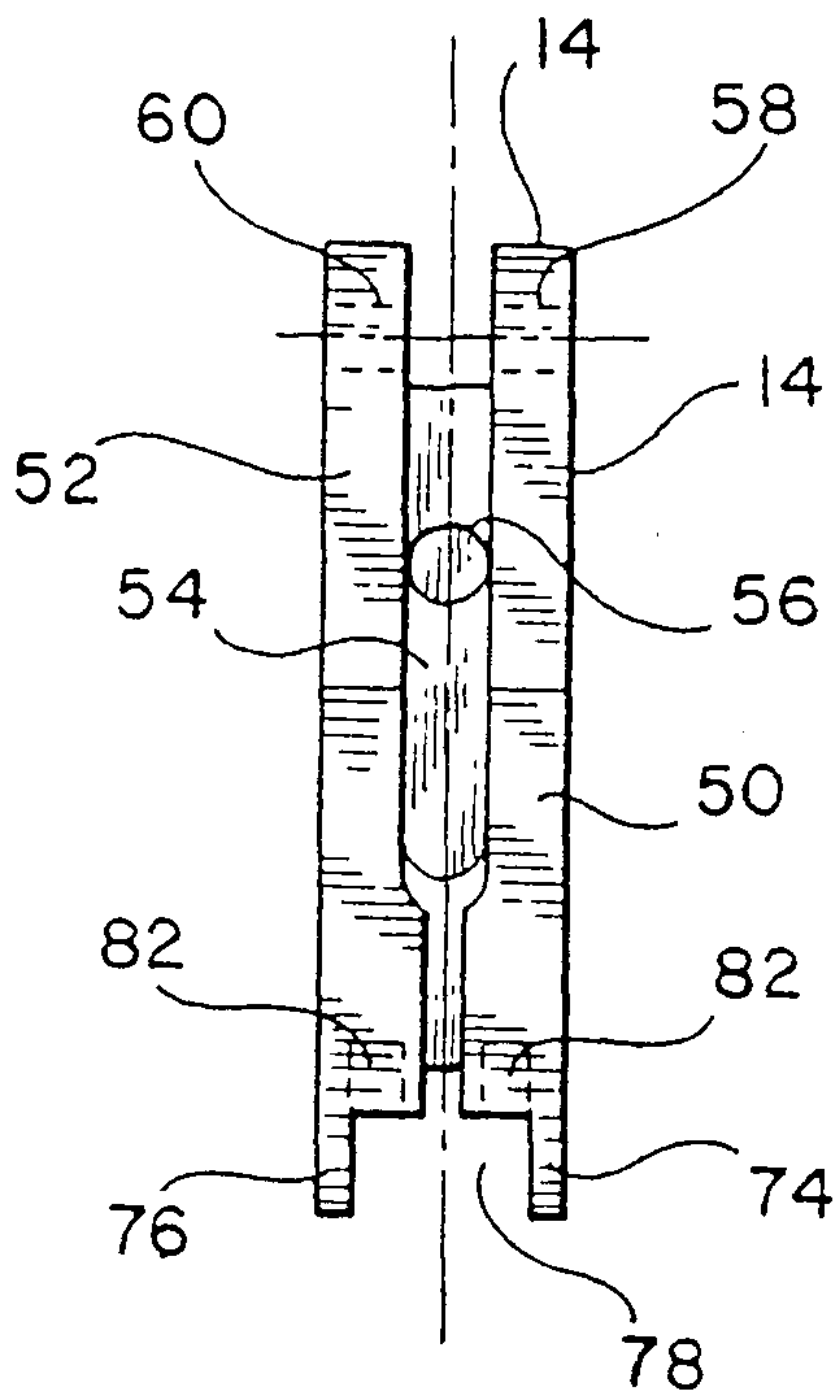


9

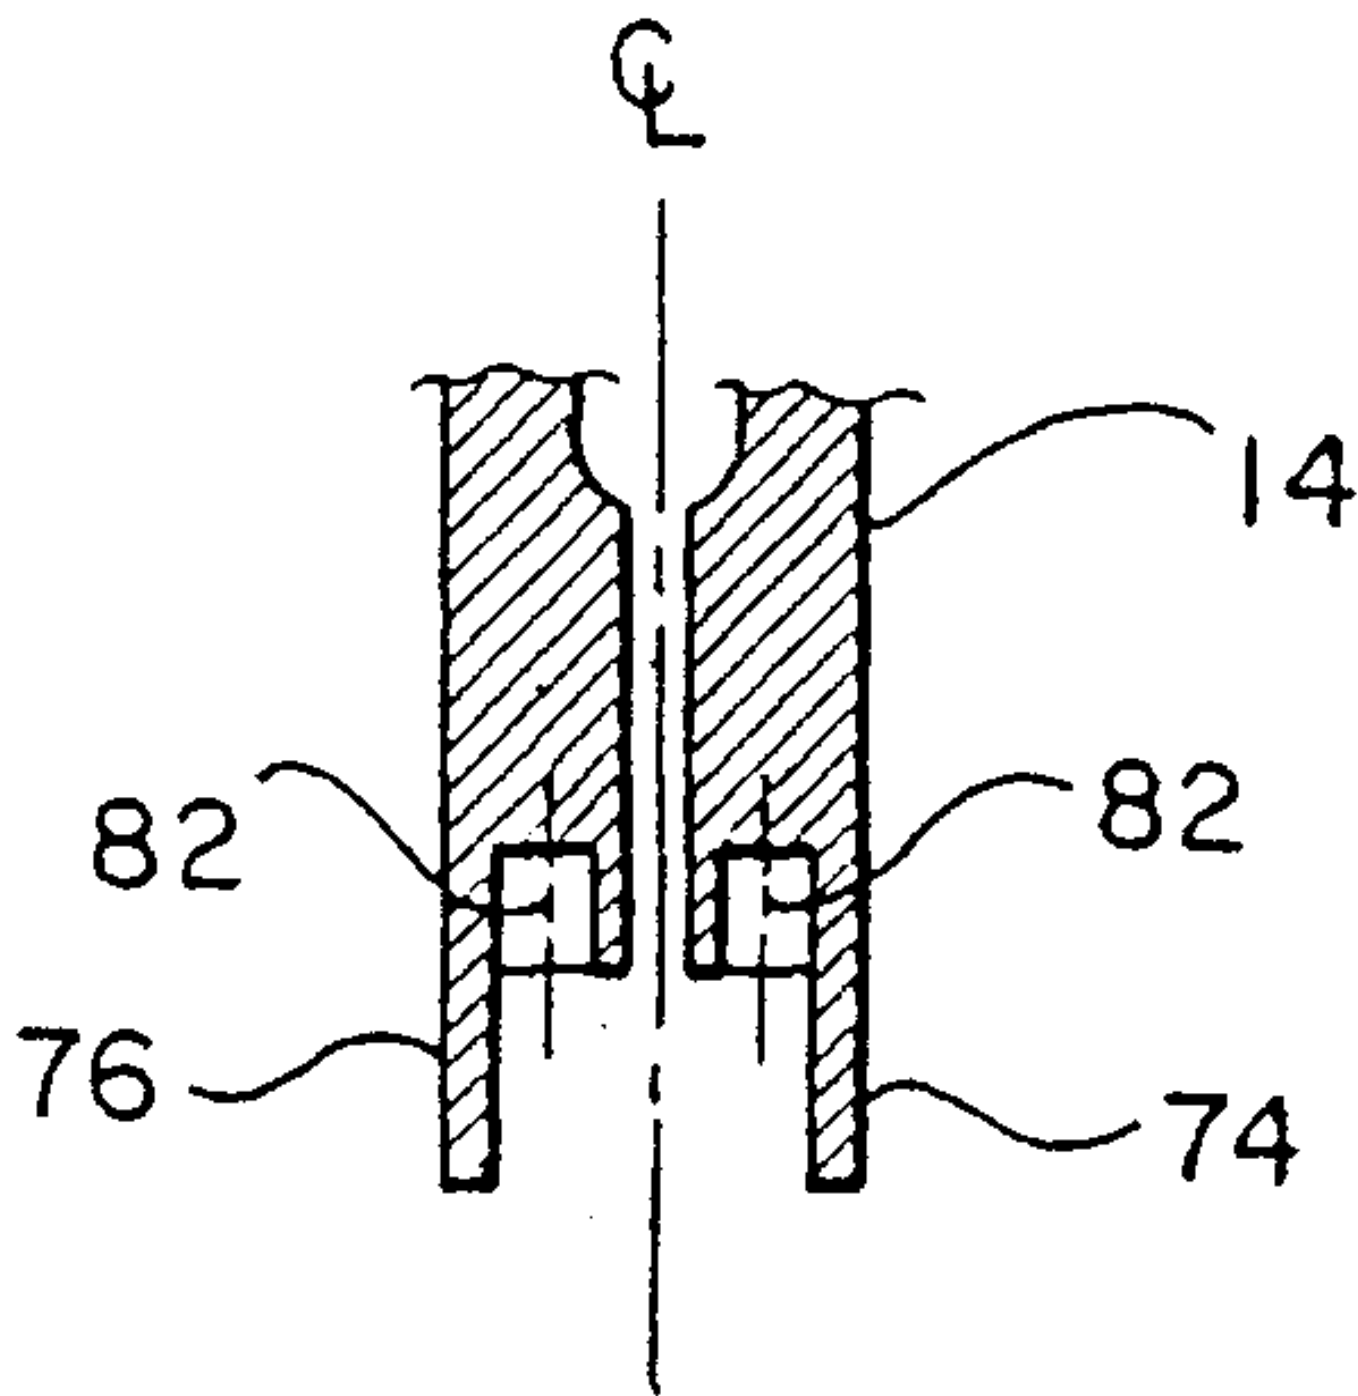


10

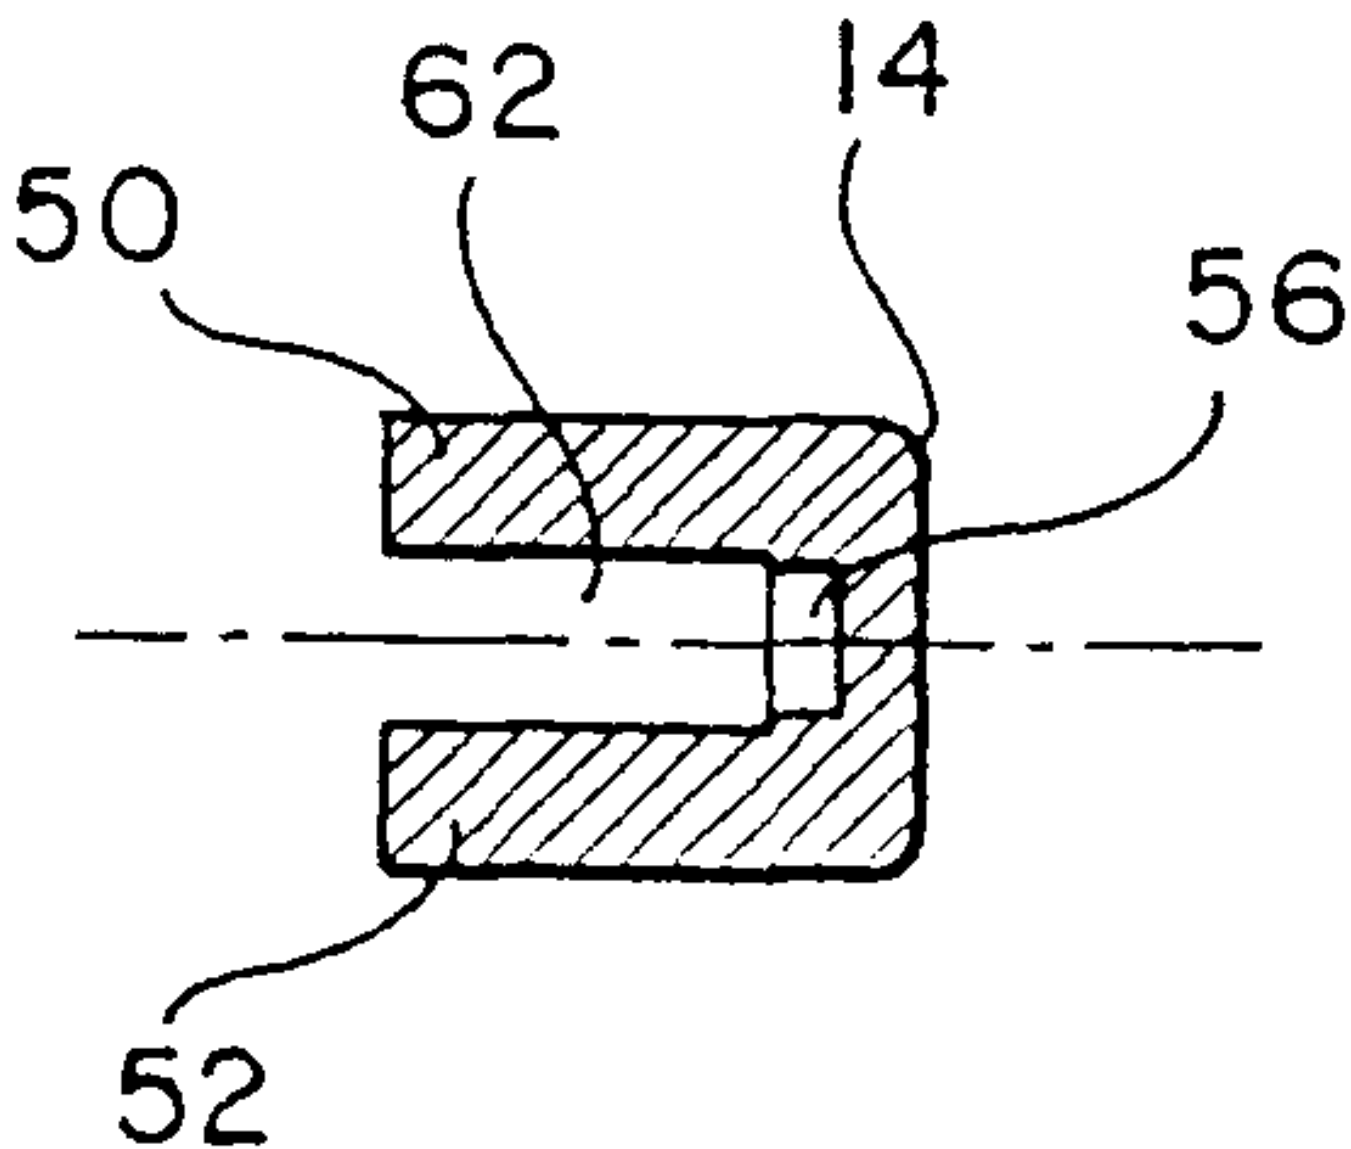


11

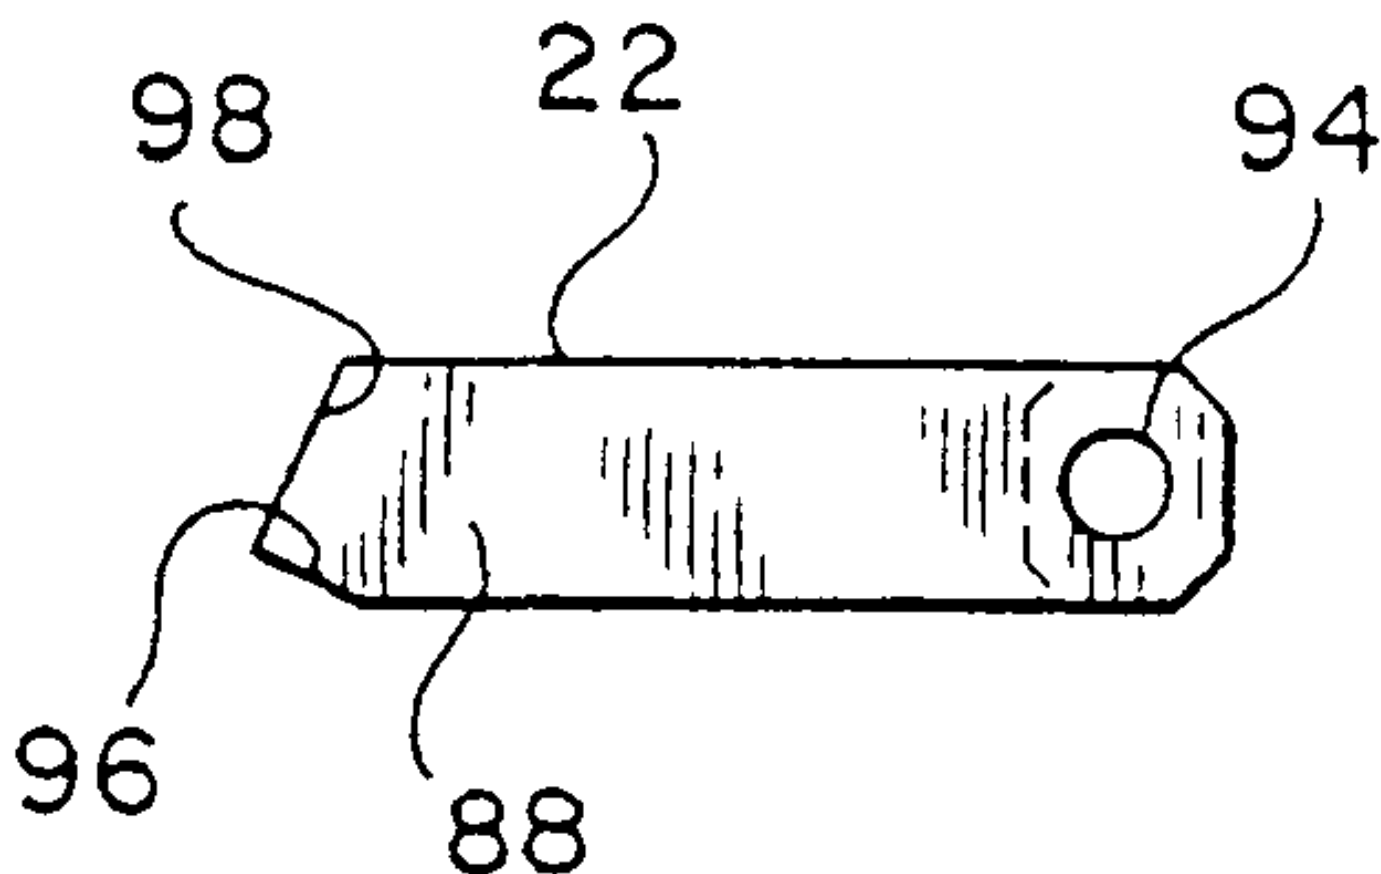

12

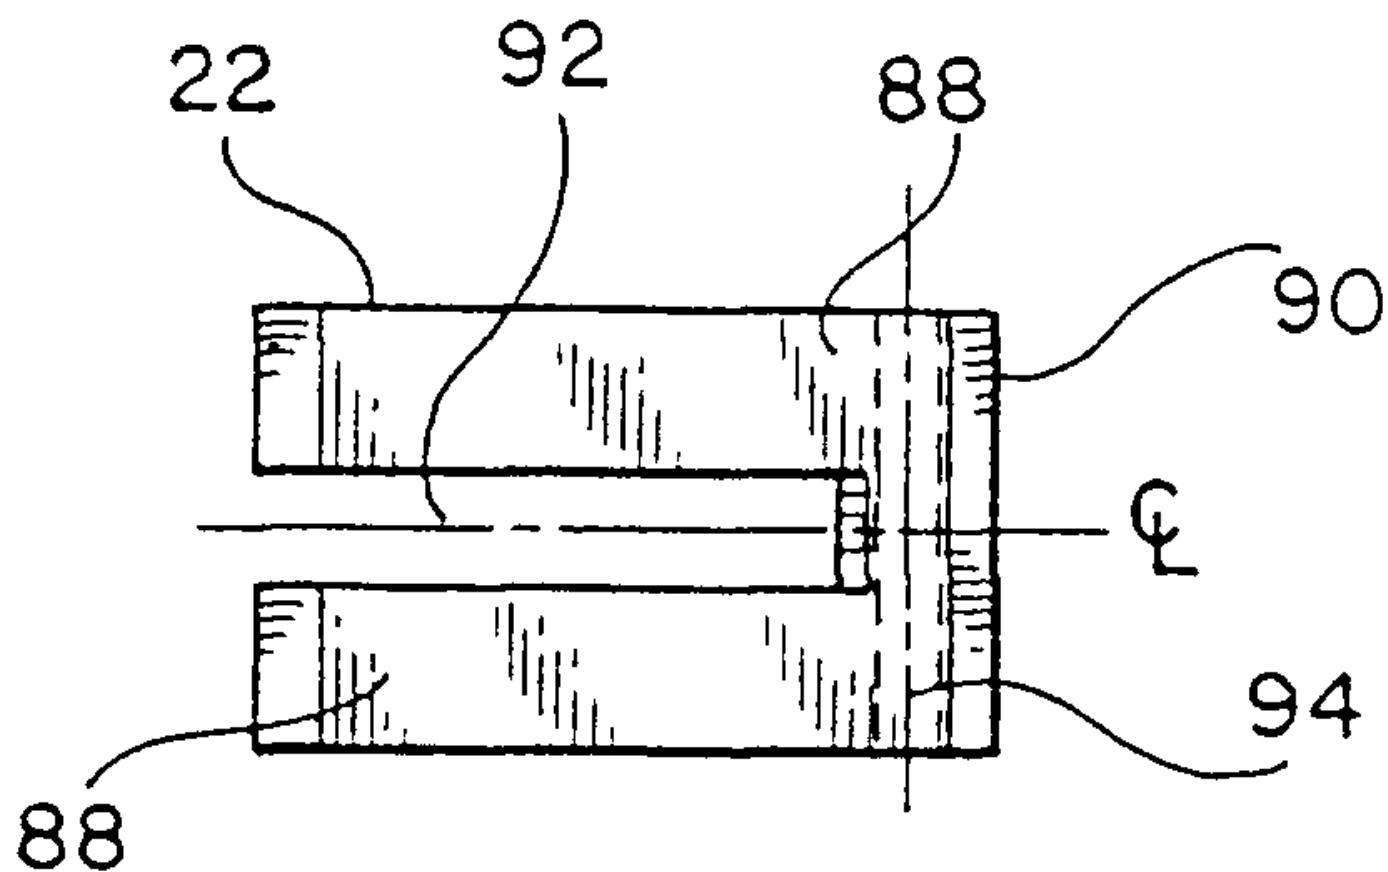

13

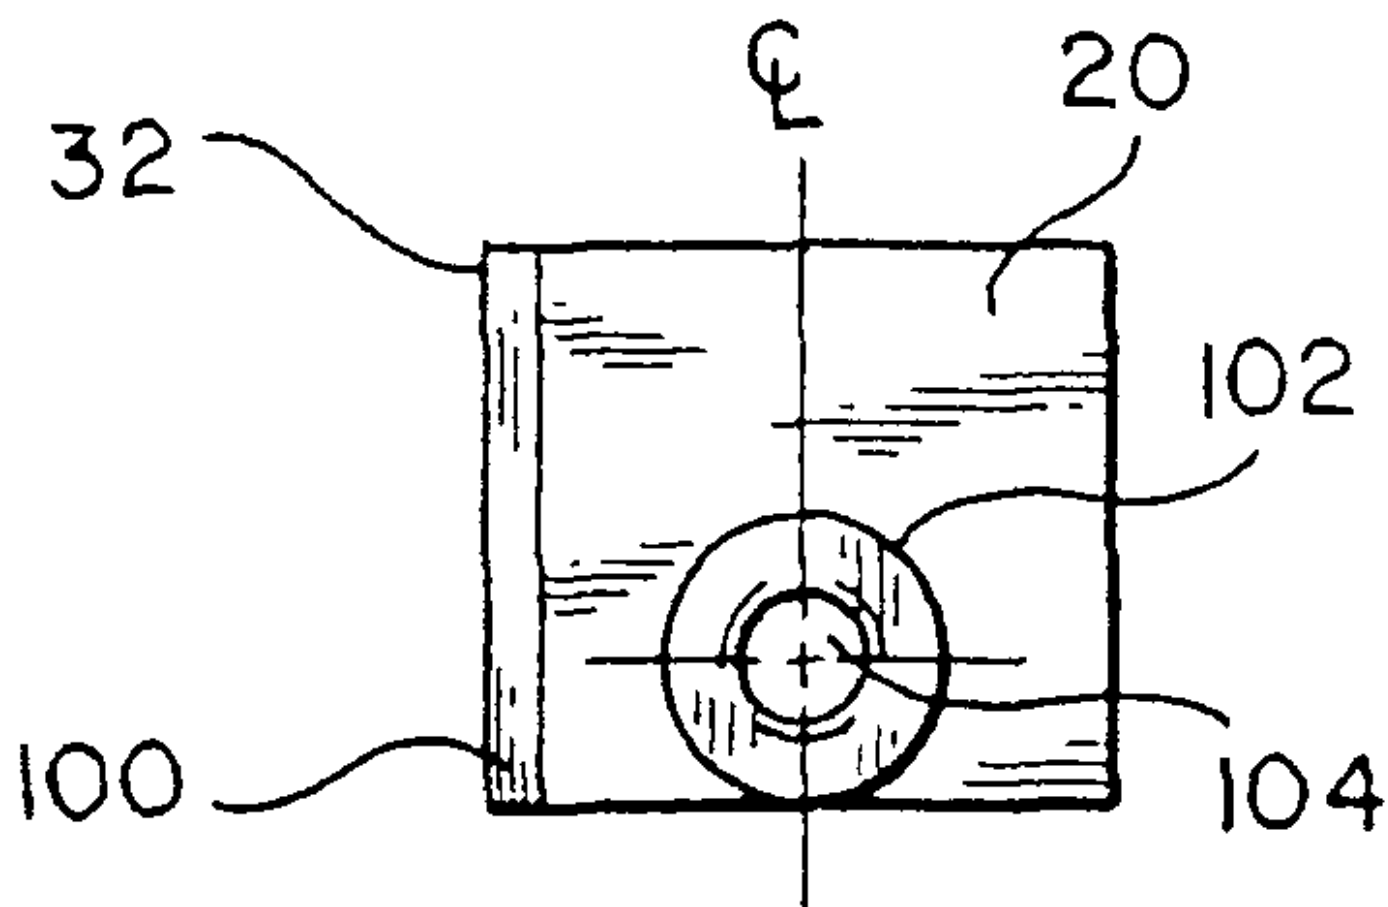

14

