

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 December 2005 (22.12.2005)

PCT

(10) International Publication Number
WO 2005/122236 A2

(51) International Patent Classification⁷: **H01L 21/4763**,
23/34

(21) International Application Number:
PCT/US2005/019439

(22) International Filing Date: 3 June 2005 (03.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/576,767 3 June 2004 (03.06.2004) US
11/144,483 2 June 2005 (02.06.2005) US

(71) Applicant (for all designated States except US): **INTERNATIONAL RECTIFIER CORPORATION** [US/US];
233 Kansas Street, El Segundo, California 90245 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FUCHS, Sven**
[GB/GB]; 62 Ashburton Road, Flat 4, Croydon, Greater
London CR0 6AN (GB). **PAVIER, Mark** [GB/GB]; Anns
Orchard, 65, Crawley Down Road, Felbridge, Sussex
RH19 2PP (GB).

(74) Agents: **WEINER, Samuel H.** et al.; Ostrolenk, Faber,
Gerb & Soffen, LLP, 1180 Avenue of the Americas, New
York, NY 10036 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: SEMICONDUCTOR DEVICE WITH REDUCED CONTACT RESISTANCE

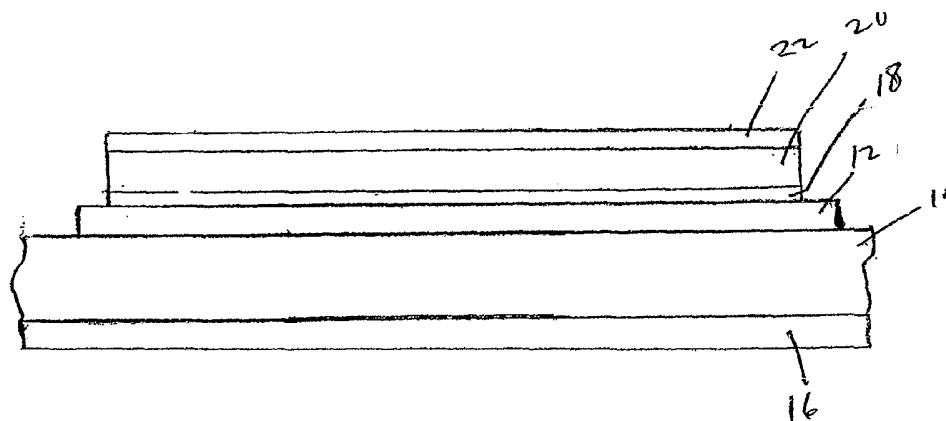

(57) Abstract: A semiconductor device that includes an electrode of one material and a conductive material of lower resistivity formed over the electrode and a process for fabricating the semiconductor device.

SEMICONDUCTOR DEVICE WITH REDUCED CONTACT RESISTANCE

RELATED APPLICATION

[0001] This application is based on and claims the benefit of United States Provisional Application No. 60/576,767, filed on June 3, 2004, entitled Semiconductor Die Contact with Reduced Resistance, to which a claim of priority is hereby made and the disclosure of which is incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] Recent advances in silicon cell technologies have reduced the RA of, for example, a 30V device from 50 to 14 m Ohm-mm². Advances in semiconductor device technology are likely to continue to reduce the RA. If this trend continues an active area of approximately 10 mm² can be expected to have an R_{dson} of 630 μOhm to 240 μOhm depending on the fabrication process.

[0003] If semiconductor device technologies are able to meet these target specifications packaging technologies will have to improve significantly. The introduction of DirectFET® technology has enabled significant reductions in die free package resistance compared to conventional 8 lead SOIC power packages. A DirectFET® package (sold by the assignee of the present application), in simple terms, is a semiconductor package which includes a conductive can, and a semiconductor die disposed inside the can and electrically and mechanically connected to an interior surface of the can. U.S. Patent No. 6,624,522 shows an example of such a package. Using the packaging concept embodied in a DirectFET® package, package resistance, excluding top metal resistance (the resistance associated with the power electrode, e.g. source electrode, of the semiconductor die which is directly connected by solder, conductive epoxy or the like to a conductive pad of a substrate such as a circuit board) is now sub 100 μOhm. However, when one

- 2 -

considers the top metal resistance this is increased somewhat to between 0.2 and 0.7 mOhm depending on the model used. For example, through modeling it has been found that the top metallization can include current paths with up to 0.66 mOhm resistance. It is, therefore, desirable to reduce the resistance of the top metal of the semiconductor die in order to improve the overall resistance of a package such as a DirectFET® package.

SUMMARY OF THE INVENTION

[0004] According to one aspect of the present invention, the electrical resistance of a power electrode of a semiconductor device is reduced by forming a thick, and highly conductive metal such as copper to the top metal. Thus, a device according to the present invention includes a semiconductor die, having an electrode on a surface thereof, the electrode electrically and mechanically connected to the die being comprised of a first conductive material, and a conductive body, the conductive body being comprised of a second material having a resistivity that is lower than that of first conductive material.

[0005] In one embodiment, a barrier layer may be interposed between the conductive body and the electrode.

[0006] Other features and advantages of the present invention will become apparent from the following description of the invention which refers to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Figure 1 illustrates a top plan view of a semiconductor die according to the prior art.

[0008] Figure 2 shows a top plan view of a semiconductor device according to the present invention.

- 3 -

[0009] Figure 3 shows a cross-sectional view of a semiconductor device according to the present invention along line 3-3 and viewed in the direction of the arrows.

[0010] Figure 4 shows a top plan view of a semiconductor device according to the present invention having a passivation layer formed thereon.

[0011] Figure 5 shows a cross-sectional view of the device shown in Figure 4 along line 5-5 and viewed in the direction of the arrows

[0012] Figure 6 show a top perspective view of a package which includes a semiconductor device according to the present invention.

[0013] Figure 7 shows a bottom perspective view of a package which includes a semiconductor device according to the present invention.

[0014] Figure 8 illustrates a cross-sectional view of the package shown in Figure 7 along line 8-8 and viewed in the direction of the arrows.

[0015] Figures 9-17 illustrate the steps in the fabrication of a semiconductor device according to an embodiment of the present invention.

[0016] Figure 18 shows a summary of a process for fabricating a device according to an embodiment of the present invention.

[0017] Figure 19 shows the effect of the thickness of a conductive body on the lowering of the electrical resistivity in a semiconductor device according to the present invention.

[0018] Figure 20A illustrates the top plan view of an example of the present invention, in which the conductive body having the lower resistivity covers the entire surface of the electrodes of a semiconductor device.

[0019] Figure 20B illustrates the top plan view of an example of the present invention, in which the conductive body having the lower resistivity covers not all but a substantial portion of the electrodes of a semiconductor device.

[0020] Figure 20C illustrates the top plan view of an example of the present invention, in which the conductive body having the lower resistivity covers not all

- 4 -

but a lesser portion (less than that shown by Figure 20B) of the entire surface of the electrodes of a semiconductor device.

[0021] Figure 21 graphically illustrates the effect of a pattern of the conductive body on the lowering of electrical resistivity.

DETAILED DESCRIPTION OF THE FIGURES

[0022] Referring to Figure 1, a semiconductor device, such as a power MOSFET, according to the prior art includes a semiconductor body 10, at least one power electrode 12 (i.e. source electrode), and a control electrode (i.e. gate electrode) 14. The device shown in Figure 1 is a vertical conduction type power device, and includes a second power electrode (i.e. drain electrode) (not shown) on a surface of semiconductor body 10 opposite first power electrodes 12.

[0023] The electrodes of a power device are made usually from Al or AlSi.

[0024] Referring next to Figures 2 and 3, a semiconductor device according to the present invention includes semiconductor body 10, at least one first power electrode 12, and a control electrode 14. Referring specifically to Figure 3, a device according to the present invention preferably includes second power electrode 16 disposed opposite on semiconductor body opposite power electrode 12. A semiconductor device according to the preferred embodiment of the present invention is a vertical conduction type power MOSFET in which first power electrode 12 is the source electrode, the second power electrode 16 is the drain electrode and control electrode 14 is the gate electrode. It should be noted that although Figure 2 shows two first power electrodes 12, the present invention does not require two first power electrodes. Furthermore, it should be noted that although the preferred embodiment is a power MOSFET, the present invention is fully applicable to other power semiconductor devices including IGBTs, power diode, triacs, and power bipolar transistors, and the like.

[0025] Referring now specifically to Figure 3, a semiconductor device according to the preferred embodiment of the present invention includes barrier layer 18 which

- 5 -

is disposed on and electrically connected to a first power electrode 12, and conductive body 20 which is disposed on and electrically connected to barrier layer 18. Conductive body 20 is preferably made from copper, but can be made from any material of lower resistivity than that of first power electrode 12. Barrier layer 18 is preferably formed from titanium (Ti) and functions to a) to hinder and ideally prevent contamination of first power electrode 12 by copper through diffusion, and b) ensure good adhesion of copper body 20 to first power electrode 12. In the preferred embodiment of the present invention titanium barrier layer 18 is about 20 nanometers thick. The thickness of copper body 20 can be selected to attain the desired resistivity, and is preferably between 10 μm to 20 μm . It is believed, however, that in a process according to the present invention it may be possible to achieve copper bodies 20 of as thick as 100 μm and possibly thicker. It also should be noted that barrier layer 18 can be eliminated if conductive body 20 is made from such a material that a) adheres well to first power electrode 12, and b) does not diffuse into first power electrode 12, or otherwise harms the functionality of the semiconductor die.

[0026] A device according to the present invention is preferably configured for flip-chip- type mounting. Specifically, copper body 20 on each electrode is provided with solderable body 22 which enables copper body 20 to become electrically and mechanically connectable to a conductive pad directly by a conductive adhesive such as solder, or a conductive epoxy, such as silver loaded epoxy.

[0027] Examples of suitable solderable bodies 22 include a nickel (e.g. about two microns thick) layer over copper body 20 and a lead tin layer (e.g. about one micron thick) formed over the nickel layer, a bimetal stack such as NiAg, or NiAu. In the case of the latter, Au will be deposited as a flash.

[0028] It should be noted that in the preferred embodiment both first power electrodes 12 and control electrode 14 include barrier layer 18, a copper body 20 and optionally a solderable body 22 to facilitate flip-chip mounting.

[0029] Referring next to Figures 4 and 5, a device according to the present invention may include a passivation body 24 (illustrated by slanted lines in Figure 4).

- 6 -

Passivation body 24 includes at least one opening 26 to expose a respective solderable body 22 whereby a conductive adhesive can reach the exposed solderable body at the bottom of each opening in passivation body 24.

[0030] Passivation body 24 is preferably composed of a suitable epoxy that can also function as a solder resist. As a result, solder or any other conductive adhesive is prevented from traveling and shorting a first power electrode 12 to control electrode 14 when the device is flip-chip mounted.

[0031] Referring next to Figures 6, 7 and 8, a device according to the present invention can be disposed within a conductive can 28 or some other conductive clip according to the concepts disclosed in U.S. Patent No. 6,624,522, which is assigned to the assignee of the present invention, and the disclosure of which is incorporated by reference.

[0032] Referring specifically to Figure 8, second power electrode 16 is electrically and mechanically attached to an interior surface of can 28 by a layer of conductive adhesive 30 such as solder or conductive epoxy. Thus, conductive can 28, which is preferably formed from copper or a copper alloy, can serve as an electrical connector for second power electrode 16. Specifically, can 28 includes connection surfaces 32 each for external electrical connection (by a conductive adhesive such as solder, or conductive epoxy) to a respective conductive pad 34 on a substrate 36, such as a circuit board. In addition, control electrode 14 and each first power electrodes 12 (only one illustrated for clarity) is available for direct electrical connection to a respective conductive pad 34 by a conductive adhesive such as solder or conductive epoxy in that each includes a solderable body 22 disposed thereover.

[0033] Alternatively, second power electrode 16 of a device according to the present invention can be electrically and mechanically attached by a conductive adhesive such as solder or conductive epoxy to the conductive pad of a lead frame or a substrate such as a circuit board.

[0034] A device according to the present invention is fabricated according to a method described hereafter.

- 7 -

[0035] Referring first to Figure 9, a semiconductor wafer 102 is prepared to have a plurality of semiconductor die each having at least one power electrode 100. Power electrode 100 may be first power electrode 12 as seen in the preferred embodiment. Also, each die may include a control electrode 104, such as control electrode 14 as described above, which is processed simultaneously with the power electrode 100.

[0036] Referring next to Figure 10, a blanket barrier layer 106 is formed over one face of wafer 102 covering electrodes 100, 104 as well as areas of wafer 102 between the electrodes. Barrier layer 106 is preferably formed from titanium and may be about 20 nanometers thick. Titanium may be sputtered. Other suitable materials for forming blanket barrier layer 106 include tantalum or titanium tungsten.

[0037] Thereafter, a blanket copper seed layer 108 is formed on barrier layer 106, as seen in Figure 11. Blanket copper seed layer 108 may be about 200 nanometers thick and may be sputtered on as well. Alternatively, blanket copper seed layer 108 may be plated through electroless plating. Blanket copper seed layer 108 forms a low resistance path for the plating current and acts as a plating electrode.

[0038] Next, photoresist layer 110 is formed over blanket copper seed layer 108, as seen in Figure 12. In one embodiment a shipley BPR 100 liquid photoresist was used to form photoresist layer 110. This material is available from Rohm and Haas electronic materials, Marlborough, MA, and was selected as it is capable of forming a layer of up to 100 μm in a single application. Photoresist layer 110 is then patterned through conventional photolithography to include openings 112 each exposing a portion of blanket copper seed layer 108 over each electrode 100, or 104 as seen in Figure 13.

[0039] The photoresist deposition, edge bead removal, and precure can be completed on a spin coater track system. The photoresist is then exposed in a mask aligner or similar photo tool. The exposed photoresist material is then developed in a suitable developer solution. If required, a post develop bake stage at elevated temperatures may be performed. The following is an example of a process for applying a photoresist:

- 8 -

- [0040] 1. Pre-clean: Iso-propyl Alcohol (IpA) 30 seconds at 50 rpm followed by nitrogen 2 min at 500 rpm.
 - [0041] 2. Dispense: 5.5 ml of BPR 100 dispensed within 20 seconds on a wafer spinning at 50 rpm.
 - [0042] 3. Spread cycle: ramp to 500 rpm at 100 rpm/sec acceleration, followed by 10 sec spin.
 - [0043] 4. Spin cycle: ramp to 1000 rpm (100 rpm/sec acceleration) followed by 30 sec spin.
 - [0044] 5. Dry cycle: 30 sec at 300 rpm.
 - [0045] 6. Edge Bead Removal: IPA to remove photoresist from 2mm perimeter.
 - [0046] 7. Soft Bake: 3 min 65°C in a convection oven ramped up to 90°C to cure for 30 minutes.
 - [0047] 8. Exposure: coated wafers were exposed to UV light at 5mJ for 3 minutes.
 - [0048] 9. Post bake: 10 minutes at 110°C.
 - [0049] 10. Development: photoresist was developed using BPR developer; bath was made up of 96% v/v deionized water and 4% v/v developer.
 - [0050] 11. Final rinse and dry: with deionized water followed by nitrogen on the spin coater.
- [0051] During photoresist developing residual photoresist material may remain in opened apertures. In order to enable uniform plating into these apertures the residual resist should be removed. This is done preferably using an oxygen plasma clean process (wafers are bombarded with O₂).
- [0052] Thereafter, as illustrated by Figure 14, an electrical contact 113 and seal clamp 114 is applied to the edges of wafer 102. Electrical contact 113 and seal clamp 114 is provided to apply voltage to electrodes 100, 104 in order to facilitate the electroplating process, as will be described later.
- [0053] Next, wafer 102 is immersed in an electroplating solution, and the appropriate voltage is applied to electrical contact 113 whereby a copper body 20 is

grown in each opening 112 on exposed copper seed layer 108. Also, a solderable body 22 is formed over each respective copper body 20 as seen in Figure 15.

[0054] For example, the following procedure can be followed to carry out the electroplating step:

[0055] 1. Put wafer on a chuck. The chuck is a mechanical fixture which also provides electrical contact.

[0056] 2. Leak test to assure tight seal.

[0057] 3. Wet wafer.

[0058] 4. Remove oxide layer on copper with 10% Sulphuric acid.

[0059] 5. Rinse with deionized water.

[0060] 6. Dry with nitrogen.

[0061] 7. Copper plate in a commercial copper plating solution. The solution may be agitated. In certain systems the wafer is rotated to aid deposition.

[0062] 8. Rinse with deionized water.

[0063] 9. Dry with nitrogen.

[0064] 10. Nickel plate in a commercial nickel plating solution.

[0065] 11. Rinse with deionized water.

[0066] 12. Dry with nitrogen.

[0067] 13. SnPb plate in commercial plating bath.

[0068] 14. Rinse with deionized water.

[0069] 15. Dry with nitrogen.

[0070] In a typical electroplating process, the surface to be electroplated forms the cathode and is submerged in a plating solution. Each manufacturer may offer its own plating solution. Manufacturers of these materials include Atotech, MacDermid, Rohm and Hass, and Cookson Electronics. The plating solution may be any one of the following:

[0071] 1. Alkaline - several modifications of cyanide and non-cyanide.

[0072] 2. Mildly alkaline - pyro phosphate

- 10 -

[0073] 3. Acid - sulfate and fluorobate.

[0074] More typically the plating solution is acid based. An example of such a plating solution may include the following chemicals:

[0075] 1. H_2SO_4 contributes to the overall solution conductivity, reduced anode and cathode polarization (e.g. 60g/ltr).

[0076] 2. CuSO_4 medium for plating (e.g. 200g/ltr).

[0077] 3. HCL, which helps to corrode anode (e.g. ppm level).

[0078] 4. Brightener/Grain refiner.

[0079] 5. Carrier/polarizer, which helps with crystal deposition and organization.

[0080] 6. Leveller, which helps with crystal deposition and organization.

[0081] The last three ingredients are typically organic materials. During the plating the following chemical reactions occur at each electrode:

[0082] • At Anode (+Ve charged): Oxidation of the copper $\text{Cu} \rightarrow \text{Cu}^{2+} + 2\text{e}^-$

[0083] • At Cathode/Wafer (-Ve charged): Reduction of Copper $\text{Cu}^{2+} + 2\text{e}^- \rightarrow \text{Cu}$

[0084] As a rule of thumb and from Faradays laws $2 \times 96,485$ coulombs of charge are usually required to produce one mole of copper from copper (II) ion (Cu^{2+}). The rate of plating is determined by the current applied to the electrodes and can be determined using the relationship $Q = \text{current (I)} \times \text{time (t)}$ in conjunction with Faradays law.

[0085] Next, the remaining photoresist 110 is removed as seen in Figure 16.

Thereafter, any copper seed material 108 and barrier material 106 that is not under copper bodies 20 is removed to obtain the structure shown in Figure 17.

[0086] For example, the following procedure can be carried out:

[0087] 1. Strip the remaining photoresist with stripper with BPR Stripper

[0088] 2. Etch copper with a copper etchant. Both alkaline and acid chemistries are suitable for etching copper. Two of the most common etchant chemistries are ammoniacal etchant and cupric chloride etchant.

[0089] 3. Rinse with deionized water.

- 11 -

[0090] 4. Dry with nitrogen.

[0091] 5. Etch titanium with titanium etchant, for example, Hydrogen Peroxide or dilute Hydrofluoric acid.

[0092] 6. Rinse with deionized water.

[0093] 7. Dry with nitrogen.

[0094] 8. Take the wafer out of the chuck.

[0095] The wafer can then be processed according to any known method to obtain a device according to the present invention. For example, back metal is applied to form second power electrode, and passivation 24 is applied and patterned to obtain a plurality of devices as described above.

[0096] For example, the wafer can be passivated through a screen printing process. The passivation material is preferably an aqueous developing, liquid photoimaging polymer. The following is an example of a procedure that can be followed in applying the passivation:

[0097] 1. Mix the passivation material: 100 parts paste part to 19 parts hardener by weight.

[0098] 2. Screen print the mixture.

[0099] 3. Tack dry in convection oven at 80°C for 20 minutes.

[0100] 4. Expose the passivation for 25 seconds at 5 mJ.

[0101] 5. Develop the passivation.

[0102] 6. Apply final cure for 60 minutes at 150°C in a convection oven.

[0103] It should be noted that in some cases the wafer may become warped. This is due to high stresses caused by the recrystallization of the fine grain structure of the electroplated copper.

[0104] Thereafter, wafer 102 is diced to obtain individual semiconductor devices according to the present invention, which can be ready to be received in a conductive can 28 as described above, or packaged in any other package for example an SO8, TO-220, D2pak, Dpak and MLP packages.

- 12 -

[0105] To perform the dicing step it may be preferable to use a dual step cutting process. The first cut should be performed with a blade specially designed for copper dicing, followed by a standard blade suitable for cutting a semiconductor die at a standard speed. Although the wafer can be fabricated without any copper in the wafer streets, copper dicing may be necessary to penetrate the residual copper present on the perimeter of the wafer contact ring. The copper deposition can be avoided by correctly designing the perimeter plating contact to fit within the plating chuck seal, thereby eliminating the copper dicing step. The re-design may also help to reduce wafer warpage, as the plated copper on the contact ring can be one of the main contributors to the stress within the wafer.

[0106] Figure 18 summarizes a process for fabricating a semiconductor device according to the present invention.

[0107] It should be noted that any material left from copper seed layer merges with the electroplated copper bodies 20. Thus, a device according to the preferred embodiment of the present invention will include a copper body 20 formed over a barrier layer 18.

[0108] Alternatively, copper bodies may be applied to a MOSFET die using a process of seed layer deposition, electroplating, photoresist, copper etch/strip or alternatively by pattern plating. In the alternative process, the photoresist is applied after electroplating. However, applying photoresist prior to electroplating is preferred in that only minimal copper etching is required and tighter tolerances are often achievable on the thick copper films.

[0109] The metal finish required on the top surface of the copper is determined by the required interconnection between the die and the package or the die and the circuit board. For solderable contacts to a copper surface a Nickel barrier is typically required followed by a thin gold film. The nickel layer prevents intermetallic formation while the gold prevents nickel oxidation and provides a solderable surface. Typical recommended nickel thickness is in the range of 4 to 8 μm .

- 13 -

[0110] It should also be noted that a copper body 20 need not cover the entire surface of the electrode over which it resides. Rather, the device covered by a copper body can be varied to obtain the desired reduction in the resistivity for the device.

[0111] Referring for example to Figures 20A-20C which show respectively a first pattern, a second pattern, and a third pattern, for copper bodies 20, it has been observed through experimentation that pattern variation may affect the resistivity obtained.

[0112] Relatively simple models based upon using the relationship $R = \rho L/A$ show that top metal resistance can add significant resistance to current flowing along the top surface of a die. In practice these models are flawed in that they only consider current flowing in one direction and do not include the parallel current paths that surround the device source pads connected to a circuit board. In order to obtain more accurate estimates of the benefits of adding thick copper to the power electrode of a die, finite element analysis (FEA) was performed. As is well known, the finite element method operates on the theory that any continuous function over a global domain can be approximated by a series of functions operating over a finite number of small sub-domains. ANSYS, available from ANSYS, Inc., Canonsburg, PA, is a software which can be used for performing finite element analyses. ANSYS solid models were set up and refined to include contributions from die, substrate, die attach adhesive and the copper can. Using this model as a baseline a copper layer was added to the model. The thickness of this layer was then modified to investigate the effect of metal thickness upon device R_{dson} .

[0113] FEA models of devices with thick copper showed less voltage dropped across the source region compared to devices with Aluminum front metal only.

[0114] Figure 19 shows the effect upon device R_{dson} of increasing the metal thickness. Note that models of copper under just the source pads and all over the die were investigated. For example, with zero copper thickness and 4 μm aluminum the device R_{dson} is approx 1.9 mOhm. As the thickness of copper is increased to 20 μm the R_{dson} drops to 1.67 m Ohm. This represents a reduction of over 200 μOhm .

- 14 -

[0115] Also models were developed to examine the effect of adding thick copper as the die size is reduced, keeping the die resistivity the same as the larger die. In both cases it appears possible to reduce R_{dson} by over 0.5 mOhm by adding about 20 μm of copper.

[0116] Interestingly, the absolute reduction in R_{dson} by adding thick copper appeared more significant in the smaller die sizes. It is believed that this result is due to the aspect ratio of the source areas being higher in smaller die, resulting in higher initial top metal resistance.

[0117] Thus, through experiments and models the inventors have discovered that a die having a thick copper body formed on a power electrode thereof exhibits a significantly reduced resistance. In both cases, for example, the addition of 1 to 20 μm of copper has shown reductions in R_{dson} in the range of 180 to 200 μOhm . Furthermore models predict that similar, if not greater, absolute shifts in R_{dson} are possible with smaller die, and some models predict significant reductions in R_{dson} are possible by combining thick copper with thinned die. It is expected, therefore, that a semiconductor device according to the present invention when assembled in a DirectFET or a conventional package such as a TO-220 package will reduce the overall resistance of the package.

[0118] To examine the effect of area coverage on the resistivity of the device, a test mask was designed with three different die test patterns. Figures 20A-20C show the dimensions of the test patterns. The design rules used on each pattern are listed below.

[0119] Pattern 1 (full surface coverage) (Figure 20A);

- [0120] - Min 220 μm clearance,
- [0121] - Min 50 μm clearance to nearest Al feature,
- [0122] - Area of feature on source: $2 \times 4.34 \text{ mm}^2$,
- [0123] - Area of feature on gate: 0.77 mm^2 ,

[0124] Pattern 2 (reduced coverage) (Figure 20B);

- [0125] - Min 300 μm clearance,

[0126] - Min 50 μm clearance to the nearest Al feature,

[0127] - Area of feature on source: $2 \times 3.80 \text{ mm}^2$

[0128] - Area of feature on gate: 0.77 mm^2

[0129] Pattern 3 (copper under source pads only) (Figure 20C):

[0130] - identical to Passivation opening,

[0131] - Area of feature on source: $2 \times 1.79 \text{ mm}^2$

[0132] - Area of feature on gate: 0.71 mm^2

[0133] Figure 21 illustrates the effect that a pattern may have on the resistivity of the device. As seen copper patterns 1 and 2 (Figures 20A and 20B), which cover respectively, all of and a substantial part of the area of the power electrode contribute the most to the reduction of the resistivity of the device.

[0134] Plating copper is advantageous in that it may be applied to selective regions of the die, may be applied during the die fabrication process or even during the packaging. Plating is commonly used in the circuit board industry and advantageously is a low temperature process. Plated copper also has the benefit of having electrical resistivity very close to that of pure copper.

[0135] In the preferred embodiment copper is plated using electroplating. Electroplating is advantageous specially when a copper thickness of more than a few microns is required in a relatively reasonable time in that electroplating offers relatively fast deposition rates.

[0136] Copper may also be plated using electroless plating if time is not an issue.

[0137] Other methods can also be used for forming a conductive body on an electrode of the device according to the present invention.

[0138] For example, thick film screen-printing is a low cost method available for forming a thick copper layer on an electrode of a power device. However, the processing temperatures for thick screen printing is relatively high (e.g. $500^\circ\text{C}+$), and may in some cases cause wafer warpage (depending on the wafer). Nevertheless, such a process can be used to practice the present invention. Low temperature pastes

- 16 -

may be used to overcome the problems associated with the high temperatures as long as the paste that is used is of lower resistance.

[0139] In addition, lamination techniques may be used for forming thick copper layers. Lamination based techniques of applying thick copper are commonly used in the circuit board industry. While copper or resin films can be applied to wafers using a lamination technique, making electrical connection between the film and the electrodes is likely to require laser or conventional drilling, plating and possibly via filling. Thus, lamination may be more expensive than plating the wafer surface, but can be used to practice the present invention.

[0140] In summary, for the reasons stated above, electroplating is preferred over other methods, although other methods are considered to be within the scope and the spirit of the present invention.

[0141] Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by the specific disclosure herein, but only by the appended claims.

- 17 -

WHAT IS CLAIMED IS:

1. A semiconductor device, comprising:
a semiconductor die, having an electrode on a surface thereof, said electrode being comprised of a first conductive material; and
a conductive body on said electrode, said conductive body being comprised of a second material having a resistivity that is lower than that of said first conductive material.
2. A device according to claim 1, wherein said electrode is comprised of aluminum.
3. A device according to claim 1, further comprising a barrier layer interposed between said electrode and said conductive body.
4. A device according to claim 3, wherein said barrier layer is comprised of titanium.
5. A device according to claim 1, wherein said conductive body is at least about 10 to about 25 microns thick.
6. A device according to claim 1, wherein said semiconductor device is a power semiconductor device and said electrode is a power electrode of said power semiconductor device.
7. A device according to claim 1, wherein said semiconductor device is a power semiconductor device and said electrode is a control electrode of said power semiconductor device.

- 18 -

8. A device according to claim 1, wherein said semiconductor device is a power MOSFET and said electrode is a source electrode of said power MOSFET.

9. A device according to claim 1, wherein said semiconductor device is a power MOSFET and said electrode is a gate electrode of said power MOSFET.

10. A device according to claim 1, further comprising a solderable body over said conductive body.

11. A device according to claim 10, wherein said solderable body is comprised of a nickel layer over said copper body and a lead tin layer over said nickel layer.

12. A device according to claim 10, wherein said solderable body is comprised of either NiAg or NiAu.

13. A device according to claim 10, further comprising a passivation body having at least one opening over said solderable body.

14. A device according to claim 1, further comprising another electrode disposed on a surface opposite said electrode, said another electrode being electrically and mechanically connected to an interior surface of a conductive can.

15. A device according to claim 1, further comprising another electrode disposed on a surface opposite said electrode, said another electrode being electrically and mechanically attached to either a conductive pad of a lead frame or a substrate.

16. A method for fabricating a semiconductor device, comprising:

- 19 -

forming a barrier layer over a surface of an electrode of a semiconductor device, said electrode being comprised of a first conductive material;

forming a seed layer over said barrier layer, said seed layer comprising of a second conductive material having an electrical resistivity lower than that of said first material; and

forming a conductive body over said seed layer, comprised of said second material.

17. A method according to claim 16, wherein said electrode is comprised of aluminum.

18. A method according to claim 16, wherein said barrier layer is comprised of titanium.

19. A method according to claim 16, wherein said second material is comprised of copper.

20. A method according to claim 19, wherein said conductive body is at least between 10 to about 25 microns thick.

21. A method according to claim 16, wherein said semiconductor device is a power semiconductor device and said electrode is a power electrode of said power semiconductor device.

22. A method according to claim 16, wherein said semiconductor device is a power semiconductor device and said electrode is a control electrode of said power semiconductor device.

- 20 -

23. A method according to claim 16, wherein said conductive body is formed by plating.

24. A method according to claim 17, wherein said conductive body is formed by electroplating.

25. A method according to claim 17, wherein said conductive body is formed by electroless plating.

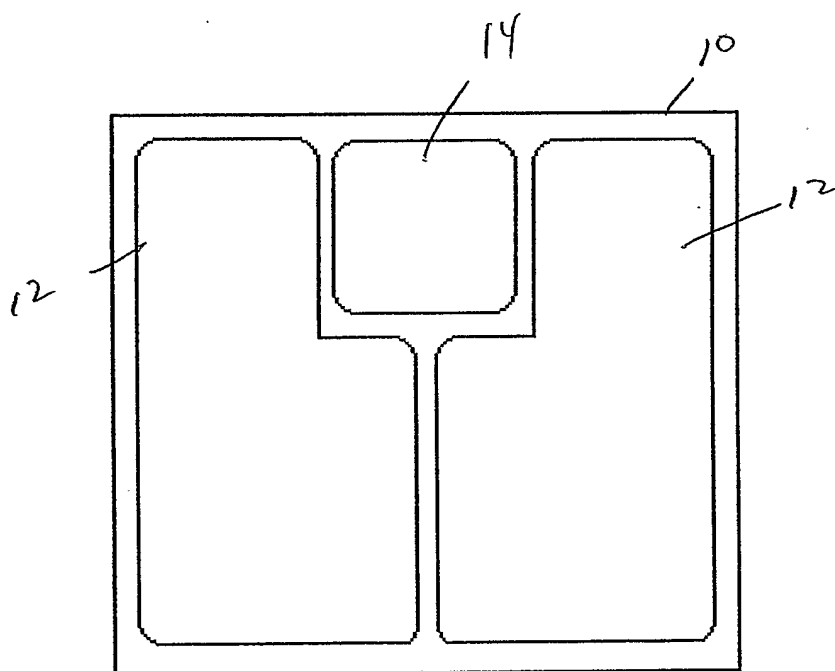


Figure 1
(prior art)

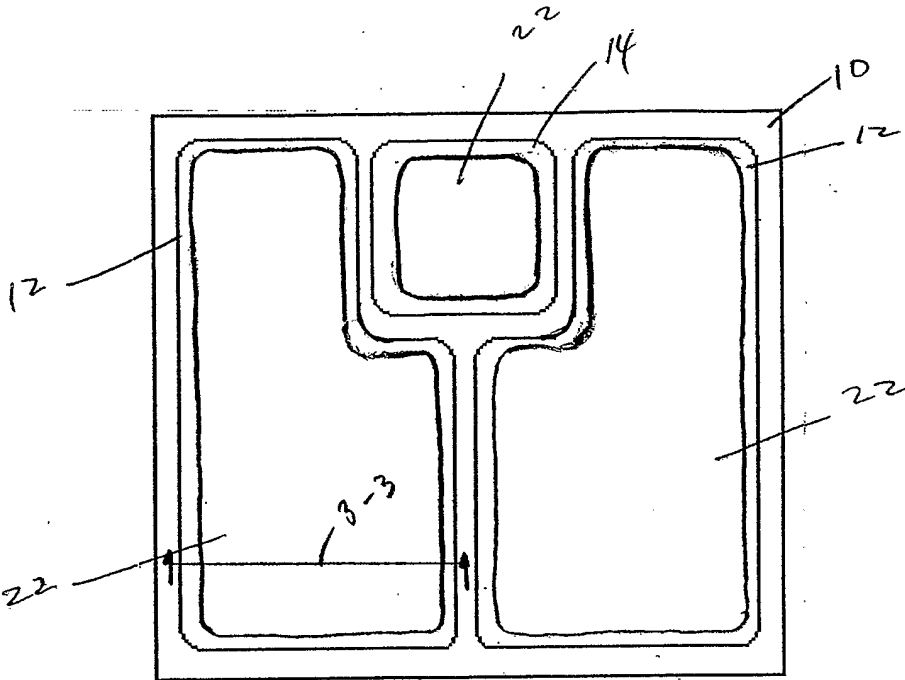


Figure 2

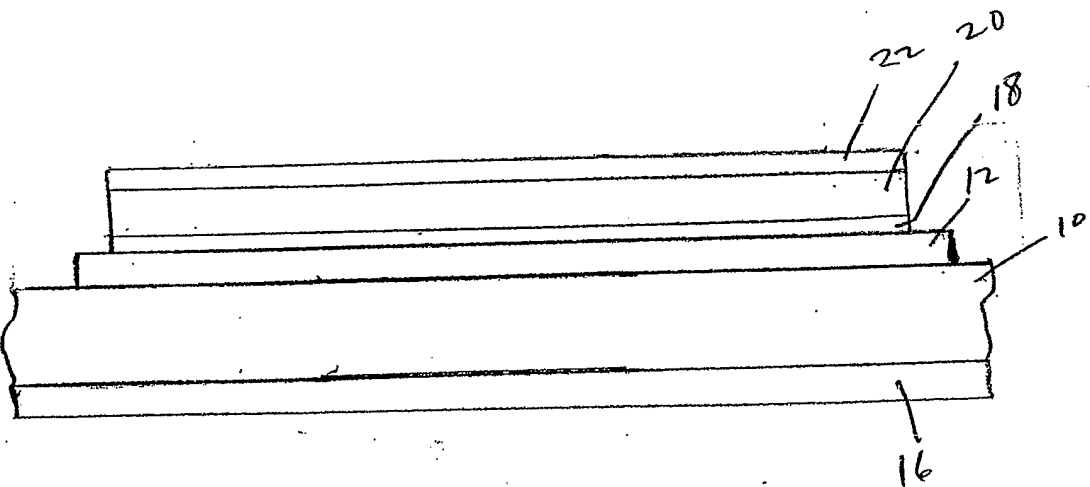


Figure 3

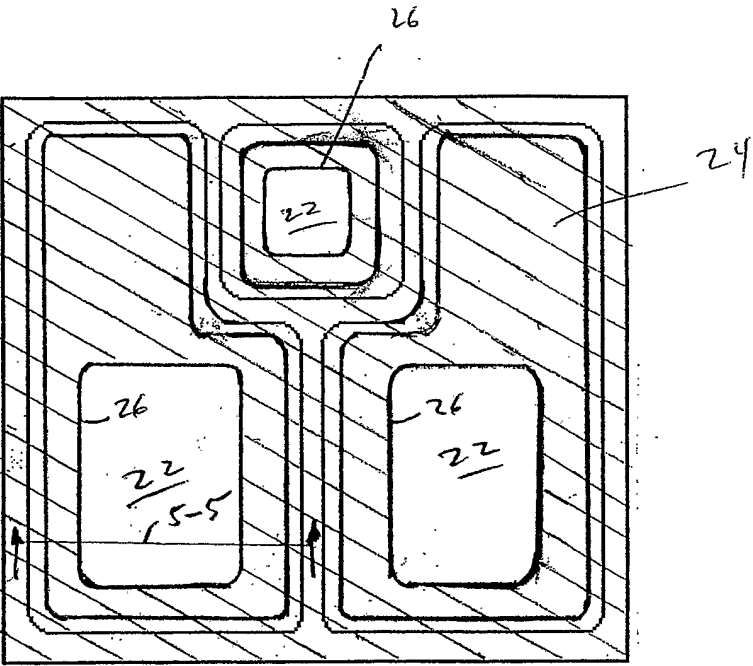


Figure 4

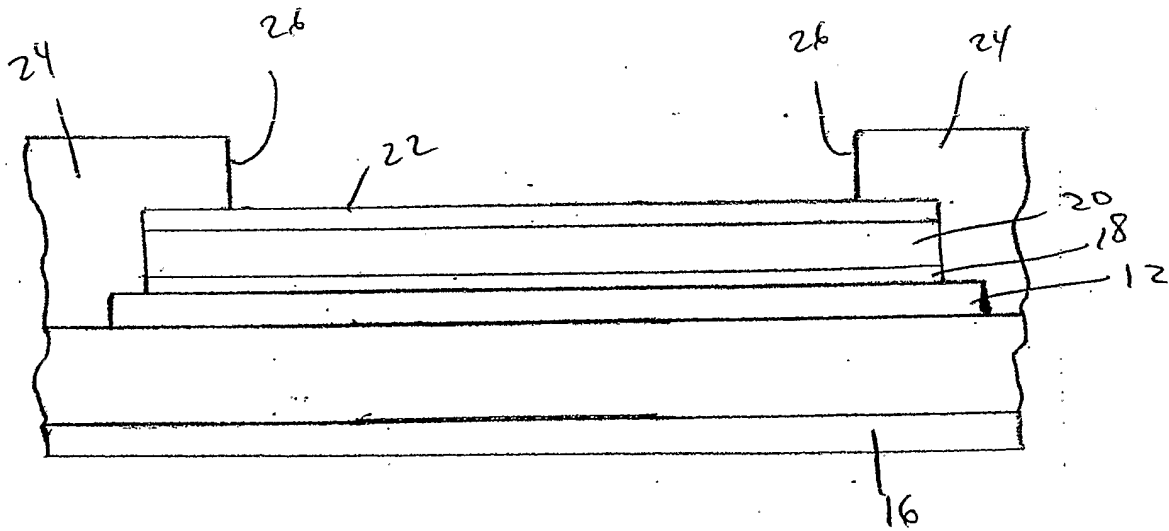


Figure 5

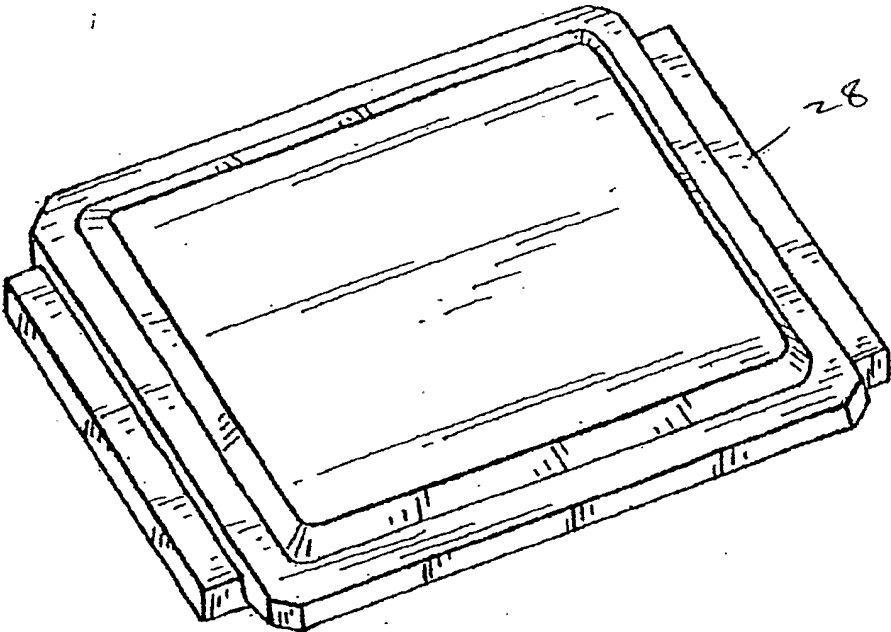


Figure 6

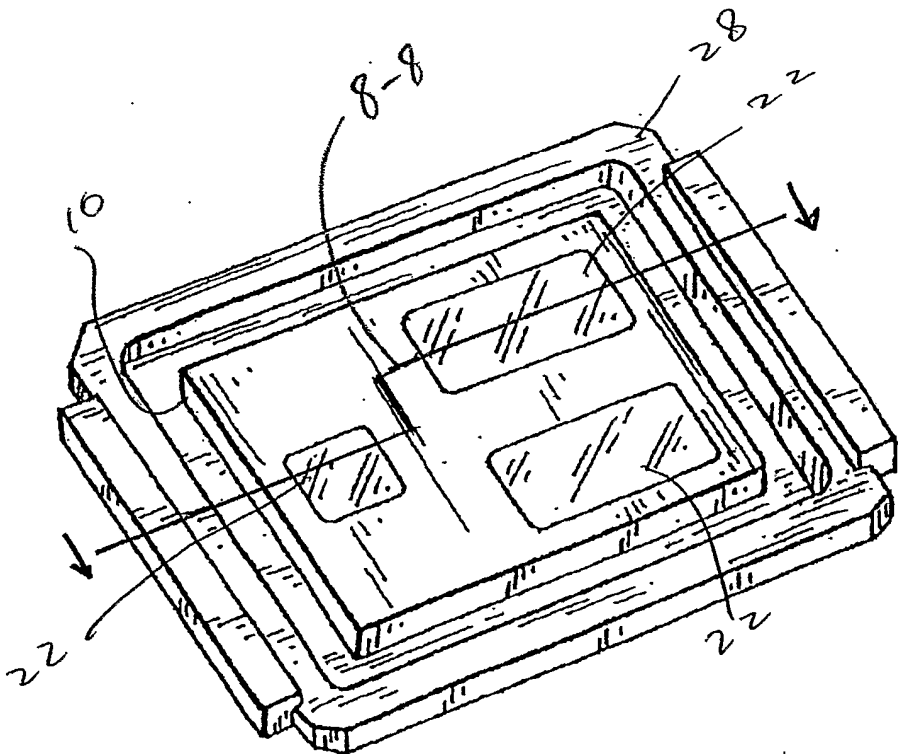


Figure 7

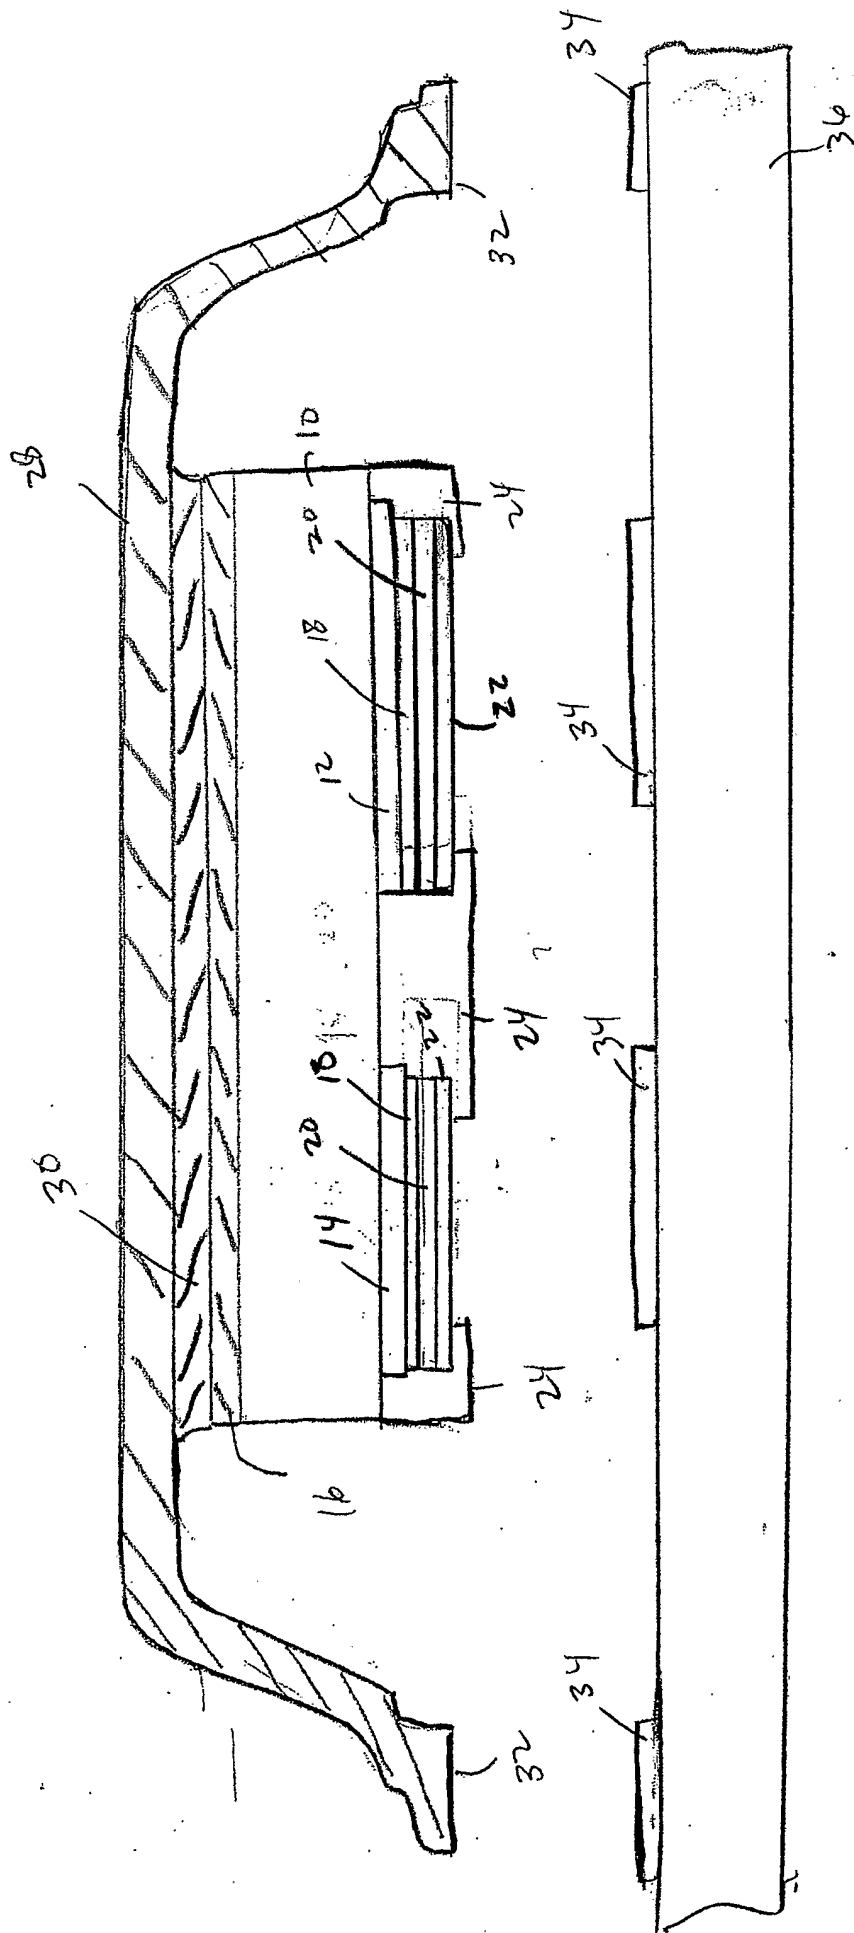


Figure 8

Patterned Aluminium

Figure 9

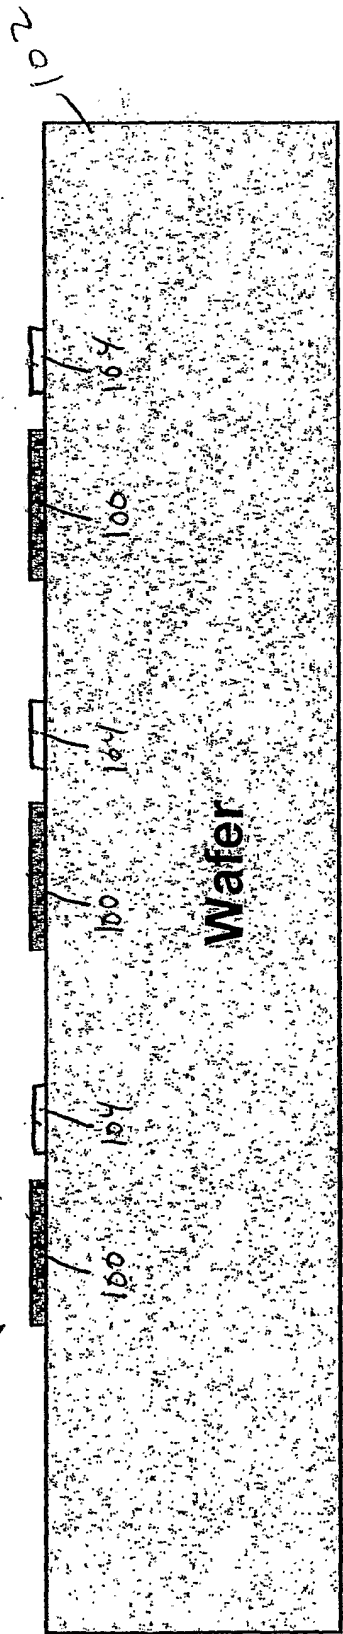


Figure 10

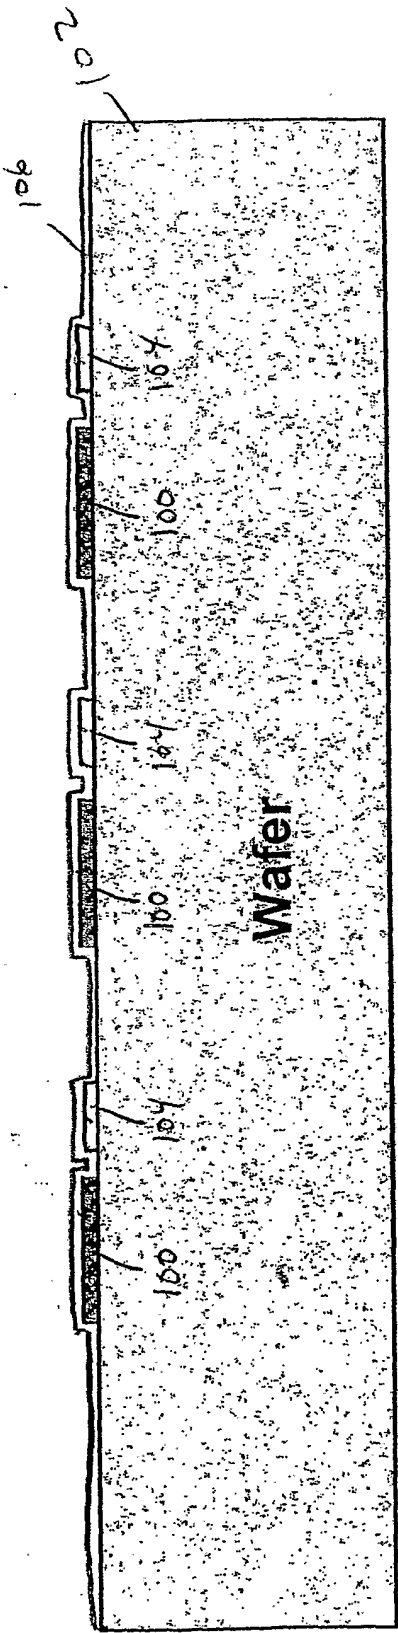


Figure 11

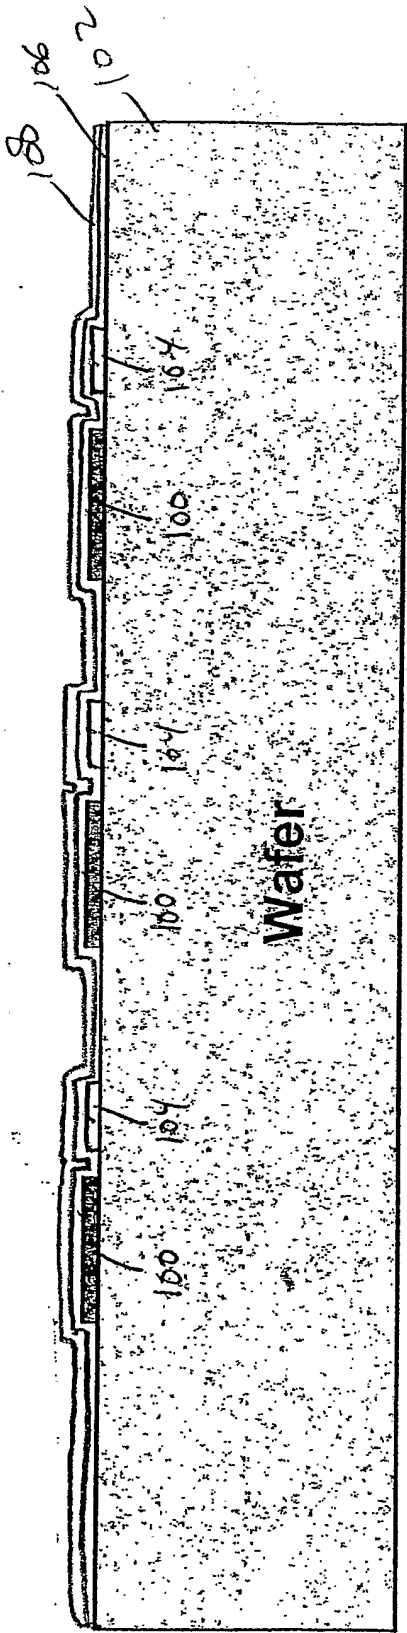


Figure 12

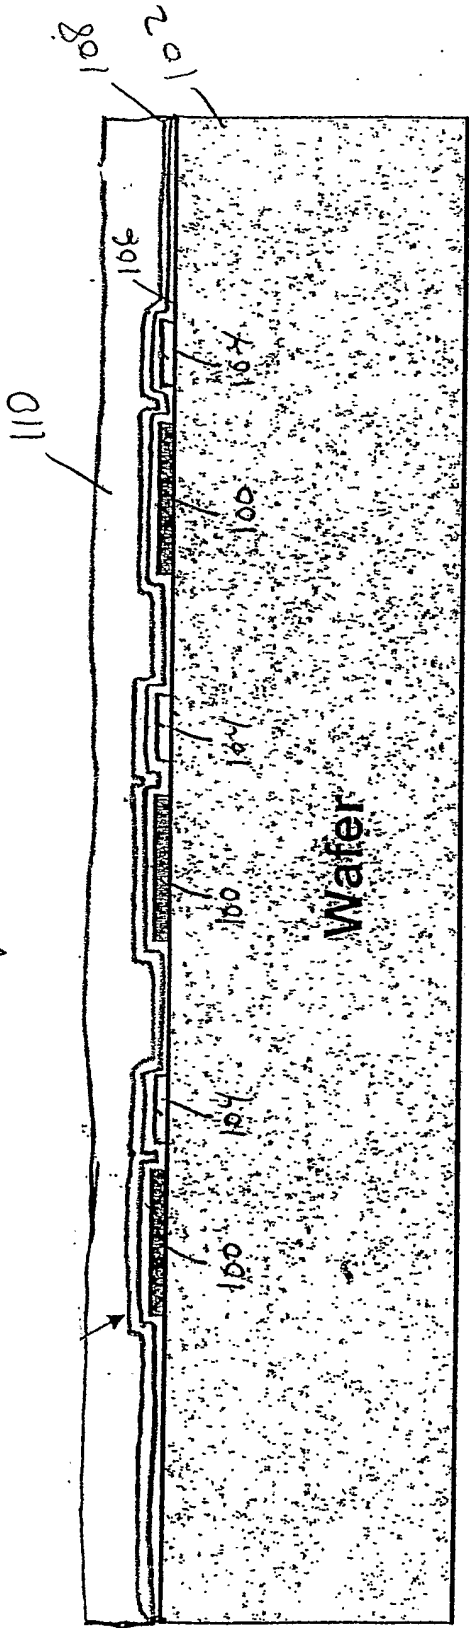


Figure 13

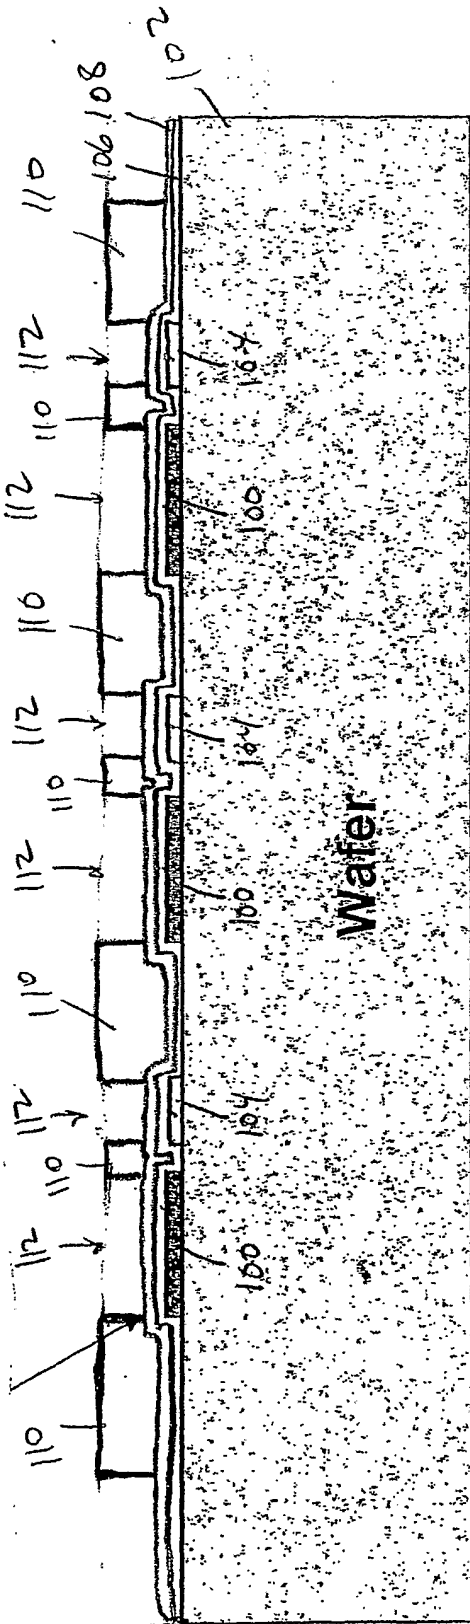


Figure 14

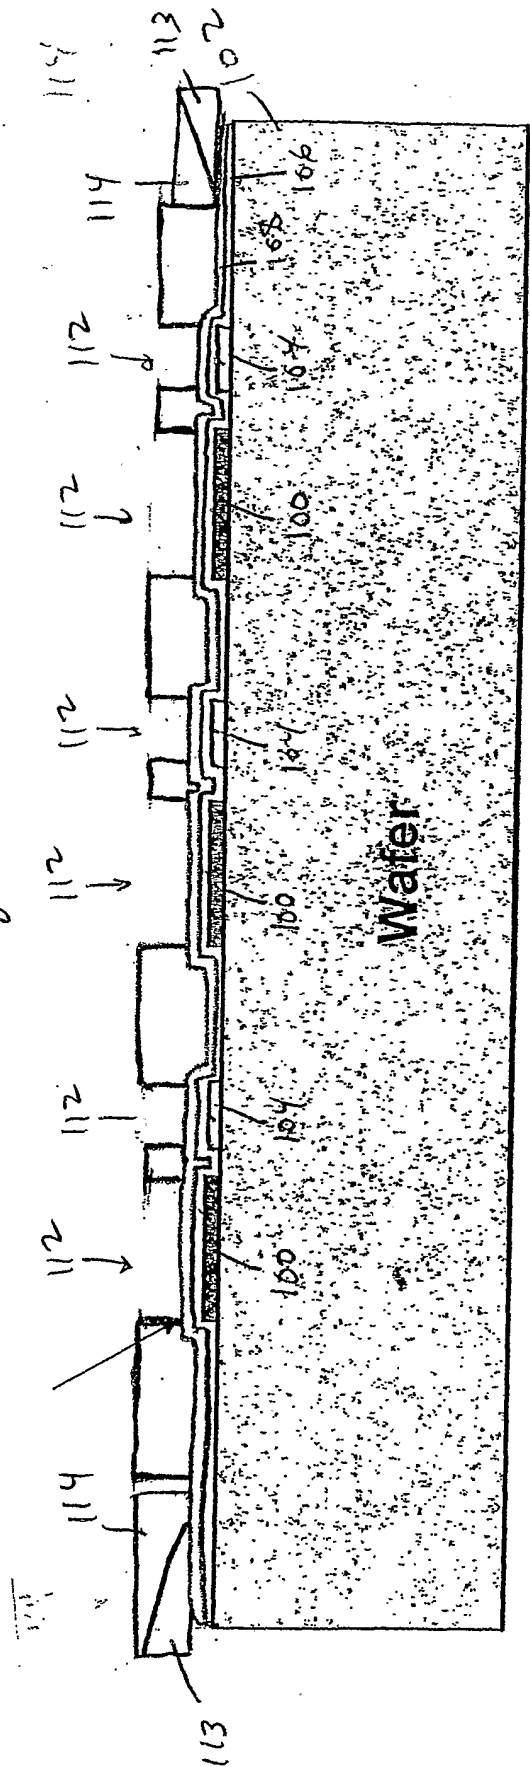


Figure 15

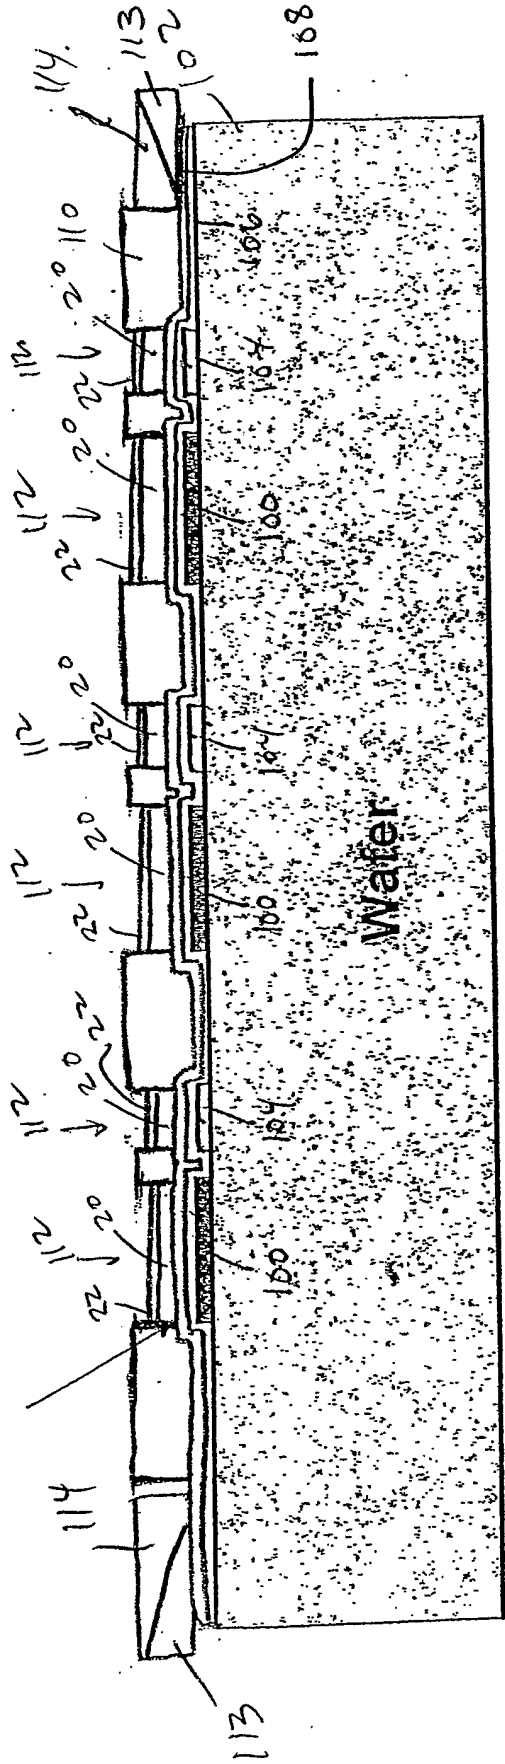
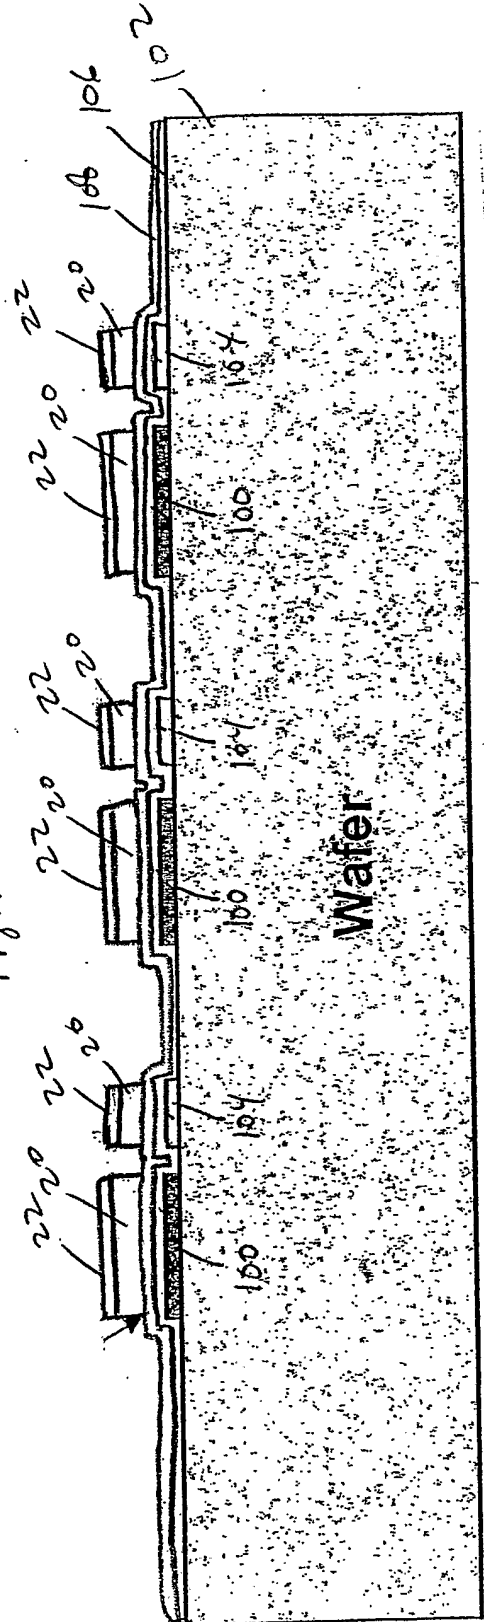
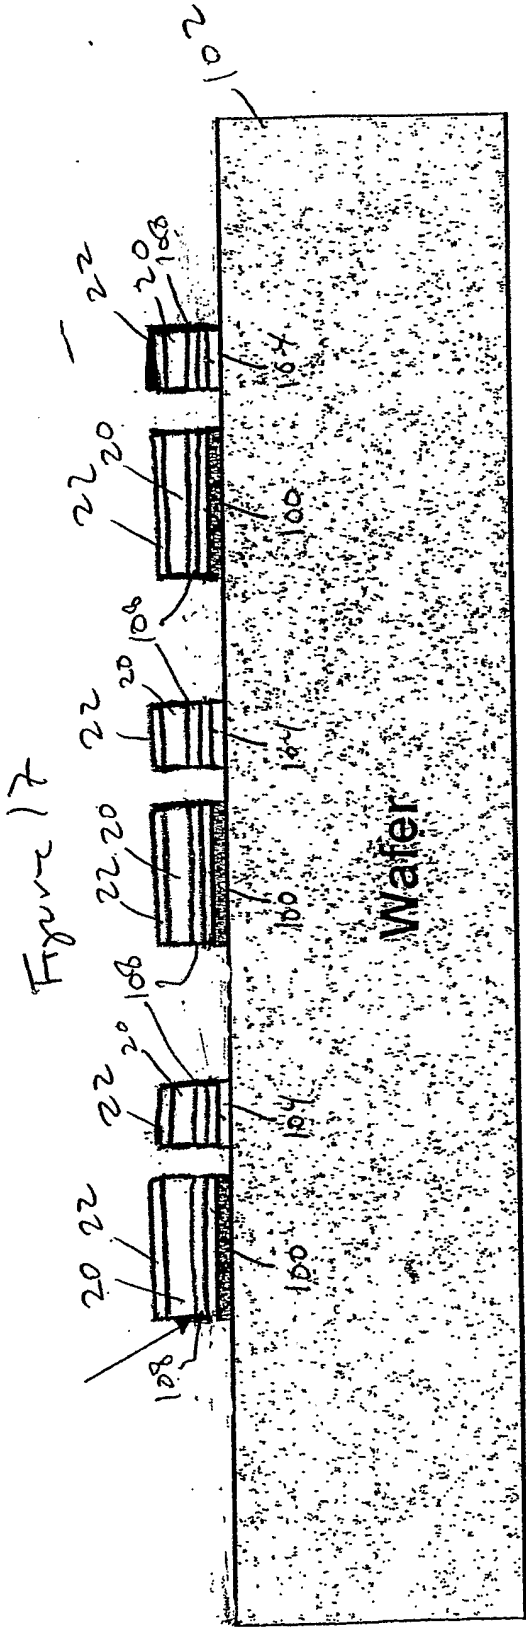


Figure 16





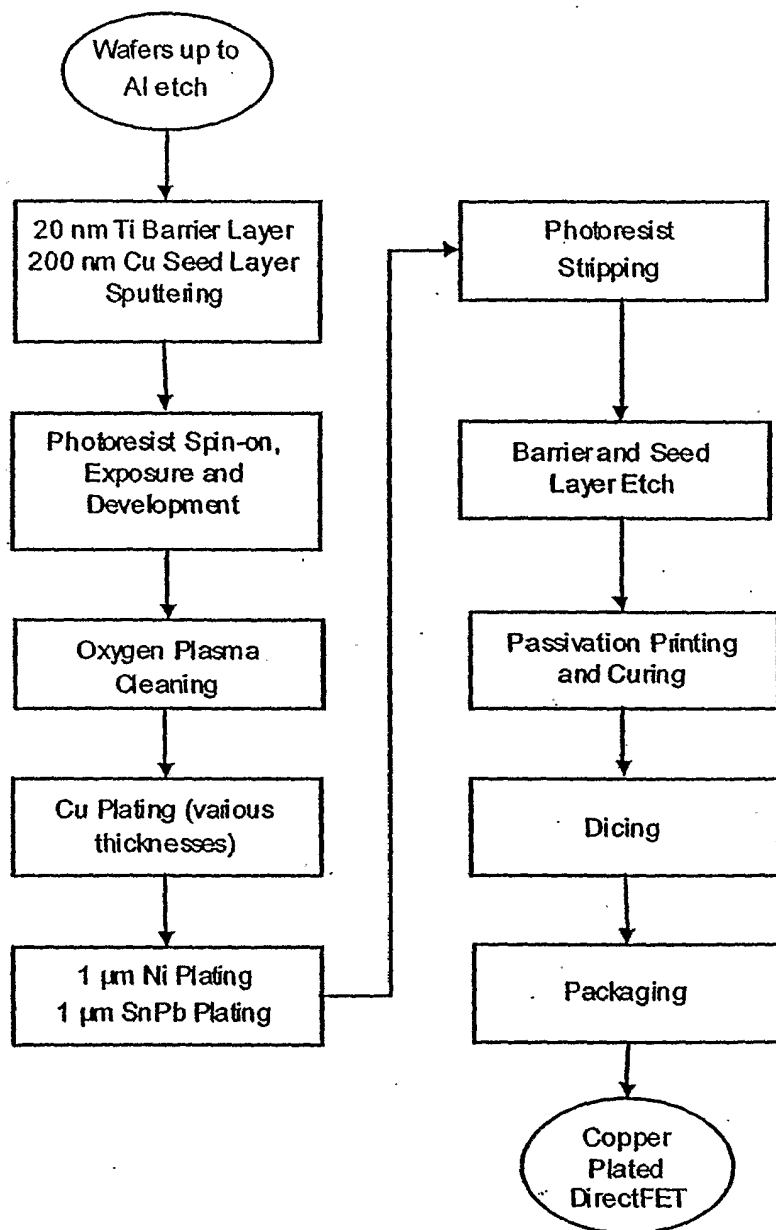


Figure 18

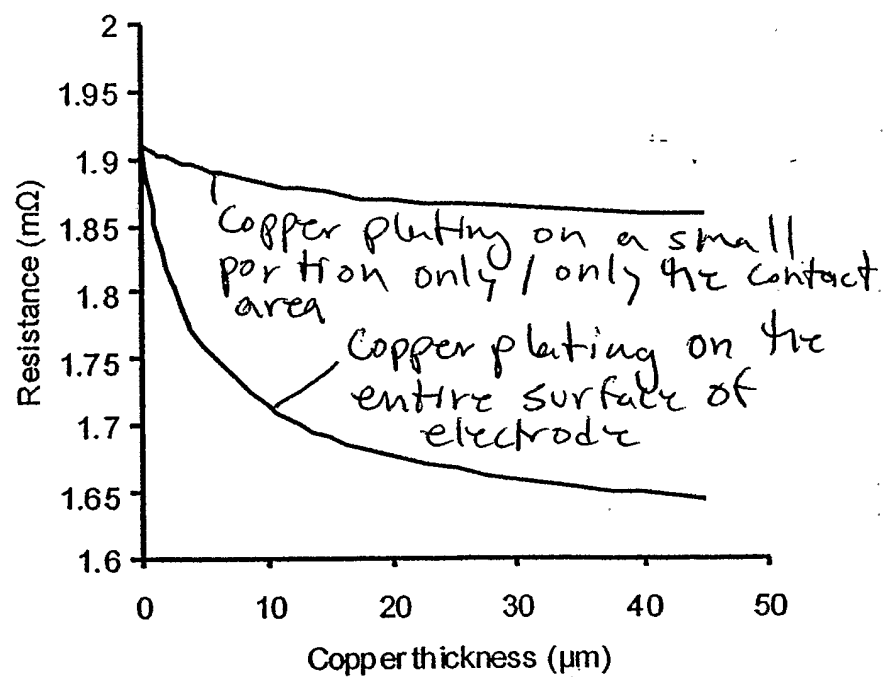


Figure 19

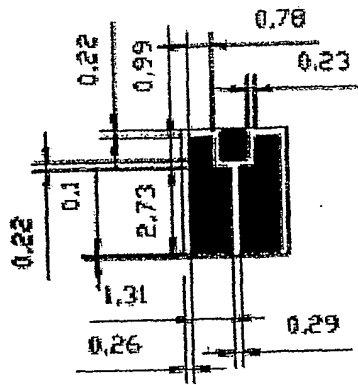


Figure 20 A

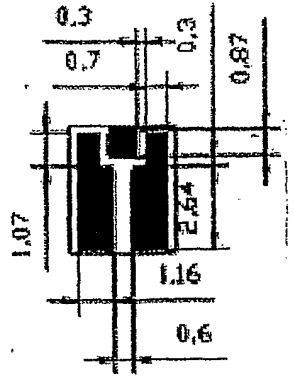


Figure 20B

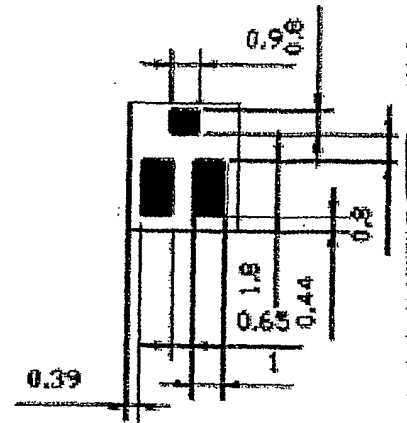


Figure 20C

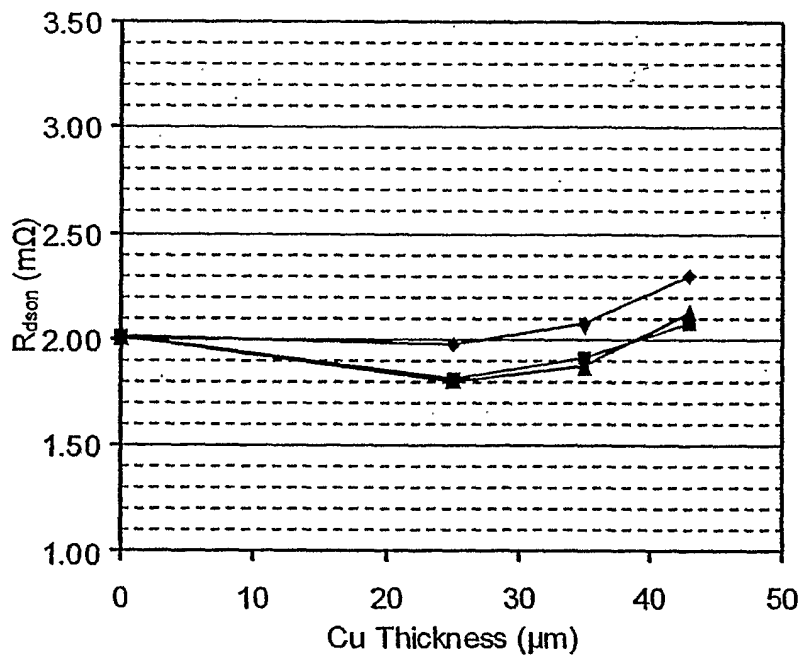


Figure 21