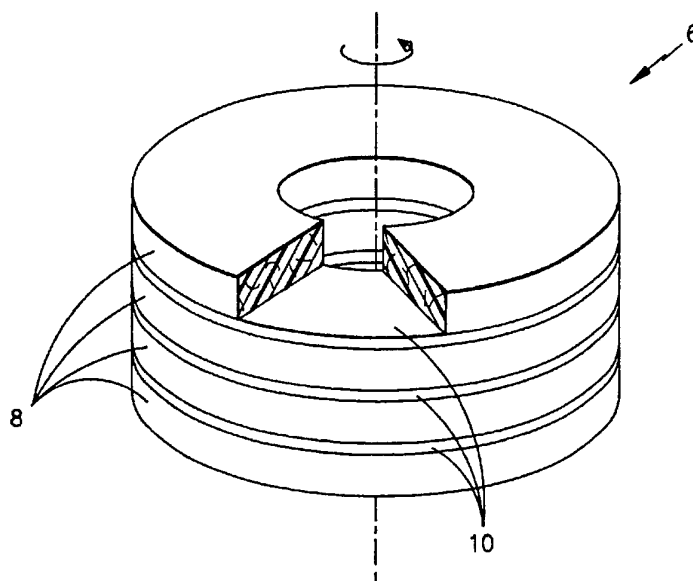


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b>  <b>F16F 15/305</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 95/09314</b>  <b>(43) International Publication Date:</b> 6 April 1995 (06.04.95)
<b>(21) International Application Number:</b> PCT/US94/08614 <b>(22) International Filing Date:</b> 1 August 1994 (01.08.94)  <b>(30) Priority Data:</b> 08/128,319      29 September 1993 (29.09.93)      US  <b>(71) Applicant:</b> UNITED TECHNOLOGIES CORPORATION [US/US]; United Technologies Building, Hartford, CT 06101 (US).  <b>(72) Inventors:</b> NARDONE, Vincent, C.; 187 Norton Lane, South Windsor, CT 06074 (US). THOMPSON, Mark, S.; 30 Gottier Drive, Vernon, CT 06066 (US). MEYER, Thomas, G.; 196 Bogg Lane, Lebanon, CT 06249 (US).  <b>(74) Agent:</b> ROMANIK, George, J.; United Technologies Corporation, Research Center, Legal Dept.- MS 129-6, 411 Silver Lane, East Hartford, CT 06108 (US).		<b>(81) Designated States:</b> CA, JP, KR, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** ENERGY STORAGE FLYWHEEL DEVICE**(57) Abstract**

The energy storage flywheel device (6) includes a plurality of annular shaped composite sections (8) and an annular shaped insert (10). The insert (10) has a specific radial strength substantially greater than the composite sections' specific radial strength. The composite sections (8) and the insert (10) are alternately stacked such that they have a common axis of rotation. They are bonded to each other such that shear stress is transferred between the composite section (8) and insert (10). In some applications, the flywheel (6) may comprise at least one annular shaped metal matrix composite section (8).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

## Description

## Energy Storage Flywheel Device

## Technical Field

The present invention relates generally to a flywheel device and more particularly  
5 to an energy storage flywheel device having improved radial strength.

## Background Art

The potential for using a flywheel as an energy storage medium is well known. From a materials technology standpoint, the primary factor that controls the energy storage efficiency of a flywheel system is the strength to density ratio of the material used  
10 for the flywheel. Conventionally, flywheels have been made of metals such as high strength steel. Steel, however, may not be a suitable material for a flywheel that must store large amounts of energy efficiently. Specific disadvantages of metallic flywheels include the high weight of the flywheel and the potential for dangerous fractures associated with rotating the flywheel at high speeds. In addition, conventional metals are  
15 not well suited for high energy flywheels because their high density results in excessive loading during operation at high rim velocities.

Due to the disadvantages of metallic flywheels, wound fiber reinforced resin matrix composite flywheels have been developed. Such flywheels, which have circumferentially-oriented fibers, have the potential for achieving high strength to density  
20 ratios in the direction of fiber reinforcement because of the availability of high strength, low density fibers. Although resin matrix composites can achieve high hoop strength (strength parallel to the fiber direction), the mechanical properties of the composites are very anisotropic. For example, unidirectional resin matrix composites may possess hoop strengths between about 1000 MPa to about 2500 MPa, while the radial strength (strength  
25 perpendicular to the fiber direction) of these composites may be only between about 10 MPa to about 20 MPa. This anisotropic behavior limits the use of resin matrix composites for flywheels. In many potential flywheel designs, particularly high speed flywheels, the flywheel's radial strength is exceeded prior to achieving full utilization of

- 2 -

the inherent high hoop strength of the flywheel. As a result fractures occur, making the flywheel unsuitable for many high speed applications.

Therefore, there exists a need for an energy storage flywheel device capable of achieving improved radial strength while maintaining sufficient hoop strength for operation at high rim velocities (e.g., 600 meters per second or greater).

#### Disclosure of the Invention

The present invention relates to an energy storage flywheel device that achieves improved flywheel radial strength while maintaining sufficient hoop strength for operation at high speeds.

One aspect of the invention includes an energy storage flywheel device having a flywheel that includes a plurality of annular shaped composite sections and annular shaped inserts. The inserts have a specific radial strength substantially greater than the composite sections' specific radial strength. The composite sections and the inserts are alternately stacked such that they have a common axis of rotation. They are bonded to each other such that shear stress is transferred between the composite sections and insert. In operation, the flywheel may be mounted on a shaft.

Another aspect of the invention includes a energy storage flywheel device having a flywheel that includes at least one annular shaped metal matrix composite section.

These and other features and advantages of the present invention will become more apparent from the following description and accompanying drawing.

#### Brief Description of the Drawing

Figure 1 is a perspective view of an energy storage flywheel device of the present invention.

Figure 2 is a perspective view of another energy storage flywheel device of the present invention including an insert that has a wedge-shaped cross-section.

Figure 3 is perspective view of another energy storage flywheel device of the present invention including interlocking features.

- 3 -

Figure 4 is a perspective view of another energy storage flywheel device of the present invention further including a plurality of apertures filled with a material that bonds the composite sections to each other and the insert.

#### Best Mode for Carrying Out the Invention

5           The energy storage flywheel device 6 of Fig. 1 achieves greater flywheel radial strength than prior art composite flywheels by alternately stacking a plurality of annular shaped composite sections 8 with at least one annular shaped insert 10. For example, as shown in Fig. 1, each insert 10 may be disposed between two composite sections 8.

10           The composite sections 8 may comprise any anisotropic material suitable for flywheel fabrication such as wound fiber reinforced resin matrix composites or metal matrix composites. If the composite is a resin matrix composite, thermosetting or thermoplastic resins are suitable for the matrix. If the composite is a metal matrix composite, metals such as Al, Mg, or Ti may be used as the matrix. Preferably, the metal will be either Al or Mg because of their relatively low densities.

15           The composite sections 8 also may comprise any conventional fibers compatible with the matrix. For example, if the matrix is a resin matrix, the fibers may be carbon fibers, glass fibers, aramid fibers, or any other fiber compatible with the matrix. If the matrix is a metal matrix, the fibers may be graphite fibers, alumina fibers, silicon carbide fibers, boron fibers, or any other fibers compatible with the matrix. If desired, the fibers  
20           may be coated to make them compatible with the matrix. The fibers may be oriented in the matrix in any way that gives the flywheel 6 sufficient hoop strength for a desired application. The composite sections 8 should be the major constituent of the flywheel 6 to provide sufficient hoop strength. For example, the composite sections 8 may make up 75% to 98% by volume of the flywheel 6. In some applications in which the composite  
25           sections 8 comprise a metal matrix composite, the inserts 10 may be dispensed with entirely and the entire flywheel 6 may be made from the metal matrix composite because of the inherent higher radial strength provided by the metal matrix.

30           The insert 10 may comprise any material with a specific radial strength substantially greater than the specific radial strength of the composite sections 8. For purposes of this application, substantially greater means at least 5 times as great. Specific

- 4 -

strength is defined as the ratio of the material's strength to its density. For example, the insert 10 may be a monolithic metal, a metal matrix composite, or a resin matrix composite. Preferably, the insert will comprise Al, an Al alloy, Ti, a Ti alloy, Ni, a Ni alloy, or steel. Most preferably, the insert 10 will be a Ti alloy because of its high radial strength, low density, and low to moderate cost. A small percentage of inserts 10 in the flywheel 6 may increase the radial strength substantially, while only slightly decreasing the hoop strength. For example, a flywheel 6 that comprises 5% by volume to 15% by volume of inserts 10 may be suitable for many applications.

In a preferred embodiment, the specific radial elastic modulus of the insert 10 will be greater than the specific radial elastic modulus of the composite sections 8, so that load transfers from the composite sections 8 in the radial direction to the insert 10. This prevents loading of the composite section 8 in the radial direction to the point where failure can occur. Specific elastic modulus (or specific stiffness, another term for the same parameter) is defined as the ratio of the material's elastic modulus to its density. Similarly, the specific hoop elastic modulus of the composite sections 8 should be greater than the specific hoop elastic modulus of the insert 10, so that load is transferred from the insert 10 to the composite sections 8 in the hoop direction. This prevents loading of the insert in the hoop direction to the point where failure can occur. The composite sections also should have a specific hoop strength substantially greater than the specific hoop strength of the insert 10.

The composite sections 8 and insert 10 may be made with any suitable conventional techniques. After fabrication, the composite sections 8 and the insert 10 are alternately stacked such that they have a common axis of rotation. Additionally, the composite sections 8 and insert 10 are bonded together such that shear stress and load are transferred between the composite sections 8 and insert 10.

Any conventionally known method for bonding may be used to bond the composite sections 8 to the insert 10. For example, diffusion bonding, mechanical bonding, and adhesive bonding techniques may be employed. Similarly, a combination of any of the above techniques may be suitable. As shown in Fig. 2, an insert 10 with a wedge-shaped cross-section that is thicker at its outer diameter than at its inner diameter may be used to mechanically bond the insert 10 to the composite sections 8.

- 5 -

In another embodiment shown in Fig. 3, the insert 10 and composite sections 8 may be shaped to form interlocking features, such as teeth, that provide a mechanical bond between the insert 10 and composite sections 8. Adhesive disposed between the insert 10 and composite sections 8 also may be used to improve the bond between the  
5 interlocking teeth.

As shown in Fig. 4, the insert 10 may comprise a plurality of apertures 12 filled with adhesive to bond the composite sections 8 to the insert 10. Alternately, if the insert 10 is integrally cast within a metal matrix composite flywheel, these apertures can initially be left unfilled to allow metal to flow between the composite sections 8. After final  
10 solidification of the metal matrix composite, metal that flows through the apertures 12 will form an integral metal network that bonds the composite sections 8 to each other and the insert 10.

The following example illustrates some advantages of the present invention without limiting the invention's broad scope.

15 Example

A flywheel may be constructed by sandwiching a plurality of annular shaped inserts comprising an alloy of 6% Al, 4% V, balance Ti between a plurality of annular shaped wound fiber reinforced resin matrix composite sections. The composite sections may comprise 50 volume percent (vol%) T800 graphite fiber (Amoco Performance  
20 Products, Inc., Atlanta, GA) and 50 vol% epoxy matrix. The composite sections and inserts, which may be made with any of the conventional techniques described above, may be bonded together with any of the techniques described above such that the composite sections comprise 95% by volume of the flywheel and the inserts comprise 5% by volume of the flywheel.

25 Table 1 shows properties of the flywheel materials, Ti-6Al-4V and T800/epoxy composite. Bonding annular sections of these materials in a flywheel construction such that shear stress is transferred between the composite sections and insert can increase radial strength significantly while only slightly decreasing hoop strength. As shown in Table 2, the addition of the Ti-6Al-4V inserts may result in a 685% improvement in the  
30 flywheel radial strength, with only a 3% decrease in the flywheel hoop strength. The

- 6 -

overall volume percent and number of the Ti-6Al-4V inserts could be tailored to meet specific design and fabrication requirements.

Table 1

5	<u>Material</u>	<u>Density (g/cm<sup>3</sup>)</u>	<u>Hoop strength (MPa)</u>	<u>Radial strength (MPa)</u>	<u>Hoop strength/ Density (MPa-cm<sup>3</sup>)/g)</u>
	T800/epoxy composite	1.58	2760	7	1746
	Ti-6Al-4V insert	4.44	966	966	218

Table 2

10	<u>Material</u>	<u>Density (g/cm<sup>3</sup>)</u>	<u>Hoop strength (MPa)</u>	<u>Radial strength (MPa)</u>	<u>Hoop strength/ Density (MPa-cm<sup>3</sup>)/g)</u>
	5 vol% Ti-6Al-4V inserts/ 95 vol% 15 T800/epoxy composite	1.72	2670	55	1553

This improvement over the prior art offers significant design advantages due to the increased radial strength of the flywheel. Thus, the present invention includes a light weight, energy storage flywheel device having greater radial strength than prior art composite flywheels while maintaining sufficient hoop strength for operation at high speeds.

The invention is not limited to the particular embodiments shown and described herein. Various changes and modifications may be made without departing from the spirit or scope of the claimed invention.

We claim:



- 7 -

### Claims

1. An energy storage flywheel device (6) comprising:
  - (a) a plurality of annular shaped composite sections (8), and
  - (b) an annular shaped insert (10) having a specific radial strength substantially greater than the composite sections' (8) specific radial strength,
- 5 wherein the composite sections (8) and the insert (10) are alternately stacked such that they have a common axis of rotation and are bonded to each other such that shear stress is transferred between the composite sections (8) and insert (10).
2. The device of claim 1, wherein the insert (10) has a specific radial elastic modulus greater than the specific radial elastic modulus of the composite sections (8).
3. The device of claims 1 or 2, wherein the composite sections (8) have a specific hoop strength substantially greater than the specific hoop strength of the insert (10).
4. The device of claims 1, 2, or 3, wherein the composite sections (8) comprise a metal matrix composite.
5. The device of claim 4, wherein the metal matrix composite comprises a matrix selected from the group consisting of Mg, Al, and Ti.
6. The device of claims 4 or 5, wherein the metal matrix composite comprises reinforcing fibers selected from the group consisting of graphite fibers, alumina fibers, silicon carbide fibers, and boron fibers.
7. The device of claim 1, 2, or 3, wherein the composite sections (8) comprise a resin matrix composite.
8. The device of claim 7, wherein the resin matrix composite comprises reinforcing fibers selected from the group consisting of carbon fibers, glass fibers, and aramid fibers.

- 8 -

9. The device of any of claims 1-8, wherein the insert (10) has an inside diameter and an outside diameter, has a wedge-shaped cross-section, and is thicker at its outer diameter than at its inner diameter.

10. The device of any of claims 1-8, wherein the insert (10) and composite sections (8) are shaped to form interlocking features that provide a mechanical bond between the insert (10) and composite sections (8).

11. The device of any of claims 1-10, further comprising an adhesive disposed between the insert (10) and composite sections (8).

12. The device of any of claims 1-10, wherein the insert comprises a plurality of apertures (12) filled with adhesive or metal that bonds the composite sections (8) to each other and the insert (10).

13. The device of any of claims 1-12, wherein the insert (10) comprises a monolithic metal selected from the group consisting of Al, Al alloys, Ti, Ti alloys, Ni, Ni alloys, and steel.

14. The device of claim 1, wherein the insert (10) comprises an alloy of 6% Al, 4% V, balance Ti and the composite sections comprise graphite fibers dispersed in an epoxy matrix.

15. An energy storage flywheel device (6) comprising at least one annular shaped metal matrix composite section (8).

16. The device of claim 15 wherein the metal matrix composite comprises a matrix selected from the group consisting of Mg, Al, and Ti and reinforcing fibers selected from the group consisting of graphite fibers, alumina fibers, silicon carbide fibers, and boron fibers.

1/2

fig. 1




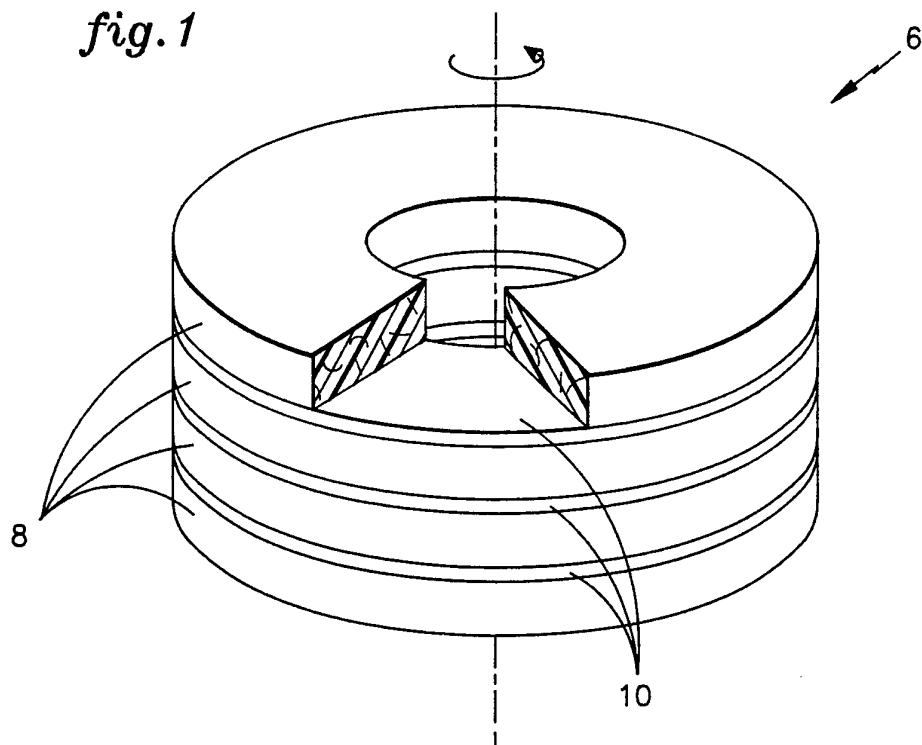


fig. 2

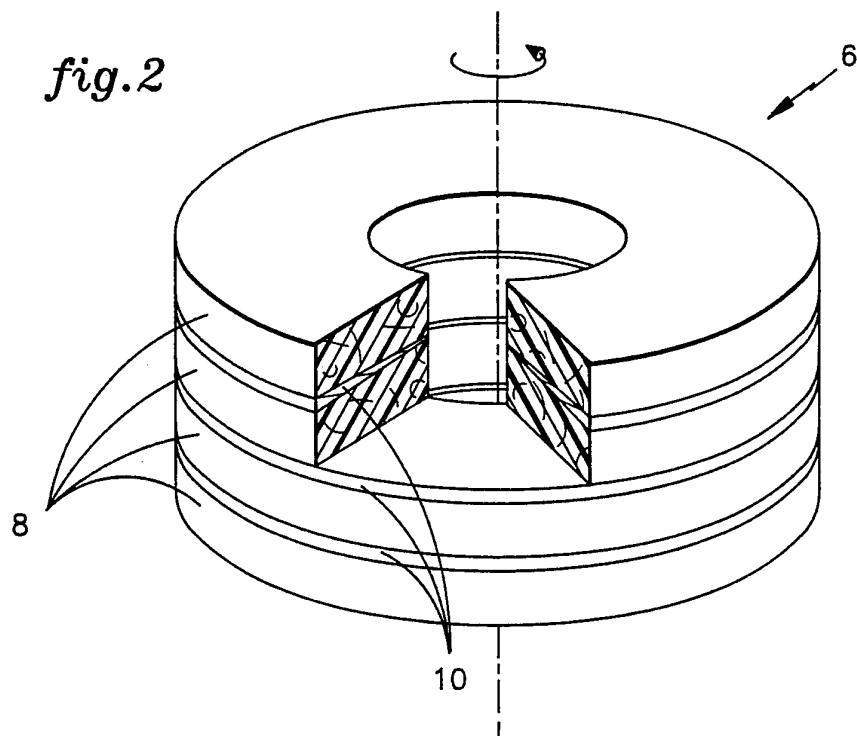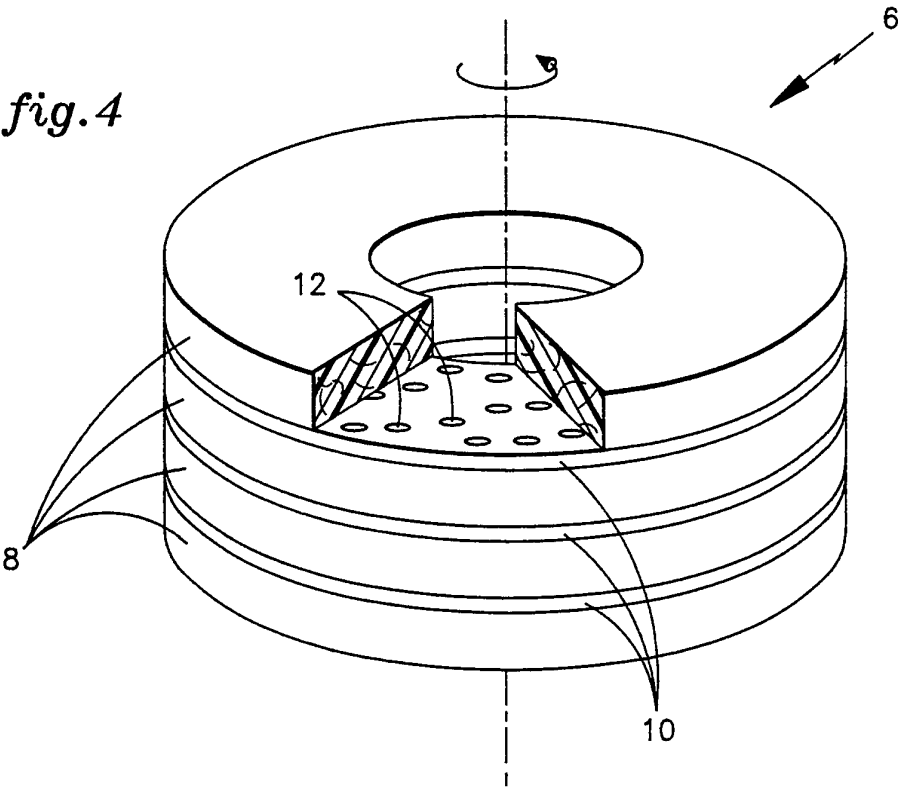

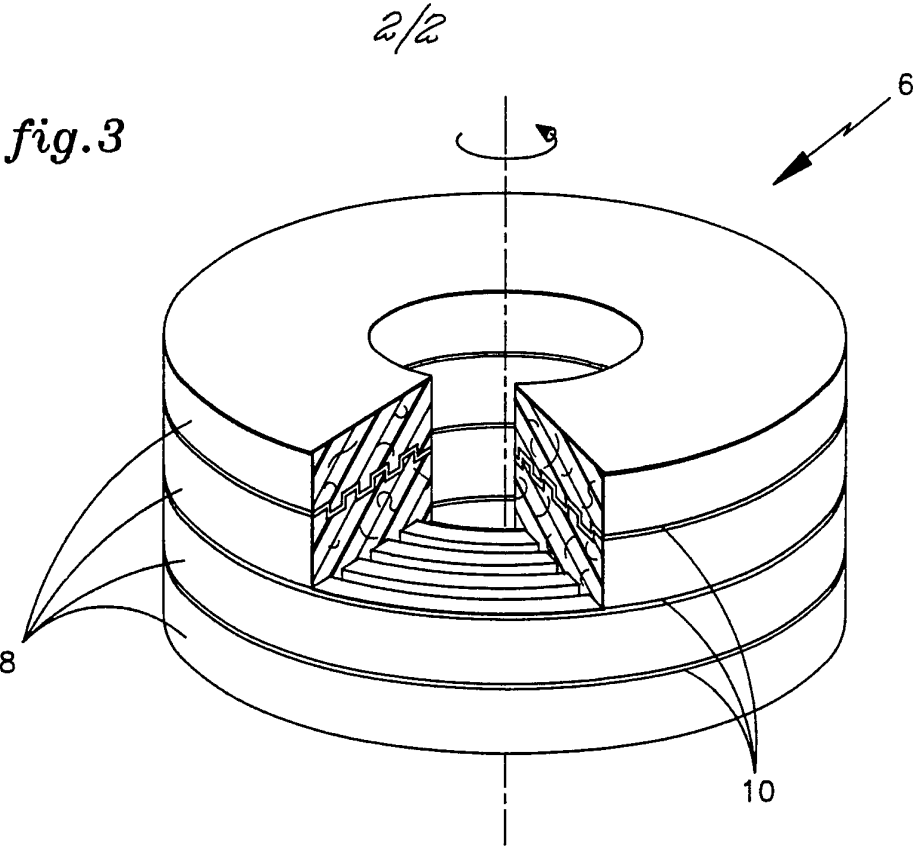

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 94/08614

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 F16F15/305

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 F16F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,4 697 324 (W.F. GRANT) 6 October 1987 see the whole document ---	1-8,16
X	PATENT ABSTRACTS OF JAPAN vol. 10, no. 189 (M-494) (2245) 3 July 1986 & JP,A,61 031 739 (HITACHI) 14 February 1986 see abstract ---	1-3
A	US,A,3 296 886 (T.J. REINHART) 10 January 1967 see the whole document ---	1
A	US,A,4 000 665 (D.W. RABENHORST) 4 January 1977 see the whole document --- -/--	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

7 November 1994

Date of mailing of the international search report

16. 11. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kusardy, R

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 94/08614

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 186 245 (J.J. GILMAN) 29 January 1980 see the whole document ---	1
A	US,A,4 207 778 (B.D. HATCH) 17 June 1980 see the whole document -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 94/08614

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4697324	06-10-87	CA-A- 1259018 DE-A- 3535070 FR-A- 2574342 GB-A, B 2168032 JP-B- 6026810 JP-A- 61139407	05-09-89 12-06-86 13-06-86 11-06-86 13-04-94 26-06-86
US-A-3296886		NONE	
US-A-4000665	04-01-77	NONE	
US-A-4186245	29-01-80	CA-A- 1125544 EP-A, B 0009902 JP-A- 55047033	15-06-82 16-04-80 02-04-80
US-A-4207778	17-06-80	US-A- 4102221	25-07-78