



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
14.09.2005 Bulletin 2005/37

(51) Int Cl.7: **C21D 8/00, C22C 38/00**

(21) Application number: **03780855.7**

(86) International application number:
PCT/JP2003/016189

(22) Date of filing: **17.12.2003**

(87) International publication number:
WO 2004/055222 (01.07.2004 Gazette 2004/27)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **18.12.2002 JP 2002367062**

(71) Applicant: **National Institute for Materials Science
Ibaraki 305-0047 (JP)**

(72) Inventors:
• **KIKUCHI, T.,
c/o NAT. INSTITUTE FOR MAT. SCIENCE
Tsukuba-shi, Ibaraki 305-0047 (JP)**
• **KAJIWARA, S.,
c/o NAT. INSTITUTE FOR MAT. SCIENCE
Tsukuba-shi, Ibaraki 305-0047 (JP)**

• **BARUJ, A.,
c/o NAT. INSTITUTE FOR MAT. SCIENCE
Tsukuba-shi, Ibaraki 305-0047 (JP)**
• **OGAWA, K.,
c/o NAT. INSTITUTE FOR MAT. SCIENCE
Tsukuba-shi, Ibaraki 305-0047 (JP)**
• **SHINYA, N.,
c/o NAT. INSTITUTE FOR MAT. SCIENCE
Tsukuba-shi, Ibaraki 305-0047 (JP)**

(74) Representative: **Vossius & Partner
Siebertstrasse 4
81675 München (DE)**


(54) **METHOD OF THERMO-MECHANICAL-TREATMENT FOR Fe-Mn-Si SHAPE-MEMORY ALLOY
DOPED WITH NbC**

(57) The present invention provides a thermomechanical treatment means for a Fe-Mn-Si-based shape memory alloy having specified components with Nb, C addition with simple deformation prior to aging. Such deformation treatment prior to aging is carried out in the inventions of the prior applications in a temperature range of from 500°C to 800°C. According to the present invention, however, the deformation treatment prior to the aging treatment can be successfully carried out not at high temperature but at room temperature, if the deformation ratio is in a specified range.

The technical meaning of the present invention must be clearly understood as compared to the prior art and the inventions of the prior applications because the present invention allows the treatment at room temperature while the others require troublesome treatment at high temperature so that there is significant difference therebetween. That is, according to the present invention, the remarkable improvement in shape memory property is achieved first time by a combination of specified alloy components, specified deformation ratio at room temperature, and setting of aging condition to a certain range. With the development of the present invention, it is expected that the use of shape memory alloys will be accelerated toward the practical use in a

wide variety of fields.

FIG. 1

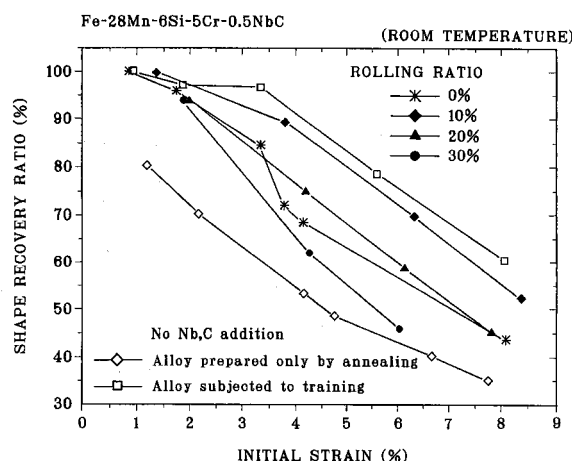

Description

TECHNICAL FIELD

[0001] The present invention relates to a thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition. More particularly, the present invention relates to a thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition which exhibits a satisfactory shape memory effect without undergoing so-called training, providing improved performance.

BACKGROUND OF THE INVENTION

[0002] It has been a long time since the Fe-Mn-Si-based shape memory alloys had been proposed and invented. However, unfortunately, the alloys of Fe-Mn-Si system may be currently in a situation that the alloys are not sufficiently used yet and not yet put to practical use. The main cause is that the alloys can not exhibit satisfactory shape memory effect without undergoing a special thermomechanical treatment called training.

[0003] Here, the training means a process sequence of repeating the following treatment several times to improve shape memory effect. The treatment consists of deforming an alloy by 2-3% at room temperature and then heating it to around 600°C higher than the reverse transformation temperature of the alloy.

[0004] In the face of the situation of prior art in which the aforementioned troublesome training is indispensable, inventors of this invention have earnestly studied aiming at developing a treatment with simple process, especially not requiring the training. As a result, the inventors have found a fact that if a small amount of Nb and C elements is applied to a particular shape memory alloy i.e. a Fe-Mn-Si-based shape memory alloy and a suitable aging heating treatment is subjected to the alloy to generate fine NbC carbides in structure of the alloy, a sufficiently satisfactory shape memory effect is obtained without undergoing the troublesome treatment called training, and thus previously filed a patent application (see Patent Document 1). The inventors have studied also about the thermomechanical treatments for the alloy with Nb, C addition, and they found a fact that pre-deformation in a temperature range of from 500°C to 800°C and a subsequent aging treatment lead to a further improved shape memory effect and thus also filed patent applications about this (see Patent Document 2, Patent Document 3).

Patent Document 1;

Japanese Patent Unexamined Publication No. 2001-226747 Patent Document 2;

Japanese Patent Unexamined Publication No. 2001-296901 Patent Document 3;

Japanese Patent Unexamined Publication No. 2002-79295

[0005] We believe that the inventions proposed in the aforementioned prior applications facilitate astonishing progress in the shape memory alloy technology, contribute to put the shape memory alloy to practical use for the future, and greatly contribute to the development of industry. However, there are still some points to be improved in proposed inventions. As for the two latter prior applications (Patent Document 2, Patent Document 3), the inventions proposed in these applications are significantly meaningful because the quite easy treatment process is achieved as well as further improved shape memory performance of alloy. In addition, it was recognized that the shape memory performance is therefore dramatically improved, thus dramatically increasing the degree of practical use. That is, the works and effects of the inventions of these applications are quite noticeable. However, there still remains a problem that the treatment process requires a heating treatment in a high temperature range of from 500°C to 800°C, which causes difficulties in most cases. It is undeniable that this point makes it difficult to put the shape memory alloys to practical use.

DISCLOSURE OF THE INVENTION

[0006] The object of the present invention is to fundamentally solve the aforementioned problems.

[0007] The inventors of this invention has earnestly studied aiming at developing and ensuring good shape memory properties for a shape memory alloy of specified components even with deformation at low temperatures. As a result, they found that the satisfactory shape memory properties can be sufficiently ensured even with deformation at room temperature so as to achieve the aforementioned object.

[0008] That is, they found amazing fact that the excellent shape memory property of alloy can be developed just by applying a basic operation comprising deforming a Fe-Mn-Si-based shape memory alloy with Nb, C addition at room temperature and then subjecting the deformed alloy to aging heating treatment to precipitate NbC carbides. In brief, the aforementioned object is achieved by the present invention.

[0009] The present invention was made on the basis of the aforementioned knowledge and success. The solving means to solve the problems are the followings (1)-(7).

(1) A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition comprising: deforming a Fe-Mn-Si-based shape memory alloy with Nb, C addition by a deformation ratio of from 5% to 40% at room temperature, and subjecting the deformed alloy to aging treatment to precipitate NbC carbides.

(2) A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition according to the above (1), wherein the Fe-Mn-

Si-based shape memory alloy with Nb, C addition comprises, as alloy components, Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more.

(3) A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition according to the above (1), wherein the Fe-Mn-Si-based shape memory alloy with Nb, C addition comprises, as alloy components, Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Cr: 1% to 20% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more.

(4) A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition according to the above (1), wherein the Fe-Mn-Si-based shape memory alloy with Nb, C addition comprises, as alloy components, Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Cr: 1% to 20% by weight, Ni: 0.1% to 20% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more.

(5) A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition according to any one of the above (2) through (4), wherein the atomic ratio between Nb and C is set in a range of from 1.0 to 1.2.

(6) A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition according to any one of the above (2) through (5), wherein the Fe-Mn-Si-based shape memory alloy with Nb, C addition contains, as impurities, Cu: 3% by weight or less, Mo: 2% by weight or less, Al: 10% by weight or less, Co: 30% by weight or less, and/or N: 5000 ppm or less.

(7) A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition according to any one of the above (1) through (6), wherein the conditions for the aging treatment are a temperature range of 400°C to 1000°C and an aging time from 1 minute to 2 hours.

EFFECT OF THE INVENTION

[0010] As a thermomechanical treatment for a Fe-Mn-Si-based shape memory alloy having specified components with Nb, C addition, conventionally, the processing treatment prior to aging is carried out by training. Alternatively, in the inventions of the prior applications, the processing treatment prior to aging is carried out in a temperature range of from 500°C to 800°C. According to the present invention, however, the processing treat-

ment prior to the aging treatment can be successfully carried out without high temperature, i.e. at room temperature, by setting a processing ratio in a specified range.

[0011] The technical meaning of the present invention must be clearly understood as compared to the prior art and the inventions of the prior applications on which the present invention is based because there are obvious difference therebetween. That is, according to the present invention, the remarkable improvement in shape memory property is achieved first time by a combination of specified alloy components, specified deformation ratio at room temperature, and setting of aging condition to a certain range. Amazingly by run-of-the-mill thermomechanical treatment comprising a deformation at room temperature and then aging, the shape recovery ratio equivalent to that of the sample subjected to the training can be obtained and, in addition, the shape recovery stress significantly larger than that of the sample subjected to the training can be obtained. With development of the present invention, it is expected that the use of shape memory alloys will be accelerated toward the practical use in a wide variety of fields.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Fig. 1 is a diagram showing relations between the amount of initial deformation and the shape recovery ratio depending on the thermomechanical treatment of Fe-Mn-Si-based shape memory alloys with Nb, C addition of the present invention; and

Fig. 2 is a diagram showing the relation between the recovered shape strain and shape recovery stress depending on the thermomechanical treatment of Fe-Mn-Si-based shape memory alloys with Nb, C addition of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

[0013] The reason why the deformation ratio at room temperature is specified to be from 5% to 40% comes from the fact that the deformation ratio lower than 5% does not effectively contribute to improvement in shape memory property while the deformation ratio over 40% makes a sample too hard so that it is extremely difficult to deform the sample after subjected to an aging treatment.

[0014] An alloy as to be subjected to the thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition of the present invention has the following chemical compositions, just as specified in the prior applications, 1) Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more;

2) The Fe-Mn-Si-based shape memory alloy with Nb, C addition has the following compositions Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Cr: 1% to 20% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more; has the following compositions Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Cr: 1% to 20% by weight, Ni: 0.1% to 20% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more.

[0015] In either of the Fe-Mn-Si-based shape memory alloys with Nb, C addition, the atomic ratio Nb/C between Nb and C in the alloy is preferably from 1.0 to 1.2.

[0016] Further, the alloy as to be subjected to a thermomechanical treatment method for the Fe-Mn-Si-based shape memory alloy of the present invention is permitted to contain, as impurities, one or more of a group consisting of Cu of 3% by weight or less, Mo of 2% by weight or less, Al of 10% by weight or less, Co of 30% by weight or less, and N of 5000 ppm or less.

Embodiments of the invention

[0017] Hereinafter, the invention will be specifically described on the basis of Fig. 1 and Fig. 2. It should be noted that examples shown in the drawings are for the purpose of disclosure for helping the easy understanding of the present invention and are not intended to limit the scope of the present invention.

EXAMPLES

[0018] First, a Fe-28Mn-6Si-5Cr-0.53Nb-0.06C alloy (% by weight) with Nb, C addition of the present invention was prepared by melting. How the shape memory property is improved by rolling at room temperature and then subjecting it to an aging treatment in a temperature range of 400°C to 1000°C for a time period from 1 minute to 2 hours, is shown below.

[0019] FIG. 1 is a graph showing differences in shape recovery ratio among a case in which only aging was conducted (0% rolling) and cases in which aging was conducted after rolling by 10%, 20% and 30% at room temperature. In all of the cases, the aging treatment was conducted at 800°C for 10 minutes. For comparison, results of samples of the Fe-28Mn-6Si-5Cr alloy with no Nb, C addition prepared only by annealing and samples of the alloy prepared after subjected to the training five times are shown. The abscissa shows the initial strain (%) by tensile deformation at room temperature, and the ordinate shows the recovery ratio of strain when the sample is heated to 600°C. When heated to 400°C, approximately the same shape recovery ratio is also obtained. The samples used in tests were test pieces having a thickness of 0.6 mm, a width of 1 to 4 mm, and a

length (gage length) of 15 mm.

[0020] As is known from this figure, the sample rolled by 10% has shape memory recovery ratios nearly equivalent to or slightly lower than those of the alloy with no Nb, C addition which was subjected to training five times. Practically the necessary initial strain is believed to be about 4%. A shape memory recovery ratio of about 90% shown at this strain strongly suggests that it is used as a practically applicable alloy. Training of at least five times is necessary for obtaining the same shape recovery ratio as this sample, with a conventional Fe-Mn-Si-based shape memory alloy with no Nb, C addition. As is understood from this, the present invention exhibits shape memory properties with a simple method.

[0021] The sample with a higher rolling ratio of 20% has shape memory recovery ratios nearly equivalent to or slightly higher than those of the case without rolling (only aged). However, the sample with a further higher rolling ratio of 30% has shape memory recovery ratios lower than those of the case which was only aged in a range with large initial strain.

[0022] On the other hand, as for shape recovery stress which is one of the important shape memory properties for practical use, the shape recovery stresses of samples aged after rolling by 20% and 30% are remarkably improved. Fig. 2 is a graph showing the degrees of improvement in shape recovery stress of these samples, in comparison with the case in which only aging was conducted (0% rolling) and a case in which the aging was conducted after rolling by 10%. The recovery stress when recovered strain on the abscissa is zero means the stress generated when a sample is tensile-deformed at room temperature, then, heated to the reverse transformation temperature or more in a state that the both ends of the sample are fixed without any recovery, and returned to room temperature again. The recovery stress at recovered strain of 2%, for example, means the stress generated in case that the both ends of the sample are fixed after a recovery of strain by 2%. Tests were conducted with the initial strain given at room temperature of from 4% to 6%.

[0023] The test pieces used were the same as those used for obtaining the results shown in Fig. 1. The recovered strain on the abscissa in Fig. 2 is explained, taking a case where a shape memory alloy is used as a coupling for examples. It is equivalent to the ratio (%) of clearance between the pipes and the coupling part (shape memory alloy) to the diameter. Remarkable increase in shape recovery stress is observed in a range of high rolling ratio: a shape recovery stress of 310MPa is obtained at the recovered strain of 0% when the rolling ratio is from 20% to 30% at room temperature and a shape recovery stress of 200 MPa is obtained even at the recovered strain of 2% for the same rolling ratio. It is also found that the same shape recovery stress as the case subjected to training is obtained even in a case that the rolling ratio is 10%.

[0024] That is, as is known from the results of this fig-

ure (Fig. 2), remarkable increase in shape recovery stress is observed in cases of high rolling ratios (20%, 30%) as compared to the cases of a rolling ratio of 0% and a rolling ratio of 10%. For the sake of comparison, Fig. 2 shows shape recovery stresses of the sample with no Nb, C addition and the sample subjected to the training five times. It is seen from this figure that the recovery stresses of these samples are much smaller than those of the present invention.

[0025] As described above, the present invention was made by finding that the deformation treatment prior to the aging treatment to a Fe-Mn-Si-based shape memory alloy having specified components with Nb, C addition can be successfully carried out at room temperature if the deformation ratio is in a specified range. The technical meaning of the present invention must be clearly understood because there are obvious advantages as compared to a conventional one which requires the training accompanied by troublesome operation and the inventions of the prior applications which still require high-temperature deformation in a range of from 500°C to 800°C.

[0026] That is, according to the present invention, the remarkable improvement in shape memory property is achieved first time by a combination of specified alloy components, specified deformation ratio at room temperature, and setting of aging condition to a certain range. Amazingly by run-of-the-mill thermomechanical treatment comprising a deformation at room temperature and then aging, the shape recovery ratio equivalent to that of the sample subjected to the training can be obtained and, in addition, the shape recovery stress significantly larger than that of the sample subjected to the training can be obtained. Anyway, the meaning of the present invention is significant. The shape memory alloy according to the present invention can be used as tightening materials for various applications, for example, for tightening water pipes, tightening oil pipes, etc., which will produce great economic effects.

[0027] It should be noted that the applications as tightening materials mentioned above are just examples and the present invention is not limited to such applications. With the development of the present invention, it is expected that the shape memory alloy will be put to practical use for various applications in a wide variety of fields.

INDUSTRIAL APPLICABILITY

[0028] The present invention provides a thermomechanical treatment means for a Fe-Mn-Si-based shape memory alloy having specified components with Nb, C addition with simple processing treatment prior to aging. Conventionally, the processing treatment prior to aging is carried out by training. Alternatively, in the inventions of the prior applications, the processing treatment prior to aging is carried out in a temperature range of from 500°C to 800°C. According to the present invention,

however, the processing treatment prior to the aging treatment can be successfully carried out without high temperature, i.e. at room temperature, if using a processing ratio in a specified range.

[0029] The technical meaning of the present invention must be clearly understood as compared to the prior art and the inventions of the prior applications because there are obvious difference therebetween. That is, according to the present invention, the remarkable improvement in shape memory property is achieved first time by a combination of specified alloy components, specified processing ratio at room temperature, and setting of aging condition into a certain range.

[0030] The technical meaning of the present invention must be clearly understood as compared to the prior art and the inventions of the prior applications because there are obvious difference therebetween. That is, according to the present invention, the remarkable improvement in shape memory property is achieved first time by a combination of specified alloy components, specified deformation ratio at room temperature, and setting of aging condition to a certain range. Amazingly by run-of-the-mill thermomechanical treatment comprising a deformation at room temperature and then aging, the shape recovery ratio equivalent to that of the sample subjected to the training can be obtained and, in addition, the shape recovery stress significantly larger than that of the sample subjected to the training can be obtained. With development of the present invention, it is expected that the use of shape memory alloys will be accelerated toward the practical use in a wide variety of fields.

Claims

1. A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition comprising:

deforming a Fe-Mn-Si-based shape memory alloy with Nb, C addition by a deformation ratio of from 5% to 40% at room temperature, and subjecting the deformed alloy to aging heating treatment to precipitate NbC carbides.

2. A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition as claimed in claim 1, wherein the Fe-Mn-Si-based shape memory alloy with Nb, C addition comprises, as alloy components, Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more.
3. A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addi-

tion as claimed in claim 1, wherein the Fe-Mn-Si-based shape memory alloy with Nb, C addition comprises, as alloy components, Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Cr: 1% to 20% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more. 5

4. A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition as claimed in claim 1, wherein the Fe-Mn-Si-based shape memory alloy with Nb, C addition comprises, as alloy components, Mn: 15% to 40% by weight, Si: 3% to 15% by weight, Cr: 1% to 20% by weight, Ni: 0.1% to 20% by weight, Nb: 0.1% to 1.5% by weight, C: 0.01% to 0.2% by weight, and Fe and inevitable impurities: residual amount, wherein the atomic ratio Nb/C between Nb and C is 1 or more. 10 15 20

5. A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition as claimed in any one of claims 2 through 4, wherein the atomic ratio between Nb and C is set in a range of from 1.0 to 1.2. 25

6. A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition as claimed in any one of claims 2 through 5, wherein the Fe-Mn-Si-based shape memory alloy with Nb, C addition contains, as impurities, Cu: 3% by weight or less, Mo: 2% by weight or less, Al: 10% by weight or less, Co: 30% by weight or less, and/or N: 5000 ppm or less. 30 35

7. A thermomechanical treatment method for a Fe-Mn-Si-based shape memory alloy with Nb, C addition as claimed in any one of claims 1 through 6, wherein the conditions for the aging heating treatment are a temperature range of 400°C to 1000°C and a time period from 1 minute to 2 hours. 40 45 50 55

FIG. 1


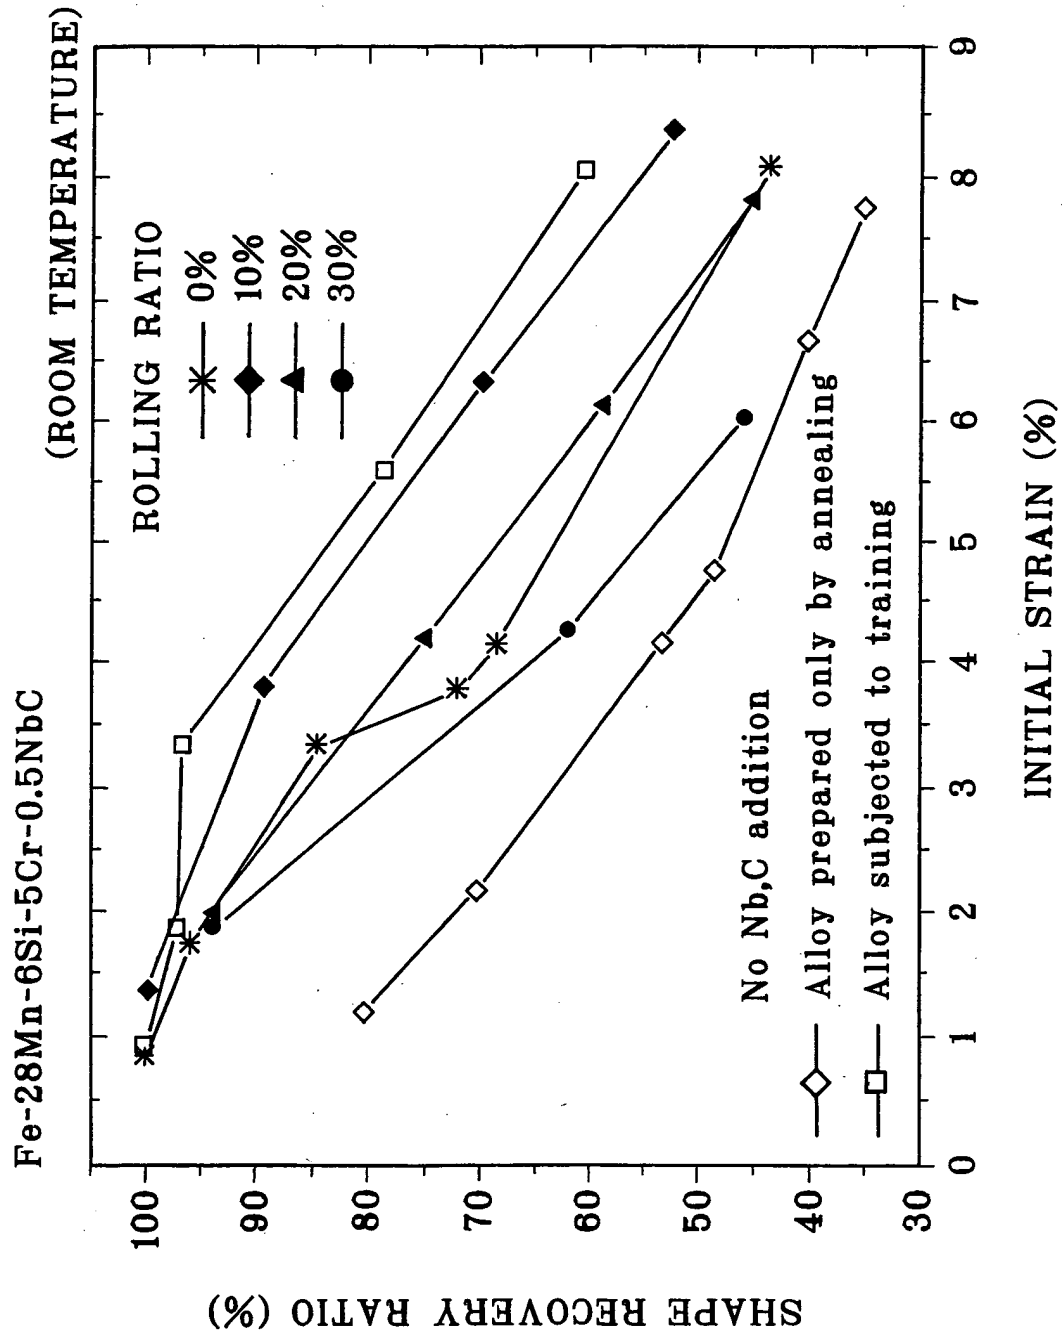


FIG. 2

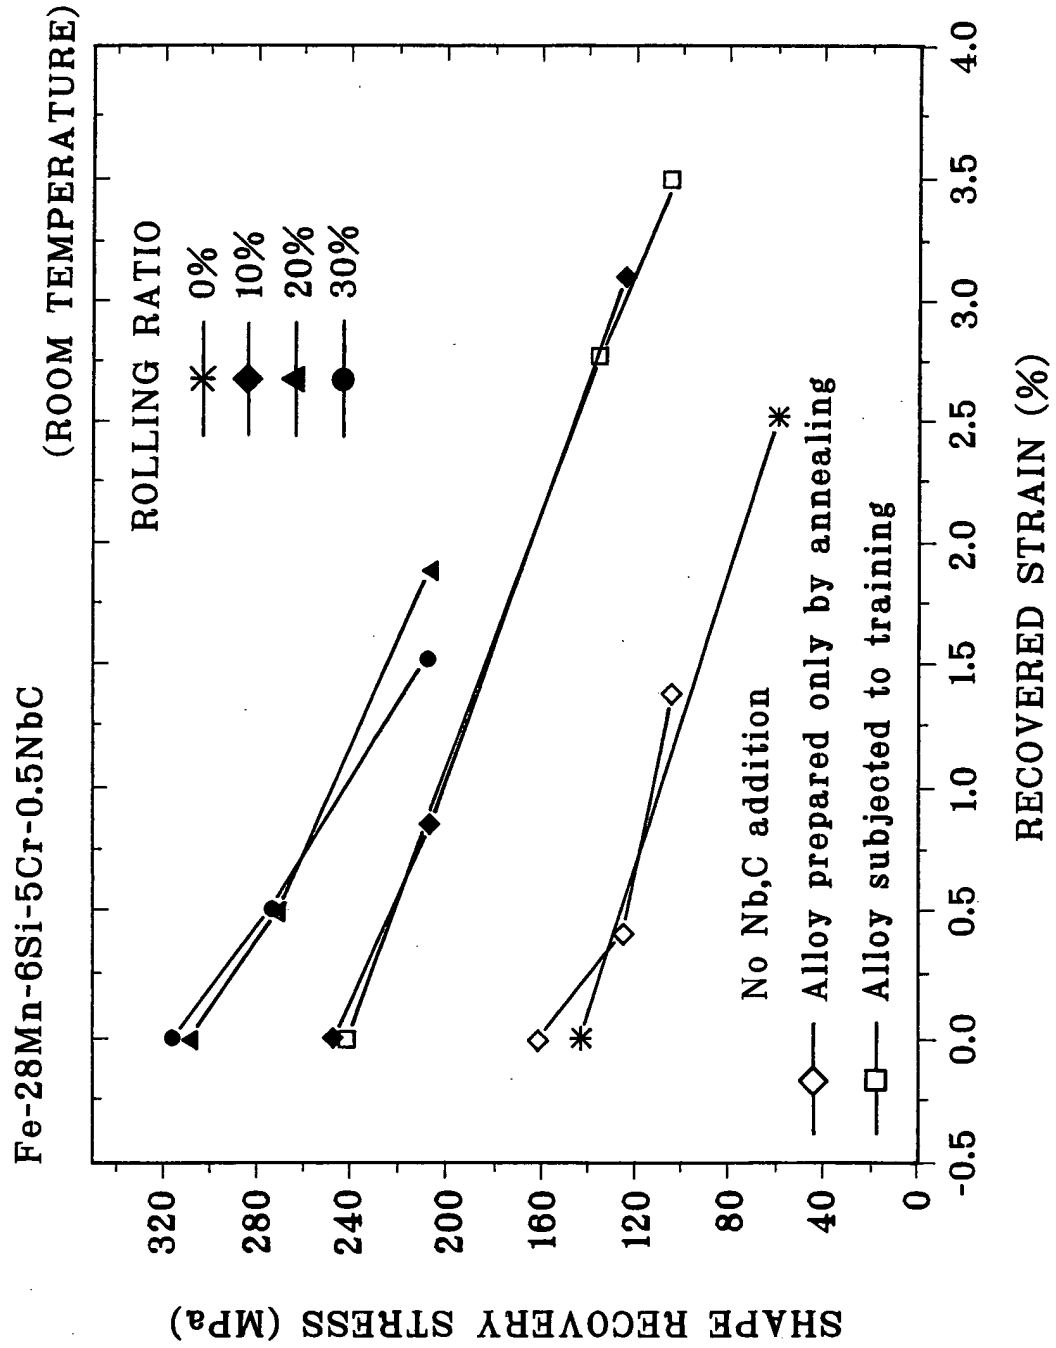

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP03/16189

A. CLASSIFICATION OF SUBJECT MATTER
Int.Cl.⁷ C21D8/00, C22C38/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
Int.Cl.⁷ C21D6/00, 8/00, C22C38/00-38/60

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2004
Kokai Jitsuyo Shinan Koho 1971-2004 Jitsuyo Shinan Toroku Koho 1996-2004

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
JICST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	SAWAGUCHI et al., "Shitsuon de Incho Henkeigo Jiko Netsushori shita Fe-28Mn-6Si-5Cr-0.5NbC Gokin no Keijo Kioku Tokusei", The Japan Institute of Metals Koen Gaiyo, Vol.133, page 75, (11 October, 2003 (11.10.03)	1-7
Y	A BARUJ ET AL., "SHAPE MEMORY BEHAVIOUR AND RECOVERY STRENGTH IN TRAINING-LESS FE-MN-SI-BASED SMA CONTAINING NBC", The Japan Institute of Metals Koen Gaiyo, Vol.128, page 347	1-7
Y	US 2001-23723 A1 (KIKUCHI ET AL.), 27 September, 2001 (27.09.01), Claims & JP 2001-226747 A & EP 1123983 A1 & CN 1317595 A	1-7

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* "A" "E" "L" "O" "P"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier document but published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	"T" "X" "Y" "&"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document member of the same patent family
--------------------------------------	---	--------------------------	--

Date of the actual completion of the international search
10 February, 2004 (10.02.04)

Date of mailing of the international search report
24 February, 2004 (24.02.04)

Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP03/16189

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5032195 A (KOREA INSTITUTE OF SCIENCE AND TECHNOLOGY), 16 June, 1991 (16.06.91), Claims & JP 2-270938 A	1-7
A	JP 62-112720 A (Nippon Steel Corp.), 23 May, 1987 (23.05.87), Claims (Family: none)	1-7

Form PCT/ISA/210 (continuation of second sheet) (July 1998)