



US00D565604S

(12) **United States Design Patent**
Bucher et al.

(10) **Patent No.:** **US D565,604 S**

(45) **Date of Patent:** **** Apr. 1, 2008**

(54) **DISCHARGE CHUTE**

(75) Inventors: **Corey W. Bucher**, Wrightstown, WI (US); **John H. Feller**, Kaukauna, WI (US)

(73) Assignee: **Ariens Company**, Brillion, WI (US)

(**) Term: **14 Years**

(21) Appl. No.: **29/295,355**

(22) Filed: **Sep. 27, 2007**

Related U.S. Application Data

(63) Continuation of application No. 29/249,989, filed on Oct. 30, 2006, now Pat. No. Des. 556,788.

(51) **LOC (8) Cl.** **15-03**

(52) **U.S. Cl.** **D15/17**

(58) **Field of Classification Search** D15/15, D15/17, 28; 56/15.7, 13.3, 200, 320.1, 320.2, 56/202, 192, 16.6, 17.4, 314, 316, 255, DIG. 20, 56/DIG. 22; 65/DIG. 24

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,756,556 A	7/1956	Watkins	
3,049,853 A	8/1962	Horner et al.	
3,503,194 A	3/1970	Ritums	
3,568,421 A	3/1971	Smith et al.	
3,646,739 A	3/1972	Dahl	
3,648,445 A	3/1972	Efflandt	
3,673,778 A	7/1972	Ramey	
3,721,078 A *	3/1973	Haffner	56/202
3,760,572 A	9/1973	Marion et al.	
3,797,214 A	3/1974	Erdman et al.	
3,805,499 A	4/1974	Woelffer et al.	
3,818,687 A	6/1974	Houst et al.	
4,008,559 A	2/1977	Lessig, III et al.	
4,041,682 A	8/1977	Kidd	
D250,193 S	11/1978	Oosterling et al.	
4,142,351 A	3/1979	Neice et al.	
4,258,539 A	3/1981	Pearce et al.	

4,322,938 A	4/1982	Efflandt
4,502,271 A	3/1985	Hansen et al.
4,672,799 A	6/1987	Parish
4,882,898 A	11/1989	Samejima et al.
5,003,757 A	4/1991	Hill

(Continued)

OTHER PUBLICATIONS

John Deere 9660 STS, http://www.deere.com/en_US/ag/feature/2005/9660_sts_combine_hur_jan05.html.

Primary Examiner—Mitchell Siegel
Assistant Examiner—Mark Goodwin
(74) *Attorney, Agent, or Firm*—Michael Best & Friedrich LLP

(57) **CLAIM**

The ornamental design for a discharge chute, as shown and described.

DESCRIPTION

FIG. 1 is a perspective view of a discharge chute according to the present invention.

FIG. 2 is an enlarged perspective view of the discharge chute shown in FIG. 1.

FIG. 3 is a side view of the discharge chute shown in FIG. 1.

FIG. 4 is a front view of the discharge chute shown in FIG. 1.


FIG. 5 is a rear view of the discharge chute shown in FIG. 1.

FIG. 6 is a top view of the discharge chute shown in FIG. 1; and,

FIG. 7 is a bottom view of the discharge chute shown in FIG. 1.

The broken line showing of the environment is for illustrative purposes only and forms no part of the claimed design.

1 Claim, 4 Drawing Sheets

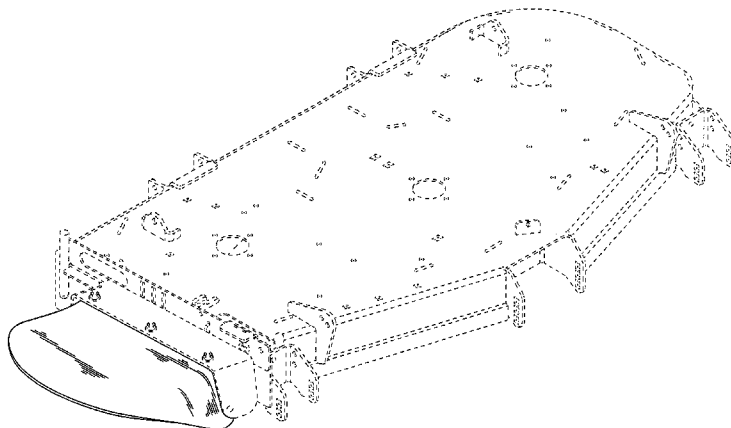

US D565,604 S

Page 2

U.S. PATENT DOCUMENTS

5,101,617 A	4/1992	Hare et al.	6,012,274 A	1/2000	Eavenson et al.
5,163,274 A	11/1992	Burdsall et al.	6,588,188 B2	7/2003	Dennie
5,195,311 A	3/1993	Holland	6,971,224 B1	12/2005	Hancock
5,331,794 A	7/1994	Reichle	6,986,240 B2	1/2006	Kallevit
D354,964 S	1/1995	Reichle	7,204,073 B1	4/2007	Chenevert
5,491,964 A	2/1996	Butler	2003/0019201 A1	1/2003	Eavenson, Sr.
5,499,494 A	3/1996	Boshell et al.	2004/0112031 A1	6/2004	Dickey
5,518,079 A	5/1996	Zvolanek	2004/0231311 A1	11/2004	Kallevig
5,913,804 A	6/1999	Benway	2005/0279072 A1	12/2005	Sarver et al.
5,992,135 A	11/1999	Benway	2006/0037299 A1	2/2006	Kallevig

* cited by examiner

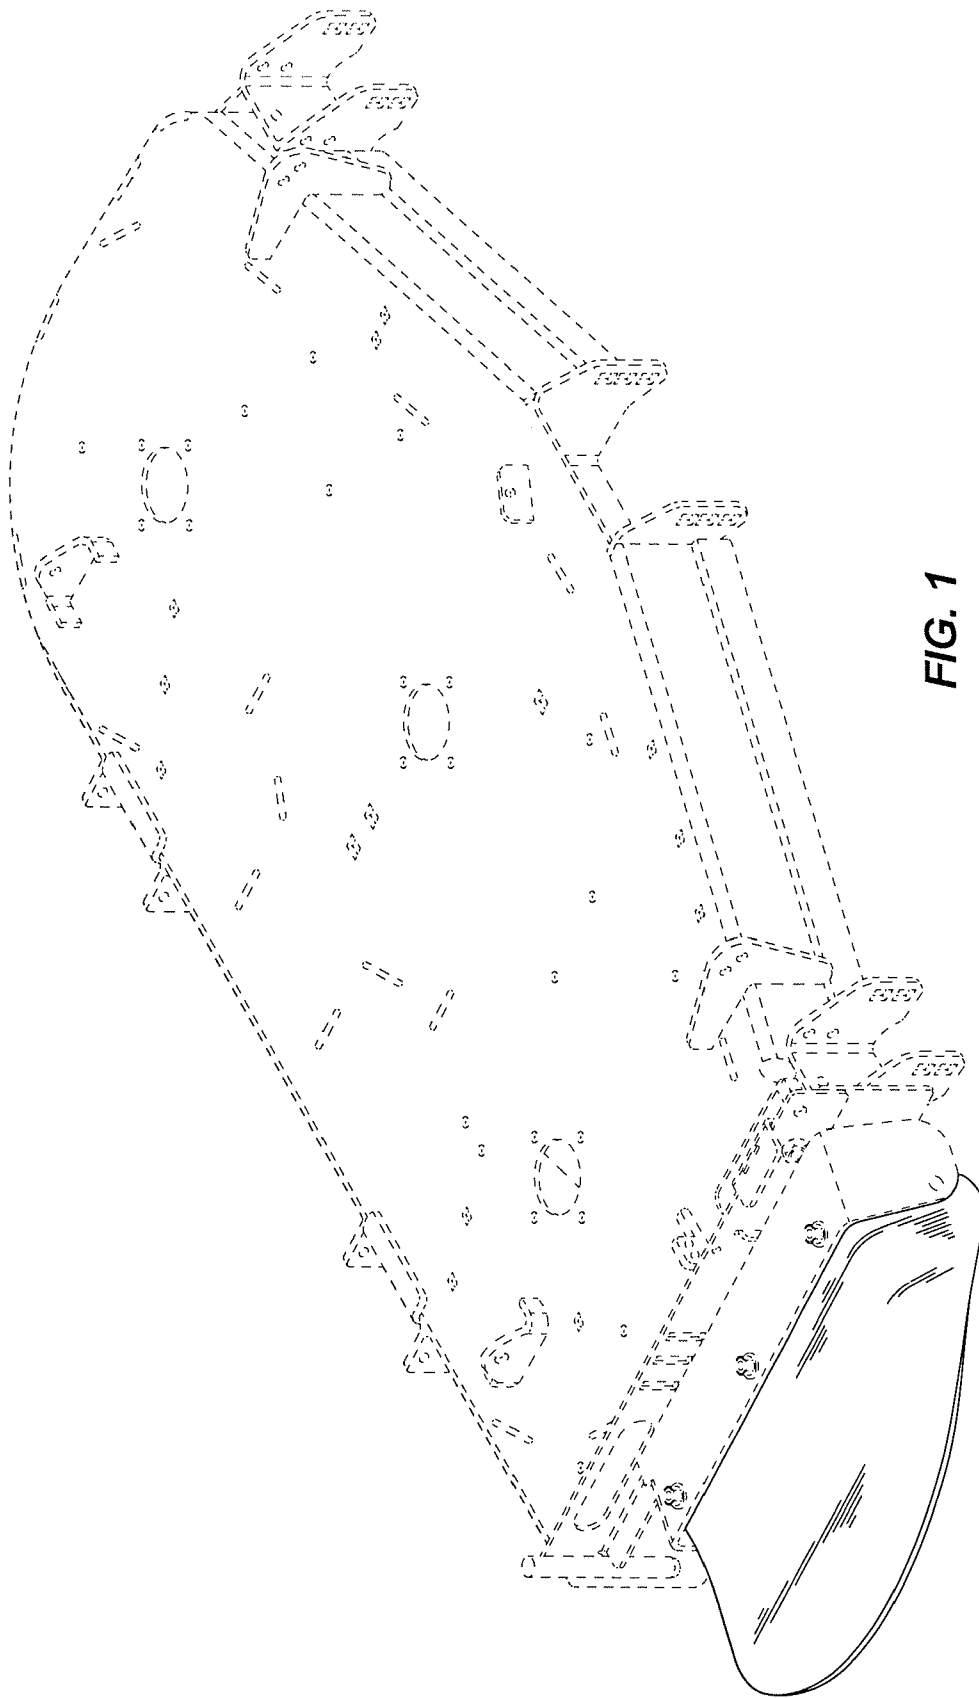


FIG. 1

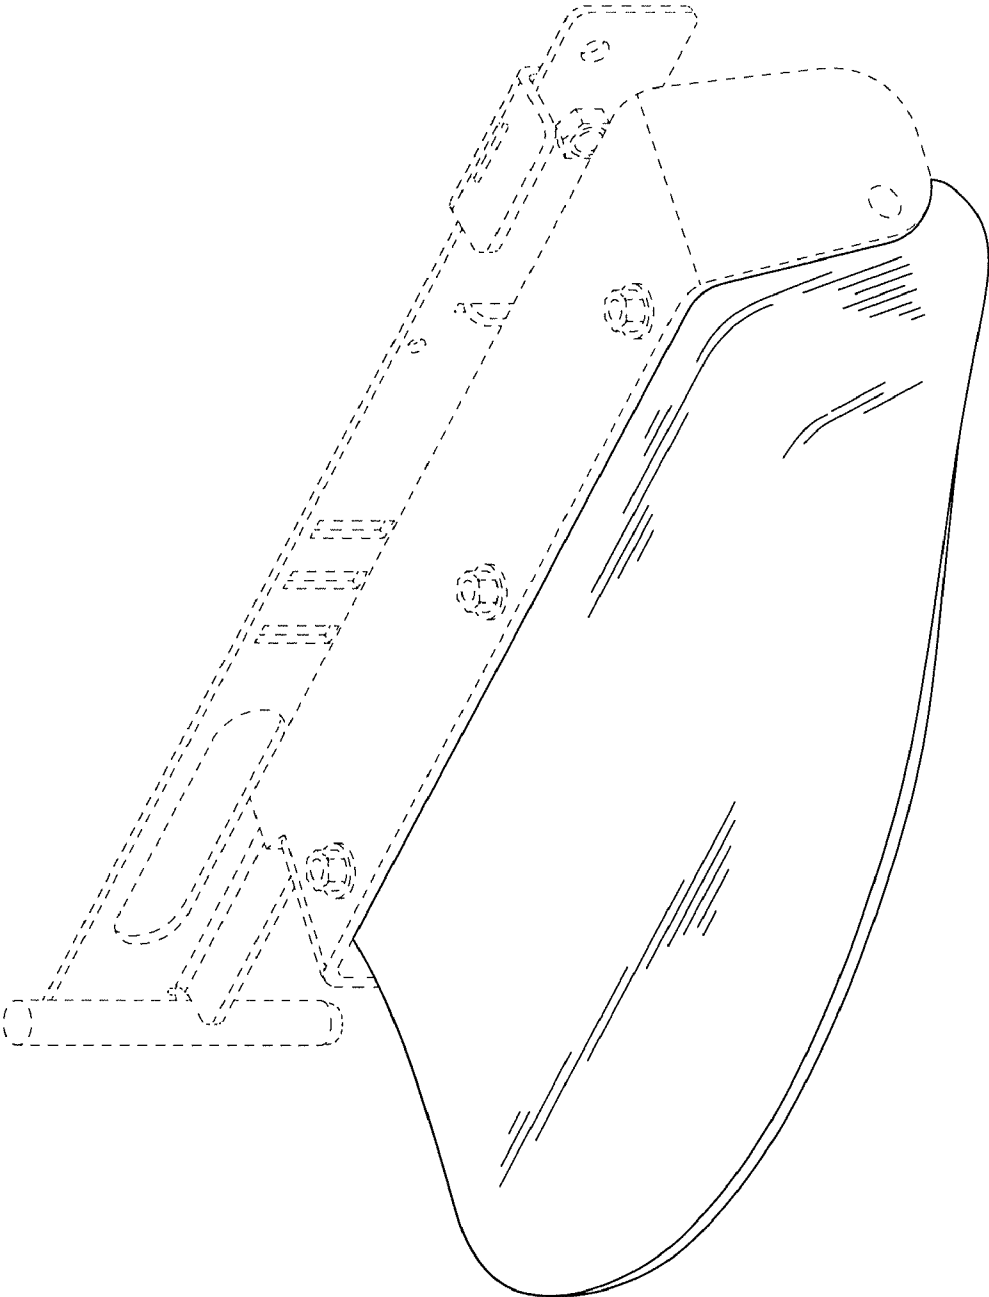


FIG. 2

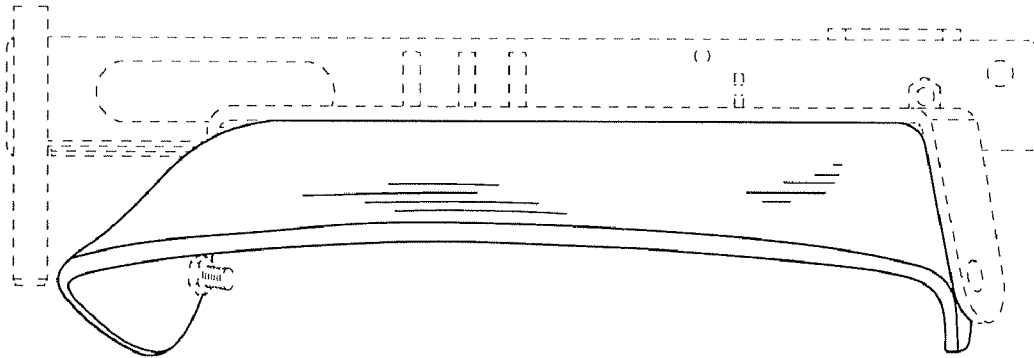


FIG. 3

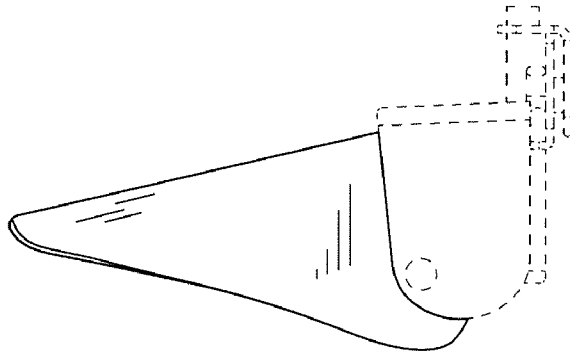


FIG. 4

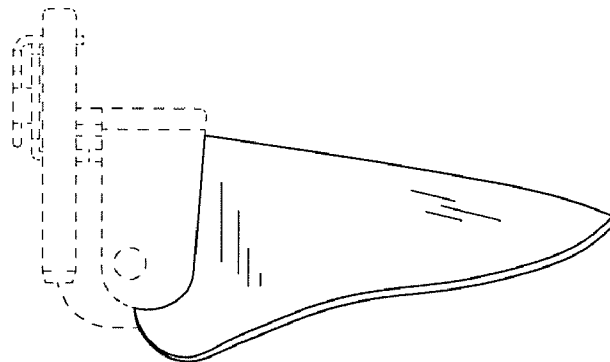


FIG. 5

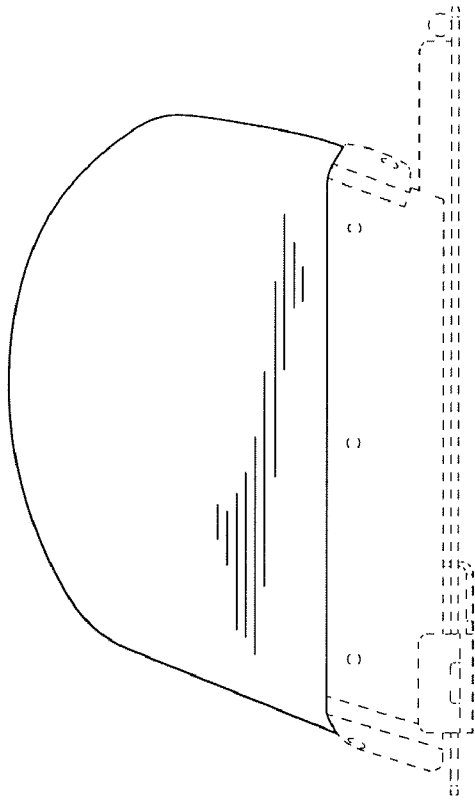


FIG. 6

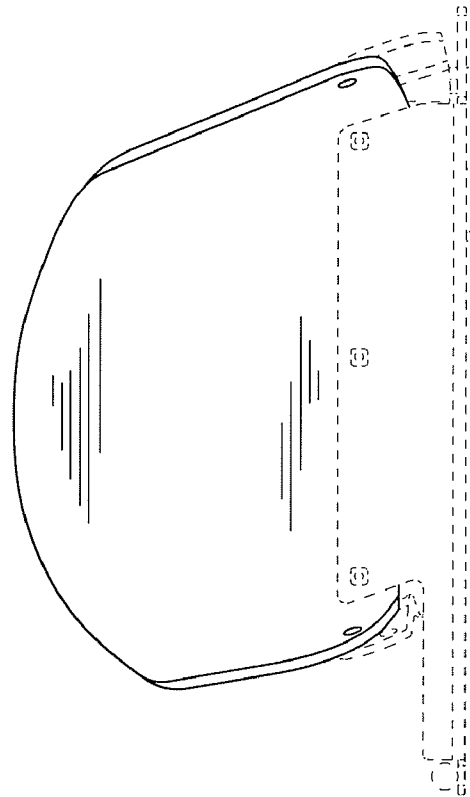


FIG. 7