



- (51) International Patent Classification:
B64D 11/00 (2006.01) *B64D 11/04* (2006.01)
- (21) International Application Number:
PCT/US2013/034606
- (22) International Filing Date:
29 March 2013 (29.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61 / 618 , 526 30 March 2012 (30.03.2012) IB
- (71) Applicant: B/E AEROSPACE, INC. B/E AEROSPACE, INC. [US/US]; 1400 Corporate Center Way, Wellington, Florida 33414, US (US).
- (72) Inventor; and
- (71) Applicant : BURD, Peter John Leslie [GB/GB]; Ty Mawr, Riverside, Burry Port, Carmarthenshire, South Wales, SA16 ORB (GB).
- (74) Agent: JAMES W. PAUL; FULWIDER PATTON LLP, 6060 Center Drive, Tenth Floor, Los Angeles, California 90045 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: AIRCRAFT GALLEY CHILLER SYSTEM

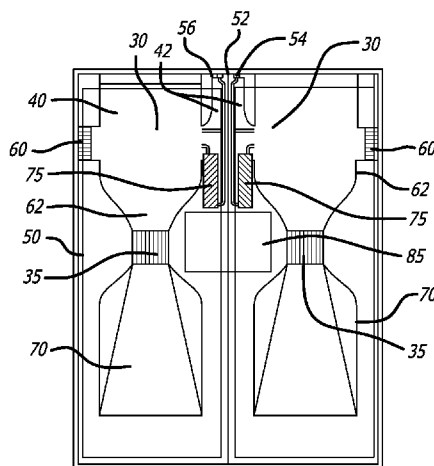


FIG. 2

(57) Abstract: A modular chiller for an aircraft galley beverage cart compartment is disclosed wherein a cassette (50) that inserts into the galley compartment (20) above the beverage cart (25) and houses an air return duct (210), a heat exchanger (30), a fan (35), and an air supply outlet (95); the chiller further includes a control valve for controlling the amount of air passing through the heat exchanger, and an electronic control box (185) for control over the chiller, where the cassette (50) is disposed between the beverage cart (25) and a galley work deck.

AIRCRAFT GALLEY CHILLER SYSTEM

CROSS-REFERENCES TO RELATED APPLICATIONS

This application claims priority from U.S. Provisional Patent Application No. 61/618,526, filed March 30, 2012, and from U.S. Non-Provisional Application No. 13/852,702, filed March 28, 2013, incorporated herein by reference in their entireties.

BACKGROUND

Large commercial passenger carrying airplanes predominantly employ one of two systems for keeping perishable food stuffs and non-perishable drinks at desired temperatures. Chilling is necessary to preserve perishables and make certain beverages and foods more palatable, especially during long haul and ultra-long haul aircraft journeys. The first method utilizes a standard vapor cycle based air chillers that utilize conventional refrigerant gas compression and expansion technology to generate a secondary re-circulated chilled air loop. The chilled air is generally supplied and returned via thermally insulated air ducting to and from a suitable storage structure, such as a galley. The air chiller may be located on or in the galley or mounted in part of the aircraft airframe.

The second method utilizes the same conventional refrigerant gas compression and expansion technology, but the cooling medium is a chilled liquid rather than a gas. This chilled liquid is pumped in a closed loop to and from a suitable storage structure such as a galley. The chilled liquid in some cases are configured as a large centralized system for the whole aircraft. In other cases, the chilled liquid can be circulated at each separate aircraft door galley complex to form a local area chilling loop, or be based on each individual galley as a standalone system. At the galley, the liquid is passed via a control valve and electronic control system to a heat exchanger, where an electric axial (or other) fan blows or sucks air through its matrix and around and enclosed areas of the storage structure that requires chilling, for example: a galley cart bay or compartment. The heat exchanger fan and its control system (though not necessarily all) are grouped together to form a chilled air recirculation unit that may be fitted in or on the galley or remotely from it, or the galley complex.

One drawback of these various chiller systems is that they take up a large percentage of available space in the galley, which is at a premium in an aircraft for obvious reasons. Further,

the chillers tend to be very heavy, which is also a drawback to their use on aircraft. Accordingly, it would be beneficial to have a chiller system that takes up less space and reflects a reduction in weight over conventional chiller systems currently in use.

SUMMARY OF THE INVENTION

5 The present invention is an aircraft chilled air distribution system with a reduced overall foot print and weight. This compact system is particularly suited for an aircraft galley that requires refrigerated or cooled carts or trolleys, and/or standard meal boxes, and/or chilled compartments. The chiller system of the present invention uses a cavity created within the area commonly separating the upper and lower portions of said aircraft galley (known as the work
10 deck area), for the installation of a chilled liquid fed chiller module with integral air distribution ductwork, a thermoelectric device or devices (using the Peltier principle) with integral air distribution ductwork, or an air chiller fed air distribution system.

 The location of the invention plays a useful role in both the galley foot print and weight reduction, as well as the efficient distribution of chilled air around the below work deck installed
15 trolley or cart. The through work deck air path, ductwork and air guiding devices are positioned for the efficient use of the chilled air to meet the certification requirements of the aircraft manufacturers.

 Other features and advantages of the present invention will become more apparent from the following detailed description of the preferred embodiments in conjunction with the
20 accompanying drawings, which illustrate by way of example the operation of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

 FIG. 1a is a side view of a chiller module for an aircraft galley beverage cart compartment;

 FIG. 1b is a rear view of the compartment of FIG. 1a;

25 FIG. 2 is a cross-sectional view taken along lines 2-2 of the module of FIG. 1a;

 FIG. 3a is a cross-sectional view of an alternate configuration of a chiller module;

FIG. 3b is a cross-sectional view of an alternate configuration of a chiller module with a reduced height;

FIG. 4a is a side view, in cross-section, of the chiller cassette;

FIG. 4b is a side view, in cross-section, of the components of the chiller cassette;

5 FIG. 4c is a side view, in cross-section, of the chiller cassette and components;

FIG. 5 is a cross-sectional view of an alternate chiller component configuration;

FIG. 6a is a cross-sectional view of a four cart chiller compartment ducting system;

FIG. 6b is a side view of the chiller compartment of FIG. 6a;

FIG. 7a is a front view of an air chiller system supply duct;

10 FIG. 7b is a front view of the air chiller return duct;

FIG. 7c are front and plan views of tapered restrictors for the ducting system;

FIG. 7d is a side view of the chiller ducting system;

FIG. 8a is a front view of a liquid chiller system duct and manifold; and

FIG. 8b is a side view of the liquid chiller system in the beverage cart compartment.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figures 1a and 1 b illustrate a first preferred layout for the chilled liquid supplied system of the present invention. A compartment 20 below the work deck of an aircraft galley houses a beverage cart 25, where the compartment is maintained at a below ambient temperature to keep the cart and its contents chilled. To cool the compartment, above the cart 25 is plug and play
20 chilling module 50 comprising a heat exchanger 30 and a fan 35 arranged in a loadable cassette. The chiller module 50 itself is designed to comply with the requirements of rapid installation and removal of LRU's (line replaceable units) on commercial airplanes, and therefore has the major components grouped together to form a cassette or module that is fitted inside the work deck

itself. Installation is carried out from the front or rear of the galley, or from inside the compartment from underneath the work deck.

Figure 2 illustrates a schematic of an exemplary chiller module 50. An electrical connector 52 is located at a first end to supply power to the chiller module 50, and a refrigerant input/output port 54 is located at the same location. The chilled liquid refrigerant and electric power are supplied to the chilling module 50 in a preferred embodiment via quick disconnects 52,54, while condensate is drained away at a condensate drain 56 in a similar fashion. Connection of these ports can be effected if desired only when the module 50 is installed in the compartment 20. The unit includes a pair of heat exchangers 30 connected to the air return ducts 40, and a pair of condensate collectors 42 capture condensate that forms on the heat exchanger/ducts. Each heat exchanger 30 may be equipped with a defrost fan 60, and the output of the heat exchangers 30 passes through a convergent air supply duct 62 to a tubeaxial fan 35. The fan 35 forces the chilled air out of the cassette 50 through air supply outlets 70 so that the air can be circulated through the compartment and chill the cart 25.

The proportion of chilled liquid required to chill an individual cart 25 compartment is controlled by the proportioning control valves 75. Similarly, the volume of air that needs to pass through the heat exchanger 30 is controlled by the speed of the fans 35, (which may be axial, scroll or other) under the command of the electronic control box 85 (or "E-Box"). Sensors (not shown) provide information about the conditions within each chilled compartment to allow individual control as heat load and conditions require.

The air (represented by arrows 90) is blown through a specially designed chilled air outlet in the underside of the module over and around the cart in the chilled cart bay before returning to be re-circulated via a specially designed duct at the back of the chilled cart bay. This outlet has apertures 95 that assist in creating an even air distribution around the cart. The duct is open at the bottom and the air return plenum 105 (or duct) mates snugly with the module air return port 40 in the chiller module when it is installed.

Figure 3a illustrates an alternative layout to the chiller module of Figures 1 and 2. As shown in Figure 3a, the chilling module 150 (with its top removed) includes the interface port 140 to the return air plenum (or duct), and the individual heat exchangers 130 disposed at the

entrance. The chilled liquid control (PGW distribution) valves 175 are located adjacent the heater exchangers 130. Poly-glycol water ("PGW") is a one type of refrigerant that may be used with the module, although other liquid coolants may also be used.

Figure 3b illustrates yet another alternative layout to the chiller module. The embodiment of Figure 3b has an entrance area 400 separates two return air inlets 410 that includes electrical, chilled liquid, and condensate drainage components. A three way bypass valve area 405 is disposed between two heat exchangers 420, each including a reflector 425. The APAC 435 is situated midline flanked by a pair of tube axial fans 440 and connected deflectors 450. The overall layout of the embodiment of Figure 3b results in a reduced vertical height as compared with other embodiments.

To assist in the removal of excess condensate, which is a by-product of moist air condensing on the heat exchangers 130, angled condensate drainage collection trays 142 are installed below the heat exchangers with outlets in the connection block 180. The air is circulated around the cart bay or chilled compartments by individual axial fans 135 in this configuration, with the supply outlets 170 leading into the chilled cart bay forming an aperture in the base of the chilling module. In this configuration, the E box is located remotely on the galley and not in the chilling module itself.

The top cover of the cassette 150 encloses all the components of the lower part to form the LRU chilling module or cassette. In Figure 4, Fig 4b forms the base and cooperates with the component in Fig 4a to form the complete unit, as shown in Figure 4c. Figure 4d shows the rear of the chilling module 150 and its connection block 180 with the locating pin 182, chilled liquid inlet and outlet ports 184, electrical and data connectors (CANbus) 186, and the condensate drainage outlets 188.

The embodiment shown in Figure 5 depicts a variation of the embodiment shown in Figures 3 and 4 where the E box 185 is installed in the chilling module 150, separate defrost fans 160 are employed, and there is a partial re-arrangement of the major components. The base plate mounts all major components including air supply and return ports, as well as the condensate drain.

Figure 6 illustrates a variation of the CIWD configuration where the axial fans have been replaced by scroll or periphery fans 200, and the air is supplied to the work deck area from a conventional air chiller mounted on top of the galley. In this embodiment, there is no heat exchanger or E box mounted in the chilling module, although the fan could be speed controllable from a remote source.

Air distribution is achieved using a modular ductwork 205 or by a common plenum at the rear of the work deck that mates with the chilling module. The chilled air return duct at the rear of the cart bay 210 connects with a return above work deck (AWD) duct 220 on the back wall of the galley, that returns the air to the air chiller. The chilled air supply duct 225 connects the air chiller to the distribution ductwork with the work deck area to the air chiller. The below work deck (BWD) chilled air return duct 210 and chilled air supply outlet 240 are similar in design to the other configurations. A vertical services column 245 is provided above work deck.

Figures 7 and 8 show a work deck chilling system and system layout for both the air chiller supplied (Figure 7) and chilled liquid supplied (Figure 8) through work deck galley refrigeration systems. The schematics show the components used in the air chiller supplied Chiller In Work Deck (CIWD) system. 7a illustrates the over laid air supply duct 300 that leads down from the air chiller 310 on top of the galley to the common air distribution plenum. The air fed system differs from the liquid in that the work deck area splits to form the two halves of the ducting necessary to distribute the air between the separate cart bays. Balance is achieved using interchangeable tapered restrictors 320 (Figure 7c) to provide differing proportions of air to each cart depending on the galley configuration.

Figure 7b illustrates the AWD (above work deck) air return duct that is mounted on the back wall of the galley. This duct 325 connects to the below work deck (BWD) chilled air return ducts 330. Figure 7d illustrates the position of the air chiller 310 on top of the galley, where this design utilizes a horizontal service area 340 between the standard containers (meal boxes) forming the upper storage compartments and the chilled air supply and return passes 345. The position of the chiller 310 in this instance is designed to meet the requirements of a center line aircraft galley. In a lateral or aft galley complex that is installed the air chiller may well be mounted below the airplane floor or behind the galley. In this case, the air distribution through

the work deck is maintained although the supply and return duct work and possibly on the outside of the envelope of the galley. Figure 7d also illustrates the through work deck air distribution ducting 350.

Figure 8a illustrates the chilled liquid supply 360 and return manifold pipe work 370 at the back of the galley chilled cart compartment, which terminates in the CIWD module interface block. Figure 8b illustrates the side view of the CIWD module and cart within the compartment below the work deck.

The present invention may include 34" or 35" deep refrigerated center-line galleys (installed along the centerline of the aircraft) by utilizing the work deck cavity as a means of circulating chilled air around a cart or trolley compartment. The invention utilizes the potential of the work deck cavity as a location to horizontally mount a refrigeration module (LRU) containing a heat exchanger, fan, fluid control valve and electronic control system that is capable of chilling the cart compartments to the required temperature using chilled liquid as a cooling medium. The present invention further utilizes the potential of the work deck area as a location of duct work for distribution of chilled air produced by a vapor cycle type air chiller mounted on, in or remotely from, the galley.

It will be apparent from the foregoing that while particular forms of the invention have been illustrated and described, various modifications can be made without departing from the spirit and scope of the present invention. Accordingly, it is not intended that the invention be limited but rather all modifications and substitutions that would be recognized by one of ordinary skill in the art are intended to be included in the scope of the invention.

I Claim:

1. A modular chiller for an aircraft galley beverage cart compartment, comprising:
a cassette that inserts into the compartment above the beverage cart, and houses an air
return duct, a heat exchanger, a fan, and an air supply outlet;

5 a control valve for controlling the amount of air passing through the heat exchanger; and
an electronic control box;
wherein the cassette is disposed between the beverage cart and a galley work deck.

10 2. The modular chiller of Claim 1, further comprising a liquid refrigerant system.

3. The modular chiller of Claim 2, wherein the liquid refrigerant is poly-glycol
water.

4. The modular chiller of Claim 1 having two heat exchangers and two or four fans.

15 5. The modular chiller of Claim 1, wherein said fan is a tubeaxial fan;

6. The modular chiller of Claim 1, further comprising a condensate drain.

7. The modular chiller of Claim 1, further comprising a defrost fan.

20 8. The modular chiller of Claim 1, further comprising a connection block having an
electrical connector, a condensate drain, a locating pin, and a liquid input/output port.

9. The modular chiller of Claim 1, wherein a liquid refrigerant circulation system is
25 combined with an air refrigeration circulation system.

10. The modular chiller of Claim 1, further comprising an air return plenum for
returning the air to the cassette.

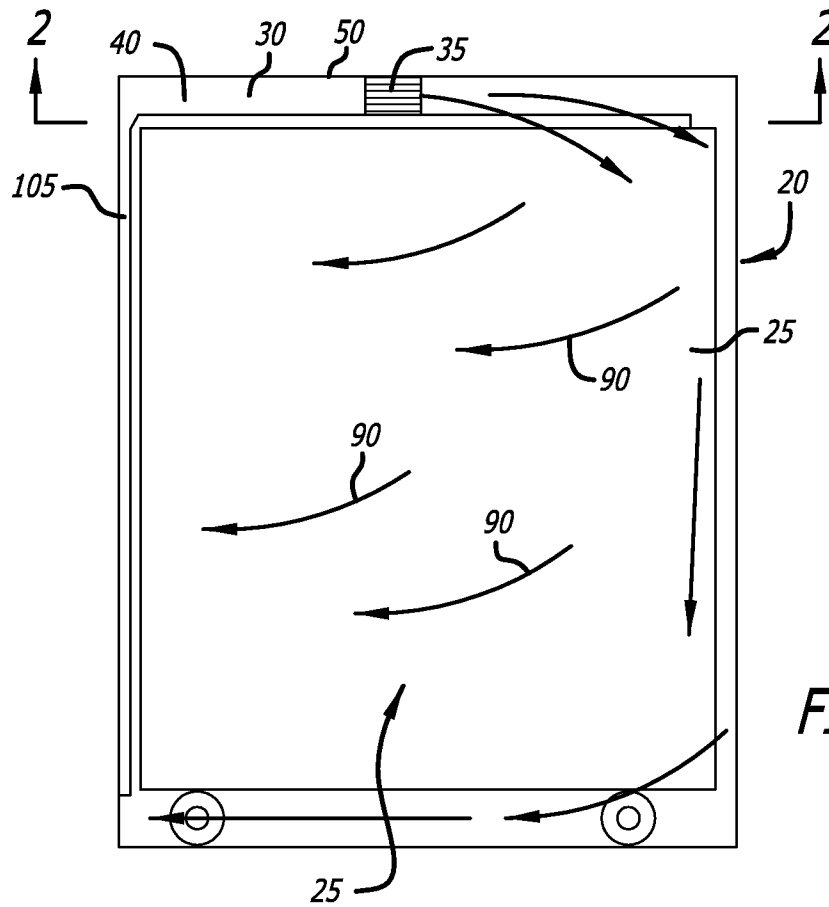


FIG. 1A

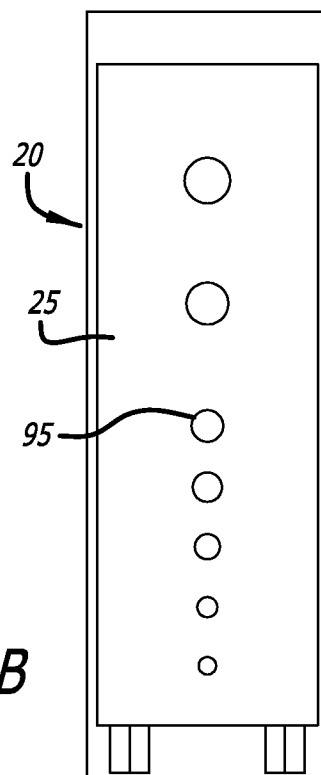


FIG. 1B

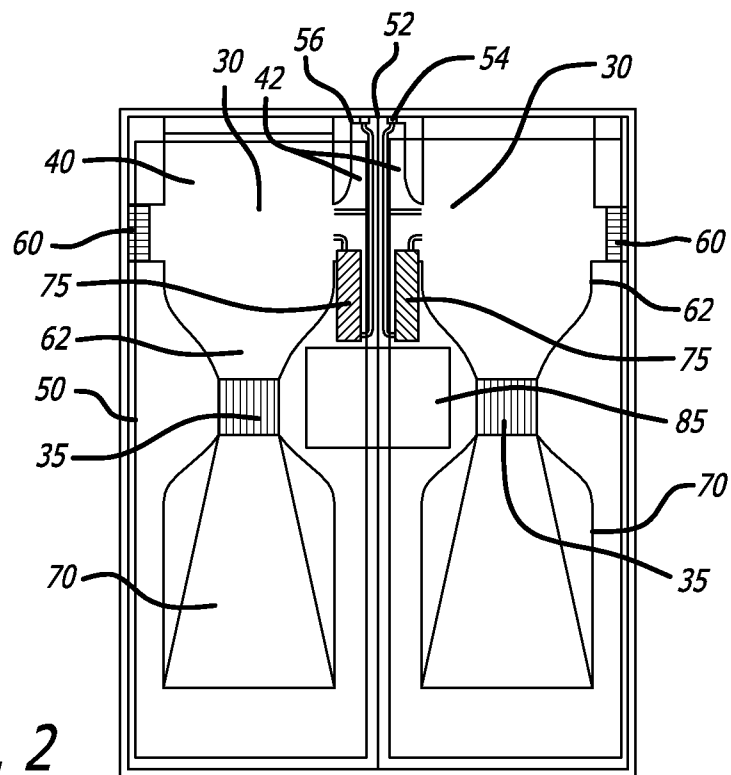


FIG. 2

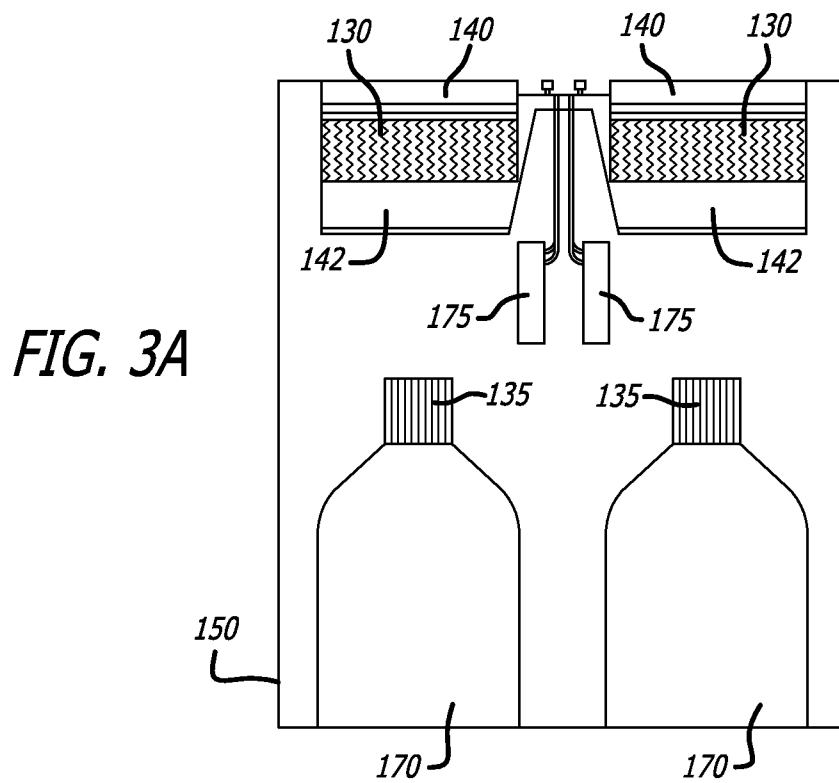
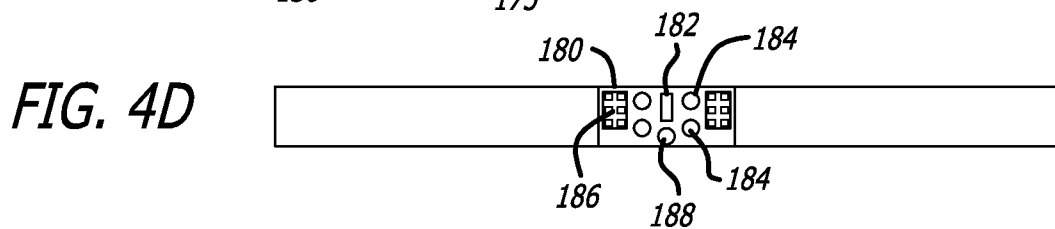
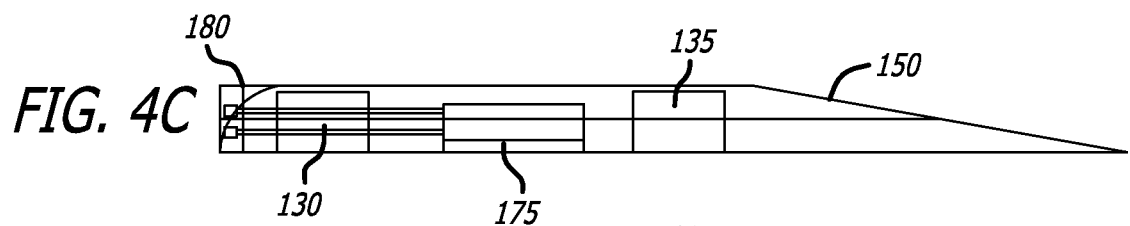
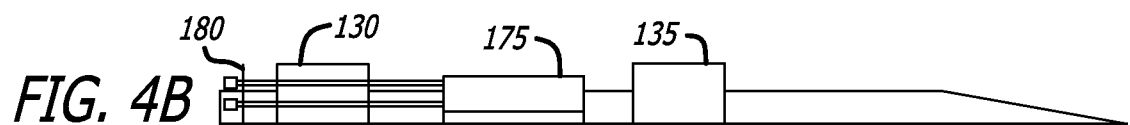
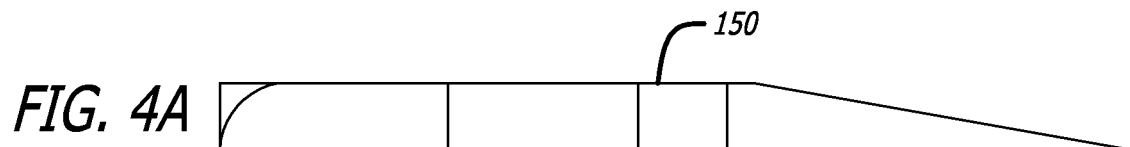
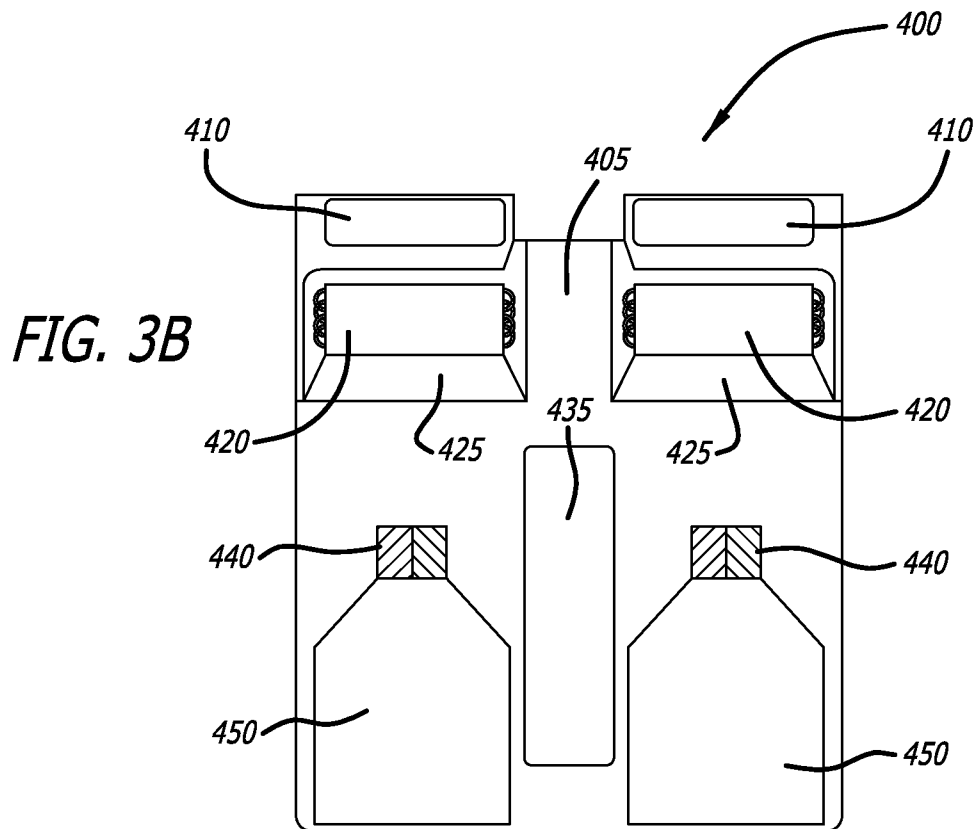
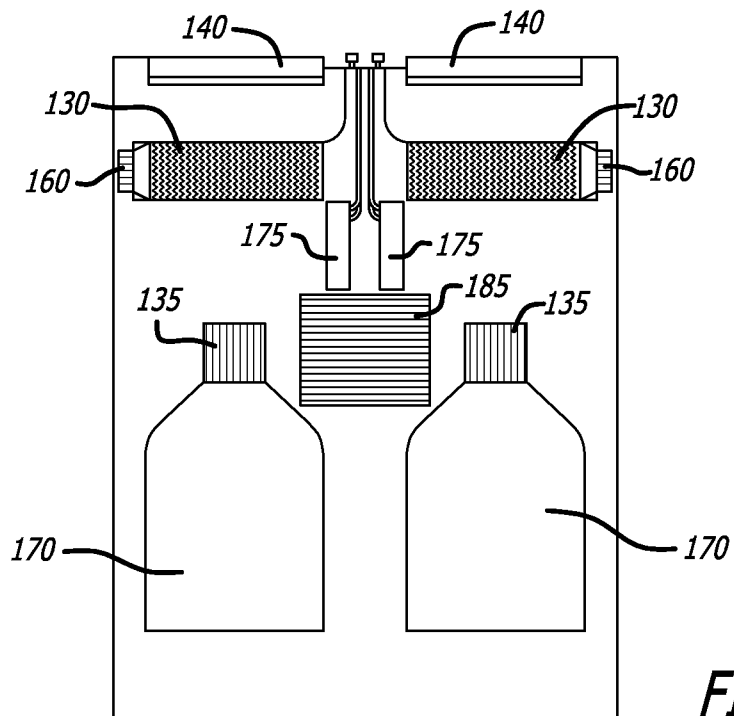
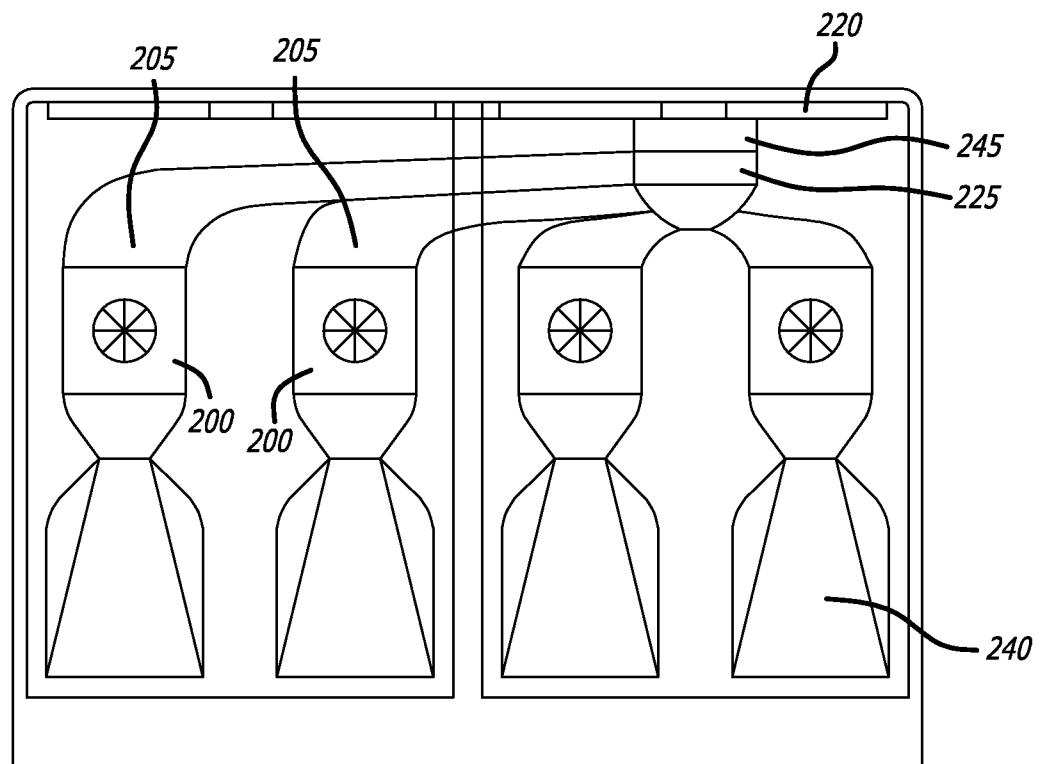
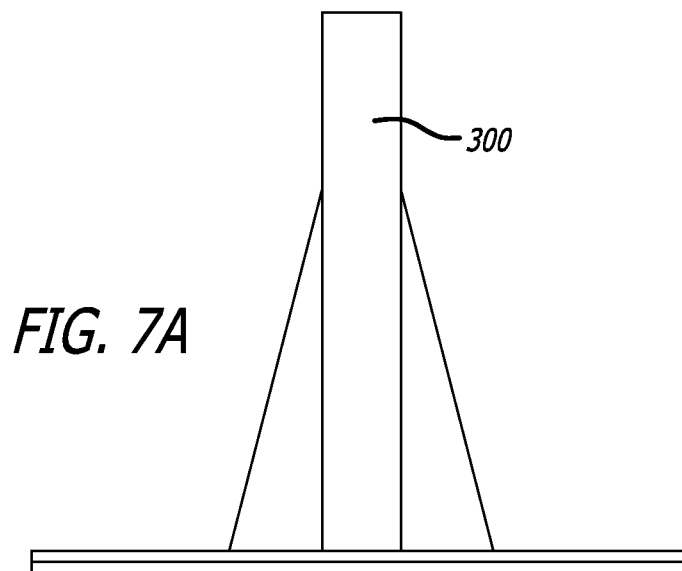
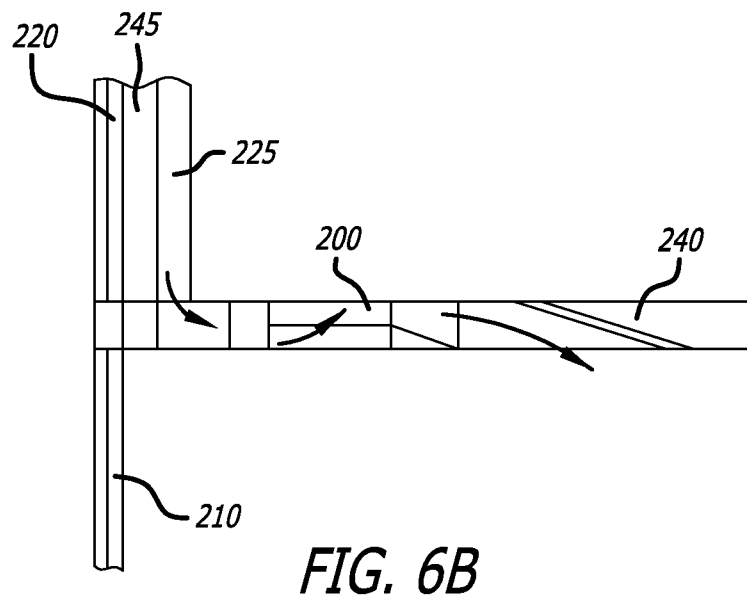


FIG. 3A



**FIG. 5****FIG. 6A**



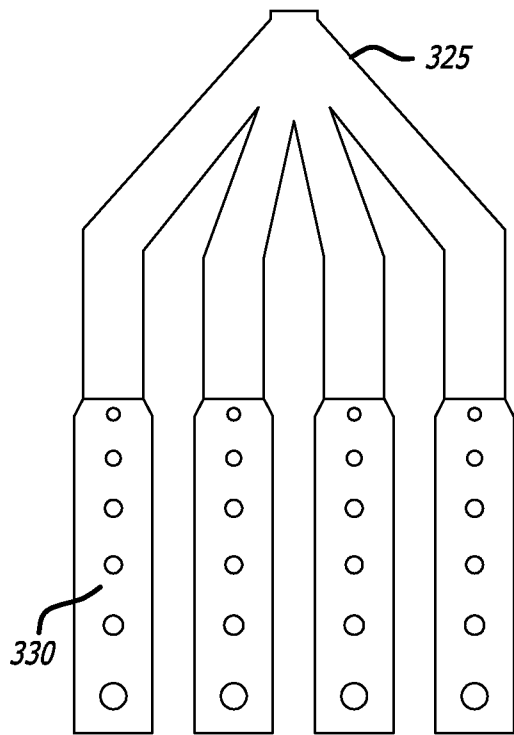


FIG. 7B

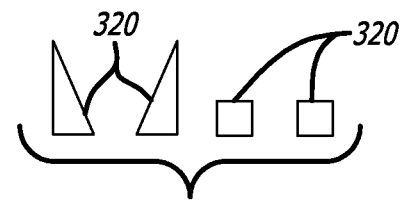


FIG. 7C



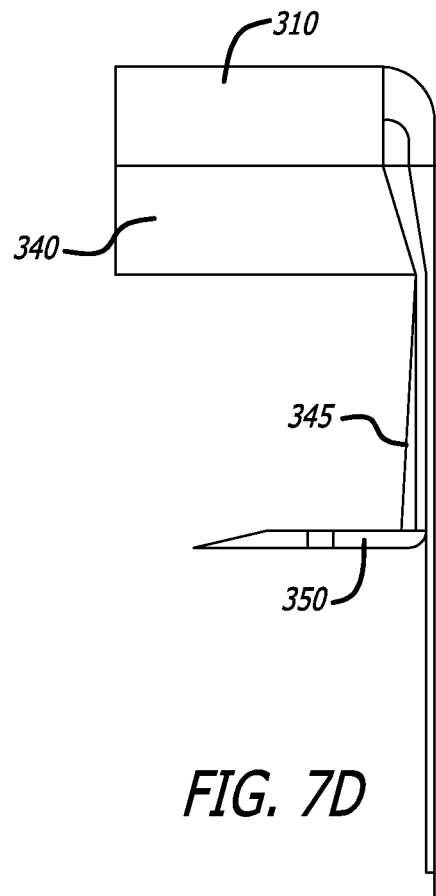


FIG. 7D

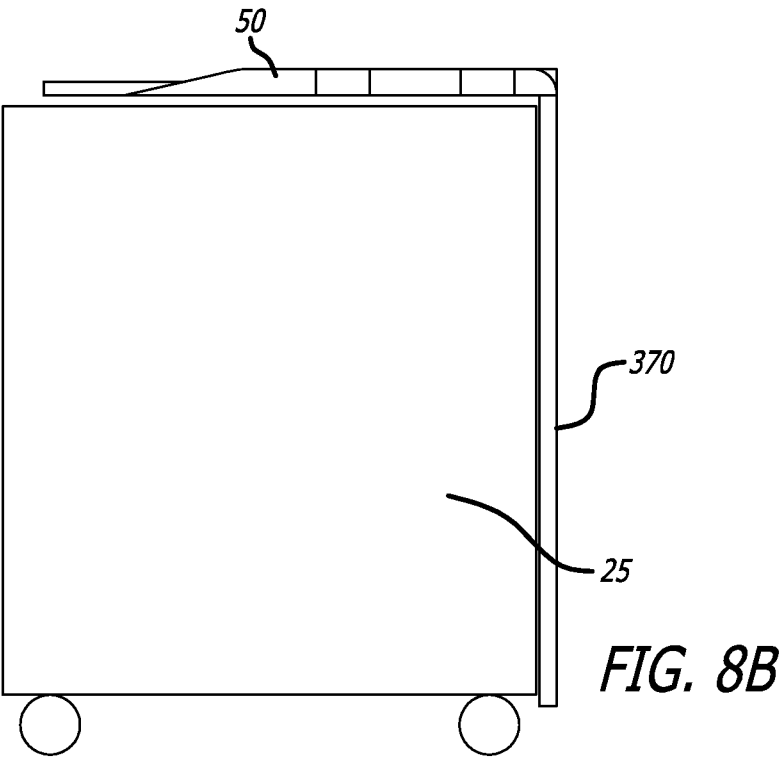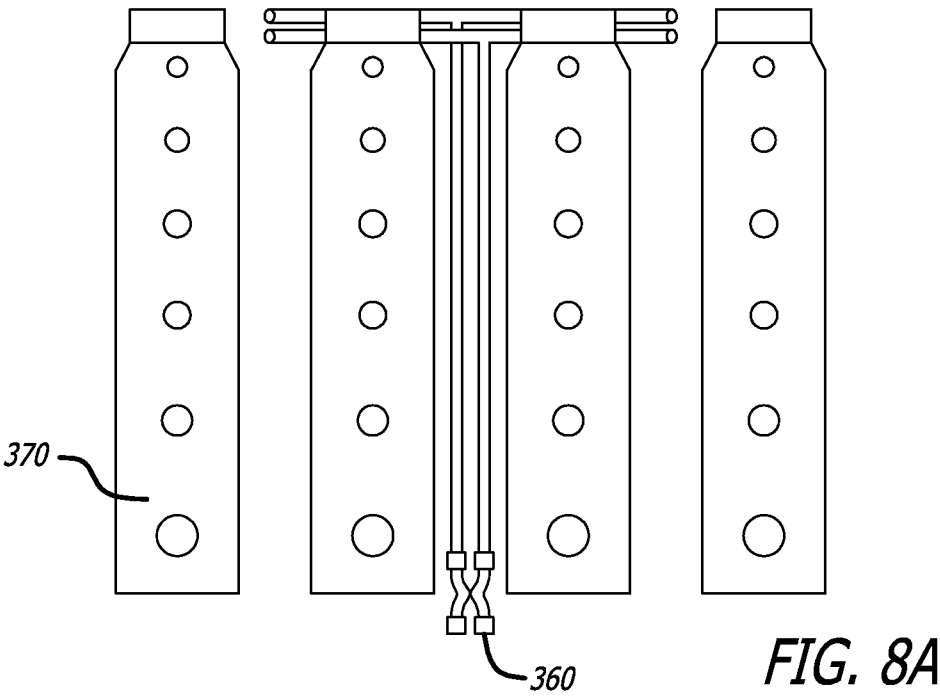

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/034606

A. CLASSIFICATION OF SUBJECT MATTER
INV. B64D11/00 B64D11/04
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B64D F25D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 2005/210910 A1 (RIGNEY RICHARD N [US] ET AL) 29 September 2005 (2005-09-29) abstract paragraphs [0041] - [0046] figures 1-12 -----	1-4,6, 8-10 7
X Y	US 2010/224726 A1 (LU QIAO [US] ET AL) 9 September 2010 (2010-09-09) abstract paragraphs [0020] - [0038], [0045] figures 4-6 -----	1-5,10 7
Y	US 2008/156030 A1 (CUR NIHAT O [US] ET AL) 3 July 2008 (2008-07-03) abstract paragraph [0083] ----- -/-	7

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 July 2013

Date of mailing of the international search report

31/07/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Weber, Ingo

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/034606

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2009/149320 A1 (BE AEROSPACE INC [US]; GODECKER WILLIAM [US]; THAYER R BRUCE [US]; WES) 10 December 2009 (2009-12-10) abstract paragraphs [0004], [0032] figures 4, 5 -----	1
A	US 2003/042361 A1 (SIMADIRIS GEORGE [US] ET AL) 6 March 2003 (2003-03-06) abstract paragraphs [0032] - [0050] figure 1 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/034606

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005210910 A1	29-09-2005	AU 2005228435 A1	13-10-2005
		CA 2559043 A1	13-10-2005
		CA 2799487 A1	13-10-2005
		EP 1748907 A2	07-02-2007
		JP 4680987 B2	11-05-2011
		JP 2007537077 A	20-12-2007
		US 2005210910 A1	29-09-2005
		WO 2005094346 A2	13-10-2005

US 2010224726 A1	09-09-2010	AU 2010221439 A1	01-09-2011
		CA 2753273 A1	10-09-2010
		EP 2403728 A1	11-01-2012
		JP 2012519624 A	30-08-2012
		US 2010224726 A1	09-09-2010
		WO 2010101972 A1	10-09-2010

US 2008156030 A1	03-07-2008	BR P10803340 A2	31-03-2009
		CA 2623912 A1	28-12-2008
		EP 2009375 A2	31-12-2008
		US 2008156030 A1	03-07-2008

WO 2009149320 A1	10-12-2009	EP 2307827 A1	13-04-2011
		US 2009301120 A1	10-12-2009
		WO 2009149320 A1	10-12-2009

US 2003042361 A1	06-03-2003	US 2003042361 A1	06-03-2003
		US 2005178908 A1	18-08-2005
		US 2007084226 A1	19-04-2007
		US 2008289800 A1	27-11-2008
		US 2012222443 A1	06-09-2012
