



(51) International Patent Classification:

B67D 7/02 (2010.01) **B67D 7/62** (2010.01)
B67D 7/42 (2010.01)

(21) International Application Number:

PCT/EP2009/064814

(22) International Filing Date:

9 November 2009 (09.11.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **DRESSER WAYNE AB** [—/SE]; Box 30049, S-200 61 Malmö (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LARSSON, Bengt I.** [SE/SE]; Tingaröd 119, S-274 53 Skivarp (SE).

(74) Agent: **AWAPATENT AB**; Box 5117, S-200 71 Malmö (SE).

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(54) Title: FLUID DISPENSING UNIT HAVING A CIRCULATION SYSTEM AND A METHOD FOR CIRCULATING A FLUID IN A FLUID DISPENSING UNIT

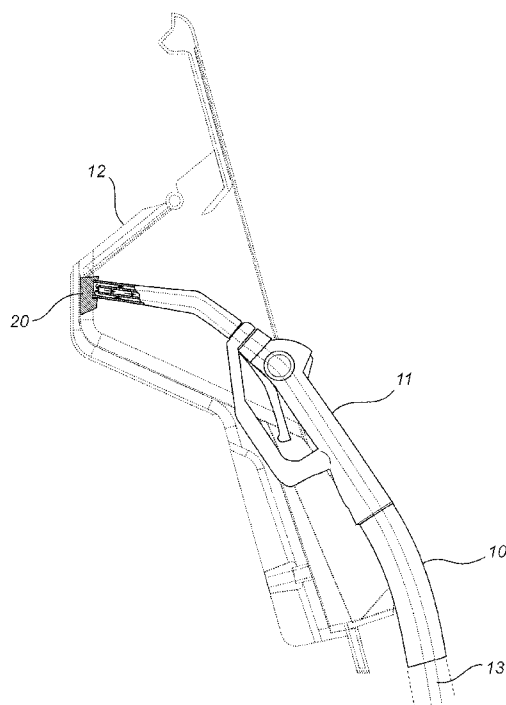


Fig. 3

(57) Abstract: A dispensing (1) unit having a circulation system (7) for circulating a fluid in the dispensing unit (1). The circulation system (7) comprises, a circulation circuit, and means (9) for circulating the fluid in the circulation circuit. By circulating the fluid, the fluid is counteracted from crystallizing. A method for circulating a fluid in a dispensing unit (1) is also provided.

FLUID DISPENSING UNIT HAVING A CIRCULATION SYSTEM
AND A METHOD FOR CIRCULATING A FLUID IN A FLUID DISPENSING UNIT

Technical field

- 5 The present invention relates to a dispensing unit capable of circulating a fluid and a method for circulating a fluid.

Background art

- 10 Today, diesel powered vehicles account for large emissions of nitrogen oxides, generally referred to as NO_x . The NO_x emissions are harmful to the environment, implying that several techniques are used in order to try to reduce these emissions.

- 15 One technique used to reduce the amount of harmful NO_x emissions is selective catalytic reduction (SCR). The basic idea of SCR is to convert NO_x into harmless diatomic nitrogen (N_2) and water (H_2O). The reaction is enabled using a reductant which is added onto a catalyst. Several reductants may be used such as anhydrous ammonia, aqueous ammonia or urea.

- 20 Today a standard is established for using a SCR reductant in diesel powered vehicles. The reductant used is an aqueous urea solution having a urea concentration of 32,5%. The solution is referred to as AUS32. In order to obtain the correct concentration the urea is mixed with demineralised water.

- 25 When the diesel engine is running AUS32 is added into the exhaust flow, before or in the catalytic converter, by an amount corresponding to 3-5% of the diesel consumption. When AUS32 is added to the exhaust flow of a diesel engine, the engine can be operated more intensely without generating more NO_x emissions.

 In Europe AUS32 is generally sold under the trade mark of AdBlue® and in North America the trade name for AUS32 is Diesel Exhaust Fluid or DEF.

AUS32 is commonly available at service stations throughout the world. Various kinds of dispensers are used in order to refill AUS32 in the therefore intended tanks of diesel powered vehicles.

There are however several problems related to the refilling and storing of AUS32. For instance, the AUS32 fluid will easily crystallize when subjected to air i.e. when dried out. This implies that crystals will begin to build up at nozzles and other parts of the dispensers that are not tightly sealed from air. This means in practice that clogging leading to a reduced flow will become a problem.

Another even more severe problem encountered in dispensers for AUS32 is crystallization by freezing of the fluid. The AUS32 fluid will begin to crystallize at -7°C , forming a slush. At -11°C the fluid will freeze forming a solid. Once the temperature drops below -7°C it is critical to control the environment of the parts of the dispensers which are subjected to the AUS32 fluid. A common solution used to counteract the fluid from freezing is to place all parts of the dispenser subjected to the fluid in a controlled heated environment. This solution makes the refilling considerably more complicated for the user, since the refilling hose and nozzle must in practice be placed in a heated cabinet or similar. During a refilling process the user must thus open the cabinet before being able to refill the AUS32 tank of his/her vehicle. Once finished the user must close the cabinet in order to not risk that the fluid in the refilling hose will freeze. If the cabinet is not sufficiently closed after a refilling process the fluid in the refilling hose and nozzle might freeze, leaving the dispenser useless for the next user. The use of heated cabinets does also bring about considerable energy consumption, particularly when the cabinet is not sufficiently closed after a refilling process.

AUS 32 is also often sold in cans. By providing AUS32 in cans, the fluid can be prevented from freezing during storage, by for example storing the cans in a controlled environment, such as inside a service station. The use of cans filled with AUS32 brings about different problems. The user will for example have to open the can manually and thereafter pour the AUS32 fluid into the therefore intended tank of a vehicle. This means that there is a significant risk of spilling AUS32 during the refilling.

Summary of the invention

It is an object of the present invention to provide an improvement of the above techniques and prior art.

5 A particular object is to provide a dispensing unit that has a circulation system for counteracting the fluid from crystallizing.

These and other objects as well as advantages that will be apparent from the following description of the present invention are achieved by a dispensing unit and a method for circulating fluid in a dispensing unit
10 according to the respective independent claims. Preferred embodiments are defined in the dependent claims.

Hence a dispensing unit is provided, comprising a circulation system for circulating a fluid in the dispensing unit. The circulation system comprises a circulation circuit and means for circulating the fluid in the circulation circuit,
15 such that said fluid is counteracted from crystallizing.

The inventive dispensing unit is advantageous in that the fluid is circulated in the dispensing unit, meaning that crystallization of the fluid is counteracted. This in turn means that the user will not encounter any or at least reduced problems with contaminated or clogged nozzles. Further the
20 risk of a reduced flow, due to clogging, from the dispenser is eliminated.

The circulation system of the dispensing unit may comprise a heating element for heating the fluid, which is advantageous in that the fluid is counteracted from freezing.

The circulation circuit of the dispensing unit may comprise a hose
25 having a coaxially installed fluid channel. This means that the fluid can be circulated in the hose and the coaxially installed fluid channel using a standard hose arrangement.

The circulation system may further comprise a valve controlling the fluid when circulating through the hose and the fluid channel, this is
30 advantageous in that the circulation of the fluid can be controlled by switching the valve.

The circulation system may further comprise a gauge block controlling said fluid when circulating through said hose and said fluid channel, which

results in that the circulation in the hose and the fluid channel can be performed in a simple and effective manner.

The circulation system may comprise a hose having a nozzle and a nozzle boot, which is advantageous in that the nozzle can be placed in the nozzle boot when circulating the fluid.

The nozzle of the dispensing unit may be adapted to attain a leak proof connection for fluid communication with the nozzle boot, when inserted in the nozzle boot. This is a simple way of achieving a leak proof fluid communication between the nozzle and the nozzle boot.

The circulation circuit may further comprise a tube connected to the nozzle boot, which is advantageous in that fluid can be circulated through the nozzle boot and the tube.

The circulation system may further comprises a reservoir adapted to hold the fluid, the reservoir may be connected to the circulation circuit, which is advantageous in that fluid can be extracted from the reservoir and returned to the reservoir after being circulated.

The heating element may be located in the circulation system, which results in that the fluid can be heated during circulation. This means that the fluid easily can be heated and/or maintained at an elevated temperature during circulation.

The heating element may be located in the reservoir, which is advantageous in that the fluid in the reservoir can be heated, which brings about that a fluid having an elevated temperature may be circulated in the circulation system.

The heating element may comprise a heat cable, which results in that the fluid can be heated in a simple and cost effective way, using standard components.

The means for circulating the fluid of the dispensing unit may comprise a pump, which is advantageous in that the fluid can be effectively circulated using a cost effective standard solution.

The circulation system may further comprise a temperature sensor connected to a control unit controlling the means for circulating the fluid,

which is advantageous in that the fluid may only be circulated under certain temperature conditions.

The control unit may further control the heating element, which results in that the fluid may only be heated under certain temperature conditions.

5 The circulation system of the dispensing unit may further comprise means for measuring the amount of circulated fluid, which is advantageous in that leaks and other operational disturbances can be easily detected.

10 The fluid of the dispensing unit may be aqueous urea solution, which results in that the dispensing unit can be utilized for refilling vehicles having a tank dedicated for aqueous urea solution.

At least a portion of the circulation system may be insulated, which is advantageous in that the energy consumption can be significantly reduced when heating the fluid.

15 According to another aspect of the invention, a method is provided for circulating a fluid in a dispensing unit having a circulation system. The method comprises circulating the fluid in a circulation circuit of the circulation system by means of a pump. By doing this the fluid can be counteracted from crystallizing.

20 The method may further comprise the step of heating the fluid by means of a heating element in the circulation system, which is advantageous in that the fluid can be heated and/or maintained at an elevated temperature.

It should be noted that the inventive method may incorporate any of the features described above in association with the inventive dispensing unit, and has the same corresponding advantages.

25

Brief Description of the Drawings

30 Embodiments of the present invention will now be described, by way of example, with reference to the accompanying schematic drawings, which shows examples of presently preferred embodiments of the invention, given as non-limiting examples.

Fig. 1 is schematic front view of a dispensing unit according to a first aspect of the invention.

Fig. 2a is a sectional view of a dispensing unit according to one embodiment of the invention, where the circulation of the fluid is controlled using a valve.

Fig. 3 is a schematic detail view showing an embodiment where the circulation of the fluid is controlled by the use of a gauge block.

Fig. 4 is a sectional view of a dispensing unit according to one embodiment of the invention, where the circulation of the fluid is controlled using a return tube.

Fig. 5 is a schematic detail view of an insulated hose according to one embodiment of the invention.

Fig. 6 is a schematic detail view illustrating how a heat cable is arranged in a reservoir according to one embodiment of the invention.

Fig. 7 is a sectional view of a dispensing unit according to one embodiment of the invention, where fluid is extracted from an underground fluid reservoir.

Fig. 8 is a block diagram illustrating a method according to a second aspect of the invention.

Detailed Description of Preferred Embodiments of the Invention

Fig. 1 shows a dispensing unit 1, having a plurality of hose storage spaces 2, on each opposing side of the dispensing unit 1. Different refilling hoses 3 are provided for different fluids such as gasoline, diesel and aqueous urea solution (AUS). An electrical cabinet 4 containing electronics for the dispensing unit 1 is provided on top of a hydraulic cabinet 5. The hydraulic cabinet 5 contains fluid dispensing means (not shown) e.g. fluid metering means, valves, piping etc. The plurality of hose storage spaces are arranged in a column 6 extending vertically. The dispensing unit 1 is connected to a plurality of reservoirs (not shown) holding different fluids. The reservoirs holding different fuels, e.g. gasoline or diesel, are normally located underground. The reservoir holding AUS is normally located in the hydraulic cabinet 5, but can also be located underground. When dispensing fluid, the fluid is drawn from one of the reservoirs by means of a pump, located in the hydraulic cabinet 5, and from there to the column 6 and out to a nozzle via

one of the refilling hoses 3. When the dispensing unit 1 is not used for dispensing any fluid, all refilling hoses 3 are located in their respective hose storage spaces 2.

Fig. 2 illustrates parts of the interior of the inventive dispensing unit 1.

- 5 The dispensing unit comprises a system 7 for dispensing and circulating AUS. The functionality and construction of the system 7 will now be described more in detail. Systems for dispensing other fluids than AUS are omitted in this description, although present in the dispensing unit 1.

Fluid in form of AUS is stored in a reservoir 8 located in the hydraulic cabinet 5. A pump 9 employed with measurement means (not shown) is used to draw fluid from the reservoir 8 transferring it into a tubing system comprising a hose 10. The hose 10 is used to transfer the fluid to a nozzle 11, which in turn is used for transferring the fluid into a tank of a vehicle, when refilling the tank. The nozzle 11 is placed in a nozzle boot 12 when not used for refilling the tank of a vehicle. A nozzle boot 12 is any means that can receive and/or hold a nozzle 11. The size and shape of the nozzle boot 12 depends on the size and shape of the nozzle 11 in question. Further, the hose has a coaxially installed fluid channel 13 in form of a hose having a smaller diameter. The fluid channel 13 is used to return fluid to the suction side of the pump 9 when the nozzle 11 is not used for refilling the tank of a vehicle and thus placed in the nozzle boot 12. In order to detect whether the nozzle 11 is placed in the nozzle boot 12 or not, a sensor 14 is used. When the sensor 14 detects that the nozzle 11 is properly placed in the nozzle boot 12 the sensor indicates that a circulation of the fluid can be allowed. In order to perform the circulation of the fluid the valve 15 needs to be switched from an open state to a closed state. The wording open state refers to a state where the valve 15 will let any fluid transferred from the pump 9 continue out of the nozzle 11. The wording closed state refers to a state where the valve 15 will lead any fluid transferred from the pump 9 into the fluid channel 13 and thus return the fluid to the suction side of the pump 9, when the pump is started. When the valve 15 is in the closed state, the pump 9 can be started, meaning that fluid will start to circulate from the pump 9, through the hose 10 and back to the pump 9 in the fluid channel 13. In other words, the hose 10 and the

fluid channel 13 constitute a circulation circuit. The fluid is thus counteracted from crystallizing.

In order to control the circulation of the fluid in a more sophisticated way, the system 7 of the dispensing unit 1 comprises additional components.

- 5 A heating element 16 is provided at the hose 10. The heating element 16 is an electrically powered heat cable which is wrapped around the hose 10. Further, the heating element 16 is controlled by a control unit 17, connected to a temperature sensor 18. The temperature of the fluid in the hose 10 is measured by the temperature sensor 18. When the temperature drops below
10 a predefined level, the control unit 17 will activate the heating element 16. The fluid is then circulated during the heating process, meaning that the fluid is counteracted from freezing. Also the pump 9 is controlled by the control unit 17. The power fed to the heating element 16 is controlled by the control unit 17, such that the fluid is maintained at an elevated predefined temperature
15 during the circulation process. In order to counteract the fluid in the reservoir 8 from freezing, the hydraulic cabinet 5 is maintained at an elevated temperature using a separate heating element (not shown).

- A flow meter 19 is used during the circulation process in order to detect the amount of the fluid being returned in the fluid channel 13. Since the pump
20 9 is employed with measurement means the signal from the flow meter 19 can be used to detect leaks during the circulation process. In order to detect leaks, the fluid flow detected by the measurement means of the pump 9 is compared to the fluid flow detected by the flow meter 19. If there is a difference in the measured flows, this is an indication of a leak. Once a leak is
25 detected the circulation of the fluid is stopped. By doing this fluid can be hindered from flowing out in case of a leak.

- Now referring to Fig 3. In order to make the fuel return from the nozzle 11 to the fluid channel 13 a gauge block 20 is placed in the nozzle boot. When the gauge block 20 is used the valve 15 of Fig. 2 is omitted. The gauge
30 block 20 is specifically designed to attain a leak proof fit around the outer periphery of the nozzle 11, enabling fluid communication between the hose 10 and the fluid channel 11. When the pump 9 is operated, fluid will flow from the hose 10, via the nozzle 11 and back into the fluid channel 13 by means of the

gauge block 20, meaning that the hose 10 and the fluid channel 13 constitutes a circulation circuit. Also when using a gauge block, a sensor 14 is used to detect that the nozzle 11 is placed in the nozzle boot 12. The circulation process is then carried out in the same way as described above in conjunction with Fig 2, i.e. when the pump 9 is operated, fluid will flow in the hose 10 and return to the pump 9 in the fluid channel 13 by means of the gauge block 20.

Fig 4, illustrates how fluid is lead back to the suction side of the pump 9, using a separate tube 21. The nozzle 11 used in Fig. 4 is specifically designed to attain a leak proof connection with the nozzle boot 12, enabling fuel communication between the hose 10 and the tube 21 via the nozzle boot 12. In this embodiment, the hose 10 and the tube 21 constitutes the circulation circuit. The circulation process is carried out in the same way as described above in conjunction with Fig 2.

Fig 5. shows a hose 10 according to an alternative embodiment. The hose 10 is covered by an insulation material 22. The purpose for introducing an insulation material 22 is a reduction of energy consumption. The insulated hose will leak less heat to the surrounding, meaning that less power needs to be used in order to maintain the fluid at a predefined temperature.

Fig 6. shows an alternative embodiment where the heating element 16 is placed in the reservoir 8. By placing the heating element 16 in the reservoir 8, no additional heating may be needed to be applied to the hydraulic cabinet 5. In this embodiment the return of the fluid from the fluid channel 13 or the tube 21 needs to be fed back to the reservoir 8.

Fig. 7 illustrates an alternative embodiment where the fluid is stored in an underground reservoir (not shown). By storing the fluid in an underground reservoir the fluid in the reservoir is normally prevented from freezing. Only the fluid circulating in the hose 10 and the fluid channel 13 via the nozzle 11 and the pump 9 needs to be heated and maintained at an elevated temperature in order to be counteracted from freezing.

In the following a method according to a second aspect of the invention will be described. The method is schematically illustrated in Fig 8. In a first step of the method 100, fluid is circulated in a circulation circuit using a pump.

By circulating the fluid in the circulation circuit, the fluid is counteracted from crystallizing.

In the second optional step 200 of the method in Fig. 8, the fluid is heated using a heating element. By heating the fluid during circulation, the fluid is counteracted from freezing.

A person skilled in the art will realize that a large number of modifications of the here described embodiments of the invention are conceivable within the scope of the invention, which is defined in the appended claims.

For example, any fluid can be dispensed using the inventive dispensing unit. It is naturally possible to dispense other reductants than AUS, such as anhydrous ammonia or aqueous ammonia.

For instance, the system 7 for dispensing and circulating AUS can be embodied in many different ways, using various components. The hose 10 can at least partly be replaced by a duct arrangement comprising ducts or pipes outside or within the hydraulic cabinet 5, some of which ducts or pipes may be rigid where flexibility is not necessary. These ducts or pipes can be made out of any suitable material, such as metal, plastics, rubber or ceramics.

Several circulation circuits for circulating fluids for different refilling hoses 3 can be used within the same dispensing unit 1. A dispensing unit 1 only having one or several systems for dispensing and circulating AUS can for example be provided. This means that there are no means for dispensing other fluids such as petrol or diesel present in the dispensing unit 1 in this specific embodiment.

The size and shape of the hydraulic cabinet 5 can for example be altered and adapted to be able to hold a reservoir 8 having a different size and shape. For instance, the hydraulic cabinet 5 can be wider for holding a larger reservoir 8, without having to change the design of the dispensing unit 1 significantly.

Any type of pump 9 being capable of dispensing and circulating fluid can be used in the dispensing unit 1. Suitable pump types include displacement, buoyancy, impulse and velocity pumps.

For instance, any type of suitable sensor 14 can be used in order to detect whether the nozzle 11 is placed in the nozzle boot 12 or not. Suitable sensor types include, optical, capacitive, magnetic and hall effect sensors. It is for example also possible to mechanically detect whether the nozzle 11 is placed in the nozzle boot 12 or not. The nozzle 11 can include mechanical switching means which switches the valve 15, when the nozzle 11 is inserted in the nozzle boot 12. This can for instance be carried out by connecting a lever to the valve 15, which lever is pressed upon, when the nozzle 11 is inserted in the nozzle boot 12.

10 The heating element 16 can for example be any kind of element producing a sufficient amount of heat, for heating the fluid. Various kinds of immersion heaters and electrical radiators can for example be successfully used. Any kind of fuel powered heating element 16 may for example be used to heat the fluid. Further, the heat produced by the heating element 16 may for instance be transferred using heated air or gas. To improve the heat transfer, one or several fans creating a forced flow can for instance be used.

For instance, the heating element 16 can be placed in various positions, in addition to the positions described above. The heating element can be placed within the hose 10, the fluid channel 13, the tube 21 or the pump 9. It is also possible to place the heating element 16 in proximity to any component of the circulation circuit. In other words, it is possible to place the heating element in proximity to or inside any of the components, being used during the circulation process.

For example, the heating element 16 can be controlled using several different strategies. It is possible to switch the power to the heating element 16, meaning that the heating element 16 is operated in intervals. By controlling the timing of the intervals, the mean power fed to the heating element 16 can be controlled. It is for instance also possible to control the voltage fed to the heating element, meaning that the power may be controlled.

The fluid in the reservoir 8 can also be counteracted from freezing when the heating element 16 is placed at the hose 10 as illustrated in Fig. 2 or 4. In order to achieve the desired anti-freeze effect in this case, the fluid

channel 13 or tube 21 need to be fed back to the reservoir 8 as described above in conjunction with Fig. 6.

It is also possible to lead the fluid from fluid channel 13 or the tube 21 directly back to an underground reservoir. Also, the use of an underground
5 reservoir can naturally be employed to the embodiments of Fig. 2, 3 and 4.

Also, the temperature sensor 18 can be placed at any suitable location, where it is possible to measure the temperature of the fluid. This means that the temperature sensor can be placed in proximity to or inside any of the parts that are in contact with the fluid during the circulation process.

10 For instance, it is possible to use various types of flow meters 19, to measure the flow in the fluid channel 13 or the tube 21. The flow meters 19 include mechanical, pressure based, optical, thermal mass, vortex, coriolis, magnetic and ultrasonic flow meters.

For example, the gauge block 20 can be crafted in various shapes
15 using different materials.

The circulation process can for example be carried out using different strategies. The circulation process can be performed continuously when the dispensing unit 1 is not used to fill the tank of a vehicle. It is also possible to run the circulation process at predefined intervals, or intervals depending on
20 outer conditions, such as temperature, humidity and wind speed. Another approach is to use measure the time since the last use of the dispensing unit 1 and initiate the circulation process if the time exceeds a predefined time limit. Also the time limit can be adapted with respect to outer conditions.

The return tube 21 can for example be made out of any suitable
25 material, such as metals, plastics or ceramics.

Further, the nozzle 11 and nozzle boot 12 used in combination with the tube 21 can for example be employed with self closing valves, meaning that a spill free system is obtained. In other words, valves in the nozzle 11 and nozzle boot 12 will close once the nozzle 11 is removed from the nozzle boot,
30 meaning that no spill will occur at the nozzle 11 or nozzle boot 12.

For instance, the insulation material 22 may be made of any suitable material, such as glass wool, rock wool, fibre glass, cellular plastic or EPDM foam.

CLAIMS

1. A dispensing (1) unit having a circulation system (7) for circulating a
5 fluid in said dispensing unit (1), said circulation system (7) comprising,
a circulation circuit, and
means (9) for circulating said fluid in said circulation circuit,
such that said fluid is counteracted from crystallizing.
- 10 2. A dispensing unit (1) according to claim 1, wherein said circulation
system (7) further comprises a heating element (16) for heating said fluid.
3. A dispensing unit (1) according to claim 1 or 2, wherein said
circulation circuit comprises a hose (10) having a coaxially installed fluid
15 channel (13).
4. A dispensing unit (1) according to claim 3, wherein said circulation
system (7) further comprises a valve (15) controlling said fluid when
circulating through said hose (10) and said fluid channel (13).
20
5. A dispensing unit (1) according to claim 3, wherein said circulation
system (7) further comprises a gauge block (20) controlling said fluid when
circulating through said hose (10) and said fluid channel (13).
- 25 6. A dispensing unit (1) according to claim 1, wherein said circulation
circuit comprises
a hose (10) comprising a nozzle (11), and
a nozzle boot (12).
- 30 7. A dispensing unit (1) according to claim 6, wherein said nozzle (11)
is adapted to attain a leak proof connection for fluid communication with said
nozzle boot (12), when inserted in said nozzle boot (12).

8. A dispensing unit (1) according to any one of claims 6 or 7, wherein said circulation circuit further comprises a tube (21) connected to said nozzle boot (12).

5 9. A dispensing unit (1) according to any one of the preceding claims, wherein said circulation system (7) further comprises a reservoir (8) adapted to hold said fluid, said reservoir (8) being connected to said circulation circuit.

10 10. A dispensing unit (1) according to any one of the preceding claims, wherein said circulation system (7) further comprises a temperature sensor (18) connected to a control unit (17) controlling said means (9) for circulating said fluid.

15 11. A dispensing unit (1) according to any one of claims 2-10, wherein said control unit (17) further controls said heating element (16).


20 12. A dispensing unit (1) according to any one of the preceding claims, wherein said circulation system (7) further comprises means (19) for measuring the amount of circulated fluid.

 13. A dispensing unit (1) according to any one of the preceding claims, wherein said fluid is aqueous urea solution.

25 14. A method for circulating a fluid in a dispensing unit (1) having a circulation system (7), comprising
 circulating (100) said fluid in a circulation circuit of said circulation system (7) by means of a pump (9),
 such that said fluid is counteracted from crystallizing.

30 15. A method according to claim 14, further comprising the step of, heating (200) said fluid by means of a heating element (16) in said circulation system (7).

1/7

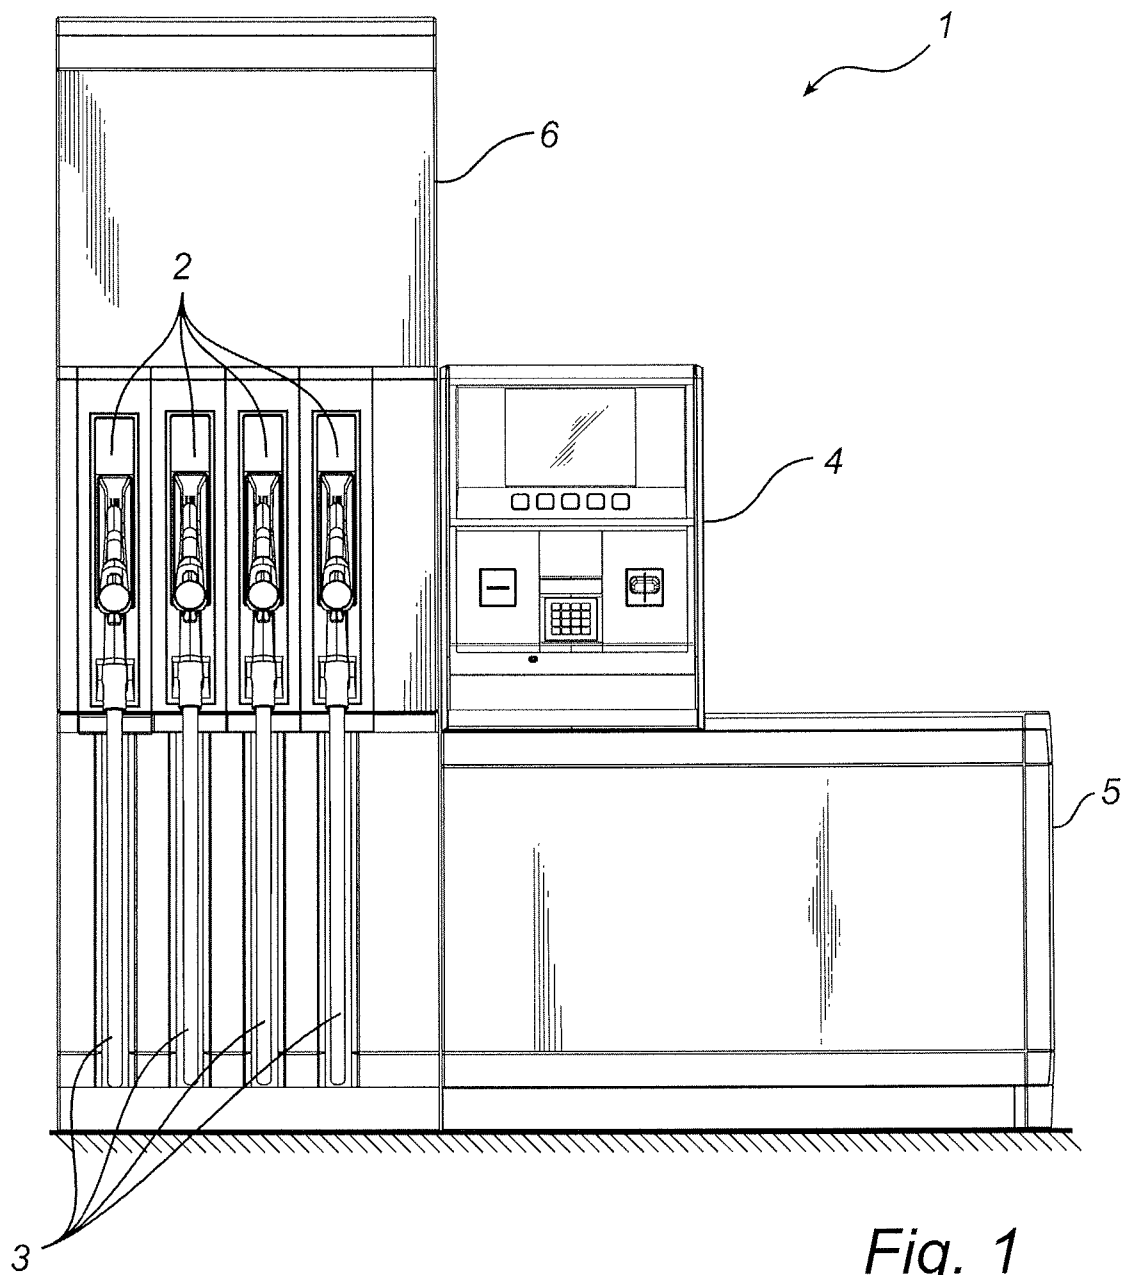

2/7

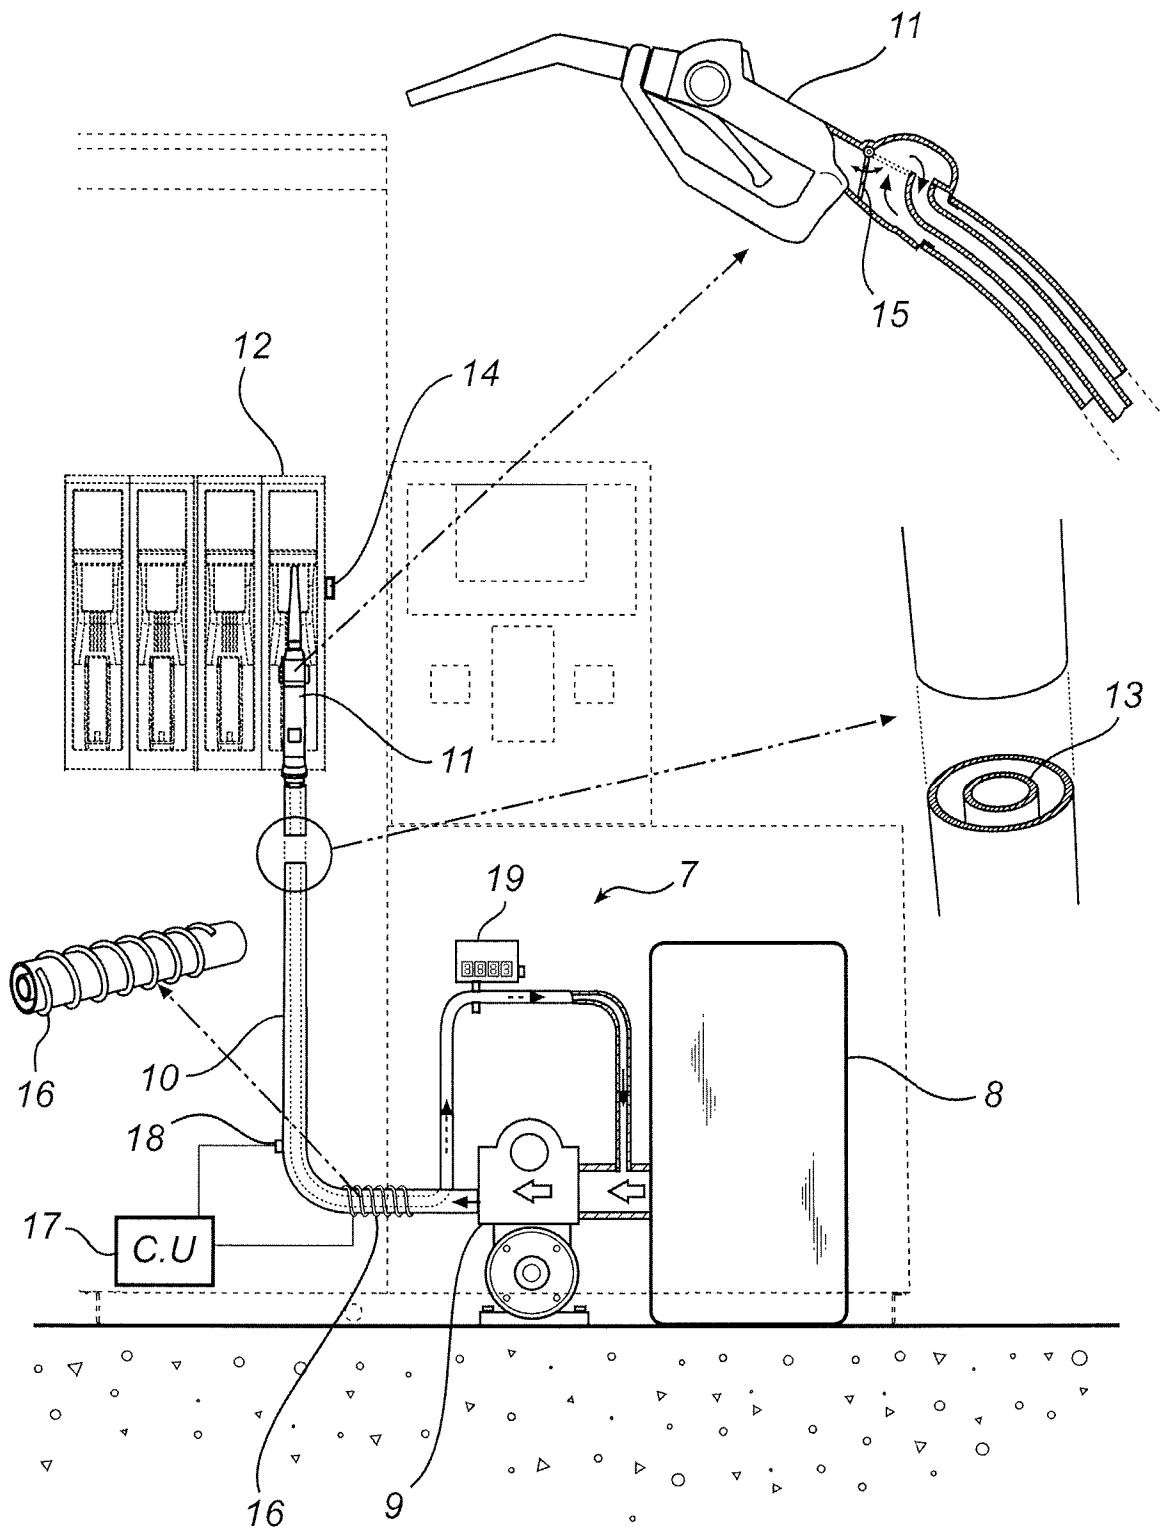


Fig. 2

3/7

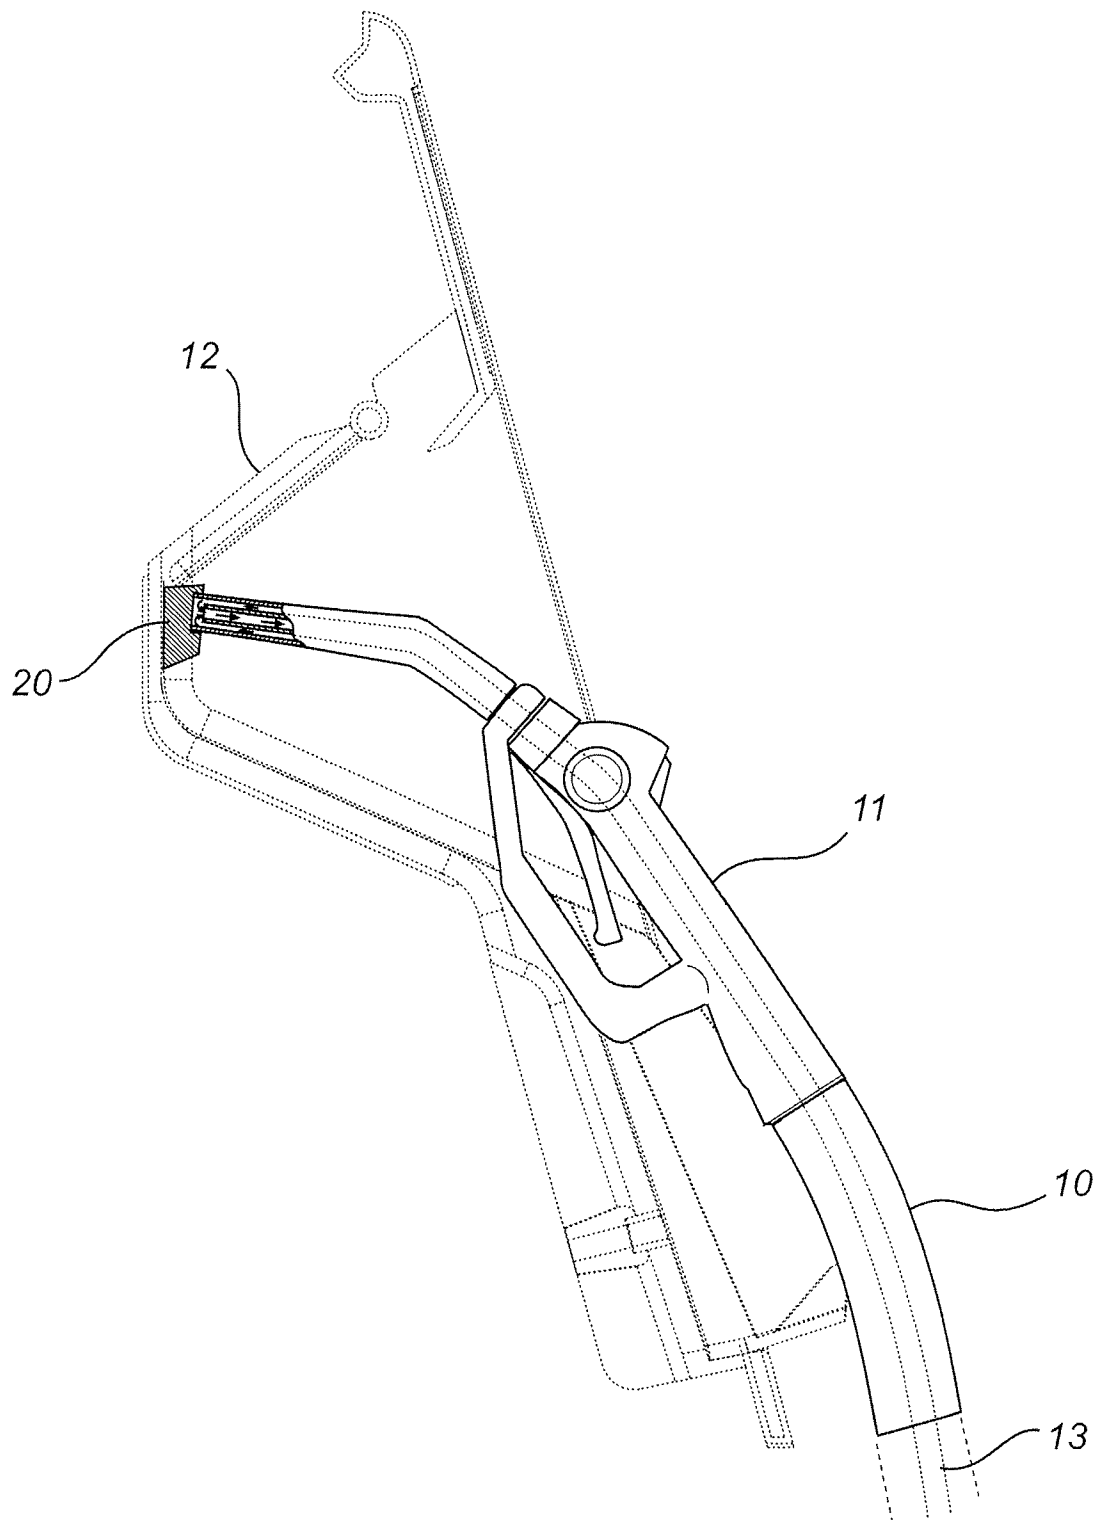


Fig. 3

4/7

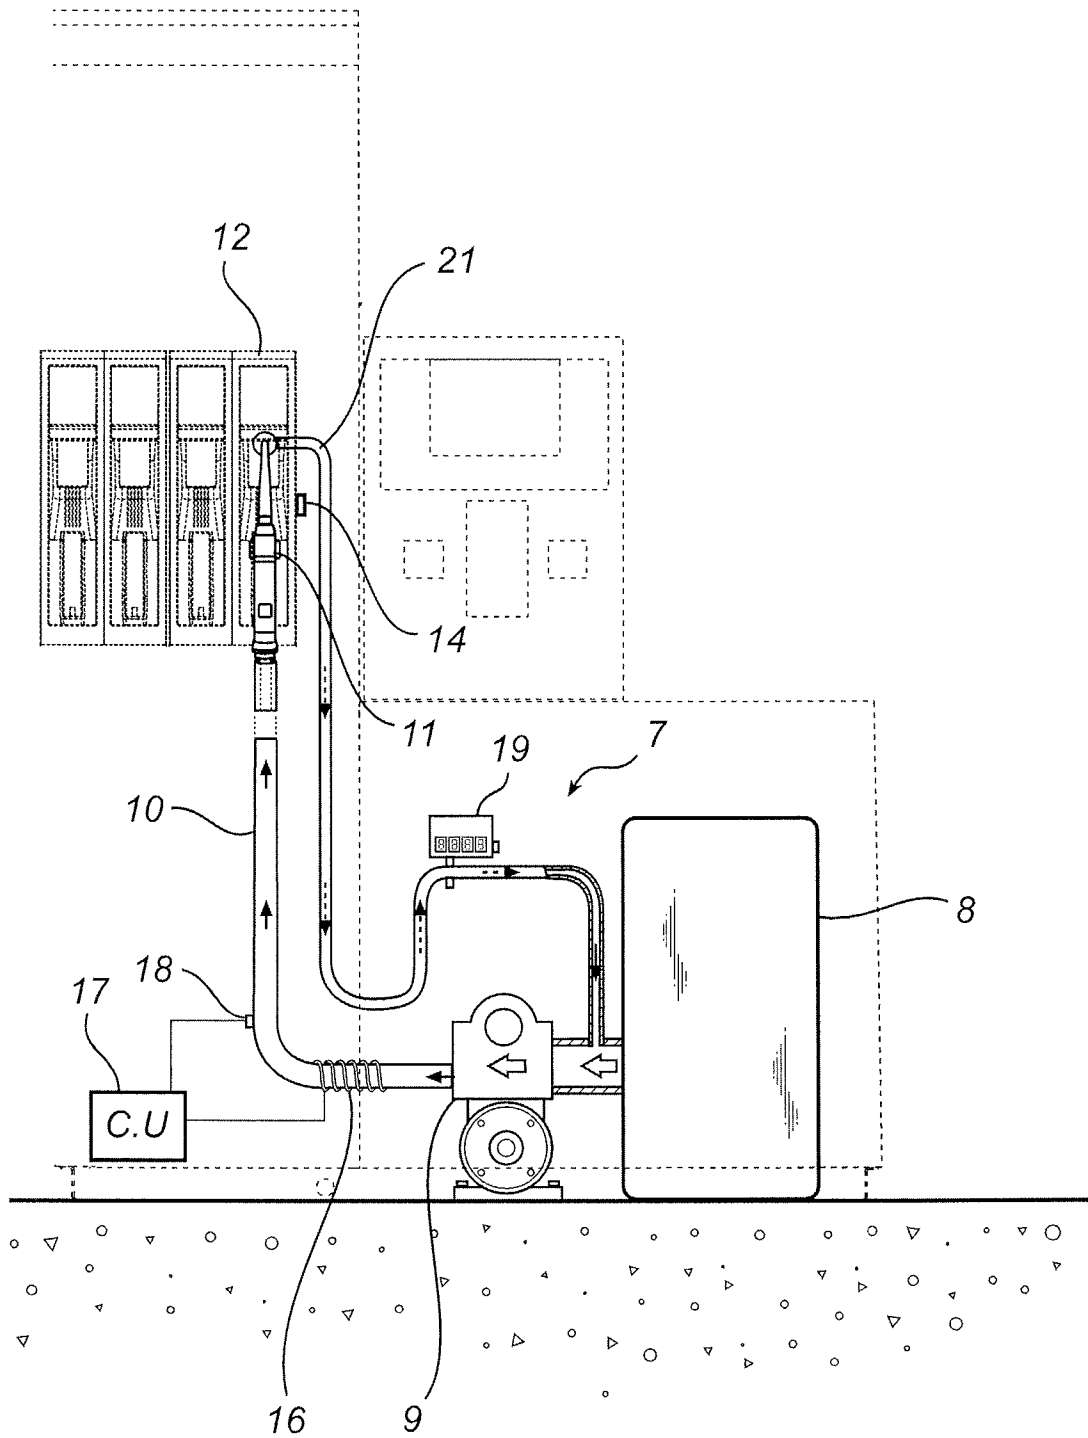


Fig. 4

5/7

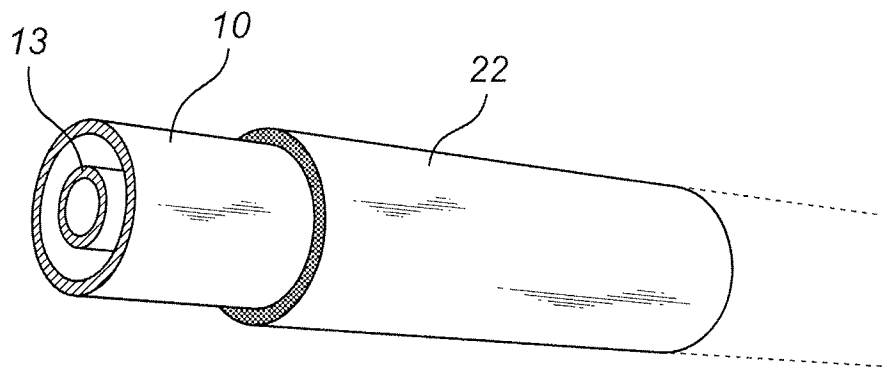


Fig. 5

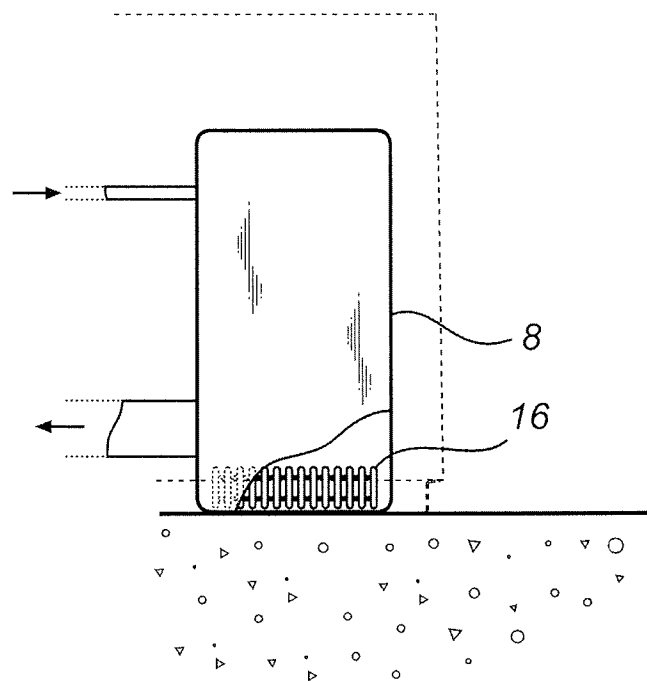


Fig. 6

6/7

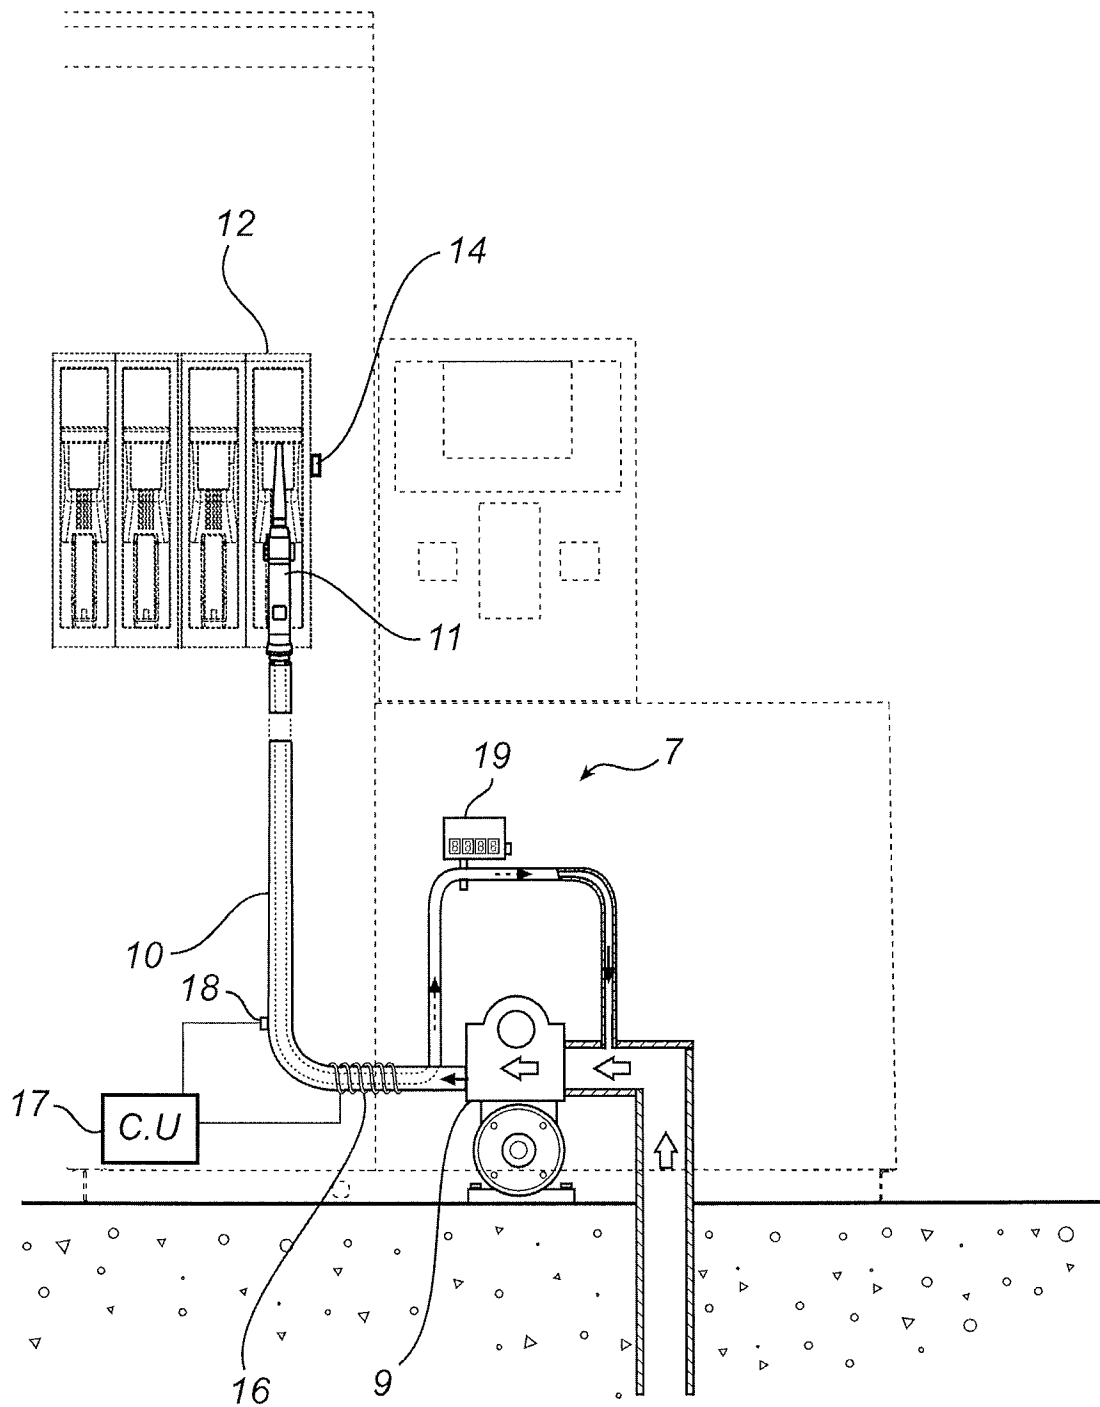
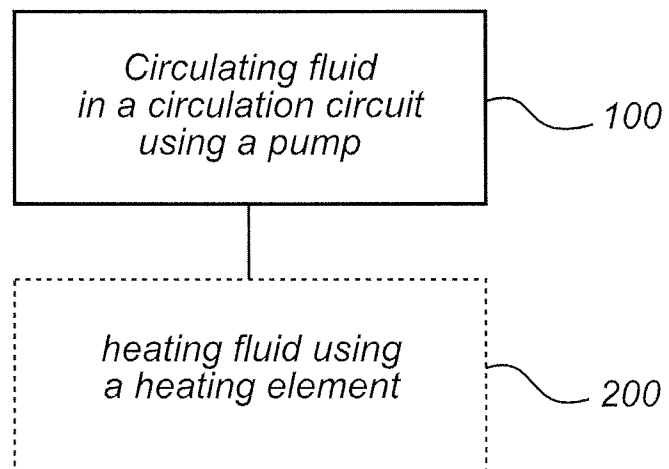


Fig. 7

7/7

*Fig. 8*

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/064814

A. CLASSIFICATION OF SUBJECT MATTER

INV. B67D7/02 B67D7/42 B67D7/62
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B67D H05B F16L F01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/150507 A1 (CHANNING DEREK ALBERT [US]) 14 August 2003 (2003-08-14) paragraph [0037]; figures 2-4,7 * abstract; figure 1	1-15
A	US 5 213 142 A (KOCH WOLFGANG H [US] ET AL) 25 May 1993 (1993-05-25) * abstract	2
A	EP 0 595 656 A1 (GILBARCO INC [US]) 4 May 1994 (1994-05-04) * abstract; figure 1 column 3, last line - column 4, line 5	3
A	WO 00/30935 A1 (MOBIL OIL CORP [US]) 2 June 2000 (2000-06-02) * abstract; figures 1-2	1

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 September 2010

Date of mailing of the international search report

28/09/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ferrien, Yann

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2009/064814

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003150507 A1	14-08-2003	NONE	
US 5213142 A	25-05-1993	US 5325896 A	05-07-1994
EP 0595656 A1	04-05-1994	AT 152080 T	15-05-1997
		AU 664490 B2	16-11-1995
		AU 5035093 A	12-05-1994
		DE 69310089 D1	28-05-1997
		DE 69310089 T2	31-07-1997
		DK 595656 T3	13-10-1997
		ES 2100476 T3	16-06-1997
		GR 3024146 T3	31-10-1997
		NO 933891 A	02-05-1994
		NZ 250086 A	26-10-1994
		US 5345979 A	13-09-1994
WO 0030935 A1	02-06-2000	AU 2156100 A	13-06-2000
		EP 1073584 A1	07-02-2001
		JP 2002530249 T	17-09-2002