



(51) International Patent Classification:

B67D 1/04 (2006.01)

B67D 1/08 (2006.01)

(21) International Application Number:

PCT/GB2020/051384

(22) International Filing Date:

08 June 2020 (08.06.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1908215.5

10 June 2019 (10.06.2019)

GB

(71) Applicant (for all designated States except US):

POLYKEG S.R.L. [IT/IT]; Via Pietro Nenni, 51, Calcinante, 24050 Bergamo (BG) (IT).

(72) Inventors; and

(71) Applicants (for US only): WALTON, Philip Andrew

[GB/GB]; Blucurve, 2 Westgate Road, Bishop Auckland Durham DL14 7AX (GB). SONZOGNI, Sergio [IT/IT]; Polykeg S.r.l., Via Pietro Nenni, 51, Calcinante, 24050 Bergamo (BG) (IT).

(74) Agent: CRASKE, Stephen; CRASKE & Co., Shallowford,

Holsworthy Road, Hatherleigh, Okehampton Devon EX20 3LE (GB).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: FLOW TERMINAL FOR A CONTAINER DIP TUBE

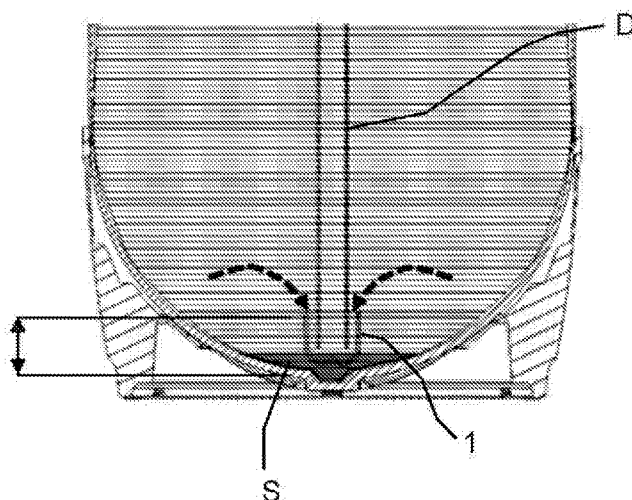


Fig. 11

(57) **Abstract:** A flow diverting device is provided at the lower end of the dip-tube (D) in a bag-in-keg container (C) which is filled top-side-down, e.g. with beer. The device directs the incoming flow to run smoothly back down the outside of the dip tube, gently into the already pooled beer thus minimising any fountain effect and associated turbulence. The device can also be used with single-wall metal or plastic kegs to reduce the dispensing of sediment and allow a greater volume of beer to be withdrawn without fobbing.



FLOW TERMINAL FOR A CONTAINER DIP TUBE

TECHNICAL FIELD OF THE INVENTION

This invention relates to a flow terminal for a container dip tube, e.g. for beer kegs.

BACKGROUND

Kegs may be used to hold and transport various liquids. They are frequently used to transfer beer from a brewery to the point of dispense for example. Typically, a beer keg has a capacity of 10 to 50 litres and consists of a pressure resistant metal or plastic container with a combined two-port valve. **Fig. 1** shows a typical metal keg which comprises a container body C, a top chime TC which facilitates handling of the keg, and a bottom chime BC which provides stable support for the keg. (Plastic kegs may not have a bottom chime, as described in **EP 2 640 646-A**.) The two-port valve V is located centrally of the top chime and is shown in greater detail in **Fig. 2**. When the valve is opened using a suitable coupling connector (see below) the valve provides two separate pathways in and out of the keg. The first pathway A has a keg opening adjacent to the valve and the second pathway B

opens at the opposite end of the keg via a dip tube D. These pathways allow the exchange of gas and liquid, firstly to fill the keg and, later, to dispense the beer. There are several common types of valve which have differing connecting systems for these flow paths, e.g. types A, S, D, G and M.

Kegs are normally dispensed with the valve orientated upwards (top-side-up). This gives convenient access for the operator to connect and disconnect a coupling connector. Pressurised gas is introduced through the first flow path A into the top of the keg thus allowing the beer to be drawn off from the bottom of the keg via the dip tube D through the second flow path B. Kegs are normally refillable, and as the contents of the kegs are normally intended for human consumption the kegs need to be cleaned before each filling cycle. Theoretically, they could be filled top-side-up however, the dip tube cannot practically reach the lowermost part of the keg as this would block the tube and thus prevent flow, so it would not be possible to effectively remove 100% of any cleaning agents used. For this reason kegs are normally filled with the valve oriented downwards (top-side-down).

Fig. 3 shows a typical filling head as used in top-side-down filling systems. The filling head has an outer body E with a keg guide ring F to locate the keg, with a keg interface seal G inside the guide ring sealing against an outer collar of the valve. A sliding core H inside the outer body E opens the valve and conducts gas in and out of the keg through pathway B1. Liquids enter or leave the

keg via pathway A1 between the core H and the seal G. As the entrance to the first flow path within the keg is adjacent to the valve, cleaning agents etc. can be effectively removed. As these kegs are in widespread use, there are a great many existing top-side-down filling machines in general use ranging from single head manual systems to complex multi-head automatic systems with high production capacities.

The filling process aims to maintain strict hygiene and normally takes several minutes. A typical filling process is as follows:

- Connect a filling head to the valve.
- Wash the valve outer surfaces (usually with steam or hot water).
- Open the valve.
- Introduce pressurised gas through the second flow path (usually CO₂ or N₂ as residual oxygen can degrade the beer). This drives out any beer remaining in the keg through the first flow path. (If the keg has previously been used to dispense beer there is invariably at least a small amount remaining that was below the level of the bottom of the dip tube.)
- Vent the second flow path and introduce cleaning agents via the first flow path.
- Introduce pressurised gas through the second flow path and drain the cleaning agents via the first flow path.
- Introduce beer via the first flow path and vent the displaced gas via the second flow path.

It is generally accepted that the beer should not be subjected to

excessive turbulence as it enters the keg as this creates foam and can have a detrimental effect on the beer quality. As the beer enters at the bottom of the keg, there is a relatively short period of turbulence on initial entry, but as the beer pools in the bottom this dampens the effect and the remainder of the fill is relatively free from excessive turbulence. When the desired amount of beer has been introduced both paths are closed and the connecting coupler is detached.

A relatively recent innovation in beer kegs is the so-called bag-in-keg container. In this case a flexible bag is used within the keg to hold the beer and physically separate the gas and beer. This gives some qualitative advantages to the system. It is not practical to re-use the bags as they are extremely difficult to clean effectively after use. Therefore, bag-in-keg systems are invariably single use with the container, chimes and two-port valve being of recyclable plastics. In these systems, the bag is connected to the second flow path of the two-port valve with the first flow path serving the space between the bag and the outer container. In a preferred configuration, a dip-tube is included within the bag. This dip tube ensures that the liquid is dispensed for the bottom of the keg and therefore minimises a phenomenon known as 'fobbing' during dispense. Fobbing is the presence of significant amounts of gas/foam being dispensed with or instead of liquid. In conventional kegs, fobbing occurs normally when the keg empties of liquid, and the level falls below the bottom of the dip-tube. This can cause problems with the dispense system, and often so-called anti-fobbing devices are fitted to shut-off the beer

flow if fobbing is detected.

It is not necessary to use a dip-tube in a bag-in-keg system, as the displacing gas pressure acting on the outside of the bag is enough to literally 'squeeze' the beer out through the second path. However, in bag-in-keg configurations without a dip-tube, fobbing can occur at any time during dispense if the dispensing gas pressure falls below carbonation pressure of the liquid. In this case, the low pressure allows gas to effervesce from the liquid and as the outlet port is at the top of the bag, the gas is dispensed along with or instead of the beer.

Fig. 4 shows a preferred bag-in-keg container configuration. This particular embodiment shows a single use polymer (PET) container C body with the bag J (of flexible polymer) closed around an internal dip tube D at the two-port valve V. Such preferred bag-in-keg containers must be filled through the dip-tube as this is the only route in and out of the bag J. With top-side-down filling equipment filling process can create excessive turbulence as the beer enters the bag through an upwardly facing tube causing a fountain effect. This turbulence can have a detrimental effect on both filling speed and beverage quality. As can be seen in **Fig. 5**, the beer pools at the bottom of the bag so it does not dampen this fountain effect, as indicated at K, which is therefore maintained throughout the filling process, reducing the filling speed and degrading the quality of the beer. Note: When filling a bag-in-keg system that does not include a dip-tube, the liquid enters at the bottom, similar to a conventional

keg, and thus there is no fountain effect.

While the dip tube minimises the possibility of fobbing during dispensing, it can cause some undesirable effects when dispensing liquids that have suspended particulates e.g. craft beers. In these cases, a sediment can form on the bottom surface of the keg during the time between filling and dispensing. If the dip-tube is extended substantially toward this bottom surface, it can cause some of this sediment to be sucked-up during dispense. For this reason, it is generally preferred to position the bottom end of the dip tube further away from the bottom surface, but this often results in increased risk of fobbing when the liquid level reaches the end of the dip tube.

One objective of the present invention is to providing a simple but effective means of reducing frothing and turbulence when filling bag-in-keg containers with a dip tube using top-side-down filling equipment.

A second objective is to provide a means of reducing the risk of fobbing and the dispensing of particulates in any keg having a dip tube.

SUMMARY OF THE INVENTION

This invention provides a bag-in-keg container:

- a container body (C);

- a bag (J) within the container body;
- a two-port valve (V) providing a first pathway (A) for gas and a second pathway (B) for liquid, said first pathway communicating with a space between the container (C) and the bag (J), and the second pathway communicating with the interior of the bag;
- a container dip tube (D) within the bag connected to the second pathway (B) of the two port valve (V);

characterised in that

an end section of the container dip tube (D) has a flow terminal (1), said flow terminal defining a flow passage (8, 9) arranged to communicate with said liquid flow path and which includes a counter-flow portion (8) leading to an opening (4), wherein the direction of liquid flow through said opening (4) is reversed relative to the direction of liquid flow through said end section of the container dip tube (D).

During filling of the bag-in-keg container the flow terminal re-directs the incoming flow to run smoothly back down the outside of the dip tube, gently into the already pooled liquid thus minimising any fountain effect and associated turbulence.

BRIEF DESCRIPTION OF THE DRAWINGS

The following description and the accompanying drawings referred to therein are included by way of non-limiting example in order to illustrate how the invention may be put into practice. In the drawings:

Figure 1 is a sectional view of a conventional metal keg;

Figure 2 is a detailed sectional view of a typical two-port valve as used in such a keg;

Figure 3 is a sectional view of a typical filling head as used in top-side down keg filling equipment;

Figure 4 is a sectional view of a preferred bag-in-keg container;

Figure 5 is a sectional view of a partially filled bag-in-keg container being filled using top-side-down filling equipment;

Figure 6 is a general view of a first form of flow terminal fitted to a container dip tube;

Figure 7 is a similar view of the flow terminal detached from the dip tube;

Figure 8 is a top plan view of the flow terminal;

Figure 9 is an axial section through the flow terminal and dip tube;

Figure 10 is a sectional view of a partially filled

bag-in-keg container provided with the flow terminal during top-side-down filling;

Figure 11 is a sectional view of a conventional plastic keg provided with the flow terminal, during dispensing;

Figure 12 is a general view of a second form of the flow terminal fitted to a container dip tube;

Figure 13 is a top plan view of the second flow terminal;

Figure 14 is an axial section through the second flow terminal and dip tube;

Figure 15 is a general view of a modified flow terminal which is fitted to a container dip tube.

DETAILED DESCRIPTION OF THE DRAWINGS

The drawings show two forms of flow terminal for use with a container dip tube of a bag-in-keg container of the kind described in the introductory paragraphs above. The flow terminals can also be used with conventional single-wall kegs formed of metal or plastics, which are also described above.

Referring to **Fig.s 6 and 7**, the flow terminal 1 is a one-piece plastic injection moulding for engagement with an end section of

the container dip tube D which contains a liquid flow path extending axially thereof and exiting through an open end M of the dip tube. The flow terminal is generally cup-shaped with a cylindrical outer wall 2 and an end wall 3 closing one end of the outer wall. The opposite end of the outer wall 2 provides an annular opening 4. Retaining means are provided to enable the flow terminal to be connected to the end section of the dip tube D. In this embodiment the retaining means comprise fins 5 (six in the embodiment shown) which project radially inwards from the outer wall 2, as shown in **Fig. 8**. The fins 5 extend axially within the outer wall 2 from the opening 4 to the end wall 3, as shown in **Fig. 9**. The inner faces 6 of the fins 5 are substantially straight, with a small inward step 7 being provided in each fin to act as spacer means. The dip tube D is a push-fit between the fins 5 and is inserted into the flow terminal until the open end M contacts the inward steps 7. The fins 5 thus form an annular space 8 between the outer wall 2 and the end section of the dip tube D, with a gap 9 between the end of the dip tube and the end wall 3. The flow terminal may be held on the dip tube D by frictional engagement between the fins 4 and the dip tube, with or without additional attachment means such as adhesive, solvent welding etc.

A continuous flow passage is thus provided from the interior of the dip tube D through open end M, into the gap 9, which in turn leads into the space 8 between the dip tube D and the outer wall 2, exiting through the opening 4. The space 8 provides a counter-flow portion leading to the opening 4, so that the direction of liquid flow through the opening 4 is reversed relative to the

axial direction of liquid flow through the dip tube D.

Several features are incorporated in this flow terminal which help to minimise turbulence and ensure smooth linear flow exiting from the opening 4. Firstly, the end wall 3 is provided with a generally conical projection 10 located co-axially with the open end M of the dip tube D, which distributes the flow evenly in all radial directions. Secondly, the junction between the end wall 3 and the outer wall 2 is internally smoothly curved at 11 to continue the smooth flow of liquid into the counter-flow space 8. Thirdly, the fins 5 divide the axial flow through the space 8 into six parallel sub-passages which helps to ensure that the flow exiting from the opening 4 is parallel to the axis of the dip tube D and non-turbulent. A further feature which can usefully be included, one embodiment of which is shown in **Fig. 15**, is to include a fine mesh 12 within the opening 4. This mesh 12 further reduces turbulence and regularises the flow down the outside of the dip tube D, thereby further lowering the impact of the flow when it enters the pool. The mesh pattern can of course vary within the scope of the invention, and the mesh could be fixed in various ways.

When used in a bag-in-keg container with a two-port valve, such as a beer keg, during top-side-down filling as shown in **Fig. 10**, the flow terminal 1 directs the incoming flow to run smoothly back down the outside of the dip tube D, passing gently into the already pooled beer at the lower end of the bag J, thus reducing or eliminating any fountain effect and associated turbulence.

The flow terminal can also be used with conventional single-wall kegs of metal or plastics fitted with a two-port valve when dispensing craft beers or other liquids that have suspended particulates. As shown in **Fig. 11**, the flow terminal reverses the flow into the dip tube D so that the outgoing liquid is not sucked from the bottom of the keg, but from the opposite direction. A dip tube fitted with this flow terminal 1 can extend further down into the container, reducing the risk of sediment S being dispensed and enabling a greater volume of liquid to be withdrawn before fobbing begins.

Referring to **Fig. 12**, the second flow terminal 1 is another one-piece plastic injection moulding for engagement with an end section of the container dip tube D which contains a liquid flow path exiting through an open end of the dip tube. The flow terminal is generally cup-shaped with a cylindrical outer wall 2 and an end wall 3 closing one end of the outer wall. The opposite end of the outer wall 2 provides an annular opening 4. Retaining means are provided to enable the flow terminal to be connected to the end section of the dip tube D. In this embodiment the retaining means comprise a pin 15 of cruciform cross-section which projects upwardly from the end wall 3, as shown in **Fig. 13**. The outer faces 16 of the pin 15 are substantially straight, with a small outward step 17 forming spacer means. The dip tube D is a push-fit onto the pin 15 and is inserted into the flow terminal until the open end M contacts the steps 17. An annular space 8 is formed between the outer wall 2 and the end section of the dip tube D, with a gap 9 between the end of the dip tube and the end

wall 3. The flow terminal may be held onto the dip tube D by frictional engagement between the pin 15 and the dip tube, with or without additional attachment means such as adhesive, solvent welding etc.

Although a pin 15 with a cruciform cross-section is easy to mould it will be appreciated that any regular cross-sectional shape could be used which has a plurality of radially-projecting fins 18 extending outwards from a central axis, e.g. three, five or six fins. The important thing to note is that the pin 15 acts to divide the flow of liquid within the dip tube into a number of equal and parallel streams.

A continuous flow passage is provided from the interior of the dip tube D through open end M, into the gap 9, which in turn leads into the space 8 between the dip tube D and the outer wall 2, exiting through the opening 4. The space 8 provides a counter-flow portion leading to the opening 4, so that the direction of liquid flow through the opening 4 is reversed relative to the axial direction of liquid flow through the dip tube D.

Features incorporated in this flow terminal help to minimise turbulence and ensure smooth linear flow exiting from the opening 4. The pin 15 divides the flow into a number of equal streams and distributes the flow evenly in all radial directions. The junction between the end wall 3 and the outer wall 2 is also internally smoothly curved at 11 to continue the smooth flow of liquid into the counter-flow space 8 which helps to ensure that the flow

exiting from the opening 4 is parallel to the axis of the dip tube D and non-turbulent. A mesh 12 could advantageously be included in the opening 4 as described above in relation to **Fig. 15**.

This second form of flow terminal can be used with bag-in-keg containers as well as single-wall containers as described above.

It should be noted that in the flow terminals described herein the outer wall 2 need not be cylindrical, e.g. hexagonal. Furthermore, the flow terminal could be integrally formed with the dip tube.

Whilst the above description places emphasis on the areas which are believed to be new and addresses specific problems which have been identified, it is intended that the features disclosed herein may be used in any combination which is capable of providing a new and useful advance in the art.

CLAIMS

1. A bag-in-keg container:
 - a container body (C);
 - a bag (J) within the container body;
 - a two-port valve (V) providing a first pathway (A) for gas and a second pathway (B) for liquid, said first pathway communicating with a space between the container (C) and the bag (J), and the second pathway communicating with the interior of the bag;
 - a container dip tube (D) within the bag connected to the second pathway (B) of the two port valve (V);characterised in that
an end section of the container dip tube (D) has a flow terminal (1), said flow terminal defining a flow passage (8, 9) arranged to communicate with said liquid flow path and which includes a counter-flow portion (8) leading to an opening (4), wherein the direction of liquid flow through said opening (4) is reversed relative to the direction of liquid flow through said end section of the container dip tube (D).
2. A bag-in-keg container according to claim 1 which includes an outer wall (2) to surround the end section of said dip tube, wherein said counter-current portion (8) is defined by a space between said outer wall and said end section.
3. A bag-in-keg container according to claim 2 which includes an end wall (3) closing one end of said outer wall.

4. A bag-in-keg container according to claim 2 which includes retaining means (5; 15) to connect the flow terminal to said end section of the dip tube.

5. A bag-in-keg container according to claim 4 wherein said retaining means includes a plurality of fins (5) which extend radially inwards from said outer wall.

6. A bag-in-keg container according to claim 3 which includes retaining means (5; 15) to connect the flow terminal to said end section of the dip tube and wherein said retaining means includes a pin (15) secured to said end wall (3).

7. A bag-in-keg container according to claim 6 wherein the pin (15) has a plurality of fins (18) extending radially outwards from a central axis.

8. A bag-in-keg container according to claim 3 which includes spacer means (7; 17) forming a gap between said end section of the dip tube and said end wall (3).

9. A bag-in-keg container according to claim 8 which includes a plurality of fins (5) which extend radially inwards from said outer wall (2) and wherein the spacer means is formed by a step (7) on the fins (5).

10. A bag-in-keg container according to claim 8 which

includes a pin (15) secured to said end wall (3) and wherein the spacer means (17) is formed by a step on the pin (15).

11. A bag-in-keg container according to claim 3 in which the end wall (3) contains a substantially conical projection (10) co-axial with the dip tube.

12. A bag-in-keg container according to claim 3 in which the junction between the end wall (3) and the outer wall (2) is internally smoothly curved (11).

13. A bag-in-keg container according claim 1 in which the opening (4) includes a mesh (12).

14. A method of filling a bag-in-keg container wherein a container according to claim 1 is filled top-side-down.

1/7

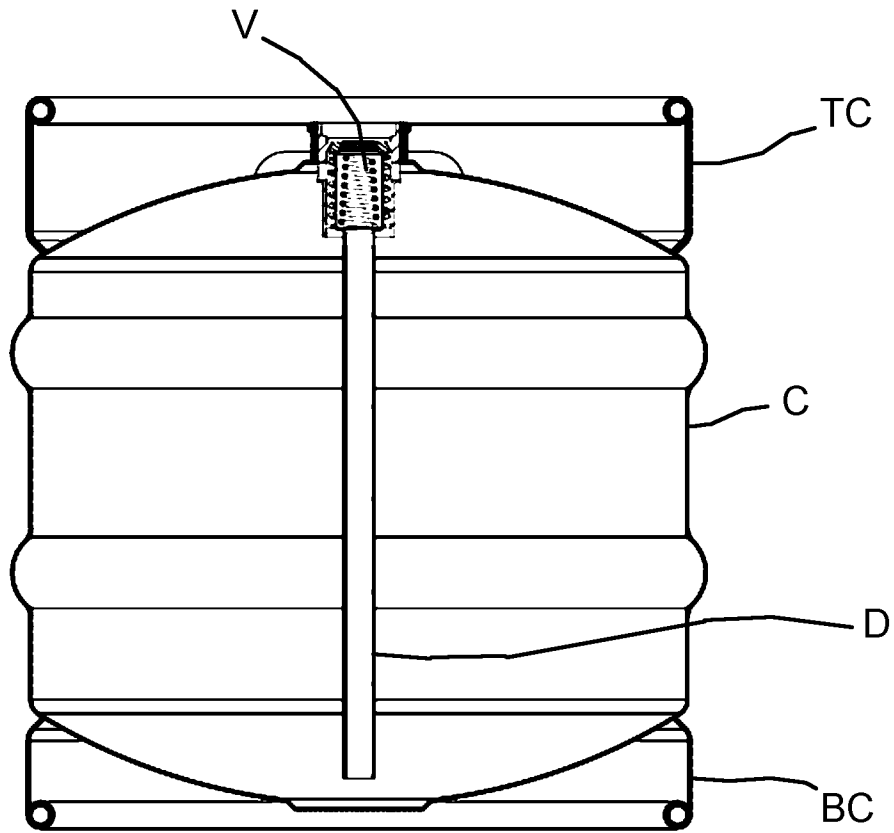


Fig. 1

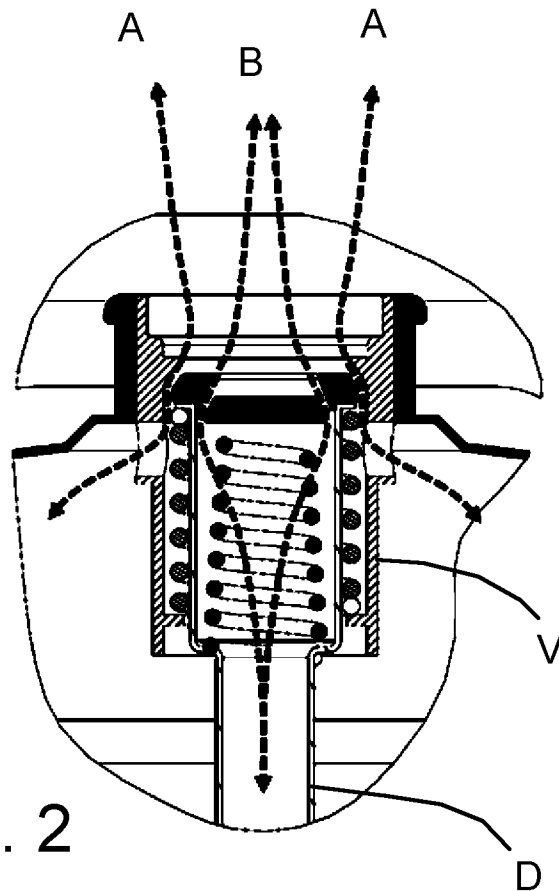


Fig. 2

2/7

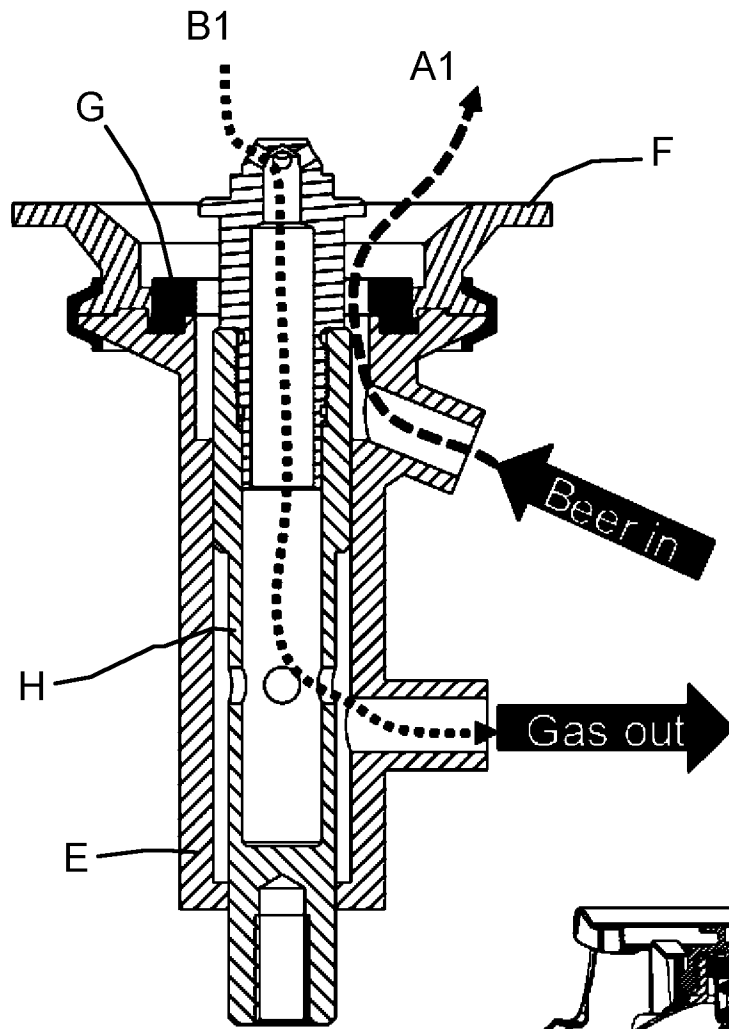


Fig. 3

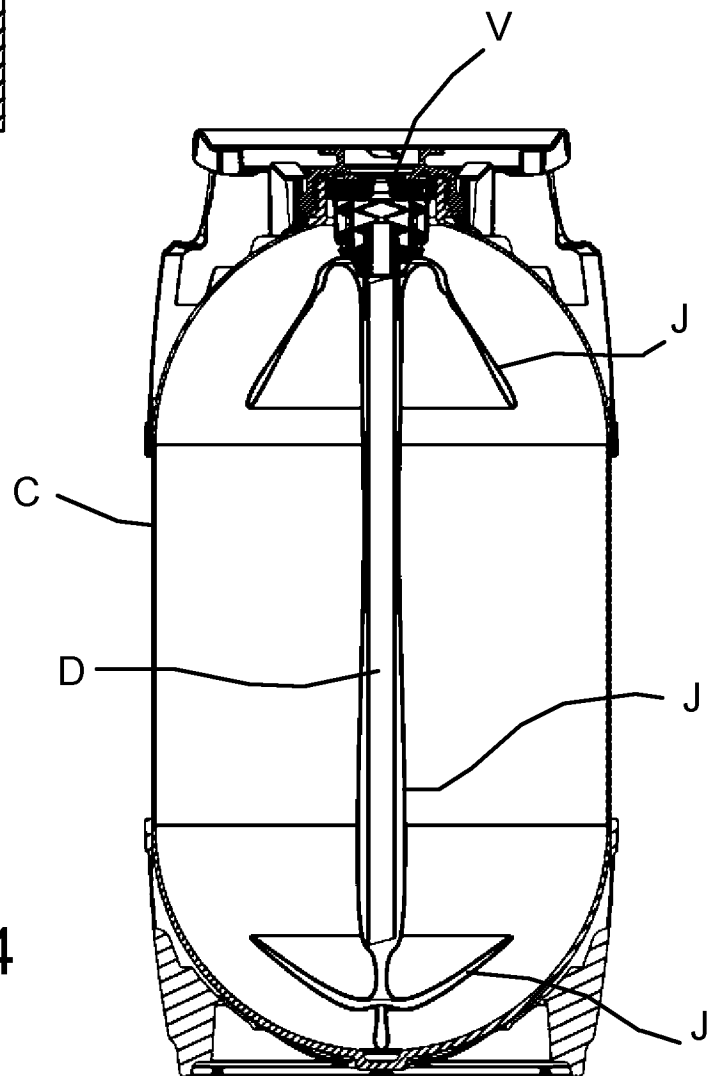


Fig. 4

3/7

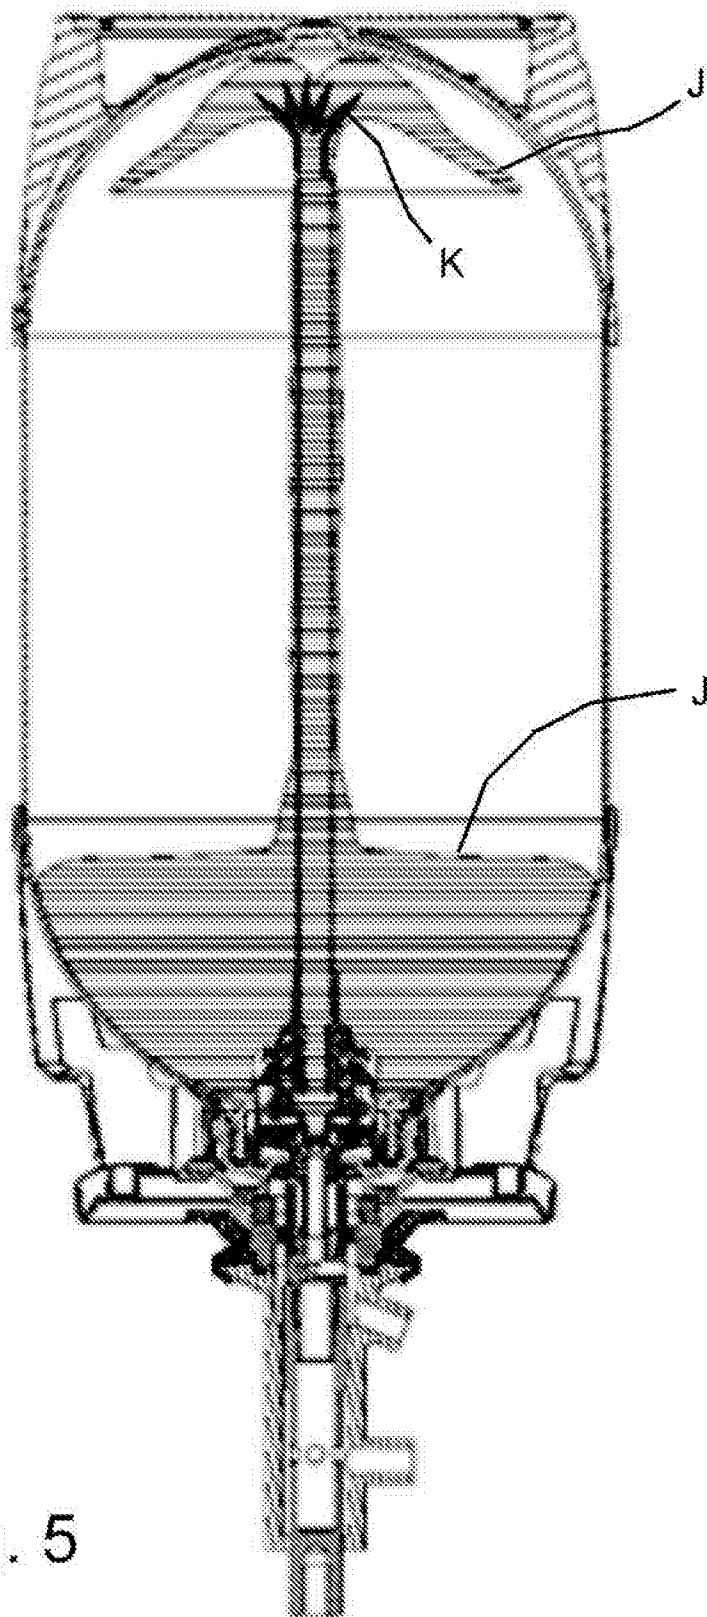


Fig. 5

5/7

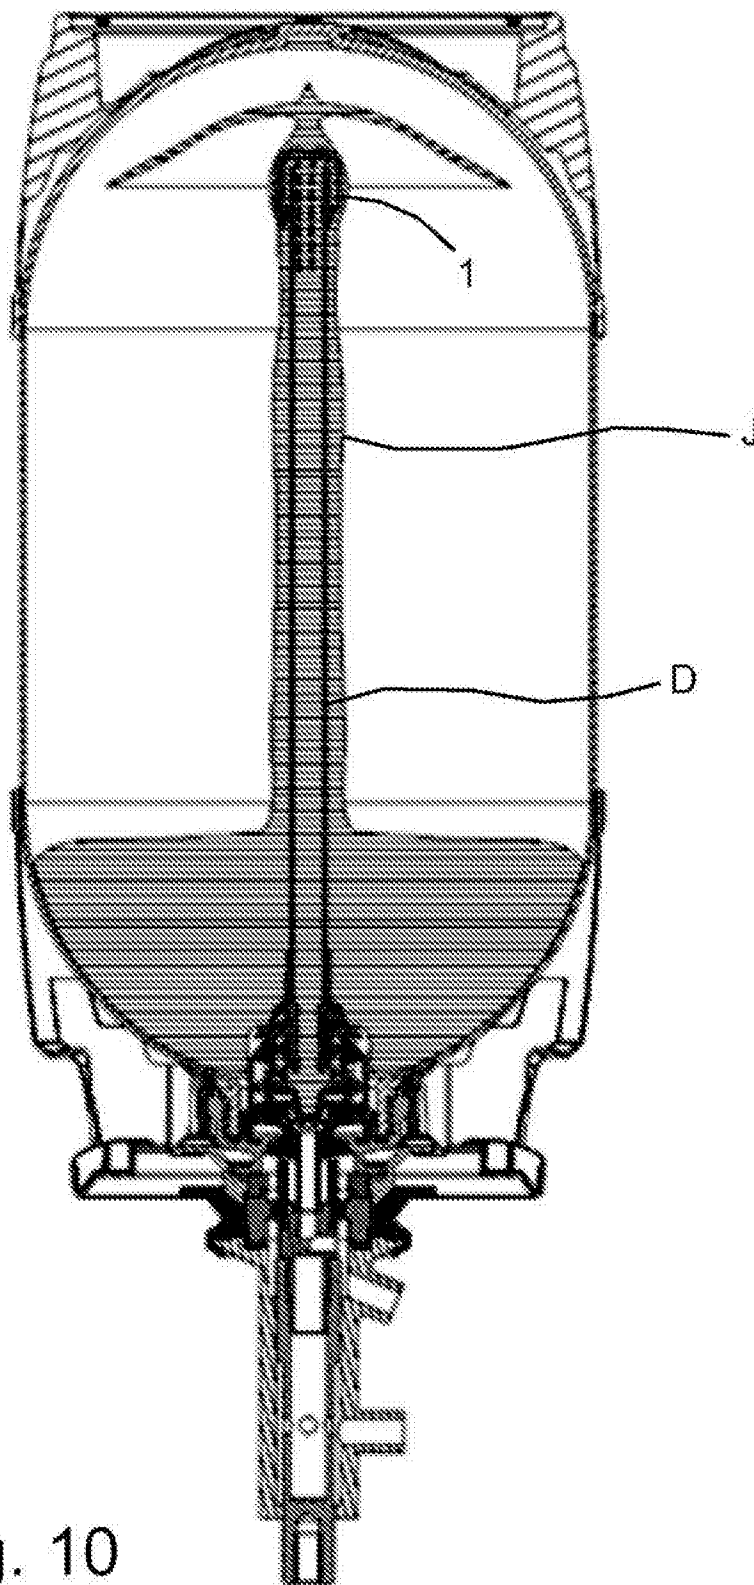


Fig. 10

6/7

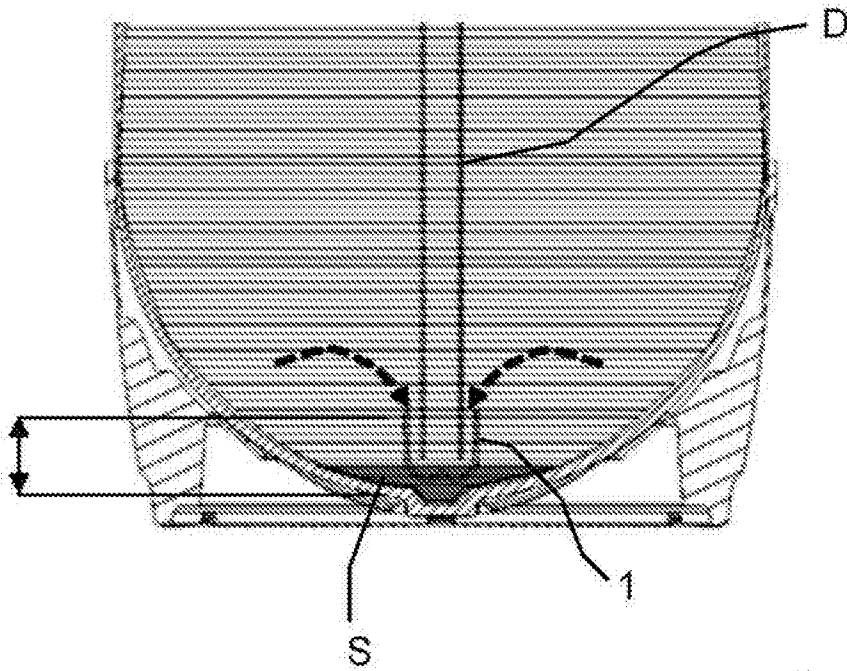


Fig. 11

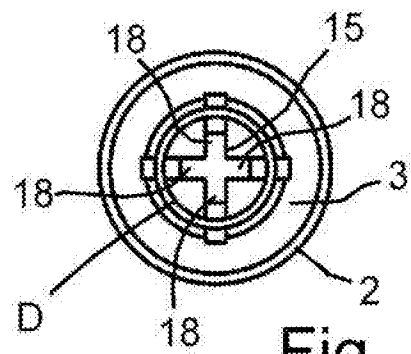


Fig. 13

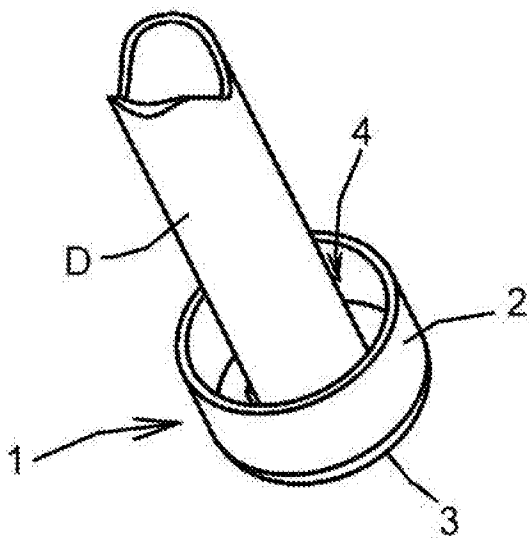


Fig. 12

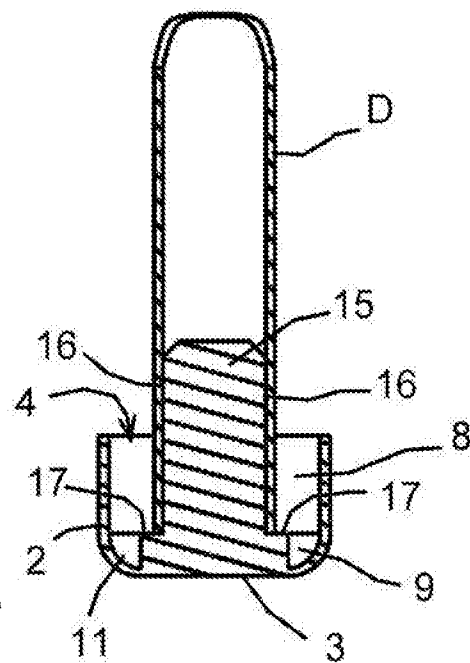


Fig. 14

7/7

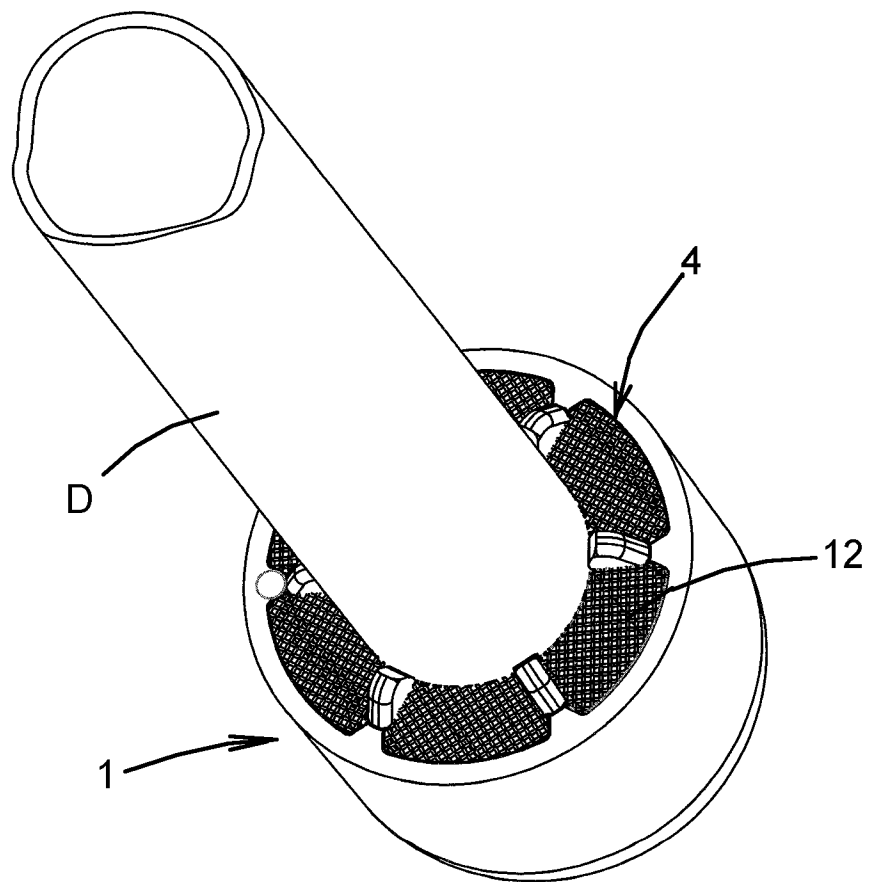


Fig. 15

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2020/051384

A. CLASSIFICATION OF SUBJECT MATTER
INV. B67D1/04 B67D1/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B67D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2005/113416 A1 (INBEV SA [BE]; ANDERSON IAN [GB]; HALKET ANDREW R B [GB]) 1 December 2005 (2005-12-01) page 3, paragraphs 2, 5, page 4, paragraphs 3, 5, 6; figures 3, 4 -----	1-7, 11-14
Y	GB 1 529 443 A (BURNETT & ROLFE LTD) 18 October 1978 (1978-10-18) page 2, line 101 - page 3, line 13; figures 1, 2 -----	1-7, 11-14
Y	WO 2013/074782 A1 (JETT INNOVATION LLC [US]) 23 May 2013 (2013-05-23) page 3, paragraph 3 - page 4, paragraph 2 page 5, paragraph 2; figures 7, 8, 13 ----- -/-	3,6,7, 11,12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 September 2020

Date of mailing of the international search report

02/10/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Schultz, Tom

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2020/051384

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 35 15 351 A1 (SCHOETTINGER & SCHAEFER GMBH & [DE]) 30 October 1986 (1986-10-30)	5
A	column 2, line 68 - column 3, line 39; figures 1-6 -----	1
Y	US 3 156 252 A (JOHNSTON MACK S) 10 November 1964 (1964-11-10) column 3, line 15 - line 33; figure 4 -----	13
A	DE 20 2005 002779 U1 (PAULANER BRAUEREI GMBH & CO KG [DE]) 6 July 2006 (2006-07-06) paragraphs [0003], [0004], [0006], [0007], [0009], [0036] - [0038], [0041], [0047], [0048]; figures 3-9 -----	1
A	GB 2 228 049 A (MILLINGTON RICHARD CO LTD [GB]) 15 August 1990 (1990-08-15) page 6, line 8 - page 8, line 13; figures 3, 5 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2020/051384

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2005113416	A1	01-12-2005	
		AU 2005245210 A1	01-12-2005
		BR PI0510519 A	26-12-2007
		CA 2568761 A1	01-12-2005
		CN 1976867 A	06-06-2007
		EP 1776309 A1	25-04-2007
		JP 2007537952 A	27-12-2007
		KR 20070050404 A	15-05-2007
		RU 2362728 C2	27-07-2009
		UA 85093 C2	25-12-2008
		US 2009211647 A1	27-08-2009
		WO 2005113416 A1	01-12-2005

GB 1529443	A	18-10-1978	NONE

WO 2013074782	A1	23-05-2013	
		US 2014312059 A1	23-10-2014
		WO 2013074782 A1	23-05-2013

DE 3515351	A1	30-10-1986	NONE

US 3156252	A	10-11-1964	NONE

DE 202005002779	U1	06-07-2006	NONE

GB 2228049	A	15-08-1990	NONE
