



- (51) **International Patent Classification:**
H02J 17/00 (2006.01) *H02J 7/02* (2006.01)
- (21) **International Application Number:**
PCT/US2011/063879
- (22) **International Filing Date:**
8 December 2011 (08.12.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/499,600 21 June 2011 (21.06.2011) US
- (71) **Applicant (for all designated States except US):** **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, California 95052 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **MATOS, Gary N.** [US/US]; 14218 NW Eagle Ridge Lane, Portland, Oregon 97229 (US). **COOPER, Emily B.** [US/US]; 1907 NW 25th Avenue, Portland, Oregon 97210 (US). **GALLAHAN, Ronald W.** [US/US]; 4200 NW Carlton Court, Portland, Oregon 97229 (US). **WALSH, James J.** [US/US]; 4409 Headen Way, Santa Clara, California 95054 (US). **YANG, Songnan** [CN/US]; 274 Snell Ct., San Jose, California 95123 (US).
- (74) **Agent:** **RAMIREZ, Ellis B.**; Prass LLP, c/o CPA Global, P.O. Box 52050, Minneapolis, Minnesota 55402 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))

(54) **Title:** APPARATUS, SYSTEMS AND METHODS FOR WIRELESS CHARGING FOR PC PLATFORMS AND PERIPHERALS

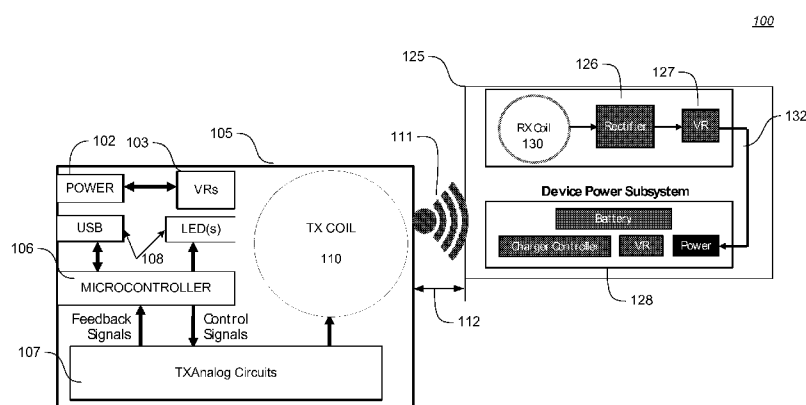


FIG. 1

(57) **Abstract:** Disclosed is a wireless charging device for charging electronic devices placed within proximity of the transmitter of the wireless charging device. The wireless charging device includes an inductive coupler, a reflected power detector, a power source and a power control system. The inductive coupler is configured to charge at least one electronic device present in the charging area. The inductive coupler takes power from the power source. The inductive coupler is also capable of communicating with electronic devices being charged to exchange a set of information. In addition to notebook PCs, this solution can be extended to desktop and tablet PCs, slates and office furniture as pervasive means of wireless charging multiple devices.

APPARATUS, SYSTEMS AND METHODS FOR WIRELESS CHARGING FOR PC PLATFORMS AND PERIPHERALS

CROSS-REFERENCES TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Application No. 61/499,600, entitled
5 "APPARATUS, SYSTEMS AND METHODS FOR WIRELESS CHARGING FOR PC
PLATFORMS AND PERIPHERALS," filed June 21, 2011, the entire disclosure of which is
incorporated herein by reference in its entirety.

BACKGROUND

1. Field of the Disclosed Embodiments

10 The disclosure relates to wireless charging for Personal Computer (PC) platforms and
peripherals.

2. Introduction

There is a significant and continually increasing need for widely available power,
15 particularly in the field of consumer and business electronics, due to the proliferation of laptop
computers, cell phones, music players, personal digital assistants and other self-powered
rechargeable portable/remote devices that require periodic charging. In many public places,
power may not be readily available to the general public because of the need for a power outlet
for a wired connection.

20 Energy or power may be transferred wirelessly using a variety of known radiative, or far-
field, and non-radiative, or near-field, techniques. For example, radiative wireless information
transfer using low-directionality antennas, such as those used in radio and cellular
communications systems and home computer networks, may be considered wireless energy
transfer. However, this type of radiative transfer is very inefficient because only a tiny portion of
25 the supplied or radiated power, namely, that portion in the direction of, and overlapping with, the
receiver is picked up. The vast majority of the power is radiated away in all the other directions
and lost in free space.

The need to power PC platforms and peripherals, such as Smartphones, is ever present.
Portability is also very important in today's computing environment. Thus, the ability to charge
30 PC platforms and peripherals without cabled device chargers is very important with no existing
apparatus, methods or systems to adequately accomplish this.

BRIEF DESCRIPTION OF THE DRAWINGS

The subject matter regarded as the invention is particularly pointed out and distinctly claimed in the concluding portion of the specification. The invention, however, both as to organization and method of operation, together with objects, features, and advantages thereof, may best be understood by reference to the following detailed description when read with the accompanying drawings in which:

FIG. 1 shows a simplified block diagram of a wireless power transfer system in accordance to an embodiment;

FIG. 2 illustrates peripherals and notebook PC as a wireless charging solution in accordance to an embodiment;

FIG. 3 illustrates a notebook PC having a transmit antenna and a receive antenna coupled thereto in accordance to an embodiment;

FIG. 4 illustrates a smart phone cross-section and a notebook PC cross-section with QTC design for wireless charging in accordance to an embodiment;

FIG. 5 is an interface to an intelligence software to provide wireless charging in accordance to an embodiment;

FIG. 6 is an interface to configure wireless power policies for a source device in accordance to an embodiment;

FIG. 7 illustrates a block diagram of a system for controlling a wireless power source in accordance to an embodiment; and

FIG. 8 is a flowchart of a method for wireless charging in accordance to an embodiment.

DETAILED DESCRIPTION OF THE DISCLOSED EMBODIMENTS

Additional features and advantages of the disclosure will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the disclosure. The features and advantages of the disclosure may be realized and obtained by means of the instruments and combinations particularly pointed out in the appended claims. These and other features of the present disclosure will become more fully apparent from the following description and appended claims, or may be learned by the practice of the disclosure as set forth herein.

Various embodiments of the disclosure are discussed in detail below. While specific implementations are discussed, it should be understood that this is done for illustration purposes

only. A person skilled in the relevant art will recognize that other components and configurations may be used without parting from the spirit and scope of the disclosure.

The disclosed embodiments may concern Personal Computer (PC) platforms and peripherals. Terminology that may be used in the present disclosure may include:

5 IWCS: Intel® Wireless Charging solution;

BEON: An Intel® derived usage term where the receiver must reside on top of an associated transmitter to obtain power;

BEBY: An Intel® derived usage term where the receiver may be in close proximity to (not touching) an associated transmitter to obtain power;

10 QTC: Quarter Torpid Coil design;

FTC: Flat Trace Coil design (also referred to as planar coils).

The term "wireless energy" is used herein to mean any form of energy associated with electric fields, magnetic fields, electromagnetic fields, or otherwise that is transmitted between a transmitter to a receiver without the use of physical electrical conductors.

15 Although embodiments of the invention are not limited in this regard, discussions utilizing terms such as, for example, "processing," "computing," "calculating," "determining," "applying," "receiving," "establishing", "analyzing", "checking", or the like, may refer to operation(s) and/or process(es) of a computer, a computing platform, a computing system, or other electronic computing device, that manipulate and/or transform data represented as physical (e.g.,
20 electronic) quantities within the computer's registers and/or memories into other data similarly represented as physical quantities within the computer's registers and/or memories or other information storage medium that may store instructions to perform operations and/or processes.

Although embodiments of the invention are not limited in this regard, the terms "plurality" and "a plurality" as used herein may include, for example, "multiple" or "two or more". The
25 terms "plurality" or "a plurality" may be used throughout the specification to describe two or more components, devices, elements, units, parameters, or the like. For example, "a plurality of resistors" may include two or more resistors.

The term "controller" is used herein generally to describe various apparatus relating to the operation of one or more device that directs or regulates a process or machine. A controller can
30 be implemented in numerous ways (e.g., such as with dedicated hardware) to perform various functions discussed herein. A "processor" is one example of a controller which employs one or more microprocessors that may be programmed using software (e.g., microcode) to perform various functions discussed herein. A controller may be implemented with or without employing

a processor, and also may be implemented as a combination of dedicated hardware to perform some functions and a processor (e.g., one or more programmed microprocessors and associated circuitry) to perform other functions. Examples of controller components that may be employed in various embodiments of the present disclosure include, but are not limited to, conventional
5 microprocessors, application specific integrated circuits (ASICs), and field-programmable gate arrays (FPGAs).

Embodiments of the present invention may provide a method, comprising: wirelessly charging a peripheral device from by a charging source in close proximity to the peripheral device using a wireless resonance energy link. In an embodiment of the present invention the
10 charging source may be a notebook computer and the peripheral device may be a Smartphone.

Further embodiments of the present invention may provide an apparatus, comprising a charging source adapted to charge a peripheral device using a wireless resonance energy link when the charging source is in close proximity to the peripheral device.

The wireless charging solution of embodiments of the present invention allows an end-user
15 to wirelessly charge their smart phone and other devices directly from their notebook PC. This unique capability is based on Wireless Resonance Energy Link (WREL) technology. In addition to notebook PCs, this solution can be extended to desktop and tablet PCs, slates and office furniture as pervasive means of wireless charging multiple devices. The primary advantages of the implementation herein include:

20 Charging Source: Notebook 'is' the source users can leave device chargers at home;

Positional Flexibility: Allows the device to be within proximity of the notebook transmitter;

Charging Power: Provides convenient power for smartphones, pico-projectors and more; and

25 Intelligent Software: Allows control of battery charging and provides real-time feedback.

FIG. 1 shows a simplified block diagram of a wireless power transfer system 100 in accordance to an embodiment. FIG. 1 illustrates wireless transmission or charging system, in accordance with various exemplary embodiments of the present invention. Input power 102 is provided to a transmitter 110 for generating a radiated field 111 for providing energy transfer. A
30 receiver 130 couples to the radiated field 111 and generates an output power 132 for storing or consumption by a device (not shown) coupled to the output power 110. Transmitter 110 is housed in a wireless charging device 105 such as a notebook PC, but can be extended to desktop and tablet PCs, slates and office furniture as pervasive means of wireless charging multiple

devices. It should be noted that wireless charging device 105 can be a device that can receive and source wireless power (BE-ALL). Additionally, the wireless charging device 105 may comprise one or more voltage regulator 103, controller or microcontroller 106 to control wireless power policies, TXAnalog Circuits 107 such as power amplifiers, impedance matching, power sensing, and other circuits known to those in the art.

Receiver 130 is housed in an electronic device 125 such as a smartphone, Bluetooth device, battery pack, or other devices that can be charged wirelessly. The output power 132 could be processed through a rectifier 126 and voltage regulator 127 before being sent to the target device power subsystem. Both the transmitter 110 and the receiver 130 are separated by a distance 112. In one exemplary embodiment, transmitter 110 and receiver 108 are configured according to a mutual resonant relationship. Transmitter 110 further includes a transmit antenna (not shown) for providing a vehicle for energy transmission and receiver 130 further includes a receive antenna (not shown) for providing a means for energy reception. The transmit and receive antennas are sized according to applications and devices to be associated therewith. Selection and management of the transmitter allows the charging system 100 to operate either in BEON or BEBY configurations and to operate at 13.56 MHz or 6.78 MHz.

FIG. 2 illustrates peripherals and notebook PC as a wireless charging solution in accordance to an embodiment. FIG. 2 illustrates a notebook computer 210 with peripherals that may be utilized by embodiments of the present invention. These may include, but are not limited to, mobile phones 220, such as Smartphones, mobile music devices 230, wireless keyboards and mice 240, Bluetooth wireless devices 250, such as hands-free devices 260 and any other mobile information devices. A mobile information device can be a mobile phone, a personal digital assistant (PDA), or any other mobile communication apparatus. The wireless charging device, the notebook PC 210, uses an IWCS User Interface 560 to configure policies that govern the relationship between the transmission of wireless power and other platform performance and power characteristics. At any time, the user of the wireless charging device such as the notebook PC 210 may configure the IWCS software to deliver more or less power to the IWCS subsystem.

The ICWS software exchanges a set of information with the chargeable electronic device such as Bluetooth wireless devices 250. The set of information is used during the charging of the electronic device. The set of information includes, but is not limited to, the presence of at least one electronic device within the proximity of the wireless charging device or within generating a radiated field 111, charging requirement of the at least one electronic device, a charging state of the wireless charging device such as notebook PC 210, and safety information

corresponding to the charging of the at least one electronic device. The communication link between the inductive coupler and the electronic device may be a bidirectional link. The communication link can function as long as some amount of power is being supplied from the inductive coupler to the electronic device. In an embodiment of the present disclosure, the set of
5 information can be exchanged in a closed loop communication with the electronic device. The closed loop communication allows the electronic device to constantly tune its output power characteristics such as its power requirement and its presence in the proximity of wireless charging area (radiated field 111) of the wireless charging device during the charging operation.

FIG. 3 illustrates a notebook PC having a transmit antenna and a receive antenna coupled
10 thereto in accordance to an embodiment. The illustrated wireless charging device is a notebook PC 210 which may comprise a transmit antenna 340 and associated transmitter circuitry (not shown) configured for transmitting wireless power and an optional receive antenna 380 and associated receiver circuitry (not shown) configured for receiving wireless power. It is noted that each antenna, the receive antenna 380 and the transmit antenna 340, may be coupled to
15 notebook PC 210 in a manner so as to avoid any electrical interference between the antennas and any metallic components of notebook PC 210.

FIG. 4 illustrates a smart phone cross-section and a notebook PC cross-section with QTC design for wireless charging in accordance to an embodiment. The illustration provides a notebook PC 210 cross-section, QTC configuration 410 and Smartphone cross-section 220. The
20 Notebook PC Cross-section shows 10mm coils and the Smart-phone cross section illustrates an 8mm coil, for example.

FIG. 5 is an interface to intelligence software to provide wireless charging in accordance to an embodiment. FIG. 5 illustrates an IWCS User Interface 560. This may include, but is not limited to, configuration settings 515, frequency to search for chargeable devices 520, wireless
25 charging state 505 such as "ON", "OFF", "RESET", "Regulatory", device charging status 510 such as "Device Present" and "Charging Complete", just to name a few. The user may select and save different wireless charging solution settings 530 ("OK") prior to beginning the transfer of power. The IWCS user interface 260 also further offers a mean 540 ("utilities") to invoke another user interface as shown in FIG. 6 that may be displayed on a display of notebook PC
30 210, for example. The wireless power software (WPS) user interface 610 includes one or more configuration policies that may be selected and set by the user.

FIG. 6 is an interface to configure wireless power policies for a source device in accordance to an embodiment. FIG. 6 illustrates the wireless power software (WPS) user

interface 610. The WPSUI 610 may be invoked and displayed when a user selects utilities function 540, the user may choose to set policies 620 that meter other aspects of system performance 650, in deference to maximizing wireless power transmission. Examples of system performance characteristics 650 that could be metered by the end user include CPU processing power, power delivered to Optical Disk Drives (ODDs), screen display brightness, CPU performance, device charging level 630, device identification 640, and others. Alternately, the software could support an automatic mode where the user simply selects the wireless power transmission level 655 and the software intelligently meters other platform performance aspects consistent with the user selection. A metering application collect metrics data elements such as CPU usage or other notebook PC 210 usage, the data may record the resulting metrics data to a data log at a memory. The data log may be a file or multiple files residing on the network PC or on a remote location. It should be noted that both UI 560 and UI 610 could be combined into a single user interface to set the wireless charging policies, setting, and meter subsystem to provide a Wireless Charging solution.

FIG. 7 illustrates a block diagram of a system for controlling a wireless power source in accordance to an embodiment. FIG. 7 illustrates a diagram of a wireless charging device such as notebook PC 210. The wireless charging device may be embodied within devices such as a desktop computer, a laptop computer, a handheld computer, a handheld communication device, or another type of computing device, or the like. The wireless charging device may include a memory 720, a processor 730, input/output devices 740, a display 750 and a bus 760. The bus 760 may permit communication and transfer of signals among the components of the wireless charging device such as notebook PC 210.

Processor 730 may include at least one conventional processor or microprocessor that interprets and executes instructions. The processor 730 may be a general purpose processor or a special purpose integrated circuit, such as an ASIC, and may include more than one processor section. Additionally, the wireless charging device may include a plurality of processors 730.

Memory 720 may be a random access memory (RAM) or another type of dynamic storage device that stores information and instructions for execution by processor 730. Memory 720 may also include a read-only memory (ROM) which may include a conventional ROM device or another type of static storage device that stores static information and instructions for processor 730. The memory 720 may be any memory device that stores data for use by wireless charging device 210.

Input/output devices 740 (I/O devices) may include one or more conventional input mechanisms that permit a user to input information to the wireless charging device 210, such as a microphone, touchpad, keypad, keyboard, mouse, pen, stylus, voice recognition device, buttons, etc., and output mechanisms such as one or more conventional mechanisms that output
5 information to the user, including a display, one or more speakers, a storage medium, such as a memory, magnetic or optical disk, disk drive, a printer device, etc., and/or interfaces for the above. The display 750 may typically be an LCD or CRT display as used on many conventional computing devices, or any other type of display device.

The wireless charging device 210 may perform functions in response to processor 730 by
10 executing sequences of instructions or instruction sets contained in a computer-readable medium, such as, for example, memory 720. Such instructions may be read into memory 720 from another computer-readable medium, such as a storage device, or from a separate device via a communication interface, or may be downloaded from an external source such as the Internet. The wireless charging device 100 may be a stand-alone wireless charging device, such as a
15 personal computer, or may be connected to a network such as an intranet, the Internet, or the like.

The memory 720 may store instructions that may be executed by the processor to perform various functions. For example, the memory may store wireless charging instructions such as IWCS power software 780 to allow the wireless charging device to perform various functions in
20 association with a particular wireless power policy to the wireless charging device. The instructions are typically unique to each specific type of wireless charging device, and the wireless charging device may store a plurality of policies each for a different peripheral.

Wireless power transmitter subsystem 770 is configured to operate under the control of wireless power software 780 as implemented in processor 730 to wirelessly transfer power
25 supplied by power source (not shown) to wireless power receiver associated with portable electronic device described in FIG. 2 via an inductive link. The wireless power transfer may be carried out over inductive link in accordance with the well-known principles of inductive coupling or resonant inductive coupling as discussed in the Background Section above. The manner in which wireless power transmitter and wireless power receiver are implemented will
30 depend on the type of inductive coupling used. A variety of transmitter and receiver designs based on inductive coupling and resonant inductive coupling are available in the art and thus need not be described herein.

Wireless power transmitter subsystem 770 comprises in some aspects, Tx Coil and/or Rx Coil arranged as substantially flat, planar or a combination of both. In addition to improving integration with smaller and more planar-sized structure such as a laptop, a flat coil structure can also reduce unwanted spurious radio frequency (RF) emissions, because the substantially flat coil will have a smaller dipole moment in the direction perpendicular to the flat coil. In some aspects, flat coils may be fabricated by forming a suitable number of turns of magnet wire, solid core wire, stranded wire, Litz wire, hollow copper tubing (producing better weight to conductivity ratio) on a non-conductive substrate or armature that maintains the appropriate flat geometry. Moreover, other methods of manufacturing a multi-turn 2D coil may be used including etched or otherwise patterned conductors and those manufactured by any methods used in printed circuit board fabrication.

FIG. 8 is a flowchart of a method for wireless charging in accordance to an embodiment. The method in action 820 performs a function to acquire presence of electronic device within charging area. The method in action 840 performs a function to acquire Wireless Power policies as received from the user through IWCS user interface 560 and wireless power software (WPS) user interface 610. The method in action 840 performs a function to provide Power in Accordance To policy and the requirements for at least one electronic device.

Other unique features of the present disclosure may provide: 1) Can operate either in BEON or BEBY configurations; 2) Can operate at various frequencies, such as 13.56 MHz or 6.78 MHz; 3) FTC or planar coils geometries (like competitive “device on mats”) have insufficient efficiency to charge phones in side-by-side configurations; and 4) Low-frequency systems cannot adapt coil geometries to ultra-thin notebooks and phones.

Embodiments within the scope of the present disclosure may also include computer-readable media for carrying or having computer-executable instructions or data structures stored thereon. Such computer-readable media can be any available media that can be accessed by a general purpose or special purpose computer. By way of example, and not limitation, such computer-readable media can comprise RAM, ROM, EEPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to carry or store desired program code means in the form of computer-executable instructions or data structures. When information is transferred or provided over a network or another communications connection (either hardwired, wireless, or combination thereof) to a computer, the computer properly views the connection as a computer-readable medium. Thus,

any such connection is properly termed a computer-readable medium. Combinations of the above should also be included within the scope of the computer-readable media.

Computer-executable instructions include, for example, instructions and data which cause a general purpose computer, special purpose computer, or special purpose processing device to perform a certain function or group of functions. Computer-executable instructions also include program modules that are executed by computers in stand-alone or network environments. Generally, program modules include routines, programs, objects, components, and data structures, etc. that performs particular tasks or implement particular abstract data types. Computer-executable instructions, associated data structures, and program modules represent examples of the program code means for executing steps of the methods disclosed herein. The particular sequence of such executable instructions or associated data structures represents examples of corresponding acts for implementing the functions described in such steps.

Embodiments of the present invention provide a non-volatile computer readable medium encoded with computer executable instructions, which when accessed, cause a machine to perform operations comprising wirelessly charging a peripheral device from by a charging source in close proximity to the peripheral device using a wireless resonance energy link. Further, embodiments herein may provide the charging source is a notebook computer and the peripheral device is a Smartphone.

Although the above description may contain specific details, they should not be construed as limiting the claims in any way. Other configurations of the described embodiments of the disclosure are part of the scope of this disclosure. For example, the principles of the disclosure may be applied to each individual user where each user may individually deploy such a system. This enables each user to utilize the benefits of the disclosure even if any one of the large number of possible applications do not need the functionality described herein. In other words, there may be multiple instances of the components each processing the content in various possible ways. It does not necessarily need to be one system used by all end users. Accordingly, the appended claims and their legal equivalents should only define the disclosure, rather than any specific examples given.

We Claim:

1. A method, comprising:

wirelessly charging a peripheral device from by a charging source in close
proximity to the peripheral device using a wireless resonance energy link.

2. The method of claim 1, wherein the charging source is a notebook computer.

3. The method of claim 1, wherein the peripheral device is a Smartphone.

4. An apparatus, comprising:

a charging source adapted to charge a peripheral device using a wireless resonance
energy link when the charging source is in close proximity to the peripheral device.

5. The apparatus of claim 4, wherein the charging source is a notebook computer.

6. The apparatus of claim 5, wherein the peripheral device is a Smartphone.

7. A non-volatile computer readable medium encoded with computer executable
instructions, which when accessed, cause a machine to perform operations comprising:
wirelessly charging a peripheral device from by a charging source in close proximity to the
peripheral device using a wireless resonance energy link.

8. The non-volatile computer readable medium of claim 7, wherein the charging
source is a notebook computer.

9. The non-volatile computer readable medium of claim 7, wherein the peripheral
device is a Smartphone.

10. A method to control a wireless charging device to charge at least one electronic
device placed within proximity of the transmitter of the wireless charging device, comprising:
displaying a user interface including selectable policies to govern the relationship
between the wireless charging device and the at least one electronic device;

receiving an indication from the user of selected ones of the selectable policies; and
controlling wireless charging of the at least one electronic device using the selected ones
of the selectable policies.

5 11. The method in accordance to claim 10, wherein selectable policies comprise at
least one of wireless transmission power, and performance level for at least one component of
the wireless charging device.

10 12. The method in accordance to claim 11, wherein selectable policies comprise
configuration settings selected from the group consisting of frequency to search for chargeable
devices and charging limit.

 13. The method in accordance to claim 11, the method further comprising:
 metering at least one of wireless charging device charging status, electronic device
charging state, electronic device charging level, and electronic device identification.

15 14. A non-transitory computer-readable medium having instructions that when
compiled by a processor control a wireless charging device, comprising:
 a computer-usable data carrier storing instructions, the instructions when executed
by the processor in a computer causes the computer to charge at least one electronic device
20 placed within proximity of the transmitter of the wireless charging device by:
 displaying a user interface including selectable policies to govern the relationship
between the wireless charging device and the at least one electronic device;
 receiving an indication from the user of selected ones of the selectable policies; and
 controlling wireless charging of the at least one electronic device using the selected ones
25 of the selectable policies.

 15. The non-transitory computer-readable medium of claim 14, wherein selectable
policies comprise at least one of wireless transmission power, and performance level for at least
one component of the wireless charging device.

30 16. The non-transitory computer-readable medium of claim 15, wherein selectable
policies comprise configuration settings selected from the group consisting of frequency to
search for chargeable devices and charging limit.

17. The non-transitory computer-readable medium of claim 16, wherein the instructions further comprise instructions causing the computer to control charging by:

metering at least one of wireless charging device charging status, electronic device
5 charging state, electronic device charging level, and electronic device identification.

100

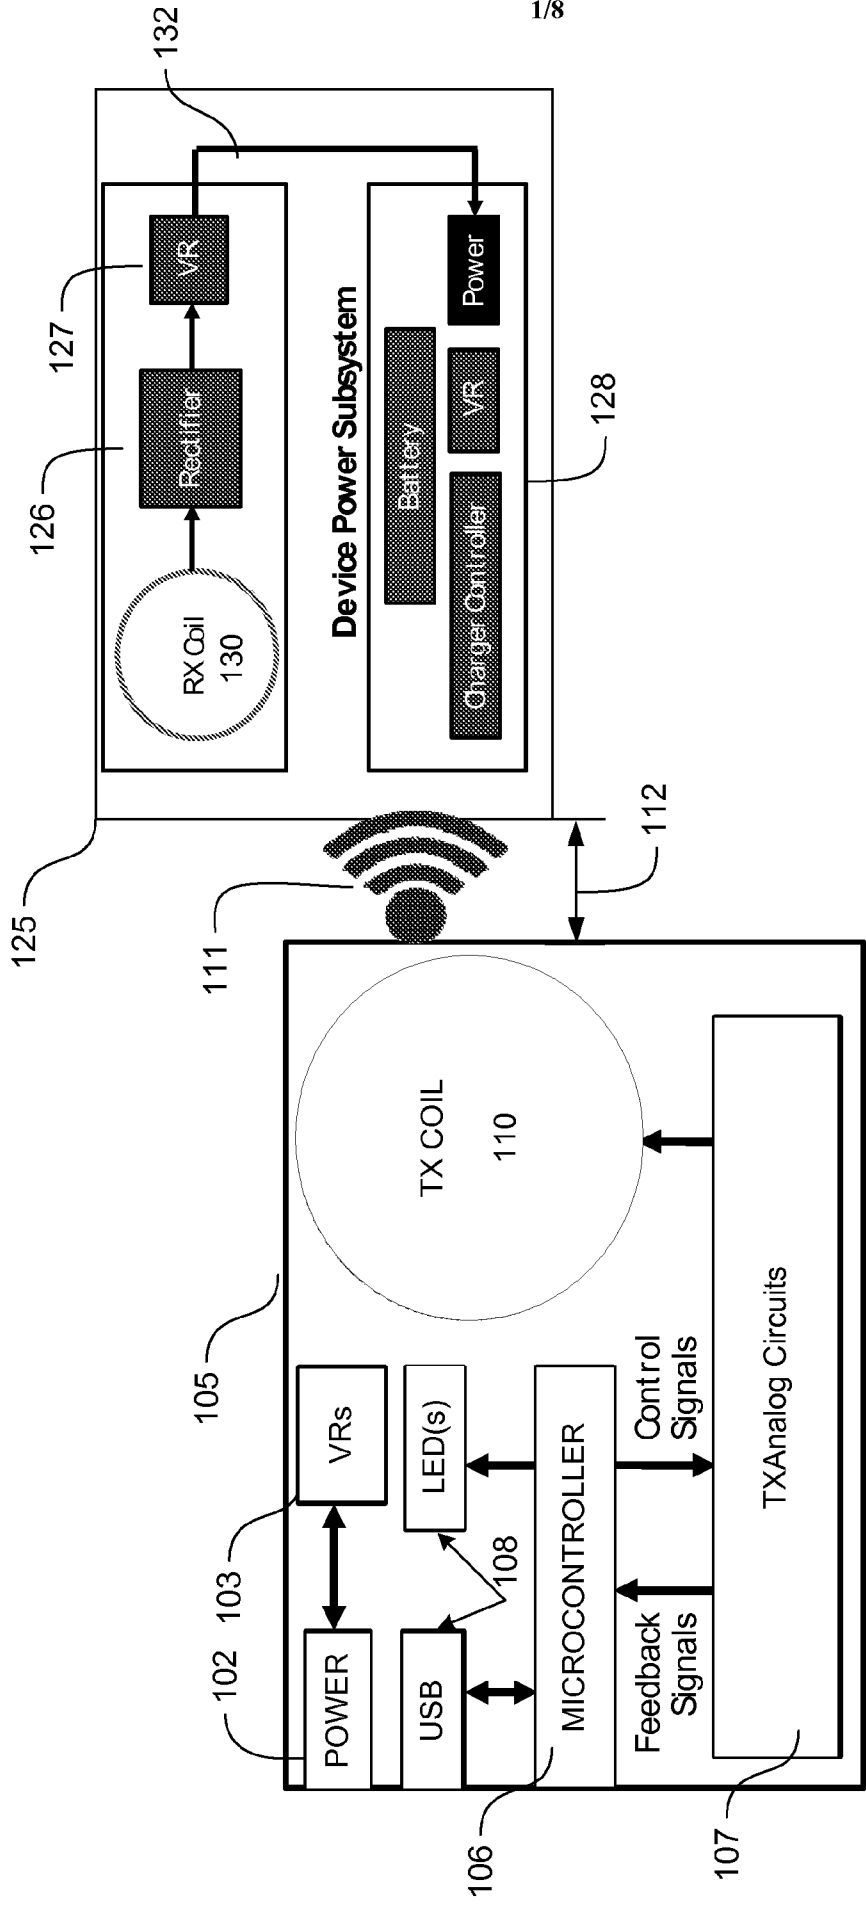


FIG. 1

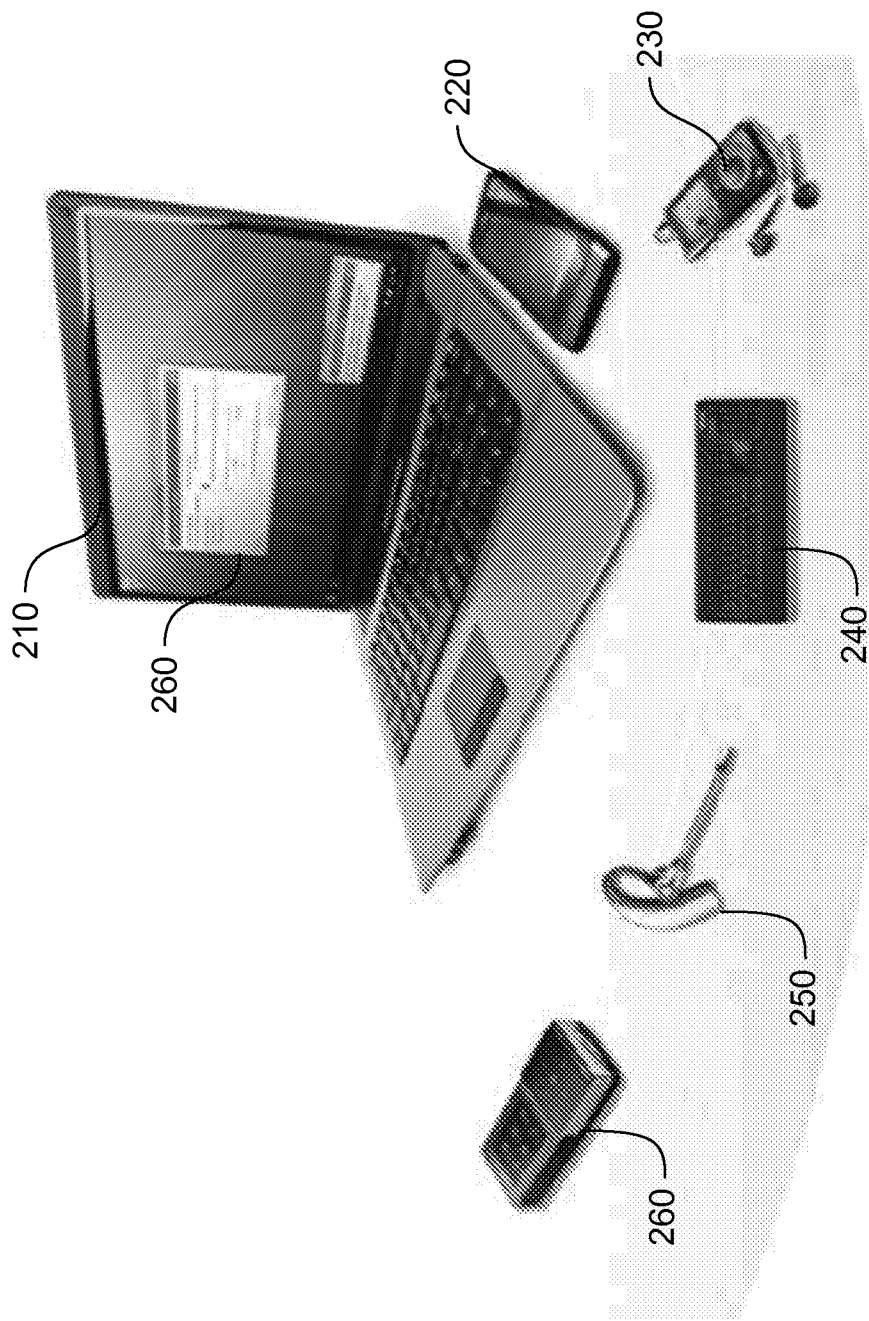


FIG. 2

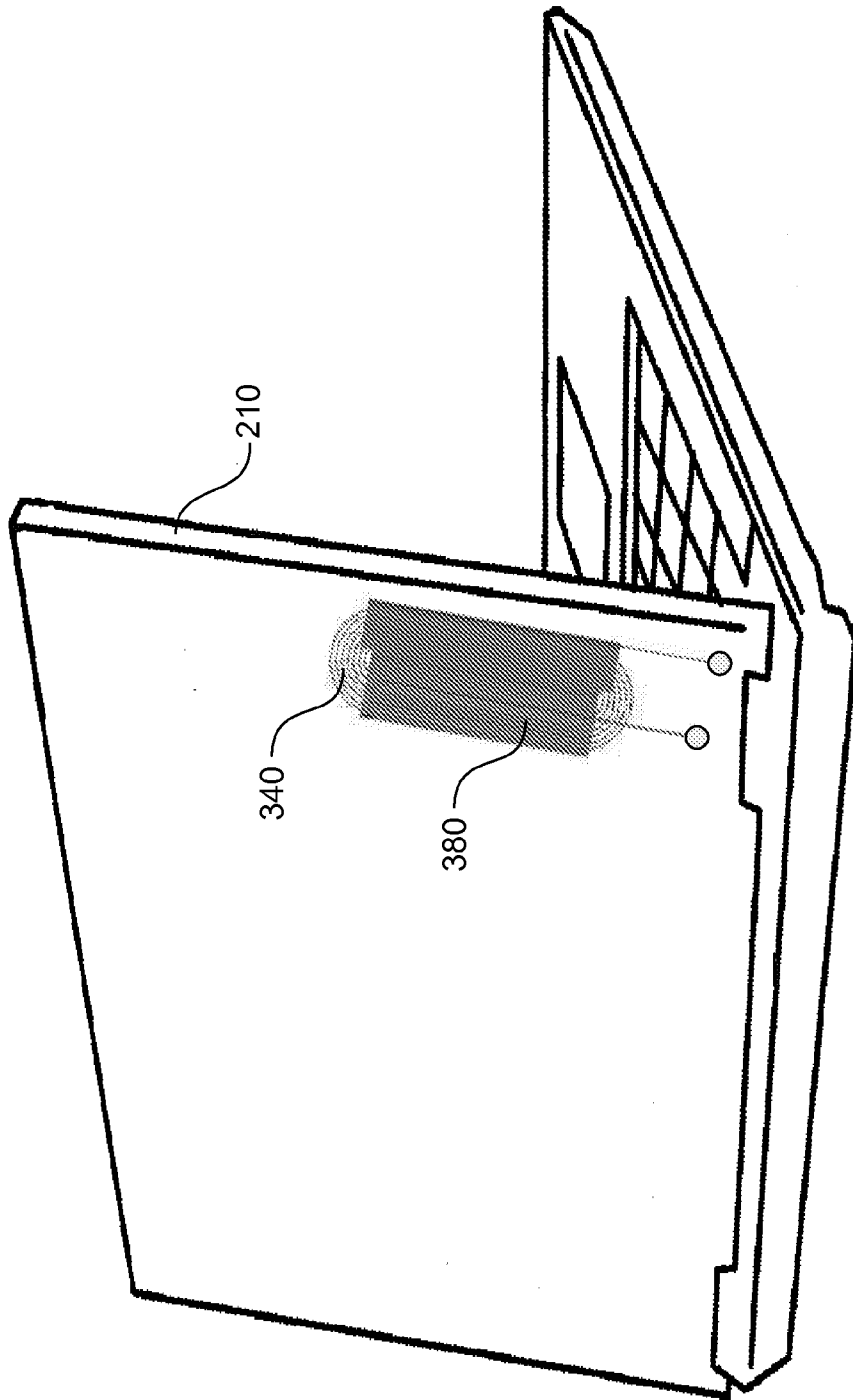


FIG. 3

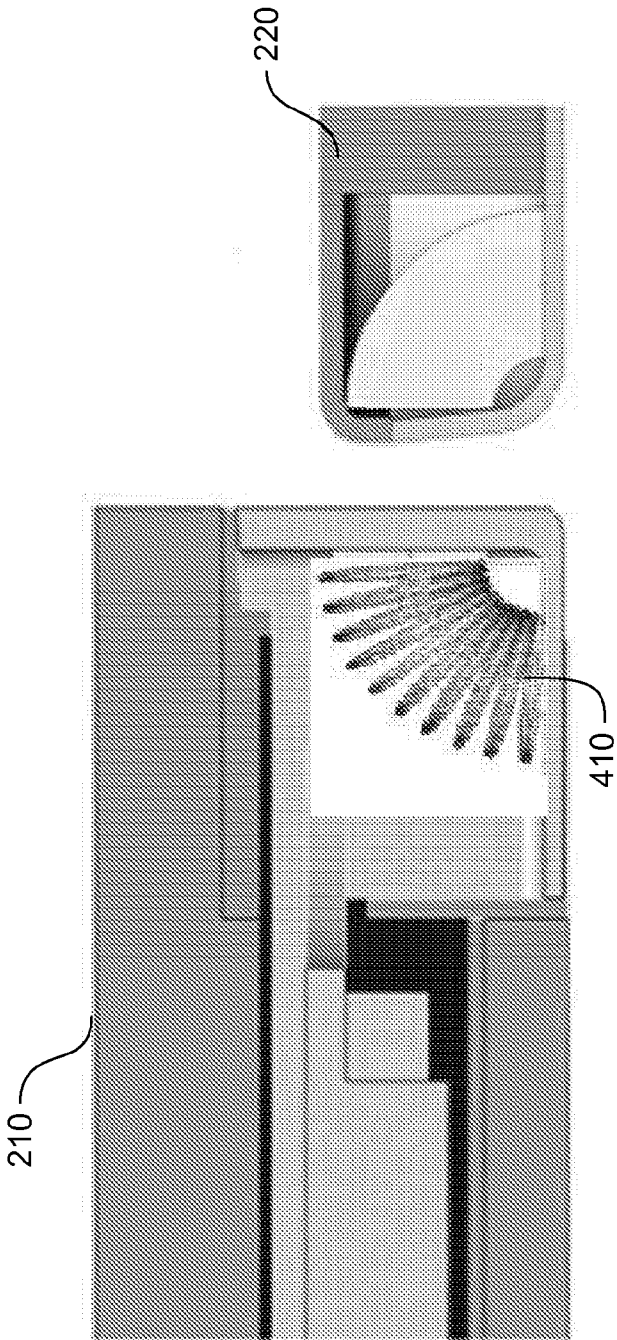


FIG. 4

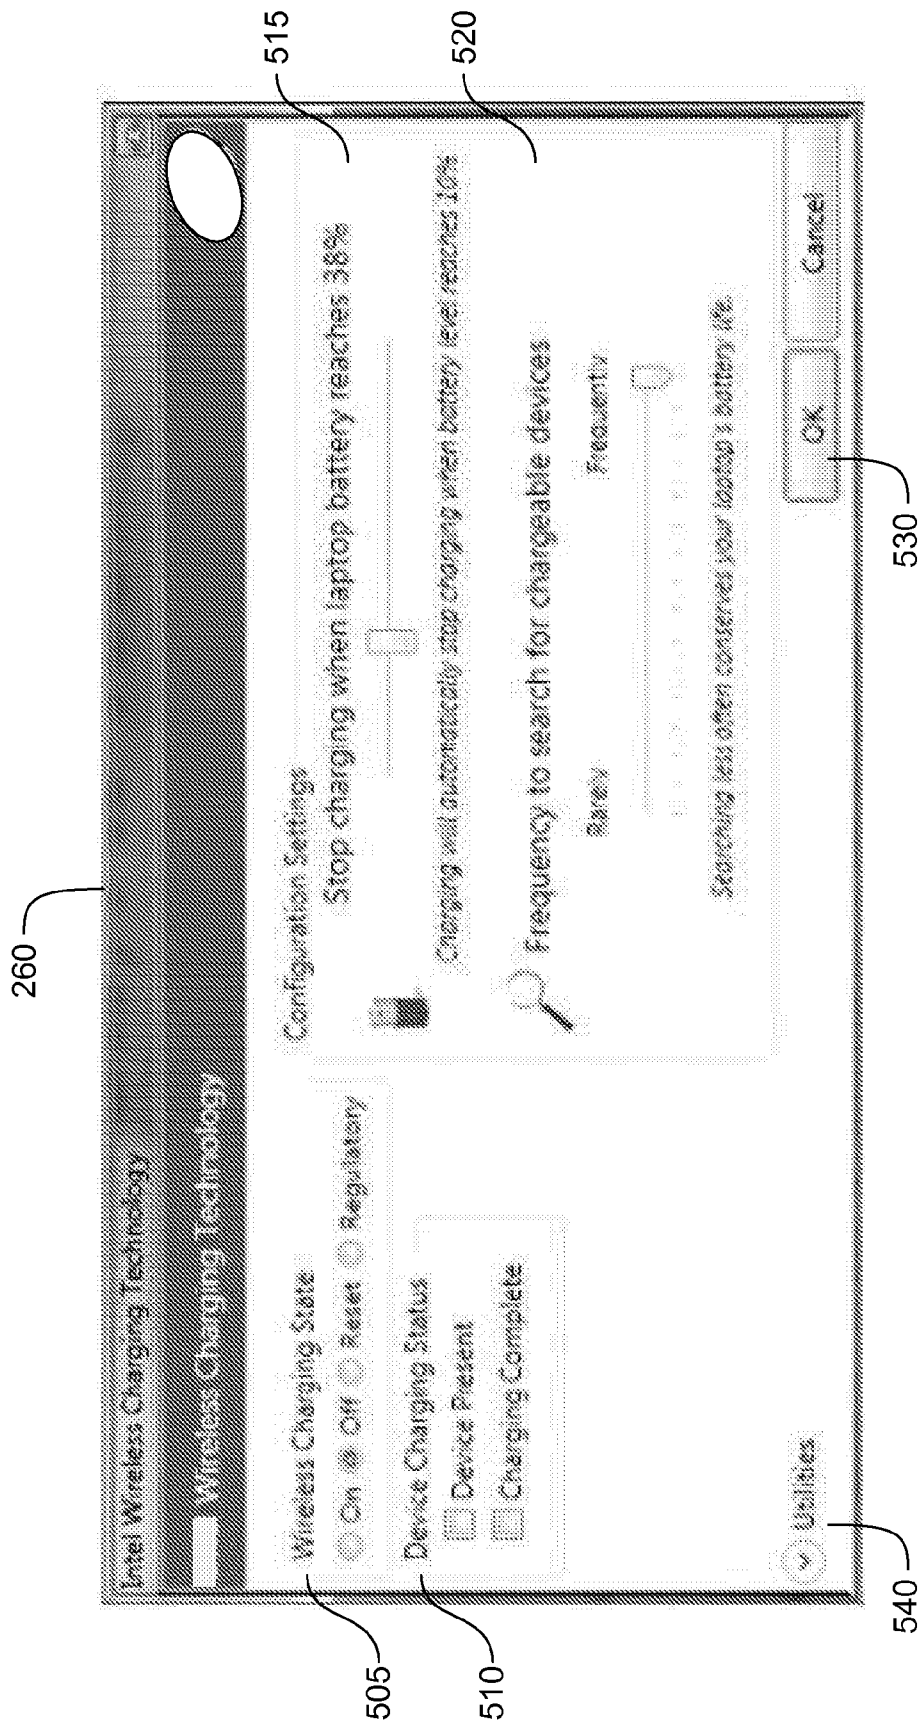


FIG. 5

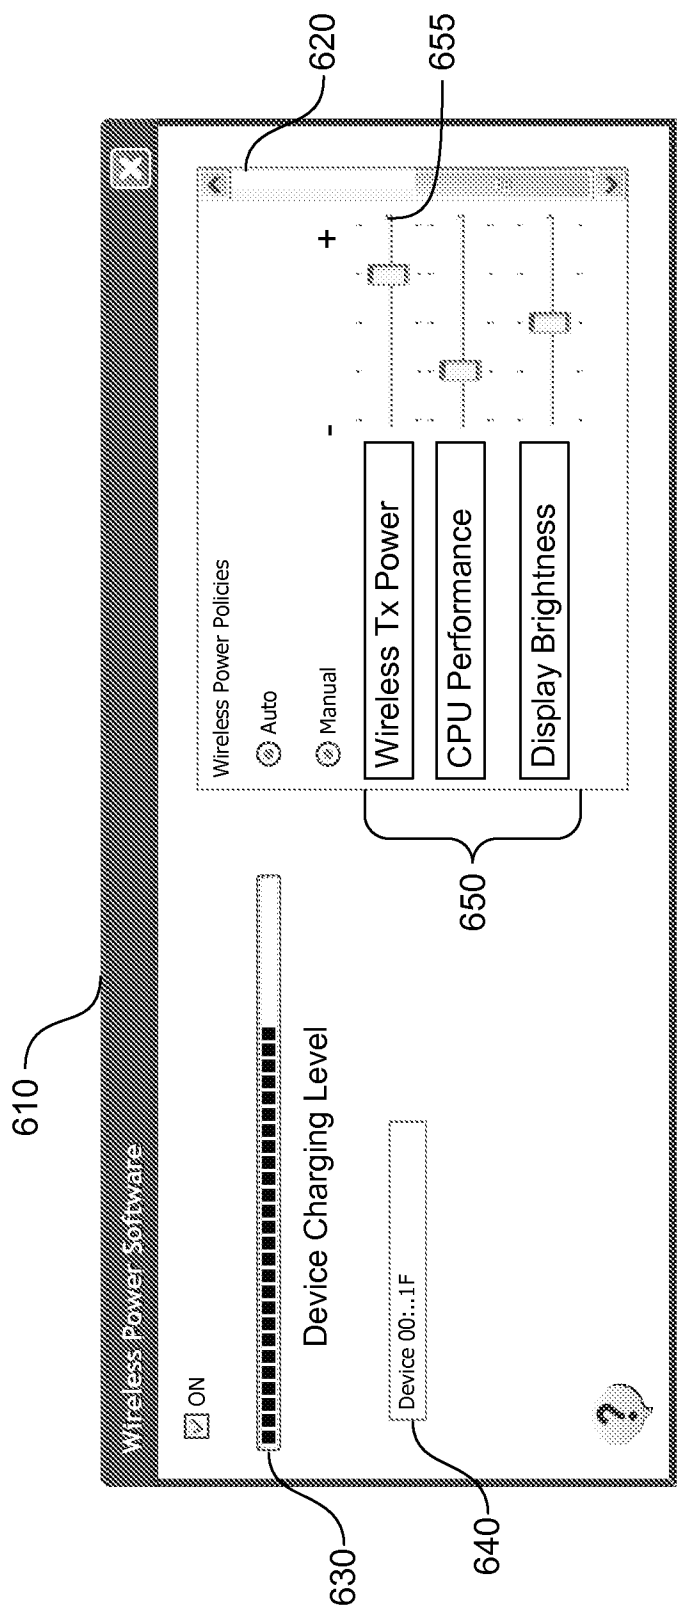


FIG. 6

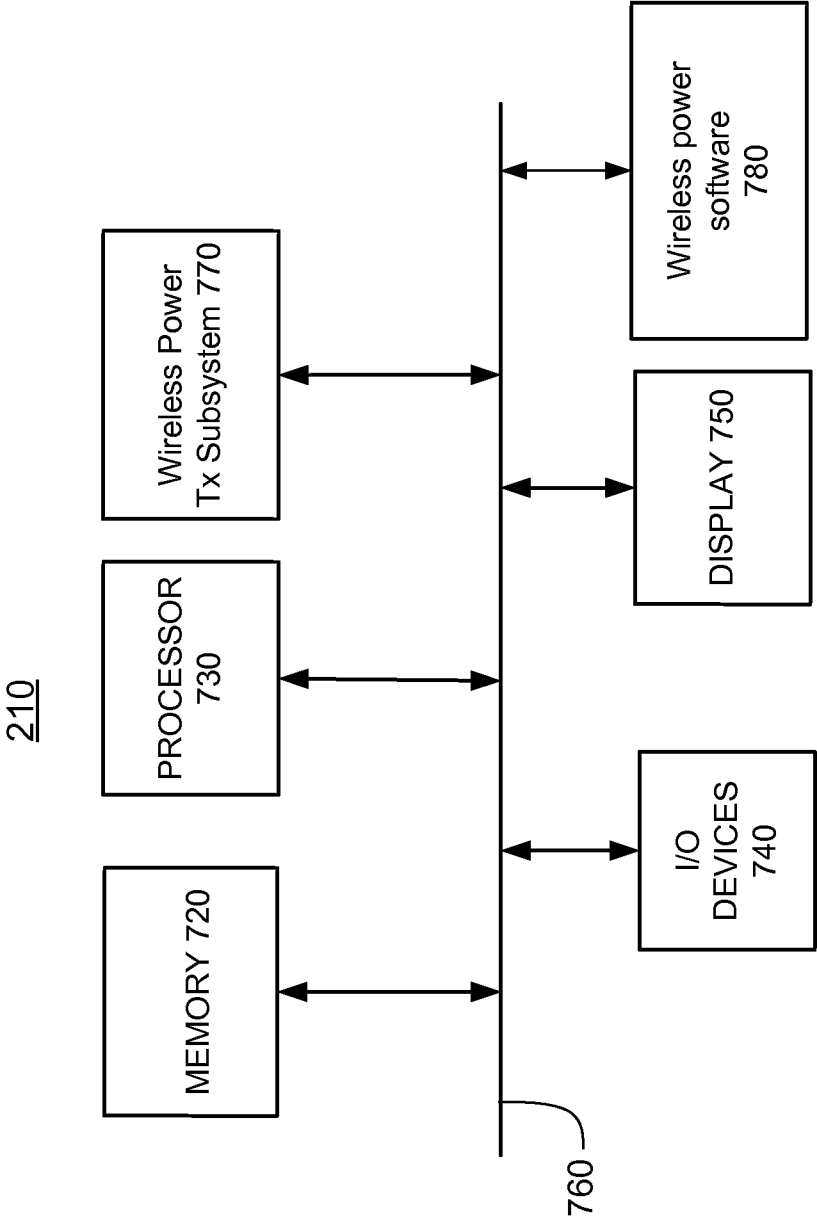


FIG. 7

800

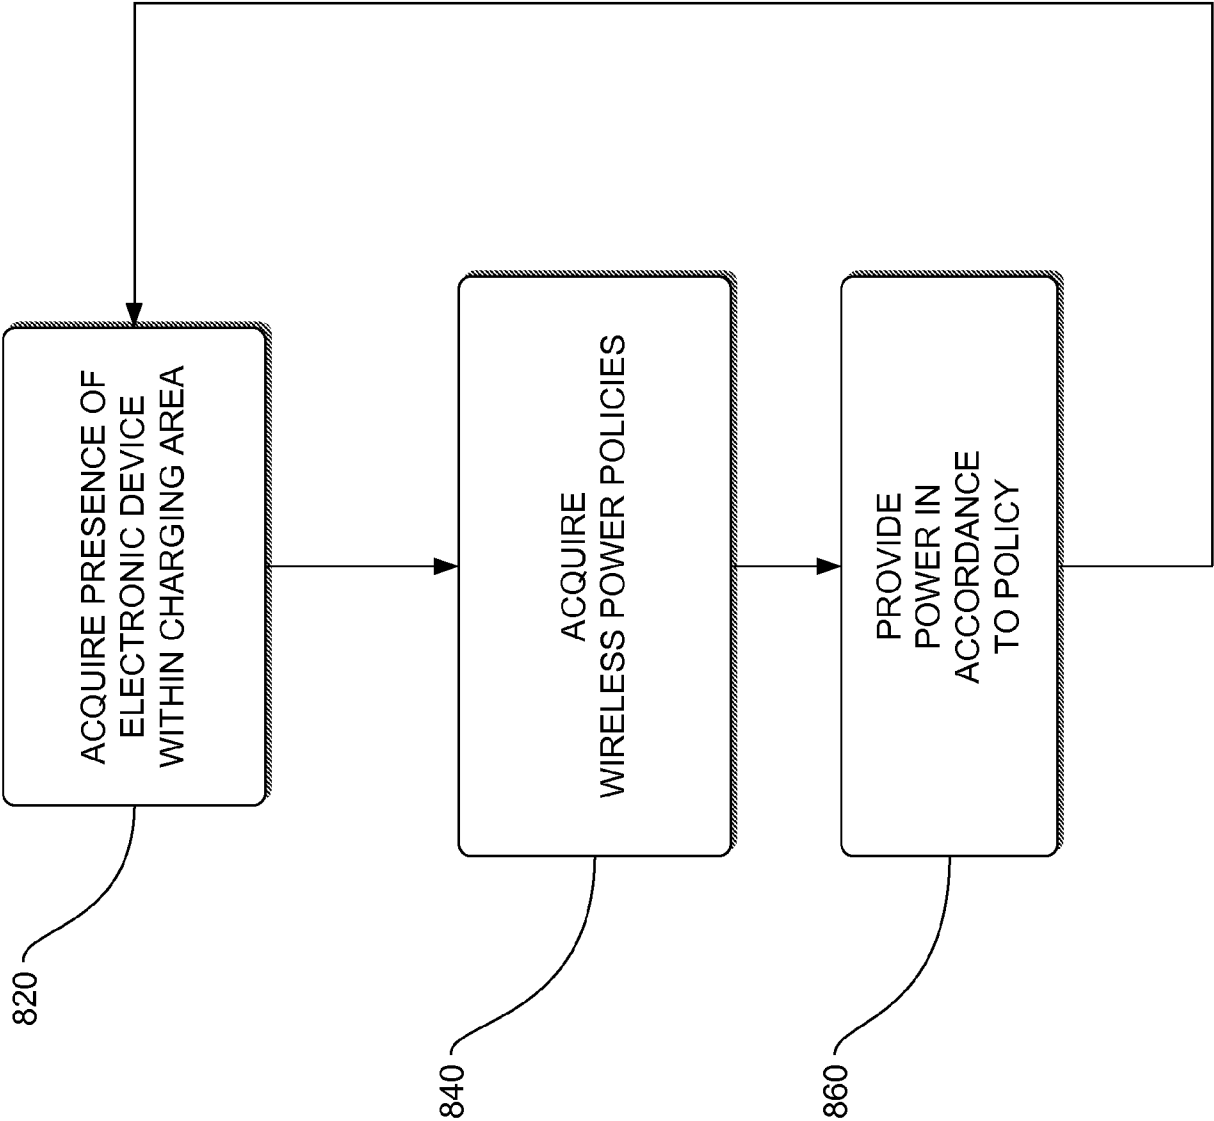


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2011/063879**A. CLASSIFICATION OF SUBJECT MATTER*****H02J 17/00(2006.01)i, H02J 7/02(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H02J 17/00; H01H 47/00; H02J 7/00; H01H 73/00; G05B 23/02; H02J 7/02; H04B 1/40

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: wireless power, notebook, policy, frequency, charging level

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	KR 10-2007-0099245 A (LG ELECTRONICS INC.) 09 October 2007 See the abstract; claim 1; figures 1,4.	1-9 10-17
X A	US 2004-0150934 A1 (DAVID W. BAARMAN) 05 August 2004 See the abstract; paragraphs [0030],[0043],[0044]; figures 3-4.	10-17 1-9
A	US 2011-0032070 A1 (BLEILE LEONARD) 10 February 2011 See the abstract; paragraph [0067], figures 2,3.	1-17
A	US 2009-0048003 A1 (LU YU-SHIANG et al.) 19 February 2009 See the abstract; paragraphs [0017],[0021],[0023],[0024]; figure 2.	1-17
A	EP 2056426 A2 (QUALCOMM INCORPORATED) 06 May 2009 See the abstract; claims 2,11; figures 1-3.	1-17

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 JUNE 2012 (13.06.2012)

Date of mailing of the international search report

13 JUNE 2012 (13.06.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

WEE Jae Woo

Telephone No. 82-42-481-8540



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/063879

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 10-2007-0099245 A	09.10.2007	None	
US 2004-0150934 A1	05.08.2004	AU 2002-259342 A1	10.11.2003
		AU 2002-259342 A8	10.11.2003
		AU 2003-276121 A1	31.12.2003
		AU 2007-343105 A1	17.07.2008
		CA 2483519 A1	06.11.2003
		CA 2487166 A1	24.12.2003
		CA 2674047 A1	17.07.2008
		CN 100511913 C	08.07.2009
		CN 101024528 A	29.08.2007
		CN 101024528 C0	29.08.2007
		CN 101232189 A	30.07.2008
		CN 101232189 C0	30.07.2008
		CN 101555999 A	14.10.2009
		CN 101584252 A	18.11.2009
		CN 101684901 A	31.03.2010
		CN 101881385 A	10.11.2010
		CN 101951036 A	19.01.2011
		CN 1631060 A	22.06.2005
		CN 1631060 B	12.05.2010
		CN 1631060 C0	22.06.2005
		CN 1662453 C0	31.08.2005
		CN 1768462 A	03.05.2006
		CN 1768462 C0	03.05.2006
		CN 1768463 A	03.05.2006
		CN 1768463 C0	23.07.2008
		CN 1768467 A	03.05.2006
		CN 1768467 B	10.11.2010
		CN 1768467 C0	03.05.2006
		CN 1771570 A	10.05.2006
		CN 1771570 C0	10.05.2006
		CN 1922700 A	28.02.2007
		CN 1922700 C0	28.02.2007
		EP 1502479 A2	02.02.2005
		EP 1502479 B1	12.10.2011
		EP 1513773 A1	16.03.2005
		EP 1513773 A4	12.04.2006
		EP 1590867 A2	02.11.2005
		EP 1590867 B1	04.08.2010
		EP 1590877 A1	02.11.2005
		EP 1593133 A2	09.11.2005
		EP 2079093 A2	15.07.2009
		EP 2079093 A3	27.01.2010
		EP 2079093 B1	09.11.2011
		EP 2079094 A2	15.07.2009
		EP 2079094 A3	27.01.2010
		EP 2079094 B1	09.11.2011
		EP 2079286 A2	15.07.2009

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/063879

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 2079286 A3	27.01.2010
		EP 2079286 B1	09.11.2011
		EP 2106676 A1	07.10.2009
		EP 2106676 B1	07.09.2011
		EP 2161806 A2	10.03.2010
		EP 2161807 A2	10.03.2010
		EP 2242161 A2	20.10.2010
		EP 2403095 A2	04.01.2012
		EP 2403096 A2	04.01.2012
		EP 2403097 A2	04.01.2012
		EP 2403098 A2	04.01.2012
		EP 2403099 A2	04.01.2012
		EP 2403100 A2	04.01.2012
		EP 2403101 A2	04.01.2012
		EP 2405552 A2	11.01.2012
		EP 2405553 A2	11.01.2012
		EP 2405564 A2	11.01.2012
		HK 1089566 A1	20.03.2009
		JP 2005-224801 A	25.08.2005
		JP 2005-279649 A	13.10.2005
		JP 2005-313173 A	10.11.2005
		JP 2005-322642 A	17.11.2005
		JP 2005-529452 A	29.09.2005
		JP 2006-517778 A	27.07.2006
		JP 2006-518179 A	03.08.2006
		JP 2006-519580 A	24.08.2006
		JP 2006-519580 T	24.08.2006
		JP 2006-523363 A	12.10.2006
		JP 2007-228794 A	06.09.2007
		JP 2007-521642 A	02.08.2007
		JP 2008-277301 A	13.11.2008
		JP 2008-293972 A	04.12.2008
		JP 2008-503196 A	31.01.2008
		JP 2009-213351 A	17.09.2009
		JP 2009-213352 A	17.09.2009
		JP 2009-218214 A	24.09.2009
		JP 2009-273360 A	19.11.2009
		JP 2009-291068 A	10.12.2009
		JP 2010-177685 A	12.08.2010
		JP 2010-278023 A	09.12.2010
		JP 2010-288450 A	24.12.2010
		JP 2010-516019 A	13.05.2010
		JP 2011-101033 A	19.05.2011
		JP 3878645 B2	07.02.2007
		JP 4261509 B2	30.04.2009
		JP 4358780 B2	14.08.2009
		JP 4384657 B2	16.12.2009
		JP 4387979 B2	24.12.2009
		JP 4401362 B2	06.11.2009
		JP 4429377 B2	10.03.2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/063879

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 4440867 B2	24.03.2010
		JP 4592682 B2	24.09.2010
		JP 4644691 B2	02.03.2011
		JP 4673391 B2	20.04.2011
		JP 4673422 B2	20.04.2011
		JP 4695137 B2	08.06.2011
		JP 4745218 B2	10.08.2011
		JP 4782415 B2	28.09.2011
		JP 4814279 B2	02.09.2011
		KR 10-0482867 B1	15.04.2005
		KR 10-0668010 B1	16.01.2007
		KR 10-0695385 B1	16.03.2007
		KR 10-0695386 B1	16.03.2007
		KR 10-0695387 B1	15.03.2007
		KR 10-0889439 B1	24.03.2009
		KR 10-0898463 B1	21.05.2009
		KR 10-0912164 B1	14.08.2009
		KR 10-0912165 B1	14.08.2009
		KR 10-0912166 B1	14.08.2009
		KR 10-0912167 B1	14.08.2009
		KR 10-0939384 B1	28.01.2010
		KR 10-0939385 B1	28.01.2010
		KR 10-0939418 B1	28.01.2010
		KR 10-0966712 B1	30.06.2010
		KR 10-0996777 B1	25.11.2010
		KR 10-1047702 B1	08.07.2011
		KR 10-1108419 B1	30.01.2012
		KR 10-1117369 B1	07.03.2012
		KR 10-2005-0010943 A	28.01.2005
		KR 10-2005-0105199 A	03.11.2005
		KR 10-2009-0099079 A	21.09.2009
		KR 10-2010-0018072 A	16.02.2010
		KR 10-2011-0047283 A	06.05.2011
		KR 10-2011-0071031 A	27.06.2011
		KR 10-2011-0074795 A	01.07.2011
		TW 200832459 A	01.08.2008
		TW 201014108 A	01.04.2010
		TW 538007 A	21.06.2003
		TW 576905 A	21.02.2004
		TW 576905 B	21.02.2004
		TW I300945 A	11.09.2008
		TW I304992 A	01.01.2009
		TW I326147 A	11.06.2010
		US 2003-015478 A1	23.01.2003
		US 6436299 B1	20.08.2002
		US 6673250 B2	06.01.2004
		US 6731071 B2	04.05.2004
		US 6812645 B2	02.11.2004
		US 6825620 B2	30.11.2004
		US 6917163 B2	12.07.2005

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/063879

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 6975198 B2	13.12.2005
		US 7116200 B2	03.10.2006
		US 7118240 B2	10.10.2006
		US 7126450 B2	24.10.2006
		US 7132918 B2	07.11.2006
		US 7180248 B2	20.02.2007
		US 7212414 B2	01.05.2007
		US 7233222 B2	19.06.2007
		US 7279843 B2	09.10.2007
		US 7385357 B2	10.06.2008
		US 7411479 B2	12.08.2008
		US 7427839 B2	23.09.2008
		US 7439684 B2	21.10.2008
		US 7518267 B2	14.04.2009
		US 7522878 B2	21.04.2009
		US 7639514 B2	29.12.2009
		US 7953369 B2	31.05.2011
US 2011-0032070 A1	10.02.2011	None	
US 2009-0048003 A1	19.02.2009	TW 200908500 A	16.02.2009
EP 2056426 A2	06.05.2009	US 2009-0108679 A1	30.04.2009
		US 8175660 B2	08.05.2012