



(51) International Patent Classification:

G06F 16/00 (2019.01)

(21) International Application Number:

PCT/US2018/061479

(22) International Filing Date:

16 November 2018 (16.11.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/587,611 17 November 2017 (17.11.2017) US

16/191,829 15 November 2018 (15.11.2018) US

(71) Applicant: **BATTELLE MEMORIAL INSTITUTE**

[US/US]; P.O. Box 999, K1-53, Richland, Washington
99352 (US).

(72) Inventors; and

(71) Applicants: **BORKUM, Mark I.** [US/US]; 2455 George Washington Way, Apt. J147, Richland, Washington 99354 (US). **WANG, Na** [US/US]; 4601 N. Fairfax Drive, Ste. 1160, Arlington, Virginia 22203 (US). **VLACHOKOS-TAS, Efthimios Alexandros** [US/US]; 878 N. Jackson Street, Arlington, Virginia 22201 (US). **BERGMANN, Harry** [US/US]; 1316 Monroe Street N.W., Washington, District of Columbia 20010 (US).

(74) Agent: **TUAN, Allan C.**; P.O. Box 999, K1-53, Richland, Washington 99352 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: SPATIAL IDENTIFICATION OF ASSETS USING N-DIMENSIONAL ASSET IDENTIFIERS

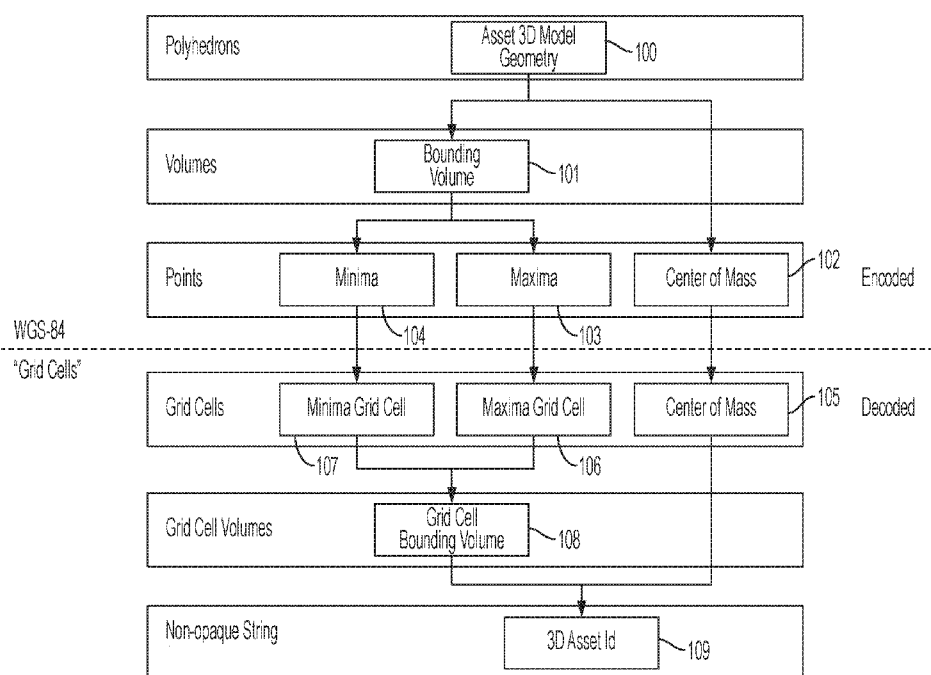


FIG. 1

(57) Abstract: Described herein are methods, systems, and storage media having computer-processable instructions for assigning an n-dimensional asset identifier to an asset ($n \geq 3$). The identifier can be generated by determining a position of the asset in n dimensions, wherein the position is based at least on the center of mass of the asset's geometry. Extents are determined for each of the n dimensions, wherein each extent is measured from the center of mass to a surface of an n-dimensional bounding polytope containing the asset. The position and the extents of the asset can then be encoded or embedded into a single, non-opaque, code string. The position and the extent information are intrinsic to the string.

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

SPATIAL IDENTIFICATION OF ASSETS USING N-DIMENSIONAL ASSET IDENTIFIERS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This invention claims priority from U.S. patent application number 16/191,829, entitled Spatial Identification of Assets Using N-Dimensional Asset Identifiers, filed November 15, 2018, and provisional patent application number 62/587,611, entitled Unique Building Identification, filed November 17, 2017. These applications are incorporated herein by reference.

ACKNOWLEDGEMENT OF GOVERNMENT SUPPORT

[0002] This invention was made with Government support under Contract DE-AC0576RL01830 awarded by the U.S. Department of Energy. The Government has certain rights in the invention.

FIELD

[0003] The present disclosure relates generally to geographic information systems and to grid reference systems, and more particularly to spatially identifying assets or spatially and temporally identifying assets.

BACKGROUND

[0004] Spatially identifying and tracking an asset, such as a building, is a fundamental capability that can enable many industrial applications. Traditionally, assets have been conceived of as occupying a place or location and, therefore, have been identified with a street address or a geographic coordinate point. These kinds of systems have many insufficiencies when attempting to uniquely identify assets, to append and join data from disparate sources, and to computationally process asset

identifiers efficiently (especially when processing large quantities of identifiers).

Examples of insufficiencies can include, but are not limited to address name duplicates, computationally taxing data structures, disparate identification schemes, and difficult-to-interpret, opaque identifier formats. An identification scheme can refer to a method of assigning identifiers to records in a set. The term “disparate” implies that said schemes are essentially different, i.e., incompatible with one another. Accordingly, a need exists for methods, systems, and non-transitory computer-readable storage media for spatially, or spatially and temporally, identifying an asset in a manner that overcomes limitations of traditional approaches to facilitate adoption across many industries and integration into many applications.

SUMMARY

[0005] Disclosed are methods, systems, and non-transitory computer-readable storage media for assigning an n-dimensional asset identifier to an asset ($n \geq 3$). The embodiments disclosed herein can provide asset identifiers that are unique, standardized, computationally efficient, non-opaque, and scalable. The identifiers have at least a spatial aspect for the asset. Some embodiments can further have additional aspects including, but not limited to, a temporal aspect.

[0006] In some embodiments, a method of assigning an n-dimensional asset identifier to an asset comprises determining a position of the asset in n dimensions ($n \geq 3$), wherein the position is based at least on the center of mass of the asset's modeled geometry; determining an extent for each of the n dimensions, wherein each extent is measured from the center of mass to a surface of an n-dimensional bounding polytope containing the asset; and encoding the position and the extents of the asset into a single, non-opaque, code string that can be stored on computer-readable media. In certain embodiments, the asset is a building, a floor of a building,

a room in a building, building HVAC equipment, building electrical equipment, building mechanical equipment, valuable inventory, an art artifact, a monument, a landmark, a buildable area or volume, a vehicle, a telecommunications installation, a basic infrastructure installation, a person, or a combination thereof. In certain embodiments, the method can further comprise referencing the position and extents to a grid reference system having n -dimensions, wherein the grid reference system comprises uniform, non-overlapping grid cells and overlays at least a portion of Earth's surface. In certain embodiments, each position within the portion of the Earth's surface is within exactly one grid cell and has one unit of extent in length, width, and height dimensions. In certain embodiments, one of the n dimensions of the grid system is height and the method further comprises the steps of: defining a stratum as a span between a fixed minimum height and a fixed maximum height at a higher altitude than the minimum height, wherein no polytope extends outside the stratum; and sub-dividing the stratum into nested layers, wherein increasingly nested layers correspond to finer resolutions. In certain embodiments, the method can further comprise contributing one symbol to the non-opaque code string for each nested layer. In certain embodiments, the polytope is a hyperrectangle. In certain embodiments, the n dimensions comprise length, width, and height. In certain embodiments, the n dimensions comprise length, width, and time. In certain embodiments, n is greater than or equal to four and the n dimensions comprise length, width, height, and time. In certain embodiments, the method can further comprise not encoding the asset's geometry into the non-opaque, code string. In certain embodiments, a plurality of single, non-opaque, code strings are comparable for functional equivalence. In certain embodiments, said step of determining a position is based on a map image.

[0007] In some embodiments, a method of assigning an n-dimensional asset identifier to an asset comprises defining a stratum as a span between a fixed minimum height and a fixed maximum height at a higher altitude than the minimum height; sub-dividing the stratum into nested layers, wherein increasingly nested layers correspond to finer resolutions; determining from a map, a position of the asset in n dimensions ($n \geq 3$) comprising length, width, and height, wherein the position is based on the center of mass of the asset's geometry; determining an extent for each of the dimensions, wherein each extent is measured from the center of mass to a surface of an n-dimensional bounding hyperrectangle containing the asset, wherein no bounding hyperrectangle extends outside the stratum; referencing the position and extents to a grid system having n-dimensions, wherein the grid system comprises uniform, non-overlapping grid cells and overlays at least a portion of Earth's surface; and encoding the position and the extents of the asset into a single, non-opaque, code string that can be stored on computer-readable media, wherein the code string does not encode the asset's geometry and wherein two non-opaque, code strings are directly comparable for functional equivalence.

[0008] In some embodiments, a non-transitory computer readable storage medium can store one or more programs, the one or more programs comprises instructions, which when executed by one or more processors of an electronic device cause the device to determine a position of an asset in n dimensions ($n \geq 3$), wherein the position is based at least on the center of mass of the asset's geometry; determine an extent for each of the n dimensions, wherein each extent is measured from the center of mass to a surface of an n-dimensional bounding polytope containing the asset; and encode the position and the extents of the asset into a single, non-opaque, code string that is a computer-readable, n-dimensional identifier of the asset. In certain embodiments, the non-transitory computer readable storage

medium stores programs comprising instructions, which when executed further cause the electronic device to reference the position and extents to a grid reference system having n-dimensions, wherein the grid system comprises uniform, non-overlapping grid cells and overlays at least a portion of Earth's surface. In certain embodiments, the non-transitory computer readable storage medium stores programs comprising instructions, which when executed further cause the electronic device to define a stratum as a span between a fixed minimum height and a fixed maximum height at a higher altitude than the minimum height, wherein no polytope extends outside the stratum; and sub-divide the stratum into nested layers, wherein increasingly nested layers correspond to finer resolutions. In certain embodiments, the n dimensions comprise length, width, and time. In certain embodiments, the non-transitory computer readable storage medium stores programs comprising instructions, which when executed cause the electronic device to encode the position and the extents of the asset into a single, non-opaque, code string do not encode the asset's geometry into the non-opaque, code string. In certain embodiments, two single, non-opaque, code strings are directly comparable for functional equivalence.

[0009] In certain embodiments, the non-transitory computer readable storage medium stores programs comprising instructions, which when executed further cause the electronic device to concatenate the non-opaque code string by removing any symbol not associated with dimensions of length and width.

[00010] The purpose of the foregoing summary and the latter abstract is to enable the United States Patent and Trademark Office and the public, especially the scientists, engineers, and practitioners in the art who are not familiar with patent or legal terms or phraseology, to determine quickly from a cursory inspection the nature and essence of the technical disclosure of the application. Neither the summary nor the abstract is intended to define the invention of the application, which is measured

by the claims, nor is it intended to be limiting as to the scope of the claims in any way.

BRIEF DESCRIPTION OF THE DRAWINGS

[00011] Figure 1 is a flow diagram depicting one embodiment of the assignment of a 3-dimensional asset identifier to an asset, wherein the dimensions are length, width, and height.

[00012] Figure 2 is an illustration representing one embodiment of a computational system for assigning an N-dimensional asset identifier to an asset.

[00013] Figures 3A – 3C are illustrations depicting various views of an embodiment of a grid reference system.

[00014] Figure 4 is an illustration depicting a logical flow for determining a grid cell in a grid reference system, which grid cell contains a center of mass.

[00015] Figure 5 is a schematic of one example of a bounding polytope, a center of mass, a maxima, and a minima for an asset.

DETAILED DESCRIPTION

[00016] Physical addresses, which have been used for centuries to locate an asset or place in the physical world, become deficient in the digital world. The inventors have observed that addresses are error-prone, lack one-to-one relationship with assets, and do not present any mutual exclusivity relative to another asset or address. Furthermore, there is not a uniform standard and as a result, cultural methodologies for identifying a location may not be clearly understood across ethnicities and languages. Difficulty in computationally joining data from disparate sources in a single location, due to the different ways of identifying assets using names, addresses, or local numbering systems, becomes a major obstacle to

information and knowledge exchange and can prevent appropriate analysis and scientific insights.

[00017] A variety of approaches has been attempted to address these issues and concerns. Each of these prior approaches has a unique set of limitations that inhibit them from wide spread adoption. Geocoding, for example, is the process of transforming a description of a location, such as coordinates and/or an address, to a location on the earth's surface. A set of latitude and longitude coordinates are commonly used as the equivalent of an asset location, known as geocodes. In the example of buildings, geocodes are traditionally directly linked to the physical address of a building. However, geocodes have similar problems as address, such as buildings with multiple geocodes, multiple buildings sharing a single geocode, or geocodes pointing to the street instead of the building footprint. Google's Place ID is a variation of the geospatial locator approach. It is a geohash code, which encodes latitude and longitude (such as 38.883687 and -77.024437) to a random code (such as ChIJD9mMzXe3t4kR6-FvrqmdTw06gkzwgjzn820) for URLs and machine-to-machine communication. Most importantly, the geohashes are fundamentally a string of random alphanumeric characters and do not provide any geographic or contextual reference. The Place IDs although it is meaningful for a database appears to be random numbers to users. They are examples of opaque strings. The information content of an "opaque" string is merely the string itself. In other words, the capabilities of an "opaque" string are limited to testing if two such strings are either identical or non-identical.

[00018] The problem of uniquely identifying assets in space and/or time in a computationally efficient manner can be solved by embedding, or encoding, both position and extents of an asset into a non-opaque string. The position and the extent information are intrinsic to the string. The unique asset identifiers described

herein give consideration to feasibility and scalability of adoption and integration. They are easy to adopt and implement, and certain embodiments do not require a centralized database or authority to generate the identifiers. Accordingly, in some embodiments, all information needed to create an identifier is publicly available. Furthermore, following a standard ruleset, multiple entities can generate the same identifier for the particular asset without referring to one another. Another consideration is usability. Although the identifiers described herein are intended primarily for data exchange and not primarily for replacement of an address or name for vernacular asset identification, one can transcribe an asset identifier without any errors or confusion. In some embodiments, identifiers are as short as possible, avoid the use of special characters that are difficult to transcribe (such as "!" "#" "?" and "\"), and not be case sensitive. Identifiers can further allow easy encoding and decoding, which is important for data verification. One can use non-proprietary information to verify an identifier. Such identifiers can be encoded and decoded without a central authority. Hence, they can be verified without a central authority. However, "ownership" of an identifier and the validity of the assignment itself may be determined by a central authority.

[00019] Examples of assets, to which an identifier can be assigned include, but are not limited to buildings, floors of buildings, rooms in a building, building HVAC equipment, building electrical equipment, building mechanical equipment, valuable inventory (e.g., supply chain inventory), art artifacts, monuments, important landmarks, buildable areas or volumes, vehicles, telecommunications installations, basic infrastructure installations, and even persons. Examples of building equipment (e.g., HVAC, electrical and/or mechanical) can include, but are not limited to, pumps, motors, generators, air conditioning units, water heaters, photovoltaic panels, elevators, escalators, and networking devices. Examples of basic infrastructure

installations can include, but are not limited to roads, bridges, dams, water and sewer system components, railway components, and subway components, airports, harbors, traffic signals, fire hydrants, and transit stations or stops. Examples of telecommunications installations can include, but are not limited to, cellular towers, switching systems, satellite dishes, edge data centers, home energy management gateways for demand response and energy efficiency measurement and verification (M&V), and other network equipment. As used herein, a buildable area or volume can refer to an area or volume defined by a boundary, which can be non-physical. For example, an architectural buildable area is a space defined by local zoning. Similarly, a region to which air rights exist can be encompassed by the term buildable volume.

[00020] In one embodiment, a generalized N-dimensional asset identifier can be determined as follows. For each dimension, which must be continuous, establish the minima and maxima. The total extent is, therefore, equal to “maxima – minima”. For each dimension, establish the ratio for subdivision. The ratio can be determined according to predetermined and/or fixed values. In one embodiment, a total extent is divided initially by a predetermined value and successive divisions are selected such that each subdivision is divisible by a fixed whole number. For example, a ratio of 1:20 divides the total extent into 20 segments (e.g., grid cells in a grid reference system), each of extent “ $1/20 * (\text{maxima} - \text{minima})$ ”. Hence, the span of the k th extent is from “ $\text{minima} + ((k - 1)/20 * (\text{maxima} - \text{minima}))$ ” to “ $\text{minima} + (k/20) * (\text{maxima} - \text{minima})$ ”. For each dimension, establish an alphabet of symbols to denote each span, e.g., a ratio of 1:20 would require 20 symbols, e.g., 0123456789ABCDEFGHIJK. Perform a number of subdivisions and denote the result of each subdivision by the corresponding symbol. The result, for each dimension, is a sequence X_1, X_2, X_3 , etc., where, in this case, “X” denotes a given dimension.

Establish a notation, e.g., write the sequence of symbols for the first dimension, followed by the sequence of symbols for the second dimension, etc.; or interleave the n th symbol for each dimension. In the case of a time dimension, the “minima” and “maxima” can be epochs. Hence, a “ratio” can correspond to years, months, hours, etc.

[00021] The identifiers described herein can be considered representations of information, but are not an assertion of information. The assertion of an asset identifier (and, for example, its association with an asset) is separate from the representation. For example, if an asset identifier incorporates a temporal dimension, then such an identifier would identify the location, spatial extent and temporal extent of the asset. If the asset changes, then the assertion changes (i.e., we assert an association with a different asset identifier). The original asset identifier does not change. Moreover, the temporal extent would be the span (of time) for which the spatial extent holds. In other words, it is not a timestamp (it is a time interval).

[00022] Referring to Fig. 1, one embodiment depicting the assignment of a three-dimensional (i.e., $N = 3$) asset identifier to an asset is shown. As illustrated, the dimensions are length, width, and height. Initially, the asset is represented by a three-dimensional spatial model **100**, such as a polyhedron. The model can be defined by a user, determined computationally according information provided by a data source, or both via a user-computer interaction. A center of mass position **102** is calculated according to the polyhedron modeling the asset. The center of mass is based on the three-dimensional polyhedron model and not on the bounding polytope or volume. In certain embodiments, the density of the model geometry is assumed to be uniform.

[00023] In the illustrated embodiment having three dimensions, the bounding polytope comprises a bounding volume **101** and is defined as a minimum cuboid that

encompasses the model geometry. The minima **104** and maxima **103** of the bounding volume for the bounding volume are determined based on predetermined outermost corners. The minima is located at the lowest altitude in a predetermined point of the bounding volume. The maxima is located at the highest altitude in another predetermined point different than that of the minima. The center of mass, maxima, and minima describe the bounding volume that encompasses the model geometry and can be denoted according to a coordinate system. One instance of determining extents in a coordinate system uses a three-dimensional coordinate system comprising latitude, longitude, and altitude. The minima can be the lowest altitude in the southwest corner of a bounding volume and the maxima can be the highest altitude in the northeast corner of the bounding volume.

[00024] Based on a grid reference system covering the surface of the Earth, each of the center of mass, maxima, and minima can then be converted to a grid cell containing each respective point **105**, **106**, and **107**. The volume of the bounding volume **108**, or a representation thereof, is also determined based on the grid reference system. In the instance from the previous paragraph, the extents from the grid cell containing the center of mass to the grid cells lying on the faces of the bounding volume in north, south, east, west, upper, and lower directions from the center of mass are measured on the basis of the number of grid cells.

[00025] The three-dimensional asset identifier **109** is encoded based on the center of mass, the maxima, the minima, and the six extents. In the instant example, the minimum number of values used in the three-dimensional asset identifier is fifteen: three dimension values for each of the center of mass, maxima, and minima grid cells and six values for the north, south, east, west, upper, and lower extents.

[00026] In some embodiments, the grid reference system comprises an n-orthotopic (i.e., hyperrectangular) grid reference system. In certain embodiments, the

grid reference system implementation can be based on an arbitrary functor, a type that can be mapped over (viz., for each value, the application of a function derives a new value), wherein a variety of functors is the one-parameter semigroup of length- n vectors (each length, the value of the parameter, n , is a distinct functor; and two vectors of length- i and length- j respectively may be concatenated to yield a new vector of length- $(i+j)$). A three-dimensional orthotope can be called a rectangular prism. In certain embodiments, grid reference systems described herein decouple the computation and presentation of the identifier string. Such embodiments allow for the ordering and/or re-ordering of the values in a string to facilitate compatibility between different sources each generating identifier, the appending of values associated with added functionality to an identifier string, or both. In certain embodiments, the n -orthotopic grid reference system comprises, length, width, and height. In certain embodiments, the grid system comprises uniform, non-overlapping grid cells and overlays at least a portion of Earth's surface. Each position within the portion of the Earth's surface can be within exactly one grid cell and has one unit of extent in length, width, and height dimensions. Every position within the "portion" lies within exactly one grid cell, and therefore has one unit of extent in every dimension. One grid cell may contain many positions.

[00027] In one example, consider a three-dimensional grid covering the surface of the Earth and subdividing the surface into three-dimensional volumetric elements (viz., voxels). All grid cells lie on the same manifold (viz., the surface of the Earth) and each grid cell can be said to have dimensions of $X \times Y \times Z$, where Z is the total vertical span (i.e., the unit height). X and Y can have extents according to a predetermined definition. For example, X and Y can each be $1/20$ of the total length span and $1/20$ of the total width span, respectively. If Z (height) is defined as a fraction of the total vertical span, then the grid system can be subdivided in the Z

(height) direction. For example, a minimum and maximum height can be predefined, thereby setting the maximum vertical span of a stratum. The stratum can then also be subdivided hierarchically to increase resolution.

[00028] Traditional grid reference systems are not compatible with dimensionality that is greater than 2. For example, some grid systems interleave the values for X and Y in their calculation. The addition of a Z value would interfere with functionality of strings generated with such 2D grid systems. In such instances, embodiments described herein can append the Z values to the end of a string in which X and Y values are interleaved. In these embodiments, a lower dimensional encoding can be recovered by eliding the additional dimensions. For example, the Z dimension can be elided from the three-dimensional encoding. One example follows, where X_k denotes the k th character in the string encoding of the X value, Y_k denotes the k th character in the string encoding of the Y value, and Z_k denotes the k th character in the string encoding of the Z value.

$$X_1Y_1X_2Y_2 \dots X_iY_i \dots Z_1Z_2 \dots Z_i$$

Second, consider non-unit values for the extent of the third dimension. To locate an arbitrary point within a three-dimensional grid requires that the minimum and maximum heights of the grid be fixed, and subsequently, subdivided. In certain embodiments, points that lie outside of the minimum and/or maximum height are not encoded.

[00029] In some embodiments, the non-opaque code string can be reduced by one or more dimensions by removing the symbols and extents associated with the one or more dimensions. In certain embodiments, any symbol not associated with dimensions of length and width are removed.

[00030] The following explanations of terms and abbreviations are provided to better describe the present disclosure and to guide those of ordinary skill in the art in

the practice of the present disclosure. As used herein, “comprising” means “including” and the singular forms “a” or “an” or “the” include plural references unless the context clearly dictates otherwise. The term “or” refers to a single element of stated alternative elements or a combination of two or more elements, unless the context clearly indicates otherwise.

[00031] Unless explained otherwise, all technical and scientific terms used herein have the same meaning as commonly understood to one of ordinary skill in the art to which this disclosure belongs. Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of the present disclosure, suitable methods and materials are described below. The materials, methods, and examples are illustrative only and not intended to be limiting. Other features of the disclosure are apparent from the following detailed description and the claims.

[00032] Unless otherwise indicated, all numbers expressing quantities of components, molecular weights, percentages, temperatures, times, and so forth, as used in the specification or claims are to be understood as being modified by the term “about.” Accordingly, unless otherwise implicitly or explicitly indicated, or unless the context is properly understood by a person of ordinary skill in the art to have a more definitive construction, the numerical parameters set forth are approximations that may depend on the desired properties sought and/or limits of detection under standard test conditions/methods as known to those of ordinary skill in the art. When directly and explicitly distinguishing embodiments from discussed prior art, the embodiment numbers are not approximates unless the word “about” is recited.

[00033] To facilitate review of the various embodiments of the disclosure, the following explanations of specific terms are provided:

[00034] As used herein, an asset's location is a "pure math" point on a manifold (e.g., Euclidean space). An asset's position is a representation of its location using a coordinate system or a grid system. The "center of mass" of an asset can refer to the mean position of the matter in the asset. The matter can be assumed to have uniform density. The center of mass is determined based on the asset's geometry in N-dimensions. The geometry of the asset can be modeled with a predetermined error tolerance in order to satisfy resolution requirements. The center of mass is not determined from a bounding polytope encompassing the asset. In certain embodiments, the bounding polytope is the minimum n-polytope that encompasses the n-dimensional model of the asset. The center of mass is not necessarily within the polytope. The asset's geometry can be represented by a model. For example a building can be represented by a rectangular box or group of rectangular boxes in three dimensions (i.e., length, width, height).

[00035] A grid reference system defines locations on maps using grid cells and can be based on a coordinate system. A grid reference locates a unique region on the map. Examples include Universal Transverse Mercator (UTM), Universal Polar Stereographic (UPS), Military Grid Reference System (MGRS), and the United States National Grid (USNG). The advantage of grid reference systems, as described herein, over latitude and longitude is that a grid reference code is not a single point map projection. In other words, it can be used to represent an n-dimensional space, not merely a single point. In embodiments described herein, Earth is hierarchically divided into a grid of various shapes and sizes. Similarly, time as a dimension can be hierarchically divided into periods of various durations. For example, time is considered a dimension in Minkowski spacetime, wherein three-dimensional Euclidean space and time are combined into a four-dimensional

manifold where the spacetime interval between any two events is independent of the inertial frame of reference in which they are recorded.

[00036] In the context of comparing a plurality of asset identifiers, functional equivalence for a given unary function f (an N -dimensional asset identifier encoding function) and a binary function g (a Boolean-valued, asset identifier “is a match” criteria function) is to say that “ $g(f(x), f(y)) = \text{TRUE}$.” In one analogy, for two geometries, x and y , equivalence/equality is akin to saying that $x=y$. Direct comparison of geometries is inefficient and/or impractical. First, note that two shapes are said to be equal if they share all interior points. However, consider the definition of the geometry for a given shape as sequence of points that define its exterior ring. The set of interior points is preserved if the sequence is reversed; however, the definitions of the “forwards” and “reversed” sequences are not equal. Given the above, computation of this equivalence would require the enumeration of all points within x , all points within y , and then point-by-point comparison; a computationally expensive operation. Accordingly, embodiments of the N -dimensional asset identifiers having the characteristic of being comparable for functional equivalence against other asset identifiers as described herein is an unexpected benefit that has been determined by the inventors.

[00037] Non-transitory as used herein when referring to a computer-accessible medium, is a limitation of the medium itself (i.e., tangible, not a propagating electromagnetic signal) as opposed to a limitation on data storage persistency. The term is not intended to otherwise limit the type of physical computer-readable storage device that is encompassed by the phrase computer-accessible medium or memory. For instance, the terms “non-transitory computer readable medium” or “tangible memory” are intended to encompass types of storage devices that do not necessarily store information permanently, including but not limited to, computer-

readable media that store data only for short periods of time and/or only in the presence of power, such as register memory, processor cache and Random Access Memory (RAM). Program instructions and data stored on a tangible computer-accessible storage medium in non-transitory form may further be transmitted by transmission media or signals such as electrical, electromagnetic, or digital signals, which may be conveyed via a communication medium such as a network and/or a wireless link.

[00038] FIG. 2 is one embodiment of a computing environment by which an N-dimensional asset identifier can be computed and/or analyzed. In one example, a computing environment such as shown in Figure 2 can be used to process asset related information and assign an N-dimensional asset identifier to the asset. For example, an asset model geometry **100** can be received as input via the network interface **270**, or via the removable non-volatile memory interface **250**. Alternatively, the model geometry can be stored in the non-removable, non-volatile memory interface. The processing unit **220** can be used to determine a bounding polytope **101**, a center of mass **102**, a maxima **103**, and a minima **102**. The processing unit **220** can further be used to convert into the grid system the bounding polytope **108**, the center of mass **105**, the maxima **106**, and the minima **107**. The processing unit **220** can also be used to encode the appropriate grid cells into a non-opaque code string as the asset identifier **109**.

[00039] With reference to FIG. 2, an example system for implementing some embodiments includes a general-purpose computing device in the form of a computer **210**. Components of computer **210** may include, but are not limited to, a processing unit **220** (which is not limited to CPUs, but can comprise GPUs), a system memory **230**, and a system bus **221** that couples various system components including the system memory to the processing unit **220**. The system

bus **221** may be any of several types of bus structures including a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. By way of example, and not limitation, such architectures include Industry Standard Architecture (ISA) bus, Micro Channel Architecture (MCA) bus, Enhanced ISA (EISA) bus, Video Electronics Standards Association (VESA) local bus, and Peripheral Component Interconnect (PCI) bus also known as Mezzanine bus. Memory and programs described herein be deployed in corresponding portions of FIG. 2.

[00040] Computer **210** typically includes a variety of computer readable media. Computer readable media can be any available media that can be accessed by computer **210** and includes both volatile and nonvolatile media, removable and non-removable media. By way of example, and not limitation, computer readable media may comprise computer storage media and communication media. Computer storage media is different from, and does not include, a modulated data signal or carrier wave. It includes hardware storage media including both volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information such as computer readable instructions, data structures, program modules or other data. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical disk storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by computer **210**. Communication media typically embodies computer readable instructions, data structures, program modules or other data in a transport mechanism and includes any information delivery media. The term “modulated data signal” means a signal that has one or more of its characteristics

set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media. Combinations of any of the above should also be included within the scope of computer readable media.

[00041] The system memory **230** includes computer storage media in the form of volatile and/ or nonvolatile memory such as read only memory (ROM) **231** and random-access memory (RAM) **232**. A basic input/output system **233** (BIOS), containing the basic routines that help to transfer information between elements within computer **210**, such as during startup, is typically stored in ROM **231**. RAM **232** typically contains data and/ or program modules that are immediately accessible to and/ or presently being operated on by processing unit **220**. By way of example, and not limitation, FIG. 2 illustrates operating system **234**, application programs **235**, other program modules **236**, and program data **237**.

[00042] The computer **210** may also include other removable/nonremovable volatile/nonvolatile computer storage media. By way of example only, FIG. 2 illustrates a hard disk drive **241** that reads from or writes to non-removable, nonvolatile magnetic media, and an optical disk drive **255** that reads from or writes to a removable, nonvolatile optical disk **256** such as a CD ROM or other optical media. Other removable/non-removable, volatile/nonvolatile computer storage media that can be used in the exemplary operating environment include, but are not limited to, magnetic tape cassettes, flash memory cards, digital versatile disks, digital video tape, solid state RAM, solid state ROM, and the like. The hard disk drive **241** is typically connected to the system bus **221** through a nonremovable memory interface such as interface **240**, and optical disk drive **255** are typically connected to the system bus **221** by a removable memory interface, such as interface **250**.

[00043] Alternatively, or in addition, the functionality described herein can be performed, at least in part, by one or more hardware logic components. For example, and without limitation, illustrative types of hardware logic components that can be used include Field-programmable Gate Arrays (FPGAs), Program-specific Integrated Circuits (ASICs), Application-specific Standard Products (ASSPs), System-on-a-chip systems (SOCs), Complex Programmable Logic Devices (CPLDs), etc.

[00044] The drives and their associated computer storage media discussed above and illustrated in FIG. 2, provide storage of computer readable instructions, data structures, program modules and other data for the computer **210**. In FIG. 2, for example, hard disk drive **241** is illustrated as storing operating system **244**, application programs **245**, other program modules **246**, and program data **247**. Note that these components can either be the same as or different from operating system **234**, application programs **235**, other program modules **236**, and program data **237**. Operating system **244**, application programs **245**, other program modules **246**, and program data **247** are given different numbers here to illustrate that, at a minimum, they are different copies.

[00045] A user may enter commands and information into the computer **210** through input devices such as a keyboard **262**, a microphone **263**, and a pointing device **261**, such as a mouse, trackball or touch pad. Other input devices (not shown) may include a joystick, game pad, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit **220** through a user input interface **260** that is coupled to the system bus, but may be connected by other interface and bus structures, such as a parallel port, game port or a universal serial bus (USB). A visual display **291** or other type of display device is also connected to the system bus **221** via an interface, such as a video interface **290**. Video interface **290** can comprise a graphics card having a GPU. The GPU be used

for computations. In addition to the monitor, computers may also include other peripheral output devices such as speakers **297** and printer **296**, which may be connected through an output peripheral interface **295**.

[00046] The computer **210** is operated in a networked environment using logical connections to one or more remote computers, such as a remote computer **280**. The remote computer **280** may be a personal computer, a hand-held device, a server, a router, a network PC, a peer device or other common network node, and typically includes many or all of the elements described above relative to the computer **210**. The logical connections depicted in FIG. 2 include a local area network (LAN) **271** and a wide area network (WAN) **273**, but may also include other networks. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet.

[00047] When used in a LAN networking environment, the computer **210** is connected to the LAN **271** through a network interface or adapter **270**. When used in a WAN networking environment, the computer **210** typically includes a modem **272** or other means for establishing communications over the WAN **273**, such as the Internet. The modem **272**, which may be internal or external, may be connected to the system bus **221** via the user input interface **260**, or other appropriate mechanism. In a networked environment, program modules depicted relative to the computer **210**, or portions thereof, may be stored in the remote memory storage device. By way of example, and not limitation, FIG. 2 illustrates remote application programs **285** as residing on remote computer **280**. It will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers may be used.

Examples and Comparisons

[00048] To further illustrate certain embodiments of the disclosed cathode materials, cathodes, battery systems and methods of making the same, and to provide various comparative analyses and data, below are some Examples with comparison test data.

[00049] N-Dimensional Asset Identifier with a Suffix for N = 3, L x W x H

[00050] An example of a grid reference system in three dimensions is illustrated in Figures 3A – 3C. In Figure 3A, a surface level of the Earth **307** establishes a minima. The surface level **307** can be at ground level, above ground, or below ground. A sky level **306** is higher in altitude than the surface level **307** and establishes a maxima. The difference between the sky level and surface level determines the total height extent **304**. Radial directions are normal to width and length aspects of the grid reference system. Fig. 3B is a top-down plan view of a volume depicting portions of the grid system. The total height extent exists between the sky level **303** and the surface level **301**. Surface-to-sky normals **301** can connect lateral grid points between the surface and sky levels. A three dimensional asset can be contained within a bounding volume described by the grid reference system. Fig. 3 is an example of a three-dimensional bounding volume encompassing a building (i.e., asset). Figure 4 illustrates a logical flow for certain embodiments described herein. A first grid cell **401** comprising a rectangular polygon can be successively reduced in size **402**, thereby increasing resolution, to identify a grid cell **403** containing the center of mass of an asset. From the center-of-mass grid cell **403**, extents **406** to north, south, east, west, up and down surfaces of a bounding volume **404** can be determined. The bounding volume **404** is the minimum rectangular polygon encompassing an asset's modeled geometry **405**.

[00051] Referring to Fig. 5, the center of mass **501**, minima **502**, and maxima **503** points have height (i.e., altitude) values and require nine numbers to be specified. Six extents must be expressed to specify the extents in the north, south, east, west, upward and downward directions from the center of mass. Accordingly, the non-opaque asset identifier contains the following segment, wherein C is the center of mass of the asset geometry and n, e, s, w, up, and down are extents in the north, east, south, west, upward, and downward directions measured from the center of mass to the rectangular bounding volume.

C-n-e-s-w-up-down

[00052] In the instant example, the asset identifier code string “C-n-e-s-w” uses hyphens “-” to separate the individual string segments. In certain embodiments, a second separator character is used, for example, forward slash “/” or dollar “\$” symbols. The code string is appended to include additional information, for example, as a suffix. Preferably, a symbol for the separator that is not present in the asset identifier code string is selected, and the original asset identifier code string can be recovered as a string prefix. Hence, all established methods and algorithms for analysis of the asset identifier code string are unaffected, and hence, the extended asset identifier is said to be backwards compatible with the original asset identifier code string.

[00053] A non-limiting example of a suffix includes Uniform Resource Identifiers (URIs). This would make the N-dimensional asset identifier code strings amenable to software-based manipulation and integration with other knowledge management systems. For example, suppose that a URI scheme is defined for floor names and numbers in an asset comprising a building. The N-dimensional asset identifier code string may be

C-n-e-s-w\$urn:buildingid:floor:A

where “urn:buildingid:floor:” is the URI scheme and prefix, and “A” is the floor name.

[00054] In view of the many possible embodiments to which the principles of the disclosed invention may be applied, it should be recognized that the illustrated embodiments are only preferred examples of the invention and should not be taken as limiting the scope of the invention. Rather, the scope of the invention is defined by the following claims. We therefore claim as our invention all that comes within the scope and spirit of these claims.

CLAIMS

What is claimed is:

1. A method of assigning an n-dimensional asset identifier to an asset comprising:

 Determining a position of the asset in n dimensions ($n \geq 3$), wherein the position is based at least on the center of mass of the asset's modeled geometry;

 Determining an extent for each of the n dimensions, wherein each extent is measured from the center of mass to a surface of an n-dimensional bounding polytope containing the asset; and

 Encoding the position and the extents of the asset into a single, non-opaque, code string that can be stored on computer-readable media.
2. The method of claim 1, wherein the asset is a building, a floor of a building, a room in a building, building HVAC equipment, building electrical equipment, building mechanical equipment, valuable inventory, an art artifact, a monument, a landmark, a buildable area or volume, a vehicle, a telecommunications installation, a basic infrastructure installation, a person, or a combination thereof.
3. The method of claim 1, further comprising referencing the position and extents to a grid reference system having n-dimensions, wherein the grid reference system comprises uniform, non-overlapping grid cells and overlays at least a portion of Earth's surface.
4. The method of claim 3, wherein each position within the portion of the Earth's surface is within exactly one grid cell and has one unit of extent in length, width, and height dimensions.
5. The method of claim 3, wherein one of the n dimensions of the grid system is height and the method further comprises the steps of:

defining a stratum as a span between a fixed minimum height and a fixed maximum height at a higher altitude than the minimum height, wherein no polytope extends outside the stratum; and

sub-dividing the stratum into nested layers, wherein increasingly nested layers correspond to finer resolutions.

6. The method of claim 4, further comprising contributing one symbol to the non-opaque code string for each nested layer.
7. The method of claim 1, wherein the polytope is a hyperrectangle.
8. The method of claim 1, wherein the n dimensions comprise length, width, and height.
9. The method of claim 1, wherein the n dimensions comprise length, width, and time.
10. The method of claim 1, wherein n is greater than or equal to four and the n dimensions comprise length, width, height, and time.
11. The method of claim 1, further comprising not encoding the asset's geometry into the non-opaque, code string.
12. The method of claim 1, wherein a plurality of single, non-opaque, code strings are comparable for functional equivalence.
13. The method of claim 1, wherein said step of determining a position is based on a map image.
14. A method of assigning an n-dimensional asset identifier to an asset comprising:
 - Defining a stratum as a span between a fixed minimum height and a fixed maximum height at a higher altitude than the minimum height;
 - Sub-dividing the stratum into nested layers, wherein increasingly nested layers correspond to finer resolutions;

Determining from a map, a position of the asset in n dimensions ($n \geq 3$) comprising length, width, and height, wherein the position is based on the center of mass of the asset's geometry;

Determining an extent for each of the dimensions, wherein each extent is measured from the center of mass to a surface of an n -dimensional bounding hyperrectangle containing the asset, wherein no bounding hyperrectangle extends outside the stratum;

Referencing the position and extents to a grid system having n -dimensions, wherein the grid system comprises uniform, non-overlapping grid cells and overlays at least a portion of Earth's surface; and

Encoding the position and the extents of the asset into a single, non-opaque, code string that can be stored on computer-readable media, wherein the code string does not encode the asset's geometry and wherein two non-opaque, code strings are directly comparable for functional equivalence.

15. A non-transitory computer readable storage medium storing one or more programs, the one or more programs comprising instructions, which when executed by one or more processors of an electronic device cause the device to:

Determine a position of an asset in n dimensions ($n \geq 3$), wherein the position is based at least on the center of mass of the asset's geometry;

Determine an extent for each of the n dimensions, wherein each extent is measured from the center of mass to a surface of an n -dimensional bounding polytope containing the asset; and

Encode the position and the extents of the asset into a single, non-opaque, code string that is a computer-readable, n -dimensional identifier of the asset.

16. The non-transitory computer readable storage medium of claim 15, storing programs comprising instructions, which when executed further cause the electronic device to reference the position and extents to a grid reference system having n-dimensions, wherein the grid system comprises uniform, non-overlapping grid cells and overlays at least a portion of Earth's surface.
17. The non-transitory computer readable storage medium of claim 16, wherein one of the n dimensions of the grid system is height and further storing programs comprising instructions, which when executed further cause the electronic device to:
 - define a stratum as a span between a fixed minimum height and a fixed maximum height at a higher altitude than the minimum height, wherein no polytope extends outside the stratum; and
 - sub-divide the stratum into nested layers, wherein increasingly nested layers correspond to finer resolutions.
18. The non-transitory computer readable storage medium of claim 15, wherein the n dimensions comprise length, width, and time.
19. The non-transitory computer readable storage medium of claim 15, wherein the instructions, which when executed cause the electronic device to encode the position and the extents of the asset into a single, non-opaque, code string do not encode the asset's geometry into the non-opaque, code string.
20. The non-transitory computer readable storage medium of claim 15, wherein two single, non-opaque, code strings are directly comparable for functional equivalence.
21. The non-transitory computer readable storage medium of claim 15, wherein the instructions, which when executed further cause the electronic device to

concatenate the non-opaque code string by removing any symbol not associated with dimensions of length and width.

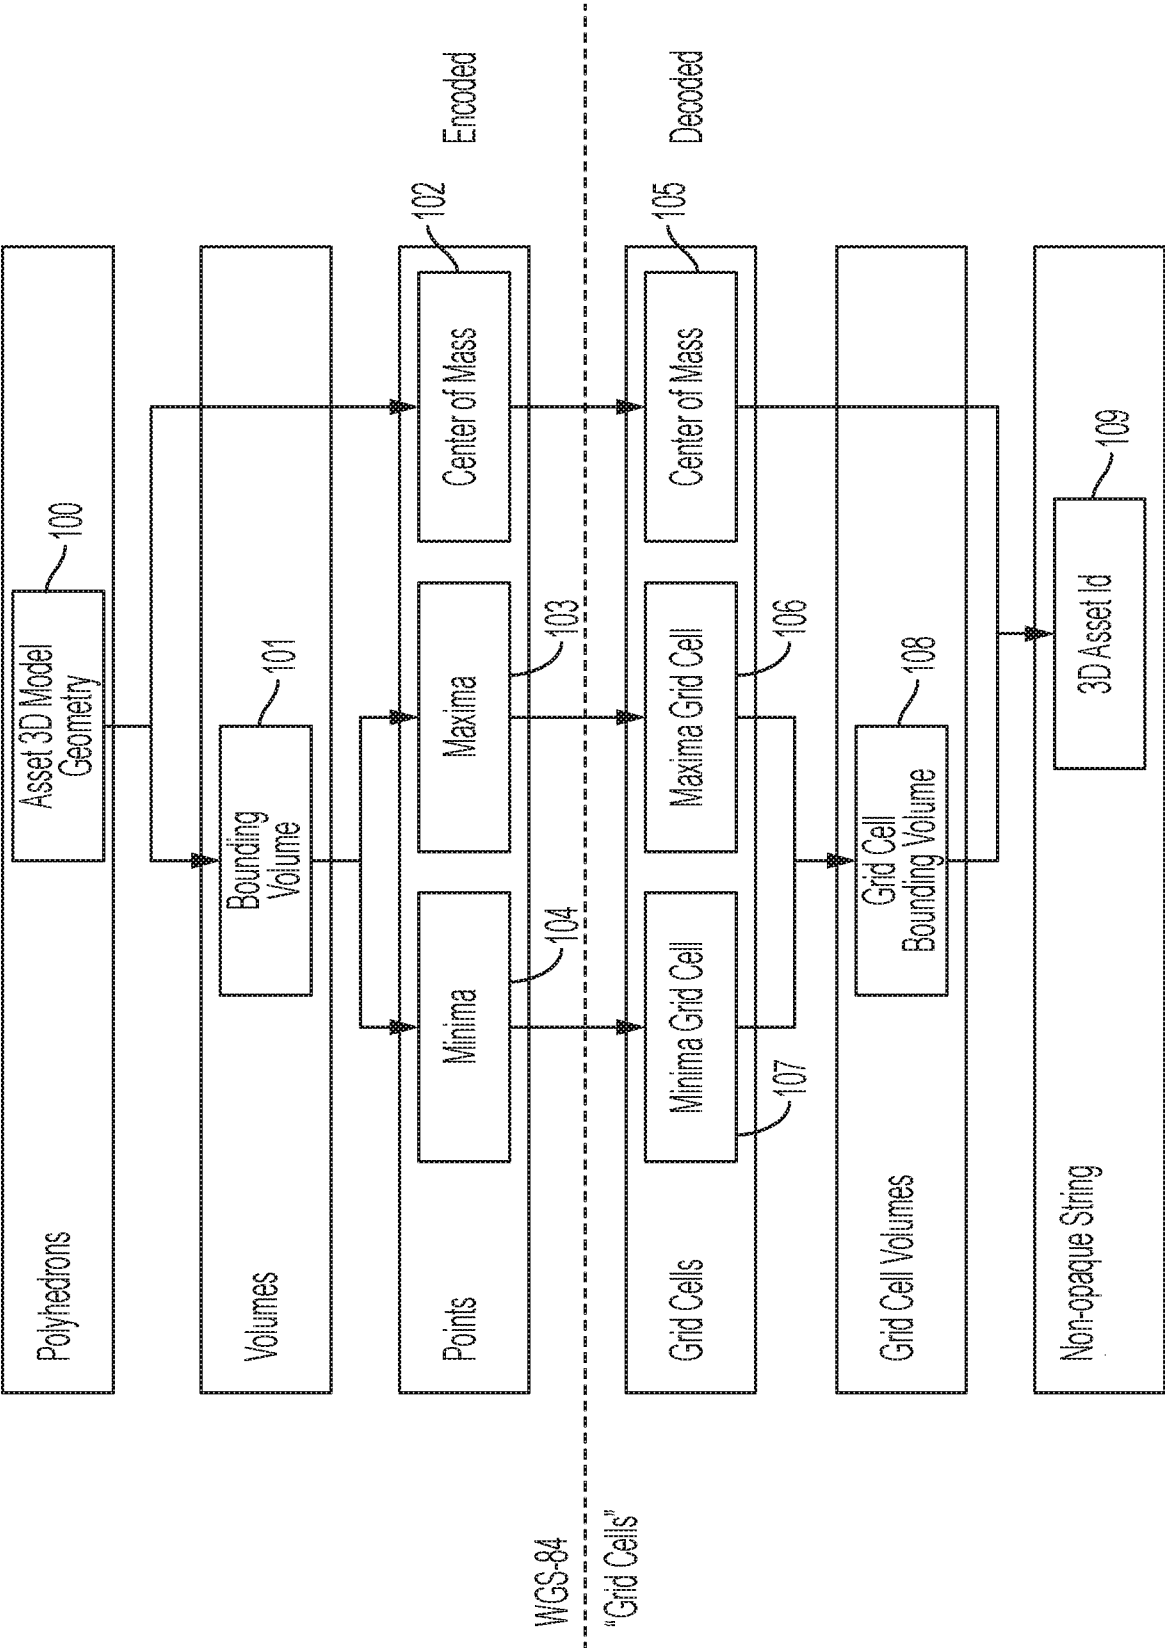


FIG. 1

2/5

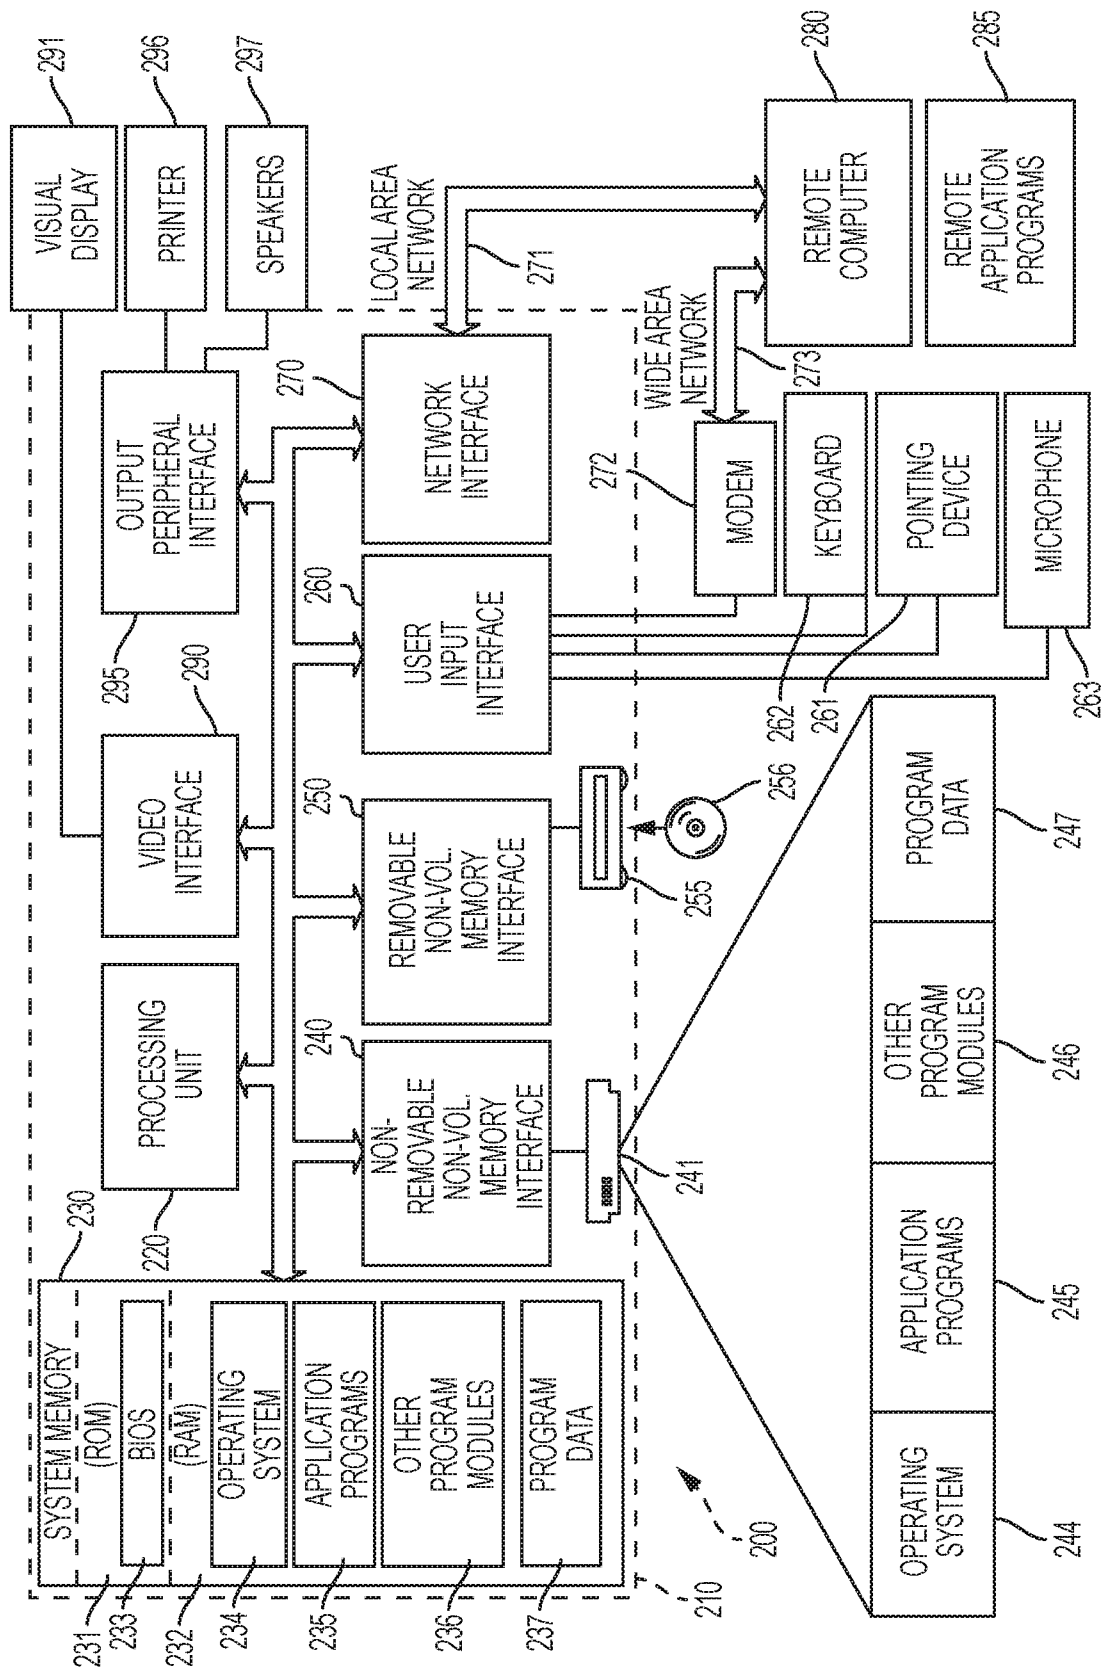


FIG. 2

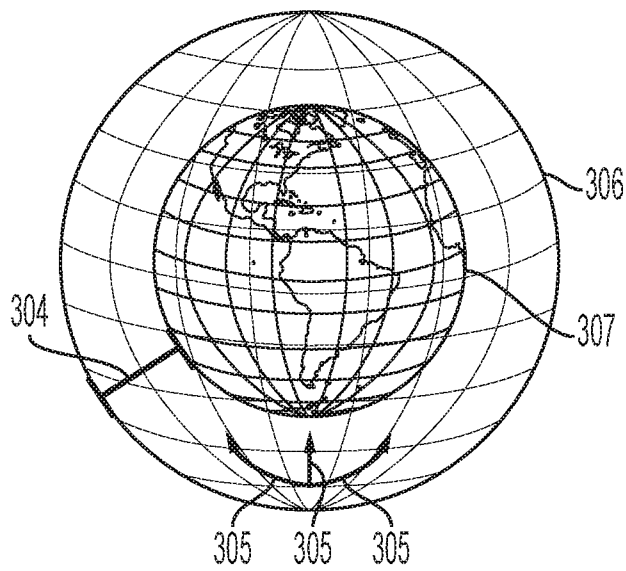


FIG. 3A

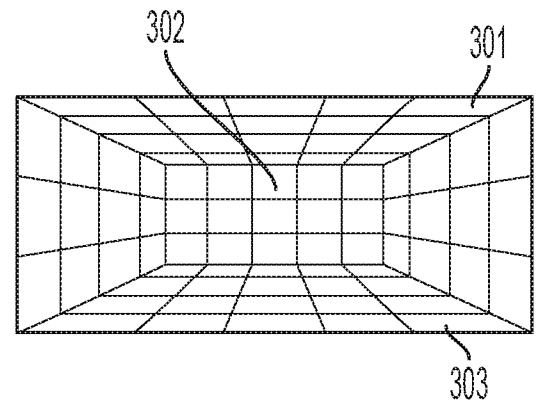


FIG. 3B

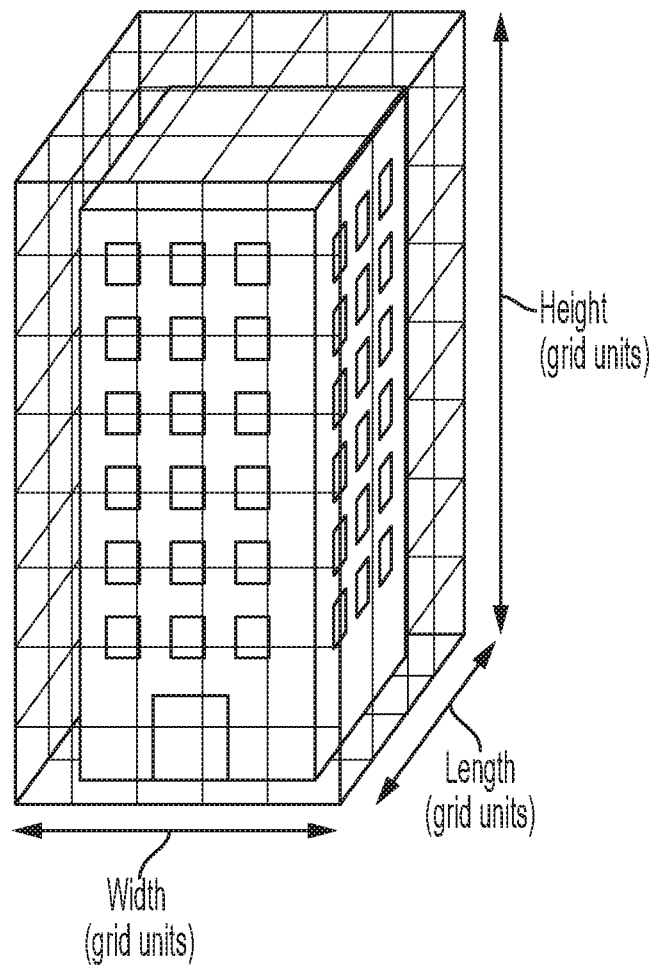


FIG. 3C

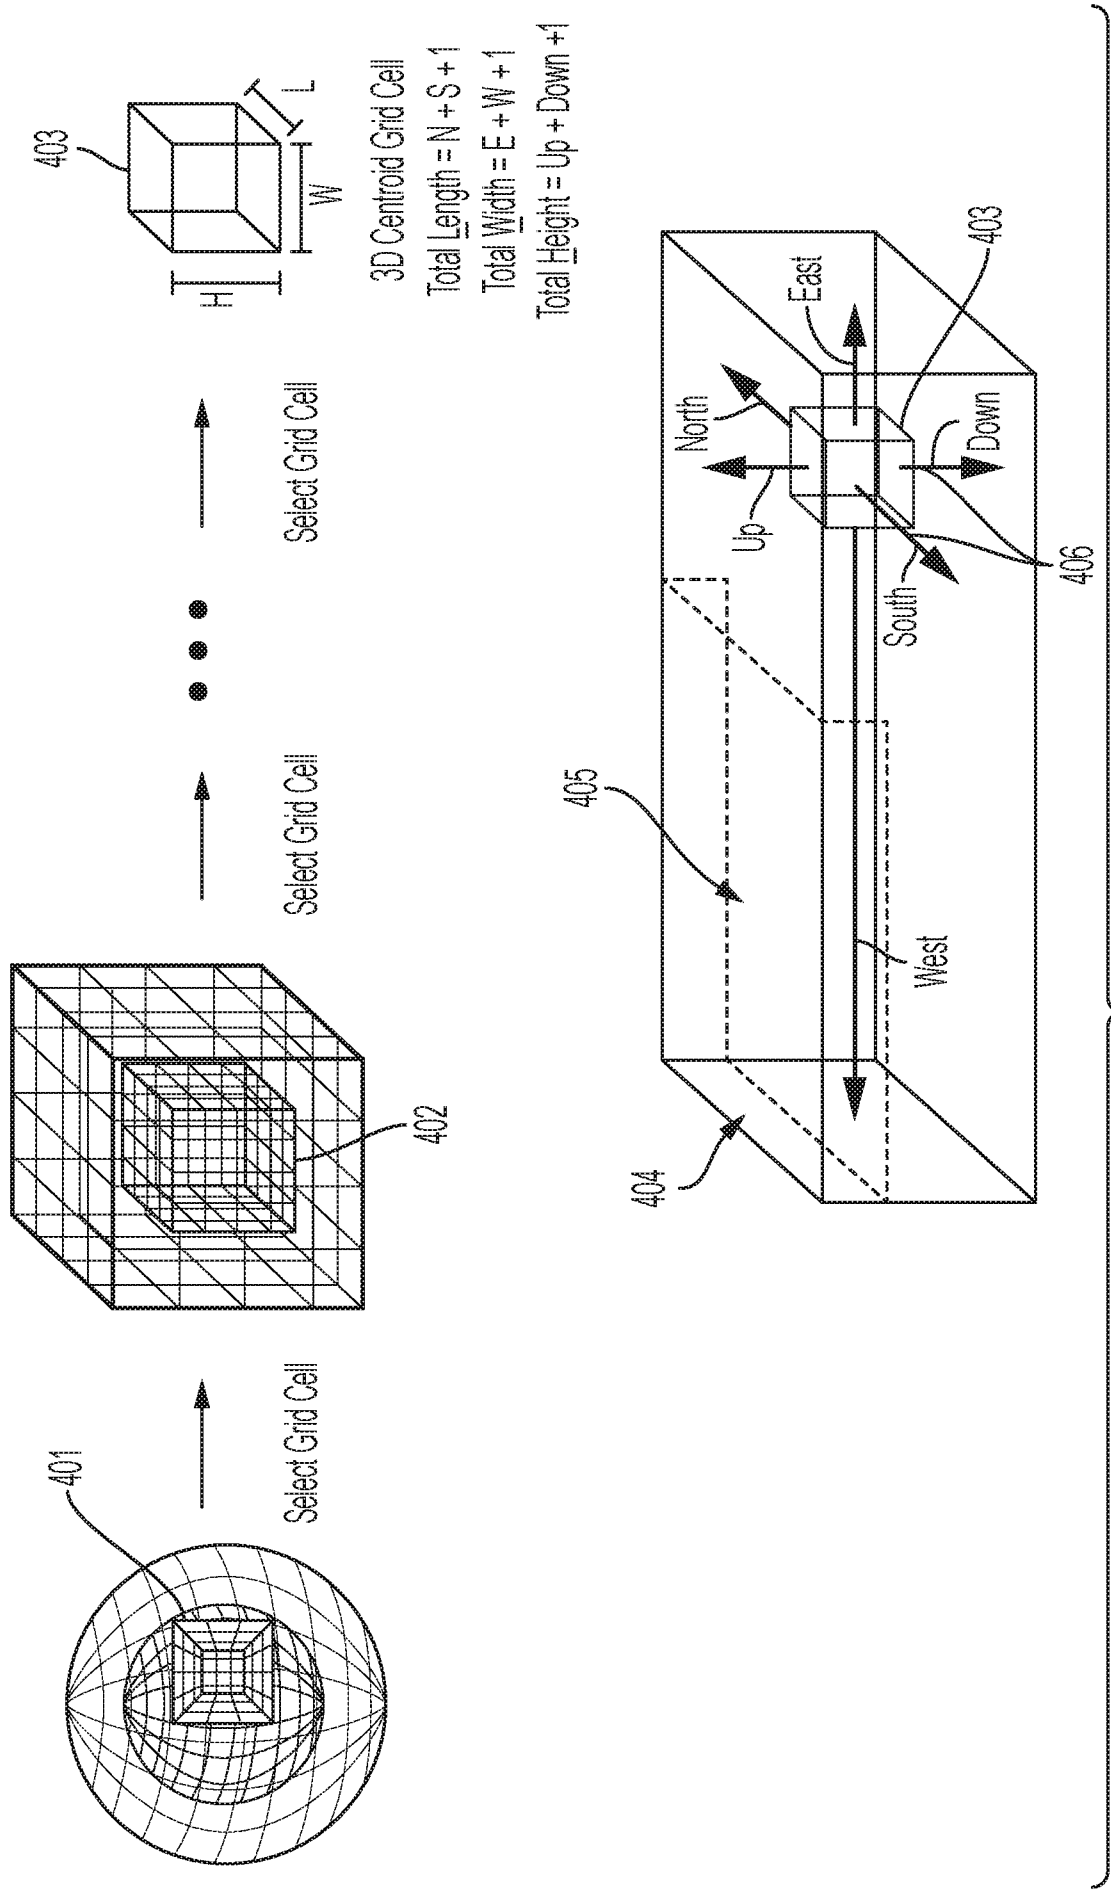


FIG. 4

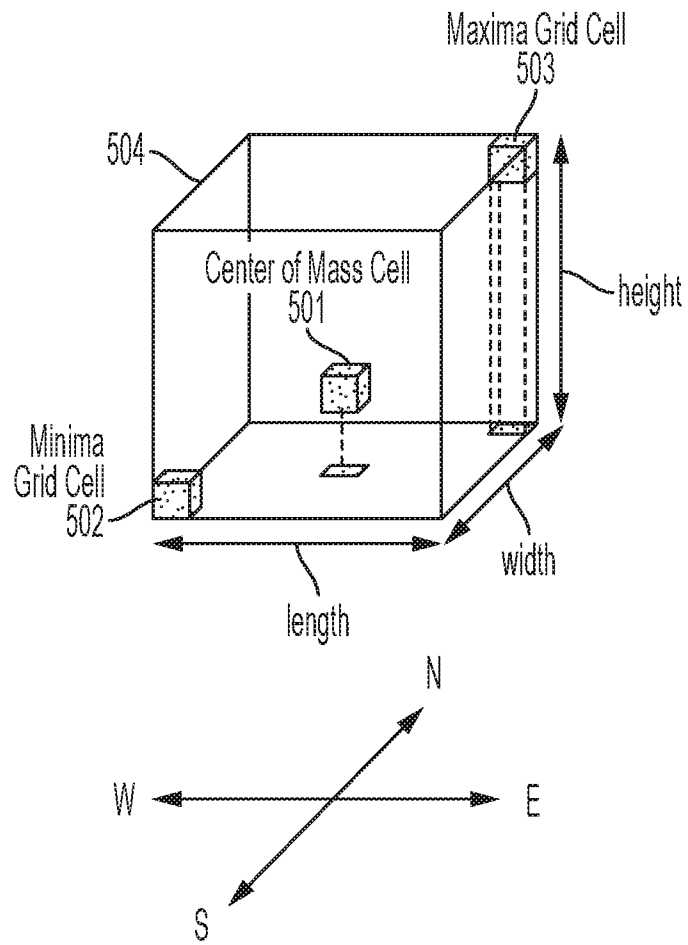


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/061479**A. CLASSIFICATION OF SUBJECT MATTER****G06F 16/00(2019.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
G06F 16/00; G01C 21/30; G01S 19/46; G06F 17/27; G06F 17/30; G06F 19/00; G06F 7/00Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: n-dimensional asset identifier, position, extent, center of mass, dimensions, bounding, encoding**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 9020941 B1 (APURV GUPTA et al.) 28 April 2015 See abstract; column 1, lines 15-45; claim 1; and figure 1.	1-21
A	US 2015-0095336 A1 (TRAC RAIL INC.) 02 April 2015 See paragraphs [0064]-[0104]; claim 1; and figure 6.	1-21
A	US 2007-0282482 A1 (PETER J. BEUCHER et al.) 06 December 2007 See paragraphs [0009], [0040]-[0052]; and figure 3.	1-21
A	US 7428525 B1 (CHRISTOPHER T. GRASTEIT) 23 September 2008 See column 3, line 28 - column 4, line 61; claim 1; and figure 1.	1-21
A	JP 2002-538518 A (GO2 SYSTEMS, INC.) 12 November 2002 See paragraphs [0007]-[0039]; and figures 1-3.	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

04 March 2019 (04.03.2019)

Date of mailing of the international search report

05 March 2019 (05.03.2019)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea




Facsimile No. +82-42-481-8578

Authorized officer

KIM, Seong Woo

Telephone No. +82-42-481-3348



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/061479

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 9020941 B1	28/04/2015	US 2009-0177643 A1 US 8150848 B2	09/07/2009 03/04/2012
US 2015-0095336 A1	02/04/2015	CA 2865371 A1	27/03/2015
US 2007-0282482 A1	06/12/2007	AU 2003-256987 A1 CN 1688895 A EP 1537439 A2 EP 1537439 B1 EP 1829155 A2 GB 2493891 A GB 2493891 B JP 2008-524588 A KR 10-2010-0127244 A US 2004-0032363 A1 US 2005-0046608 A1 US 2006-0132352 A1 US 2006-0192709 A1 US 2006-0244673 A1 US 2006-0267833 A1 US 2008-0165050 A1 US 2009-0280742 A1 US 2010-0103025 A1 US 2010-0277387 A1 US 2011-0148714 A1 US 2011-0315765 A1 US 2012-0007787 A1 US 2012-0023572 A1 US 2013-0027249 A1 US 2014-0062792 A1 US 2015-0318624 A1 US 2016-0039340 A1 US 6963301 B2 US 7298314 B2 US 7307595 B2 US 7414571 B2 US 7538715 B2 US 7592949 B2 US 7755552 B2 US 7859452 B2 US 7957833 B2 US 8018383 B1 US 8253626 B2 US 8326451 B2 US 8436780 B2 US 8643538 B2 US 8922440 B2 US 9209525 B2 US 9285453 B2	03/03/2004 26/10/2005 08/06/2005 10/10/2007 05/09/2007 20/02/2013 08/10/2014 10/07/2008 03/12/2010 19/02/2004 03/03/2005 22/06/2006 31/08/2006 02/11/2006 30/11/2006 10/07/2008 12/11/2009 29/04/2010 04/11/2010 23/06/2011 29/12/2011 12/01/2012 26/01/2012 31/01/2013 06/03/2014 05/11/2015 11/02/2016 08/11/2005 20/11/2007 11/12/2007 19/08/2008 26/05/2009 22/09/2009 13/07/2010 28/12/2010 07/06/2011 13/09/2011 28/08/2012 04/12/2012 07/05/2013 04/02/2014 30/12/2014 08/12/2015 15/03/2016

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/061479

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7428525 B1	23/09/2008	US 9997845 B2	12/06/2018
		WO 2004-017087 A2	26/02/2004
		WO 2004-017087 A3	21/05/2004
		WO 2006-080983 A2	03/08/2006
		WO 2006-080983 A3	14/12/2006
		WO 2009-148644 A1	10/12/2009
		WO 2011-156426 A2	15/12/2011
		WO 2011-156426 A3	19/04/2012
US 7428525 B1	23/09/2008	AU 2001-29244 A1	06/06/2001
		WO 01-35192 A2	17/05/2001
		WO 01-35192 A3	04/10/2001
JP 2002-538518 A	12/11/2002	EP 0920601 A1	19/03/2003
		EP 1159584 A1	05/12/2001
		EP 1253400 A2	30/10/2002
		JP 2000-517050 A	19/12/2000
		US 2001-0029426 A1	11/10/2001
		US 2002-0087260 A1	04/07/2002
		US 2003-0033176 A1	13/02/2003
		US 2003-0036842 A1	20/02/2003
		US 2003-0074136 A1	17/04/2003
		US 2004-0139049 A1	15/07/2004
		US 2005-0283503 A1	22/12/2005
		US 2009-0077100 A1	19/03/2009
		US 2014-0324844 A1	30/10/2014
		US 5839088 A	17/11/1998
		US 6047236 A	04/04/2000
		US 6202023 B1	13/03/2001
		US 6223122 B1	24/04/2001
		US 6295502 B1	25/09/2001
		US 6339744 B1	15/01/2002
		US 6356834 B2	12/03/2002
		US 6473692 B2	29/10/2002
		US 6597983 B2	22/07/2003
		US 6609062 B2	19/08/2003
		US 7421275 B1	02/09/2008
		US 8112419 B2	07/02/2012
		US 8935220 B2	13/01/2015
		US 9729381 B2	08/08/2017
		WO 00-50844 A1	31/08/2000
		WO 02-063853 A2	15/08/2002
		WO 98-08055 A1	26/02/1998