

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 January 2012 (05.01.2012)

(10) International Publication Number
WO 2012/001118 A1

- (51) International Patent Classification:
E21B 43/10 (2006.01) *E21B 43/26* (2006.01)
- (21) International Application Number:
PCT/EP20 11/061033
- (22) International Filing Date:
30 June 2011 (30.06.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1016795 1.2 30 June 2010 (30.06.2010) EP
- (71) Applicant (for all designated States except US): **WELL-TEC A/S** [DK/DK]; Gydevang 25, DK-3450 Allerød (DK).
- (72) Inventors; and
- (75) Inventors/ Applicants (for US only): **HALLUNDBÅK, Jorgen** [DK/DK]; Haregabsvej 15, Esb0nderup Skovhuse, DK-3230 Græsted (DK). **HAZEL, Poul** [GB/GB]; North Skelmonae, Ellon, Aberdeen AB41/7JQ (GB).
- (74) Agent: **HOFFMANN DRAGSTED A/S**; Radhuspladsen 16, DK-1550 København V (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17 :

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(H))

Published:

— with international search report (Art. 21(3))

(54) Title: **FRACTURING SYSTEM**

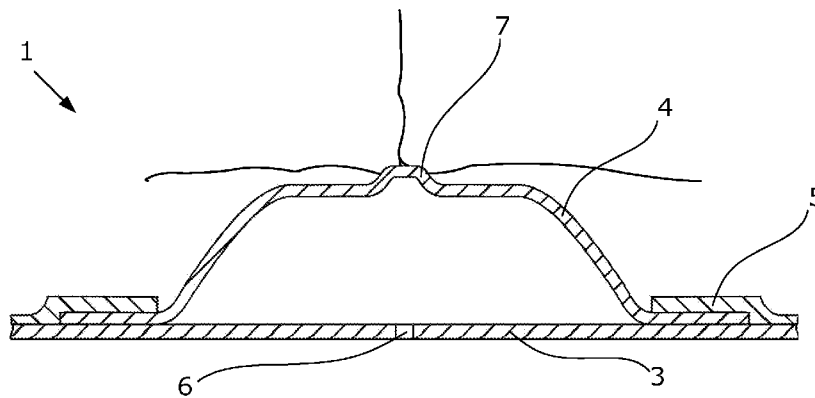


Fig. 5

(57) **Abstract:** The present invention relates to a fracturing system for fracturing a formation surrounding a well tubular structure, comprising a tubular part to be mounted as a part of the well tubular structure, the tubular part being made of metal, an expandable sleeve made of metal, the sleeve having a wall thickness and surrounding the tubular part, a fastening means for connecting the sleeve with the tubular part, and an aperture in the tubular part or the fastening means. Furthermore, the invention relates to a fracturing method for fracturing a formation surrounding a well tubular structure.

WO 2012/001118 A1

FRACTURING SYSTEM

Field of the Invention

The present invention relates to a fracturing system for fracturing a formation
5 surrounding a well tubular structure, comprising a tubular part to be mounted as
a part of the well tubular structure, the tubular part being made of metal, an
expandable sleeve made of metal, the sleeve having a wall thickness and
surrounding the tubular part, a fastening means for connecting the sleeve with
the tubular part, and an aperture in the tubular part or the fastening means.
10 Furthermore, the invention relates to a fracturing method for fracturing a
formation surrounding a well tubular structure.

Background Art

15 In a wellbore, the formation is fractured in order to let oil pass into the wellbore
and further on to the production casing. When fracturing the formation, it is
desirable to obtain fractures extending substantially transversely to the extension
of the borehole, and thus the casing. However, these fractures commonly extend
substantially along the casing due to the natural layers in the formation.

20 Fractures extending perpendicularly to the casing extend longer into the
formation. In this way, they uncover a larger area of the formation filled with oil
containing fluid, which leads to a more optimised production than with
longitudinal fractures.

25

Summary of the Invention

It is an object of the present invention to wholly or partly overcome the above
disadvantages and drawbacks of the prior art. More specifically, it is an object to
30 provide an improved fracturing system which is capable of making fractures
substantially perpendicularly to the production casing.

The above objects, together with numerous other objects, advantages, and
features, which will become evident from the below description, are accomplished

by a solution in accordance with the present invention by a fracturing system for fracturing a formation surrounding a well tubular structure, comprising:

- a tubular part to be mounted as a part of the well tubular structure, the tubular part being made of metal,

5 - an expandable sleeve made of metal, the sleeve having a wall thickness and surrounding the tubular part,

- a fastening means for connecting the sleeve with the tubular part, and

- an aperture in the tubular part or the fastening means,

wherein the sleeve has a fracture initiating element.

10

In an embodiment, the fracturing initiating element may project from a surface of the sleeve.

By a fracture initiating element projecting from the surface of the sleeve is meant
15 a position along the surface in which a slope of a tangent to the surface changes and becomes zero for changes again, the element projecting in this position towards the formation.

Moreover, the fracture initiating element may at least partly penetrate part of the
20 formation in an expanded condition of the expandable sleeve.

Further, the expandable sleeve may have an expanded condition in which a
contact surface of the sleeve contacts the formation and an unexpanded
condition, the fracture initiating element projecting at least in the expanded
25 position from the contact surface into the formation in order to fracture the formation.

In an embodiment of the invention, the fracture initiating element may be
arranged between the fastening means.

30

Furthermore, the fracture initiating element may comprise a centre part of the sleeve having a decreased wall thickness in relation to another part of the sleeve.

In addition, the fracture initiating element may comprise several areas
35 distributed along a circumference of the sleeve, and the areas of the sleeve may have a decreased wall thickness in relation to other areas of the sleeve.

Moreover, the fracture initiating element may comprise a projection.

Additionally, the fracture initiating element may comprise a shear plug, a spring-loaded valve or a rupture disc.

5

In an embodiment, the projection may taper away from the tubular part towards the formation.

Furthermore, the projection may be a circumferential projection.

10

Additionally, the sleeve may have a plurality of projections along its circumference to ensure that the projections are arranged in the same circumferential cross-sectional plane of the sleeve.

15

In another embodiment, the fracture initiating element may comprise at least one area having a decreased wall thickness which bursts when it reaches a predetermined pressure.

20

The fracturing system as described above may further comprise a tool for expanding the expandable sleeve by letting a pressurised fluid through an aperture in the tubular part into a space between the expandable sleeve and the tubular part.

25

Furthermore, a valve may be arranged in the aperture to control the passage of pressurised fluid into the space between the expandable sleeve and the tubular part.

30

In addition, the sleeve may have two ends made of a different material than a centre part of the sleeve.

These two ends may be welded to the centre part, and they may have an inclined surface corresponding to an inclined surface of the centre part of the sleeve.

35

In an embodiment, the valve may be a one-way valve or a two-way valve.

In another embodiment, at least one of the fastening means may be slidable in relation to the connection part of the tubular part of the annular barrier.

Furthermore, at least one of the fastening means may be fixedly fastened to the tubular part.

5 In yet another embodiment, the tool may have a means for moving the valve from one position to another.

10 Furthermore, the tool may have an isolation device for isolating a first section between an outside wall of the tool and an inside wall of the well tubular structure outside the aperture of the tubular part.

In addition, the isolation device of the tool may have at least one sealing means for sealing against the inside wall of the well tubular structure on each side of the valve in order to isolate the first section inside the well tubular structure.

15 Moreover, the tool may have a pressure delivering means for taking in fluid from the borehole and for delivering pressurised fluid to the first section.

Additionally, the tool may have a means for connecting the tool to a drill pipe. Also, the tool may have packers for closing an annular area.

20 The invention furthermore relates to the use of the fracturing system as described above in a well tubular structure for inserting the structure into a borehole.

25 Finally, the invention relates to a fracturing method for fracturing a formation surrounding a well tubular structure by expanding an expandable sleeve in the fracturing system as described above inside a borehole, the method comprising the steps of:

- placing a tool outside the aperture of the tubular part,
- 30 - injecting fluid into the space between the tubular part and the expandable sleeve to expand the sleeve,
- fracturing the formation by expanding the sleeve until the sleeve applies a predetermined pressure on the formation.

35 Furthermore, the fracturing method may comprise the step of expanding the sleeve until the fracture initiating element bursts.

Brief Description of the Drawings

The invention and its many advantages will be described in more detail below with reference to the accompanying schematic drawings, which for the purpose of illustration show some non-limiting embodiments and in which

Fig. 1 shows a cross-sectional view of a casing in a wellbore having a horizontal part,

Fig. 2 shows a cross-sectional view of a casing in a vertical well,

Fig. 3 shows a cross-sectional view of an expanded sleeve creating fractures in the formation,

Fig. 4 shows a cross-sectional view of an unexpanded fracturing system,

Fig. 5 shows a cross-sectional view of the fracturing system of Fig. 4 in an expanded condition,

Fig. 6 shows a cross-sectional view of an embodiment of an unexpanded fracturing system,

Fig. 7 shows a cross-sectional view of the fracturing system of Fig. 6 in an expanded condition,

Fig. 8 shows a cross-sectional view of yet another embodiment of an unexpanded fracturing system,

Fig. 9 shows a cross-sectional view of the fracturing system of Fig. 8 in an expanded condition,

Fig. 10 shows a cross-sectional view of yet another embodiment of an unexpanded fracturing system,

Fig. 11 shows a cross-sectional view of the fracturing system of Fig. 10 in its almost fully expanded condition,

Fig. 12 shows a cross-sectional view of the fracturing system of Fig. 10 in its fully expanded condition, in which the fracture initiating element burst so to let fluid fracture the formation,

5 Fig. 13 shows a cross-sectional view transversely through the fracture initiating elements of Fig. 9,

Fig. 14 shows a cross-sectional view of yet another embodiment of an unexpanded fracturing system,

10

Fig. 15 shows a cross-sectional view of the fracturing system of Fig. 14 in an expanded condition, and

Fig. 16 shows a cross-sectional view of the fracturing system of Fig. 14 in its fully
15 expanded condition in which the fracture initiating element has been released from the sleeve so to let fluid fracture the formation.

All the figures are highly schematic and not necessarily to scale, and they show only those parts which are necessary in order to elucidate the invention, other
20 parts being omitted or merely suggested.

Detailed description of the invention

Fig. 1 shows a well having a vertical and a horizontal part. In the horizontal part,
25 formation fractures 11 extending perpendicularly to the production casing are shown. The production casing is fastened to the formation by means of annular barriers, and the fractures are situated between the expanded annular barriers in the horizontal part. In this kind of well, the fractures 11 are vertical and may also be perpendicular to the natural layers of the formation. A well which is only
30 vertical is shown in Fig. 2. The well has annular barriers and horizontal fractures, all of which are also perpendicular and transverse to the production casing. In the following, both types of fractures 11 illustrated in Figs. 1 and 2, which are perpendicular to the production casing, will be referred to as transverse fractures.

35 Fig. 3 shows an illustration of an expanded sleeve 4 creating transverse fractures 11 in the formation above the sleeve and longitudinal fractures in the formation below the sleeve. As can be seen, longitudinal fractures are fractures extending

along the extension of the production casing. Estimates made in the oil industry show that a horizontal well having transverse formation fractures improves the production efficiency by up to 60% compared to a horizontal well having longitudinal fractures.

5

By expanding the sleeve 4 in an annular barrier to create fractures in the formation, the expanded sleeve presses against the formation, causing the fractures to become coincidental.

10 Fig. 4 shows a fracturing system 1 comprising a sleeve 4 with a fracture initiating element 7. The fracture initiating element 7 is in this embodiment a part of the sleeve 4 having an decreased wall thickness so that when the sleeve is expanded, as shown in Fig. 5, the fracture initiating element 7 projects and functions as a notch when pressed towards the formation. In this way, the
15 fracturing process is controlled to ensure that the fractures are transverse instead of longitudinal.

The fracturing system 1 comprises an expandable sleeve 4 and a tubular metal part 3, both of which are mounted as a part of the well tubular structure 2 when
20 inserting the production casing in the borehole. As illustrated in Fig. 4, the expandable sleeve 4 has a wall thickness t in its unexpanded condition and surrounds the tubular part 3 and is sealingly fastened to the tubular part by means of a fastening means 5. The tubular part 3 has at least one aperture 6 functioning as a passage for letting fluid into the space between the sleeve 4 and
25 the tubular part to expand the sleeve.

In the fracturing system 1 of Fig. 6, the expandable sleeve 4 has a fracture initiating element 7 which is a part of the sleeve having a decreased wall thickness, as shown in Fig. 4. Furthermore, the fracture initiating element 7
30 comprises a projection 9 tapering into a circumferential rim. The sleeve 4 of Fig. 6 is shown in its expanded condition in Fig. 7 in which the part of the sleeve having a decreased thickness projects towards the formation as a projecting part, and the rim arranged on the projecting part having a decreased thickness presses against the formation and increases the notch effect of the projecting
35 part.

Thus, in Figs. 5-9, 11 and 14-16, the fracturing initiating element projects from a surface of the sleeve. By a fracture initiating element projecting from the surface of the sleeve is meant a position along the surface in which a slope of a tangent to the surface changes and becomes zero for changes again, the element
5 projecting in this position from the surface of the sleeve and towards the formation.

In Figs. 5, 7, 11 and 15, the fracture initiating element at least partly penetrates part of the formation in an expanded condition of the expandable sleeve. After
10 penetration of part of the fracture initiating element, a contact surface 30 being another part of the sleeve contacts the formation.

In another embodiment, the expandable sleeve 4 has a plurality of fracture initiating elements 7 in the form of parts of the sleeve having a decreased wall
15 thickness. The sleeve 4 has several circular areas having a decreased thickness, and on the outside of the sleeve each fracture initiating element comprises a projection 9 tapering towards a point.

The sleeve 4 of Fig. 8 comprises a plurality of fracture initiating elements 7 in the
20 form of projections 9 arranged on the outside of the sleeve in the same cross-sectional plane of the sleeve transverse to the longitudinal direction of the casing. Each projection 9 tapers towards a point 16 which is pressed into the formation when the sleeve 4 is expanded, and the point 16 of each projection 9 functions as a notch initiating a fracture transverse to the longitudinal direction of the casing
25 when the sleeve is expanded, as shown in Fig. 9.

As shown in Fig. 8, the aperture 6 may have a valve 10 which must be opened
30 before pressurised fluid 12 can be injected into the space between the sleeve 4 and the tubular part 3 in order to expand the sleeve.

In Figs. 10-12, the fracturing system 1 has a plurality of fracture initiating
elements 7 in the form of areas having a decreased wall thickness. When the sleeve 4 is expanded, as shown in Fig. 11, the areas having a decreased wall thickness project from the outside of the sleeve towards the formation, and when
35 being further expanded, the areas burst, as shown in Fig. 12. Thus, the fracture initiating elements 7 function as notches creating fractures 11 in the formation, and when they burst, fluid 15 can be injected into the formation wall at a high

pressure, thereby fracturing the formation even further. If the fluid 15 comprises acid, the fractures 11 can be enlarged by means of the acid.

As mentioned, it is desirable to have transverse fractures, and by having a plurality of fracture initiating elements 7 in the same cross-sectional plane, controlled transverse fractures are easily made in the same cross-sectional plane transverse to the longitudinal direction of the production casing. Hereby, a more efficient fracturing system 1 is provided, controlling the fracturing direction of the fractures. In Fig. 13, a cross-sectional view transverse to the longitudinal extension of the fracturing system through the sleeve and the fracture initiating elements are shown with transverse fractures in the same cross-sectional plane. Furthermore, the fracture elements are shown spaced along the circumference of the sleeve.

An unexpanded fracturing system in which the fracture initiating element is a shear plug fastened in the wall of the sleeve is shown in the cross-sectional view of Fig. 14. The fracture initiating element partly penetrates the formation as shown in Fig. 15 and is releasable from the sleeve when a certain pressure is injected into the aperture 6 so that the fracture initiating element leaves an open hole in the wall of the sleeve. In Fig. 16, fracturing fluid is penetrating the hole in the sleeve wall and further into the fracture in the formation.

Instead of a shear plug as shown in Figs. 14-16, the fracture initiating element may be a spring-loaded valve or a rupture disc. The fracture initiating element may also be a pointed element being welded as part of the wall of the sleeve, and thus the welding connection breaks at a certain fluid pressure injected through the aperture 6.

The well tubular structure 2 may be the production tubing or casing, or a similar kind of tubing downhole in a well or a borehole.

The valve 10 may be any kind of valve capable of controlling a flow, such as a ball valve, a butterfly valve, a choke valve, a check valve or non-return valve, a diaphragm valve, an expansion valve, a gate valve, a globe valve, a knife valve, a needle valve, a piston valve, a pinch valve or a plug valve.

The expandable tubular metal sleeve 4 may be a cold-drawn or hot-drawn tubular structure.

5 The fluid used for expanding the expandable sleeve 4 may be any kind of well fluid present in the borehole surrounding the tool 20 and/or the well tubular structure 3. Also, the fluid may be cement, gas, water, polymers or a two-component compound, such as powder or particles, mixing or reacting with a binding or hardening agent.

10 Although the invention has been described in the above in connection with preferred embodiments of the invention, it will be evident for a person skilled in the art that several modifications are conceivable without departing from the invention as defined by the following claims.

15

Claims

1. A fracturing system (1) for fracturing a formation surrounding a well tubular structure (2), comprising:
- 5 - a tubular part (3) to be mounted as a part of the well tubular structure, the tubular part being made of metal,
- an expandable sleeve (4) made of metal, the sleeve having a wall thickness (t) and surrounding the tubular part,
- a fastening means (5) for connecting the sleeve with the tubular part, and
- 10 - an aperture (6) in the tubular part or the fastening means, wherein the sleeve has a fracture initiating element (7).
2. A fracturing system according to claim 1, wherein the expandable sleeve has an expanded condition in which a contact surface (30) of the sleeve contacts
- 15 the formation and an unexpanded condition, the fracture initiating element projecting at least in the expanded position from the contact surface into the formation in order to fracture the formation.
3. A fracturing system according to claim 1 or 2, wherein the fracture initiating
- 20 element comprises a centre part (8) of the sleeve having a decreased wall thickness in relation to another part of the sleeve.
4. A fracturing system according to claim 1 or 2, wherein the fracture initiating
- 25 element comprises several areas distributed along a circumference of the sleeve, and wherein the areas of the sleeve have a decreased wall thickness in relation to other areas of the sleeve.
5. A fracturing system according to any of the preceding claims, wherein the
- 30 fracture initiating element comprises a projection (9).
6. A fracturing system according to claim 5, wherein the fracture initiating
- element comprises a shear plug, a spring-loaded valve or a rupture disc.
7. A fracturing system according to claim 5 or 6, wherein the projection tapers
- 35 away from the tubular part towards the formation.

8. A fracturing system according to any of claims 5-7, wherein the projection is a circumferential projection.
9. A fracturing system according to any of claims 5-8, wherein the sleeve has a plurality of projections along its circumference to ensure that the projections are arranged in the same circumferential cross-sectional plane of the sleeve.
10. A fracturing system according to any of the preceding claims, wherein the fracture initiating element comprises at least one area having a decreased wall thickness which bursts when it reaches a predetermined pressure.
11. A fracturing system according to any of the preceding claims, further comprising a tool for expanding the expandable sleeve by letting a pressurised fluid through an aperture in the tubular part into a space between the expandable sleeve and the tubular part.
12. A fracturing system according to any of the preceding claims, wherein a valve is arranged in the aperture to control the passage of pressurised fluid into the space between the expandable sleeve and the tubular part.
13. Use of the fracturing system according to any of claims 1-12 in a well tubular structure for inserting the structure into a borehole.
14. A fracturing method for fracturing a formation surrounding a well tubular structure (2) by expanding an expandable sleeve in the fracturing system according to any of claims 1-12 inside a borehole, the method comprising the steps of:
- placing a tool outside the aperture of the tubular part,
 - injecting fluid into the space between the tubular part and the expandable sleeve to expand the sleeve,
 - fracturing the formation by expanding the sleeve until the sleeve applies a predetermined pressure on the formation.
15. A fracturing method according to claim 14, further comprising the step of expanding the sleeve until the fracture initiating element bursts.

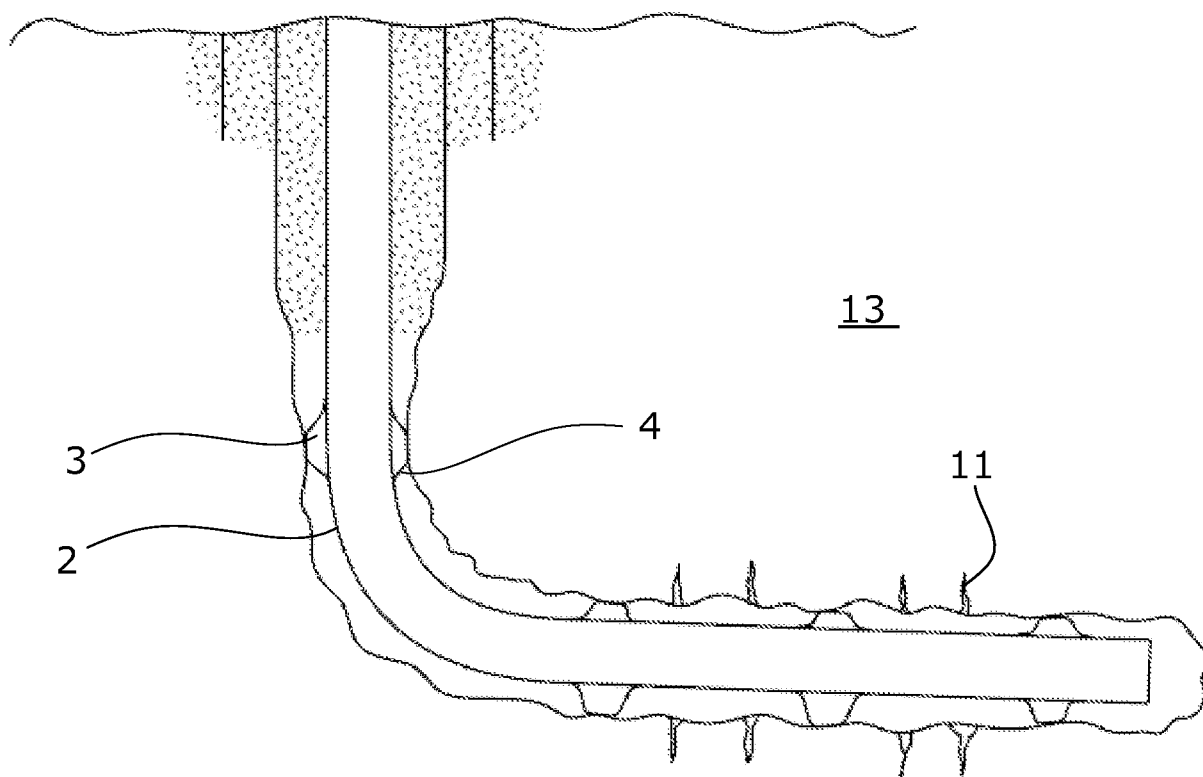


Fig. 1

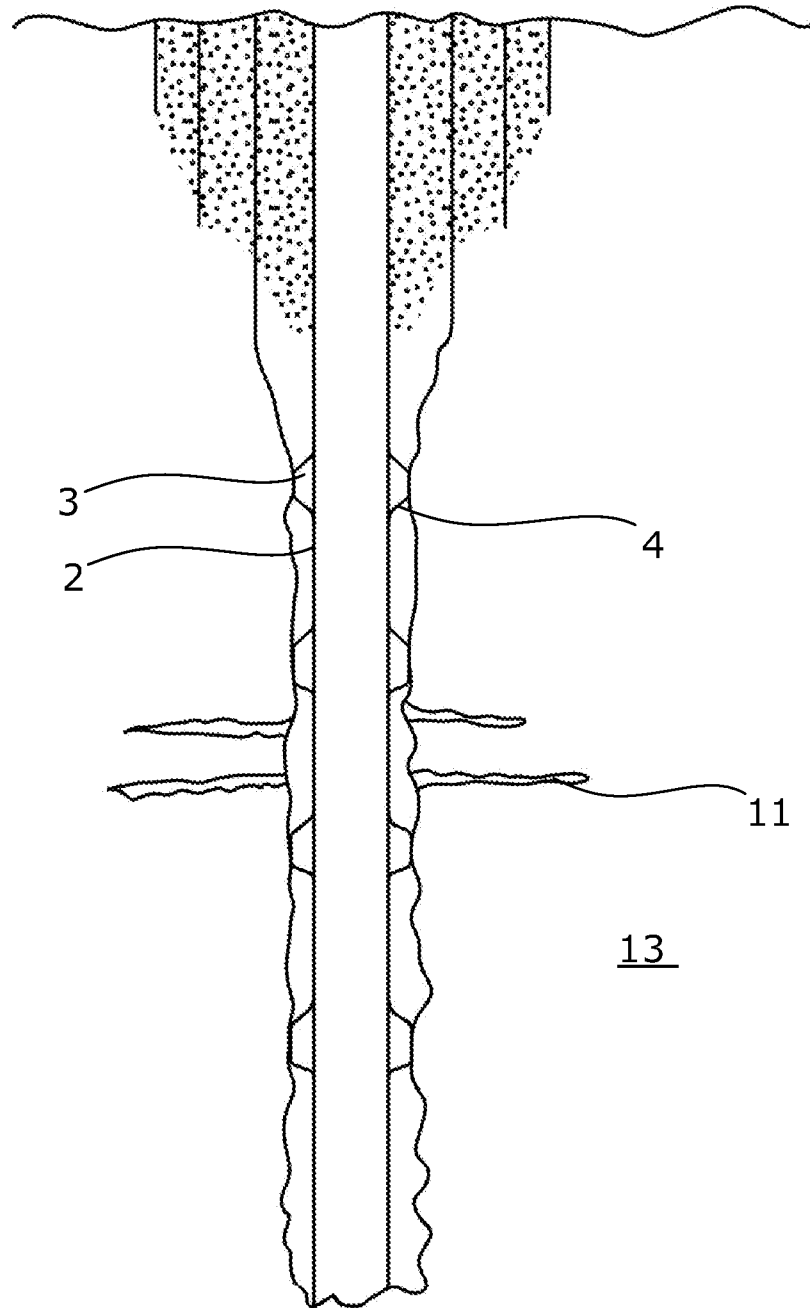


Fig. 2

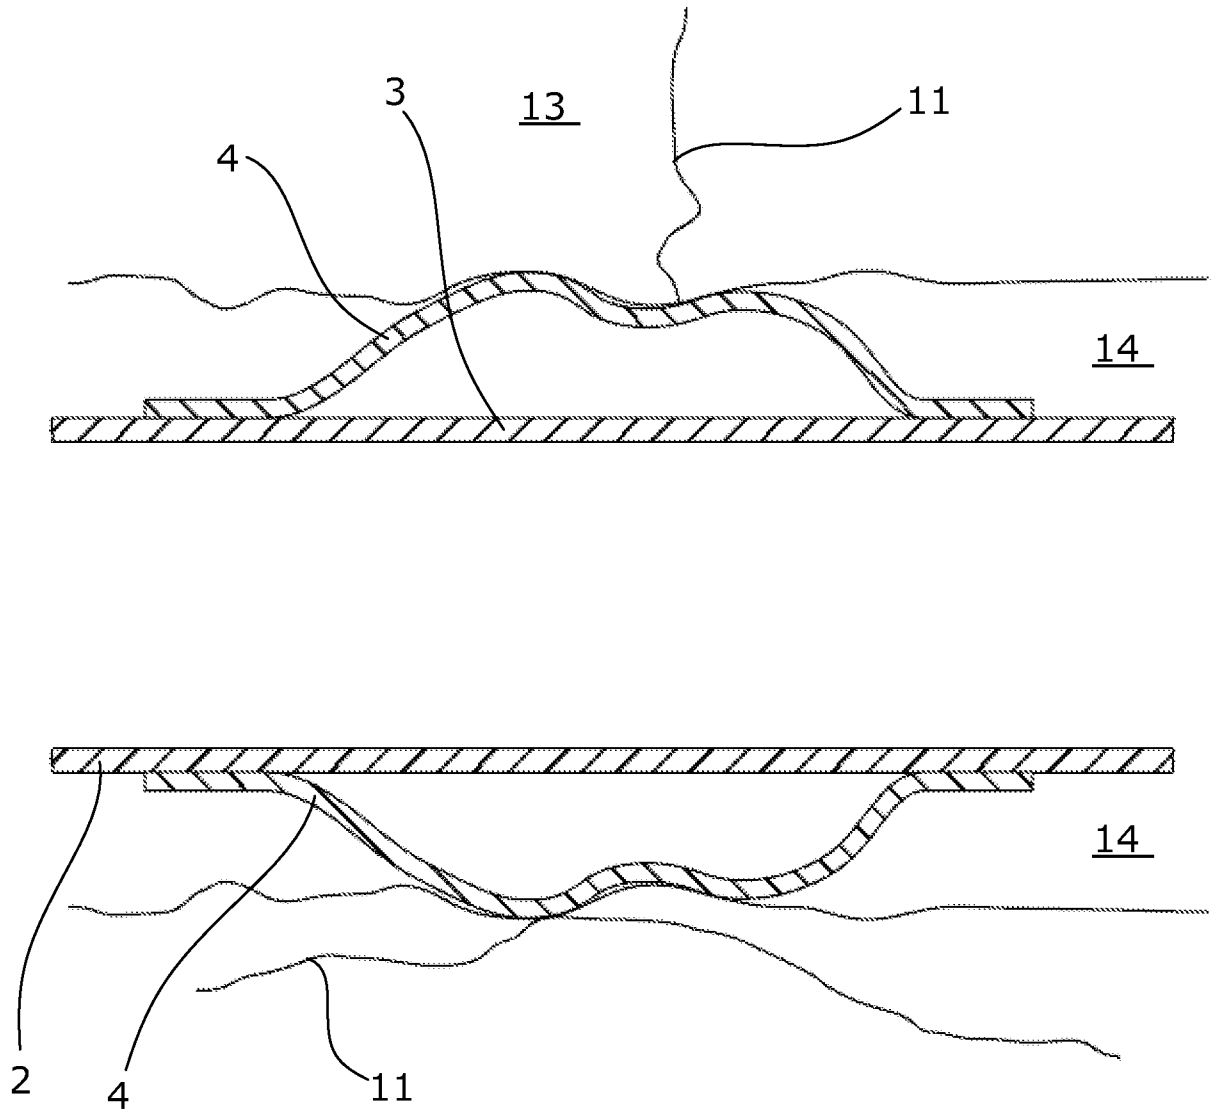


Fig. 3

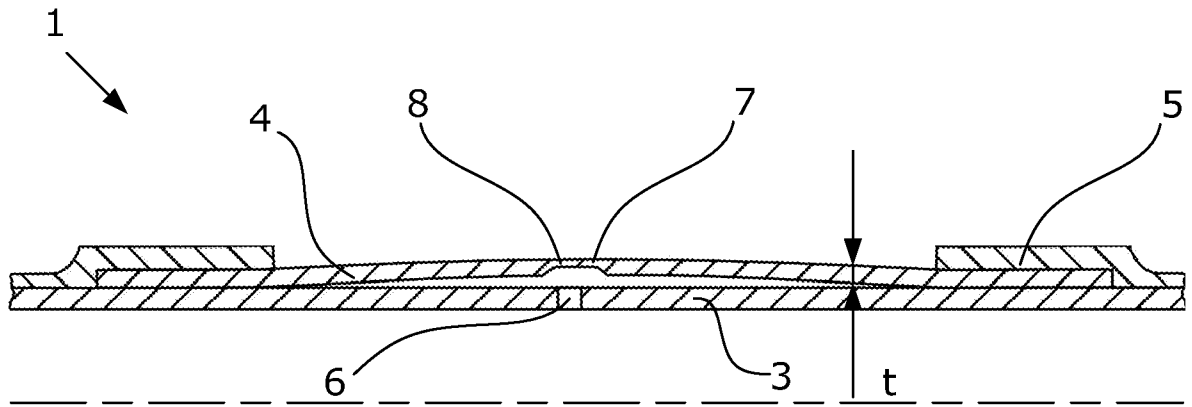


Fig. 4

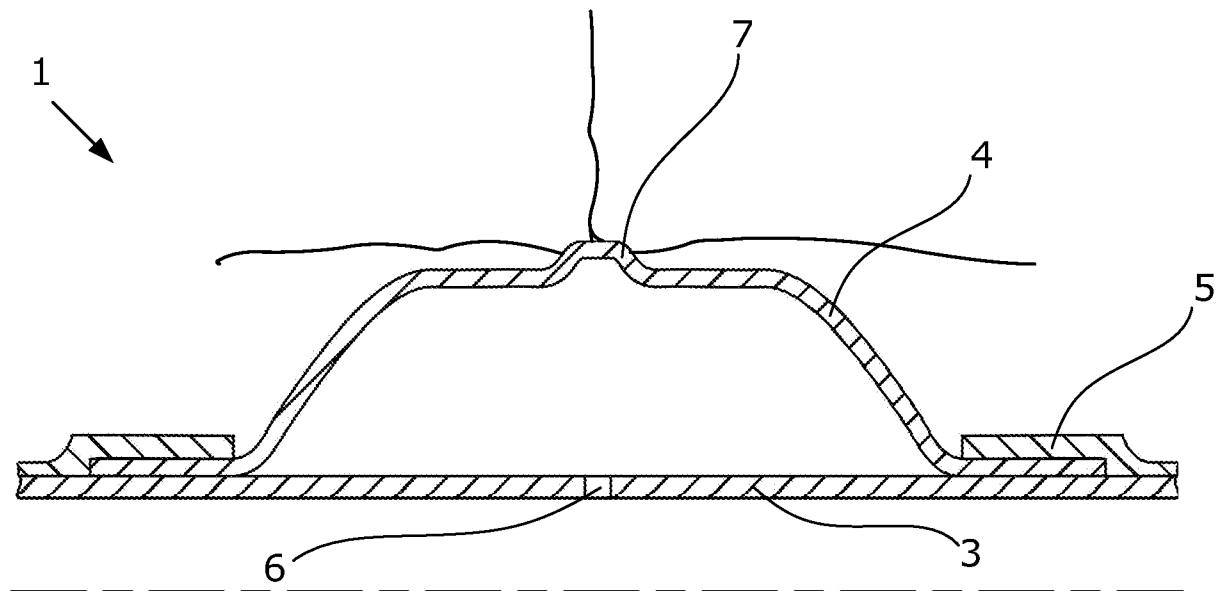


Fig. 5

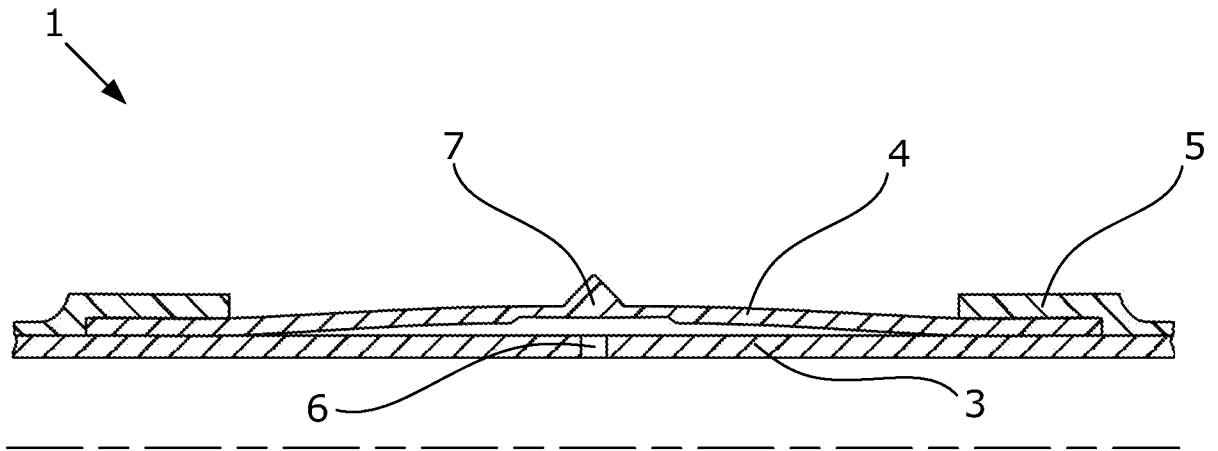


Fig. 6

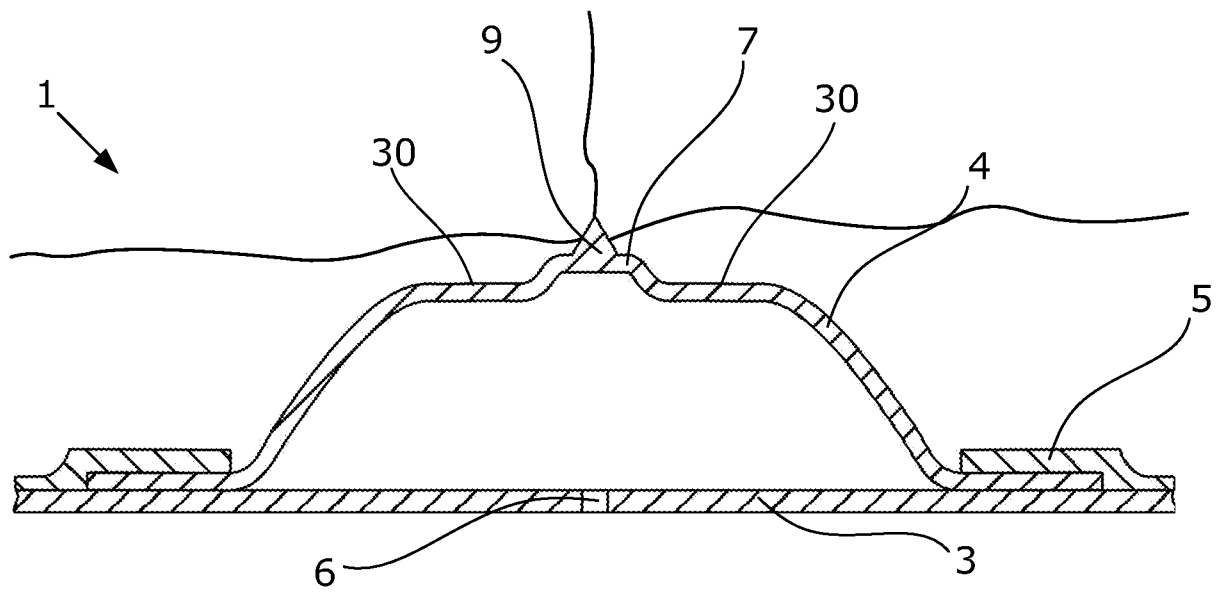


Fig. 7

6/10

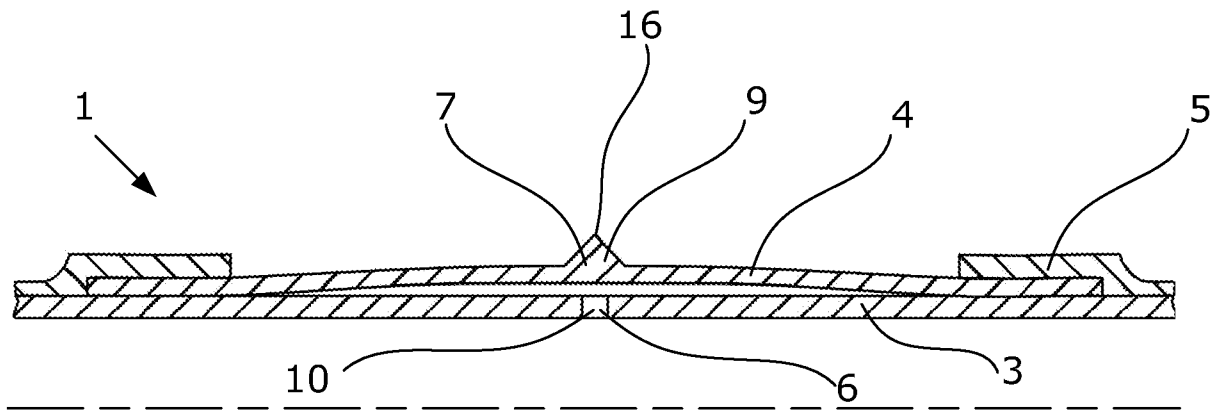


Fig. 8

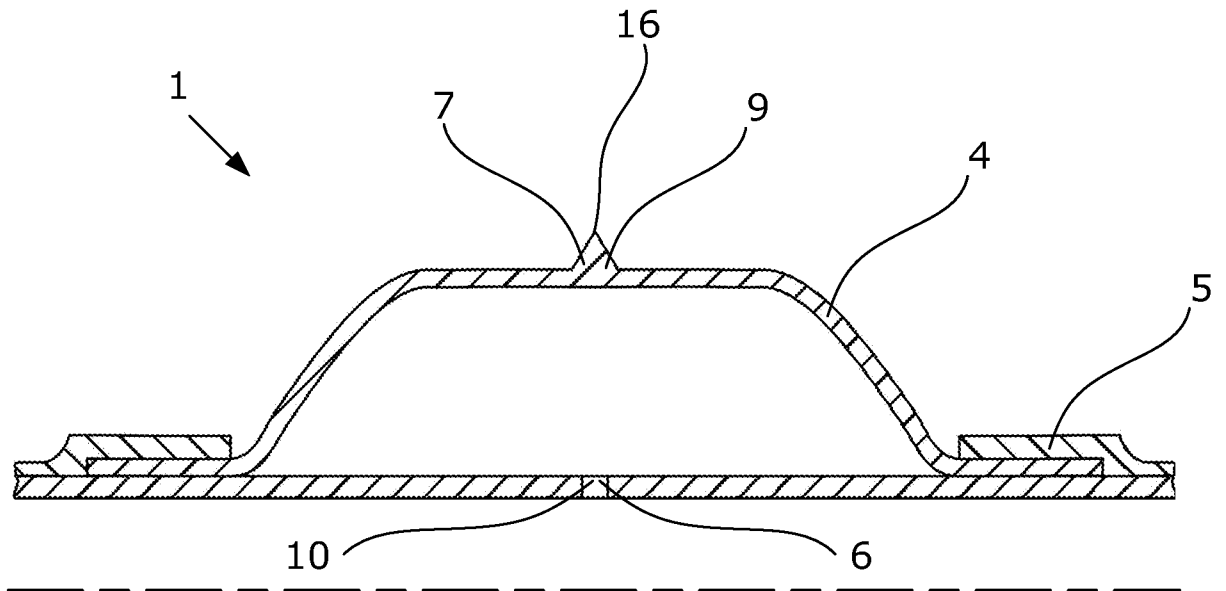


Fig. 9

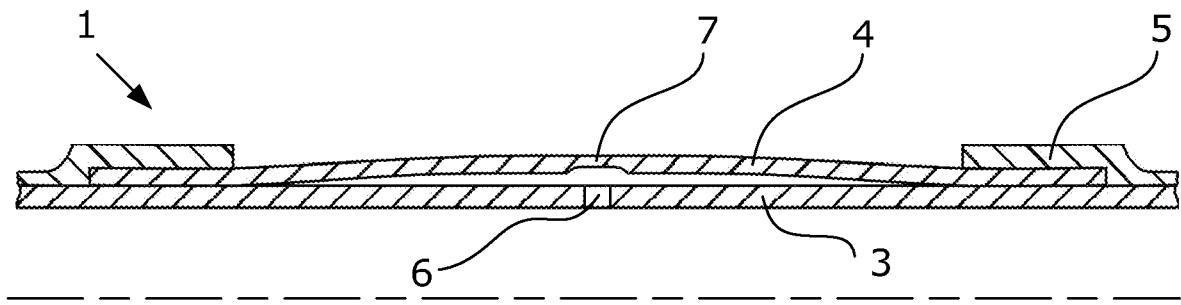


Fig. 10

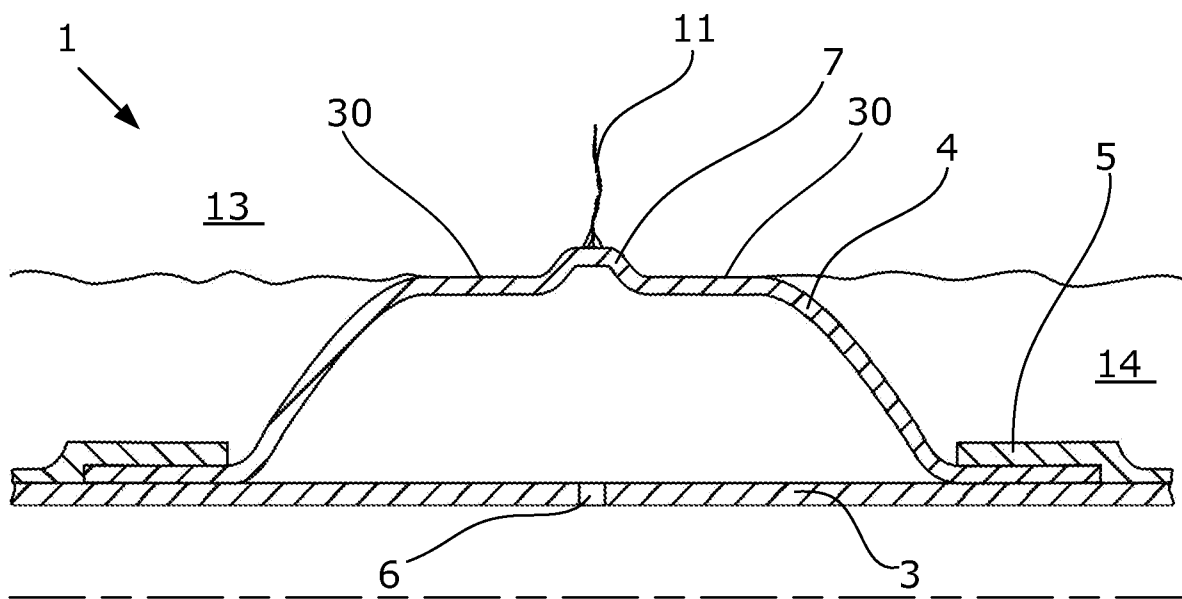


Fig. 11

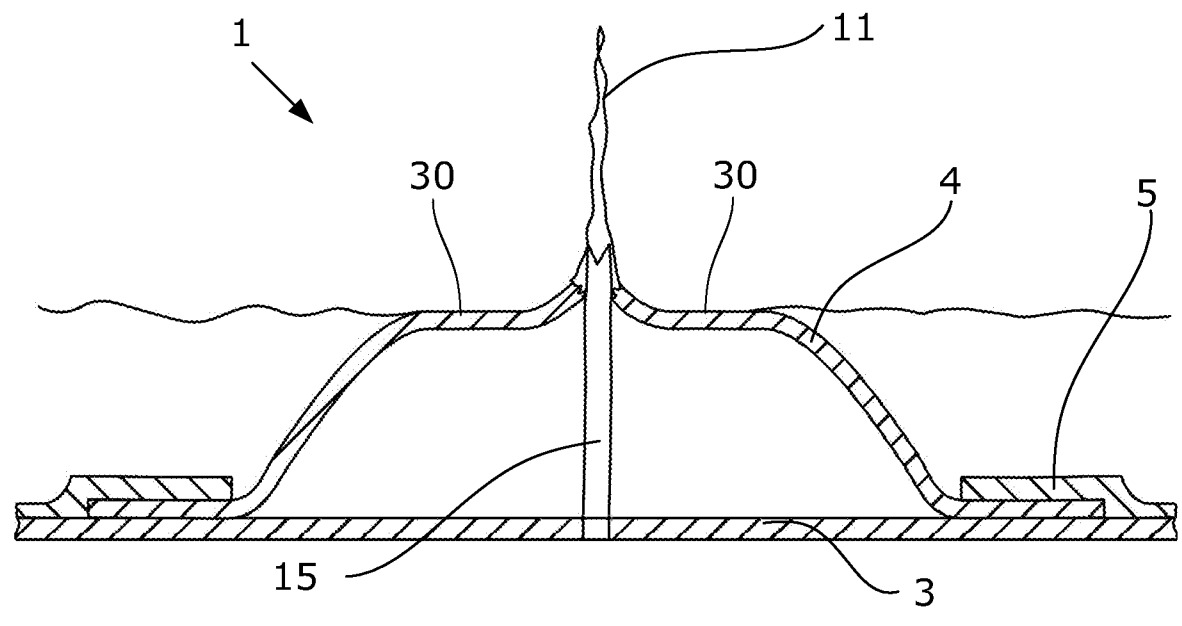


Fig. 12

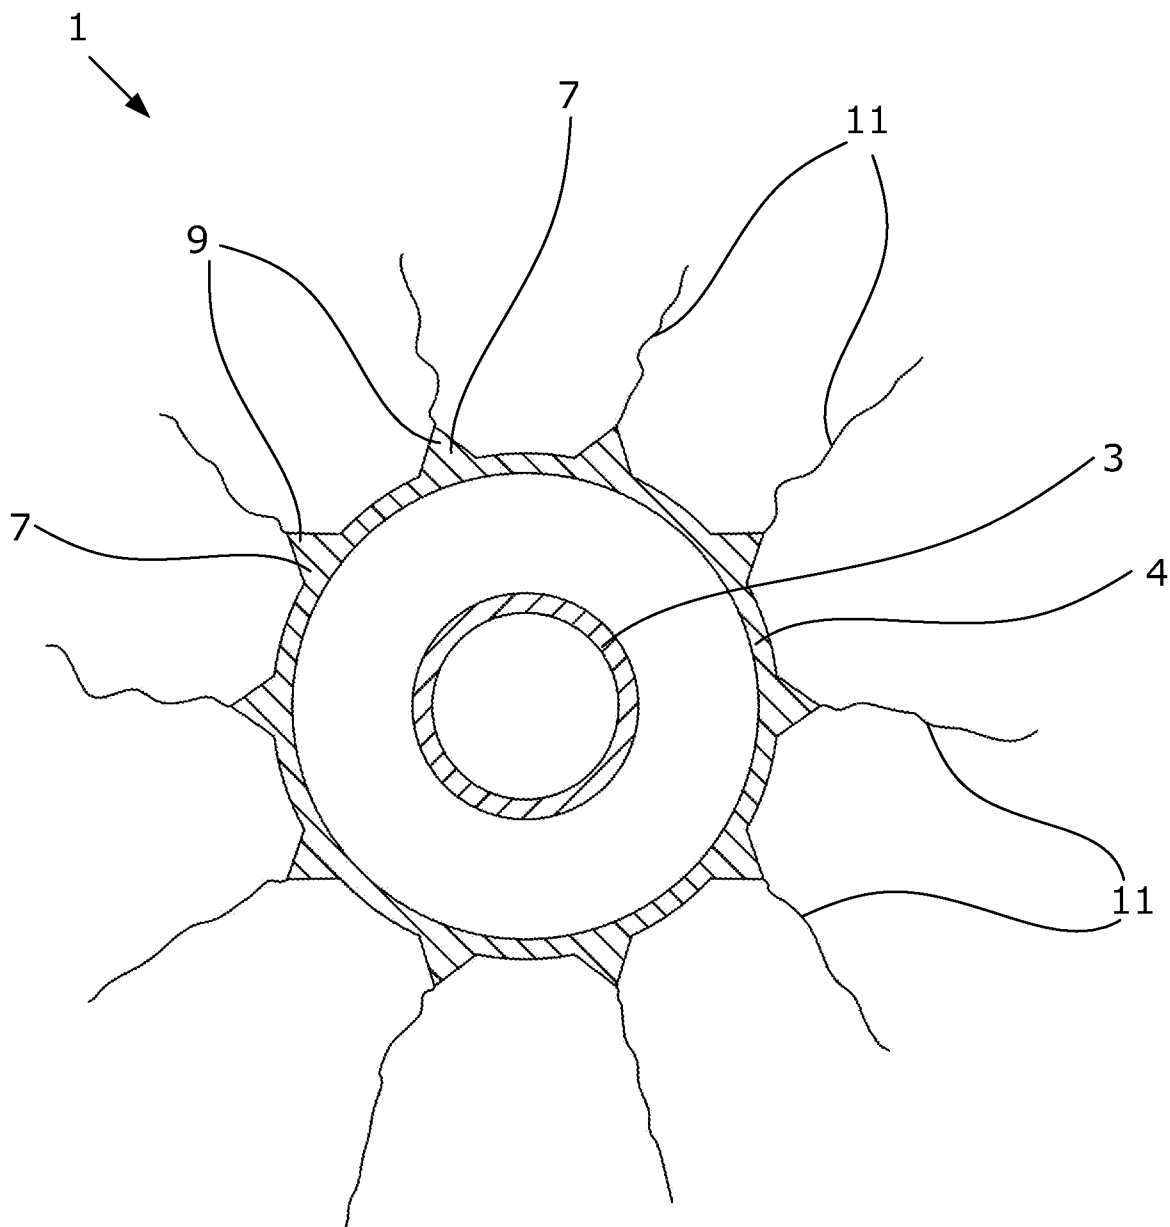


Fig. 13

9/10

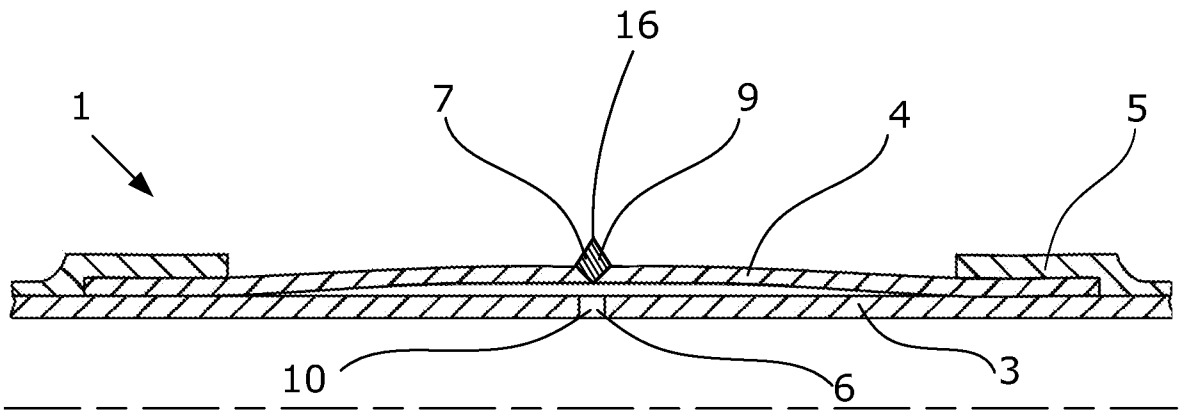


Fig. 14

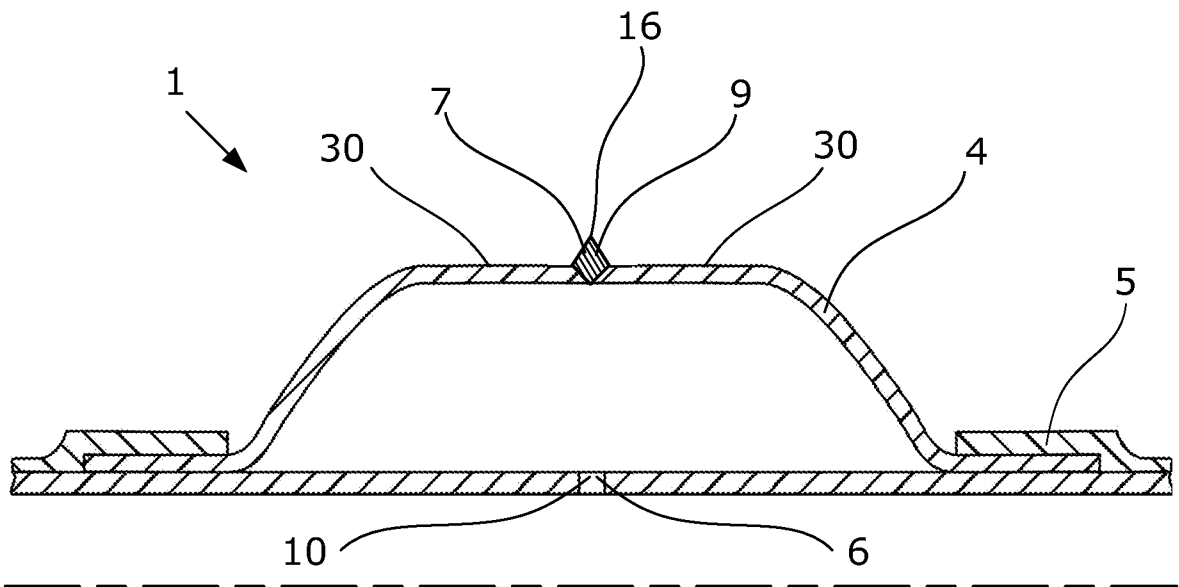


Fig. 15

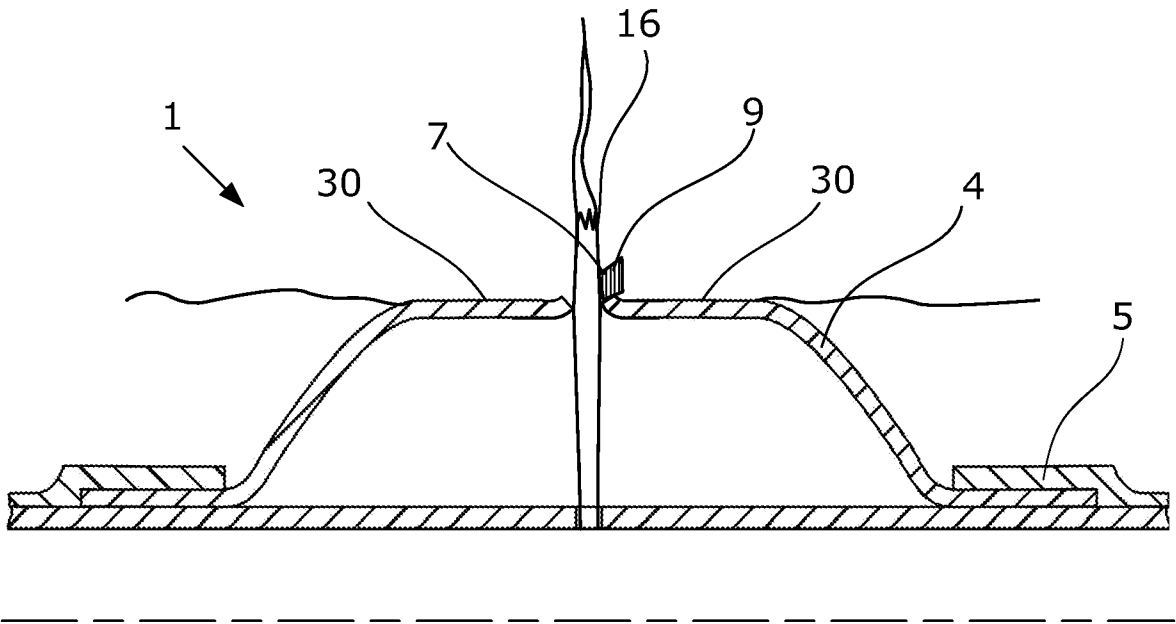


Fig. 16

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/061033

A. CLASSIFICATION OF SUBJECT MATTER
INV. E21B43/10 E21B43/26
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 798 557 A (SEWELL BEN W) 9 July 1957 (1957-07-09) col umn 2, lines 5-9, 55-58; figures 1, 2, 5 -----	1, 2, 11, 13, 14
A	US 2 923 358 A (HI LDEBRANDT ALEXANDER B) 2 February 1960 (1960-02-02) col umn 1, lines 65-70; figure 1 col umn 2, lines 3-5, 8-11, 41-46 col umn 3, lines 5-10 col umn 4, lines 33-35, 47-50 -----	1-15
A	US 2006/131020 AI (ZUPANICK JOSEPH A [US]) 22 June 2006 (2006-06-22) paragraph [0016]; figure 9 ----- -/- .	1-15

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 27 July 2011	Date of mailing of the international search report 08/08/2011
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Georgescu, Mi hnea
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/061033

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2008/035345 A1 (KOSAKEWICH DARRELL S [CA]) 14 February 2008 (2008-02-14) paragraph [0009] -----	1-15
A	W0 2009/001069 A2 (METCALFE PAUL DAVID [GB]) 31 December 2008 (2008-12-31) page 2, lines 7-8 page 3, lines 31-33 page 4, lines 20-22 page 5, lines 8-10 page 6, lines 1-5 page 8, lines 6-7, 26-29 -----	1-15
A	US 2008/142219 A1 (STEELE DAVID J [US] ET AL) 19 June 2008 (2008-06-19) paragraph [0003] -----	1-15
A	US 5 396 957 A (SURJAATMADJA JIM B [US] ET AL) 14 March 1995 (1995-03-14) column 10, lines 43-48; figure 1 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2011/061033
--

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2798557	A	09-07-1957	NONE

US 2923358	A	02-02-1960	NONE

us 2006131020	AI	22-06-2006	NONE

us 2008035345	AI	14-02-2008	US 2010263869 AI 21-10-2010

Wo 2009001069	A2	31-12-2008	EP 2176513 A2 21-04 -2010
			EP 2176514 A2 21-04 -2010
			EP 2292892 A2 09-03 -2011
			EP 2292893 A2 09-03 -2011
			EP 2287442 A2 23-02 -2011
			EP 2287443 A2 23-02 -2011
			Wo 2009001073 A2 31-12 -2008
			US 2010175895 AI 15-07 -2010
US 2010186969 AI 29-07 -2010			

US 2008142219	AI	19-06 -2008	CA 2596201 AI 14-06-2008
			EP 2092156 A2 26-08-2009
			wo 2008076768 A2 26-06-2008

US 5396957	A	14-03 -1995	NO 941032 A 31-03-1995
