

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2017390700 C1

(54) Title
Laser system comprising a protection device

(51) International Patent Classification(s)
F41H 13/00 (2006.01) **F41G 1/35** (2006.01)

(21) Application No: **2017390700** (22) Date of Filing: **2017.12.19**

(87) WIPO No: **WO18/127397**

(30) Priority Data

(31) Number **10 2017 100 068.2** (32) Date **2017.01.04** (33) Country **DE**

(43) Publication Date: **2018.07.12**

(44) Accepted Journal Date: **2020.04.23**

(44) Amended Journal Date: **2020.05.21**

(71) Applicant(s)
Rheinmetall Waffe Munition GmbH

(72) Inventor(s)
Jung, Markus;Riesbeck, Thomas;Baumgärtel, Thomas

(74) Agent / Attorney
Phillips Ormonde Fitzpatrick, PO Box 323, Collins Street West, VIC, 8007, AU

(56) Related Art
WO 2007039473 A1
FR 2753898 A1
FR 2993971 A1
US 8051761 B1
US 20160062148 A1

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
12. Juli 2018 (12.07.2018)

(10) Internationale Veröffentlichungsnummer
WO 2018/127397 A1

(51) Internationale Patentklassifikation:
F41H 13/00 (2006.01) **F41G 1/35** (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2017/083433

(22) Internationales Anmeldedatum:
19. Dezember 2017 (19.12.2017)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
10 2017 100 068.2
04. Januar 2017 (04.01.2017) DE

(72) Erfinder: **JUNG, Markus**; Am Hirtenhaus 5, 29358 Eicklingen (DE). **RIESBECK, Thomas**; Schlepegrellstr. 48, 29223 Celle (DE). **BAUMGÄRTEL, Thomas**; Vorwerker Platz 5, 29229 Celle (DE).

(74) Anwalt: **DIETRICH, Barbara**; Rheinmetall Platz 1, 40476 Düsseldorf (DE).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare nationale Schutzrechtsart): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(71) Anmelder: **RHEINMETALL WAFFE MUNITION GMBH** [DE/DE]; Heinrich-Ehrhardt-Str. 2, 29345 Unterlüß (DE).

(54) Title: LASER SYSTEM COMPRISING A PROTECTION DEVICE

(54) Bezeichnung: LASERSYSTEM MIT SCHUTZEINRICHTUNG

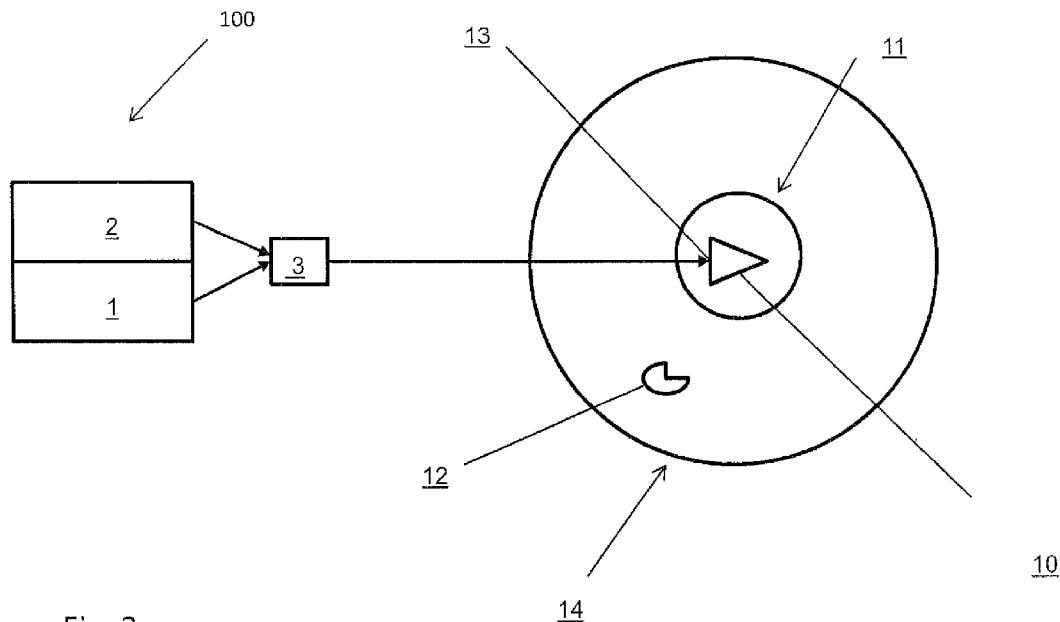


Fig. 3

(57) Abstract: The invention relates to a protection device (100) for a laser system comprising at least one active laser (1) having at least one beam guide (1.1, 3). Eye safety and/or protection for an exposed person (12) is achieved using at least one additional laser (2) as a warning laser which, operating in a visible spectral range, is used shortly before the active laser (1) is used, and which, can cause at least one person (12) to close his or her eyes and/or change his or her viewing direction away from the receptor point (13) of the active laser beam on a target (10).

(57) Zusammenfassung: Vorgeschlagen wird eine Schutzvorrichtung (100) für ein Lasersystem mit wenigstens einem Wirklaser (1) mit wenigstens einer Strahlführung (1.1, 3). Die Augensicherheit bzw. der Schutz für eine gefährdete Person (12) wird durch wenigstens



SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Bestimmungsstaaten** (*soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

- mit internationalem Recherchenbericht (Artikel 21 Absatz 3)

einen zusätzlichen Laser (2) als Warnlaser erreicht, der in einem sichtbaren Spektralbereich arbeitend kurz vor Einsatz des Wirklasers (1) eingesetzt wird und der ein Schließen des Auges bzw. ein Abwenden der Blickrichtung vom Aufpunkt (13) des Wirkaserstrahls auf ein Ziel (10) bei wenigstens einer Person (12) herbeiführen kann.

DESCRIPTION

Laser System with Protection Device

5 Technical Field

The invention concerns a protection device for a laser system for creating a laser system that protects the eyes.

10

Background

A reference herein to a patent document or any other matter identified as prior art, is not to be taken as an 15 admission that the document or other matter was known or that the information it contains was part of the common general knowledge as at the priority date of any of the claims.

20 Laser effectors can be implemented as very precise weapons that can concentrate the action of a very small fleck, a so-called receptor point, on the target object. Furthermore, directional and diffuse reflections of the laser radiation can occur about the receptor point, 25 depending on the laser power, the material and surface quality of the target object. Said laser radiation can also sometimes be damaging to the eyes.

30 The permissible laser power density according to international standards for the exposure to radiation (exposure limit value ELV) of the eye is 50 W/m² for an applied wavelength of 1.06 µm.

35 With some application scenarios discussed for laser weapons (attacking a pickup, speedboat, jet ski etc.) it cannot be excluded that the ELV value for the eye is

exceeded in the case of soldiers, combatants and civilians located in the immediate vicinity of the receptor point and/or appearing in the direction of the reflections or scattering of the laser beam (active laser beam) from the receptor point. Looking into the direct beam/laser beam or at the receptor point from a short distance can lead to exceeding the ELV and thereby to damage.

10 DE 693 06 078 T2 already concerns the topic of eye protection. This document describes an optical laser target device with alternating blocking of the laser and observation beam paths. A movable element blocks the laser beam when the target beam is not blocked by 15 the movable element. During this the laser beam and the target beam are alternately blocked with such a frequency that the persistence of the retinal image of the operator is maintained.

20 DE 601 08 174 T2 (EP 1 391 014 B1) proposes to allow a laser weapon to operate in the visually safe wavelength range.

25 DE 10 2012 221 164 A1 concerns a device and a method for detecting laser radiation. DE 14 97 569 A is cited therein, wherein it is displayed to the user of a periscope by means of a warning lamp that the periscope is directed towards a light source with eye-damaging radiation. The protection device can be used against 30 laser radiation in optical instruments. However, because only directly incident laser radiation can be detected, DE 10 2012 221 164 A1 proposes to monitor incident light from a larger spatial angle for the presence of coherent, monochromatic or polarized laser 35 radiation with a device and to output a warning signal.

Although said proposals appear practical, the use thereof for the present problem of eye protection while

guaranteeing reliability is not practical, in particular as a laser weapon (or a weapon laser). The aforementioned eye-safe implemented lasers do not meet the requirements placed on a weapon laser or have significant

5 disadvantages, compared for example to a Yb:YAG laser (weapon lasers), in terms of available laser power, achievable beam quality, illumination duration, stability, efficiency (electrical to optical), availability etc.

10

It is desirable to exclude eye damage resulting from looking into the direct high intensity beam of an active laser, or at least to prevent the same.

15

Summary of the Invention

20

In one form of the invention there is provided a laser system with an active laser with at least one beam guide and an effective range about an object/target when the active laser is in use, comprising a protection device with at least one additional laser that operates in a visible spectral range, wherein the additional laser is switched on if at least one person has been detected in the effective range of the active laser before the active

25 laser is used

25

In another form of the invention there is provided a method for the protection against laser radiation of a laser system with an active laser with at least one beam guide and an effective range about an object/target when the active laser is in use, comprising the following steps:

35

- determining the effective range about the object/target,
- monitoring at least the effective range for people,

- 3a -

- transmitting a visible light beam by an additional laser after detecting at least one person,
switching the active laser onto the object/target.

5

The laser system comprises at least one active laser with at least one beam guide in this case. The protection device is in particular provided for a laser weapon. The protection or eye safety of potentially endangered people 10 is provided in this case by at least one additional safety device. Said safety device is intended to bring about or cause at least closing of the eye and/or possibly turning the viewing direction away from the receptor point of the active laser beam on a target. The safety device can 15 comprise a further laser as a warning laser, which is used operating in a visible spectral range shortly before the use of the active laser.

The invention is based on the idea of protecting a person 20 against the eye-damaging light radiation of an active laser and warning said person. In addition to said warning, it is intended that eye safety is provided by either stimulating the eye closure reflex to close the eye and/or by changing the viewing direction of the person(s) from the receptor point and thereby from the 25 scattered radiation or direct exposure to the radiation. It is provided to furnish a protection device against laser beams that are directly or indirectly incident on a target/object (for example diffuse scattered 30 radiation).

The background of the idea is to shift the ELV value for the scattered radiation from a low limit value of the (open) eye to a high limit value of the skin (closed eye). For the closed eye the ELV value is 1000 W/m² (for 35 human skin) and is thus greater by a factor of 20.

As a protective device, in addition to the active laser a laser is operated that works in a visible spectral range. Said laser is used shortly before the active 5 laser is used. Said use is intended to result in closure of the eyes of the person(s) and/or turning the viewing direction away from the receptor point of the active laser beam.

10 Alternatively, by selecting the surface that is illuminated by said laser the view to the receptor point can be interrupted or the line of sight to the receptor point can be made unavailable. A laser operating in the green spectral range is preferable.

15

However, there is also the possibility of indicating the anticipated danger to the person or the people by transmitting a red laser beam. This can then be pulsed for example to signal to the people. Such pulsed red 20 laser radiation can for example be used if primarily only tuning away is intended to be caused.

Said laser is used in addition to the active laser and is used primarily for warning, which occurs with a time 25 offset from the active laser. In this case, the warning laser can be a dazzling laser (dazzler), such as for example a GLOW (Green Laser Optical Warner). The active laser can be a fiber laser (approx. 1-100 kW/cm²). Other alternative lasers are known to the person skilled in 30 the art.

The additional laser preferably illuminates at least the same surface on the target as the active laser. However, depending on the vignette (military: small 35 system, application scenario) the surface illuminated by the additional laser on the object/target can also be much larger than the surface illuminated by the active laser, in order to allow the person or the

people the line of sight to the receptor point. The at least one person in the effective range of the active laser notices said illumination. Intuitively, said illumination is perceived to be a danger. Because of 5 the visibility of the laser beam of the additional laser, the at least one person will follow the human reflex, the so-called eyelid reflex, and/or will turn the viewing direction away from the beam direction of the additional laser (dazzling laser) or from 10 reflections from the illuminated object/target.

Only after a predetermined time, as a rule after approx. 250 ms (eyelid reflex or time to turn away), is 15 the actual active laser then switched onto the object/target.

Due to said forewarning by the additional laser or the time delay of the use of the active laser after the additional laser becomes effective, it is possible to 20 avoid, or at least to minimize, damage to the people by the radiation of the active laser or the scattered radiation thereof from the receptor point. Damage can be considerably reduced as a result. In particular, in the case of successful eye closure, avoidance of 25 (permanent) damage is achieved, because now the considerably higher ELV value for the skin (closed eyes) is responsible.

Owing to this solution, active lasers can be used in 30 vignettes and the risk to people (such as soldiers, combatants, civilians etc.) can be considerably reduced.

The additional laser (dazzling laser) can be used both 35 axially parallel in the optical axis of and offset from the active laser. The additional laser can additionally also be used as an illuminating laser for the active laser.

With the additional laser, graduation of the escalation is achieved, because the people are given prior visual warning.

- 5 It will be understood that the protection device according to the invention can also be used as an active laser in material processing etc., i.e. also in civil fields.
- 10 Where any or all of the terms "comprise", "comprises", "comprised" or "comprising" are used in this specification (including the claims) they are to be interpreted as specifying the presence of the stated features, integers, steps or components, but not
- 15 precluding the presence of one or more other features, integers, steps or components.

Detailed Description

- 20 The invention will be described in detail using an exemplary embodiment with drawings.

Figs. 1 through 3 show in sketch form a target 10 that is to be attacked by at least one laser system, here by an active laser 1. A beam guide 1.1 is associated with the active laser 1. The active laser 1 is a laser weapon for attacking the target 10 in this exemplary embodiment.

14 denotes an effective range that exists around the target 10 when using the active laser 1. As can be seen from the figure, at least one endangered object 12, here at least one person 12, is in the effective range 14 of the active laser 1 or in the effective range 14 of the laser radiation thereof.

In order to avoid that eye injuries etc. could be caused to the person 12 by the laser radiation of the active laser 1, a protection device 100 is provided. Said protection device 100 has the task of signaling a 5 hazardous situation to the person 12. In the preferred implementation, this signal is intended to have the result that the person 12 closes their eyes automatically (human reaction to brightness for example).

An additional laser 2 with a beam guide 2.1 is provided as a protection device 100 in the preferred implementation. said laser 2 is primarily operated as a warning laser.

5

According to fig. 1, said additional laser 2 can operate offset from the active laser 1. The active laser 1 and the additional laser 2 are spaced apart from each other and from the target 10.

10

According to fig. 2, the active laser 1 and the additional laser 2 are oriented axially parallel to each other. The two are preferably disposed in the immediate vicinity of each other.

15

In the exemplary embodiment according to fig. 3, the active laser 1 and the warning laser 2 use the same beam guide 3. The actual beam guide 1.1 or 2.1 can be omitted, because the additional laser 2 and the active laser 1 are not operated at the same time but successively. A changeover to the beam guide 3 can be provided.

25

The active laser 1 can be a fiber laser (for example a Yb:YAG laser). The additional laser 2 can be a dazzling laser. Said dazzling laser can operate in the green spectral range. Whereas the active laser 1 preferably operates in the range from 1-100 kW/cm², the power of a dazzling laser is preferably 1-100 mW/cm².

30

The manner of operation is as follows:

35

The effective range 14 of the active laser 1, which can be different depending on the design of the active laser 1 if this is unknown, is intended to be determined in advance.

At least said effective range 14 of the active laser 1 is then monitored for people 12. The monitoring can be carried out visually or by means of sensors (not shown in detail). If at least one person 12 is detected 5 within said effective range 14 of the active laser 1, visually or by means of the sensors, switching on the additional laser 2 is carried out before possible operation of the active laser 1. This switching on can be carried out manually. Automatic switch-on is 10 possible, for example because of the sensor data processed in a control unit (not shown in detail).

By transmitting a visible light beam by the additional laser 2, the at least one person 12 is notified that he 15 is in an endangered area. The visible light beam is transmitted as a warning signal in this case. The warning signal can be a green, red or another color of light beam.

20 With said information, the person 12 is warned about a hazard. As a result, it can be achieved that the at least one person 12 is prompted at least to close their eyes and/or to turn the viewing direction of the person(s) away from the receptor point 13 and thereby 25 from the scattered radiation or direct exposure to the radiation of the subsequently switched on active laser 1.

Only after a predetermined time, i.e. after the 30 switching on of the additional laser 2, as a rule after approx. 250 ms, is the actual active laser 1 then switched on to the object/target 10. This switch-on can preferably be initiated by the control unit.

35 The additional laser 2 can additionally or alternatively be used as an illuminating laser for the active laser 2.

The claims defining the invention are as follows:

1. A laser system with an active laser with at least one beam guide and an effective range about an object/target when the active laser is in use, comprising
5 a protection device with at least one additional laser that operates in a visible spectral range, wherein the additional laser is switched on if at least one person has been detected in the effective range of the active laser before the active laser is used.
- 10 2. The laser system as claimed in claim 1, wherein the active laser and the additional laser are mounted separately from each other.
- 15 3. The laser system as claimed in claim 1, wherein the active laser and the additional laser are oriented axially parallel to each other.
- 20 4. The laser system as claimed in any one of claims 1 through 3, wherein the active laser and the additional laser access a common beam guide.
- 25 5. The laser system as claimed in any one of claims 1 through 4, wherein the active laser is a fiber laser.
- 30 6. The laser system as claimed in any one of claims 1 through 5, wherein the additional laser is a dazzling laser.
- 35 7. The laser system as claimed in claim 6, wherein the dazzling laser operates in the green spectral range.
8. The laser system as claimed in any one of claims 1 through 7, wherein the safety device can also function as an illuminating laser.
9. A method for the protection against laser radiation of a laser system with an active laser with at least one

beam guide and an effective range about an object/target when the active laser is in us, comprising the following steps:

- 5 • determining the effective range about the object/target,
- monitoring at least the effective range for people,
- transmitting a visible light beam by an
- 10 additional laser after detecting at least one person,
- switching the active laser onto the object/target.

15 10. The method as claimed in claim 9, wherein switching on the active laser is carried out with a time offset relative to switching on the additional laser.

11. The method as claimed in claim 9 or 10, wherein the

20 additional laser illuminates at least the same surface on the object/target as the active laser, wherein the surface on the object/target illuminated by the additional laser can also be larger than the surface illuminated by the active laser.

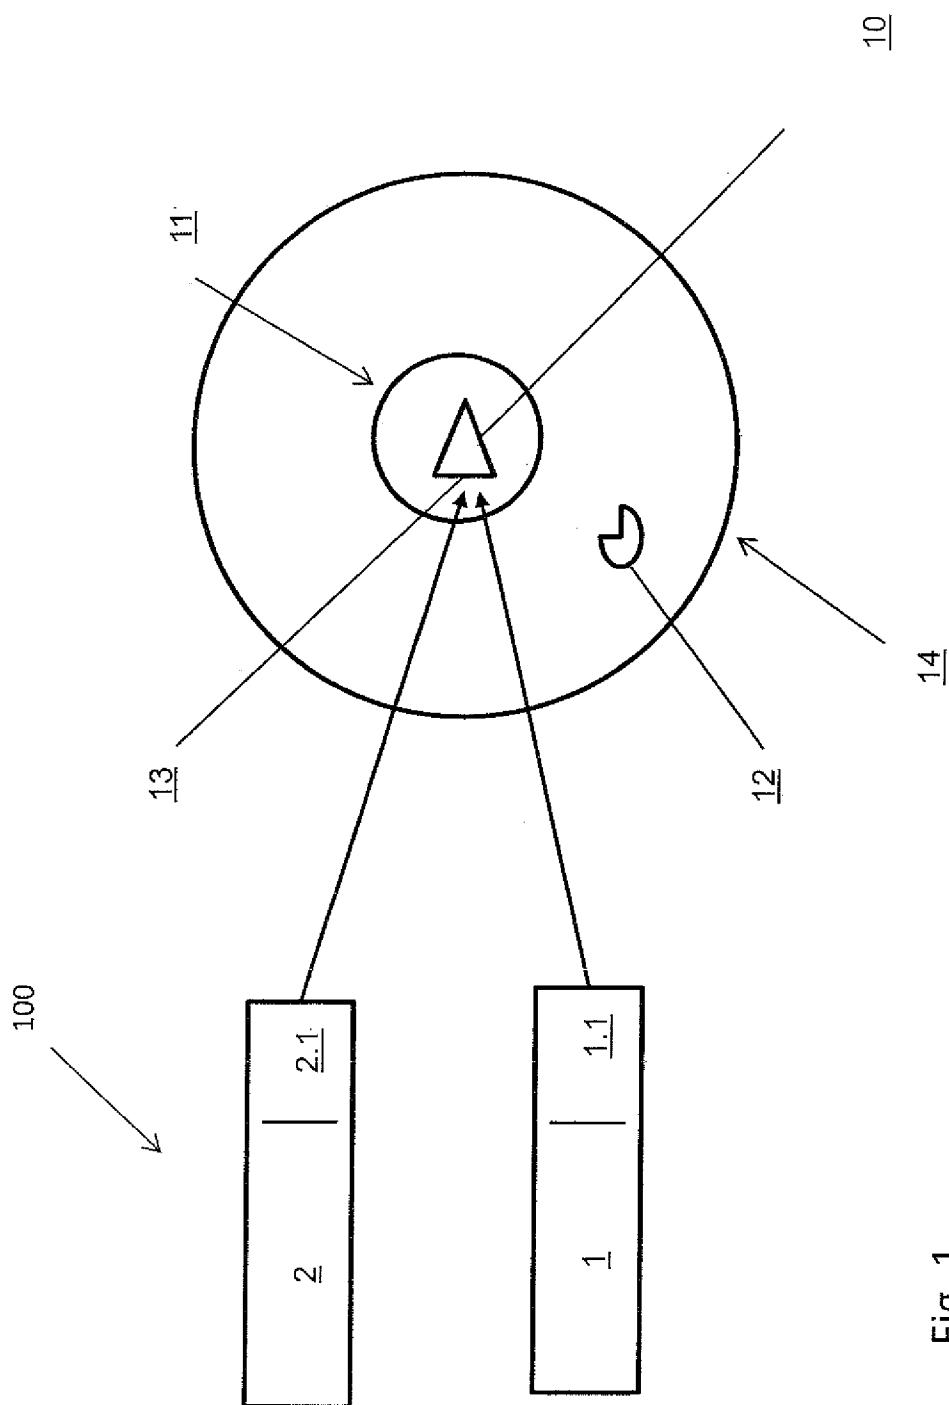


Fig. 1

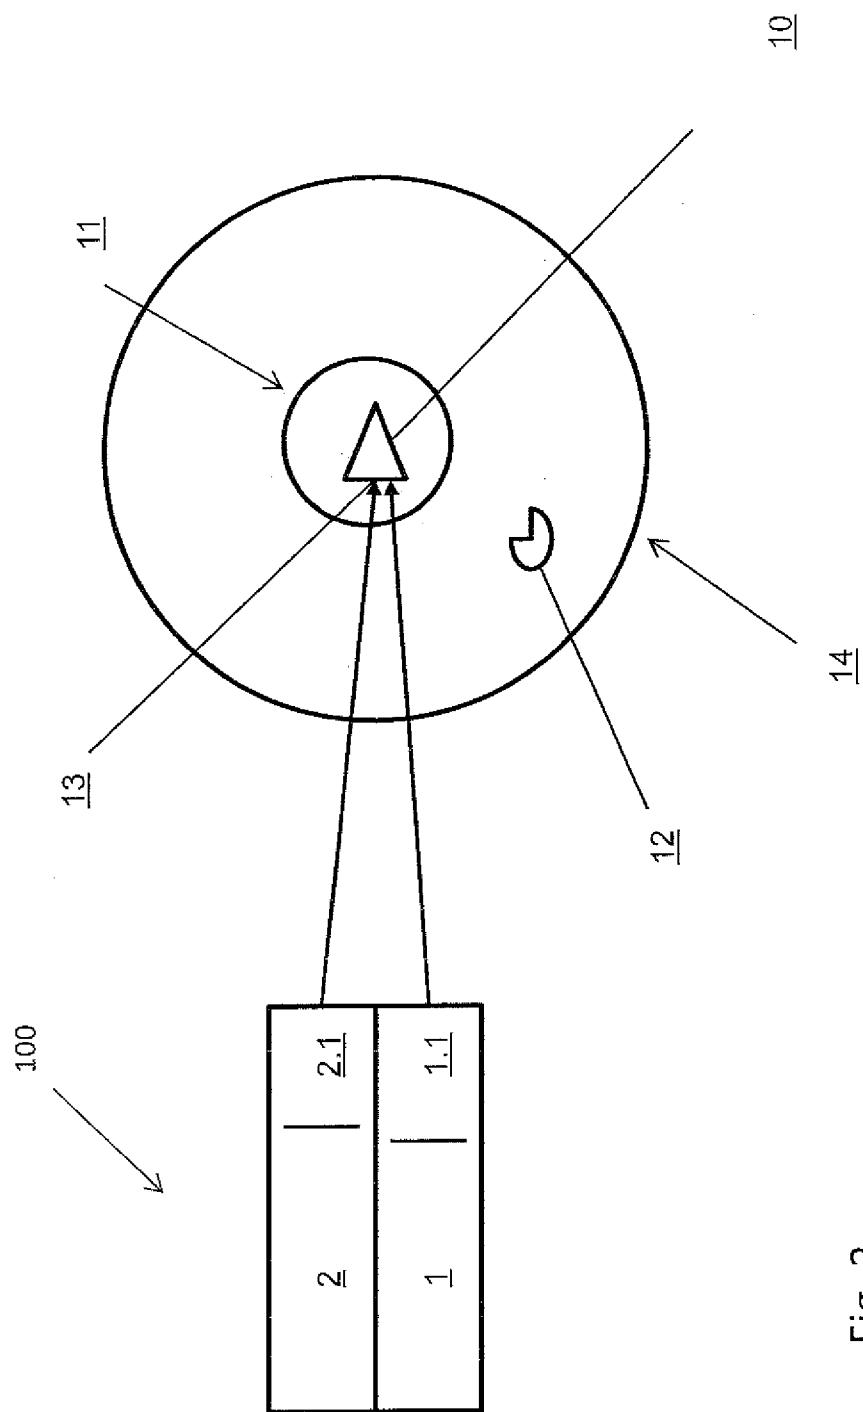


Fig. 2

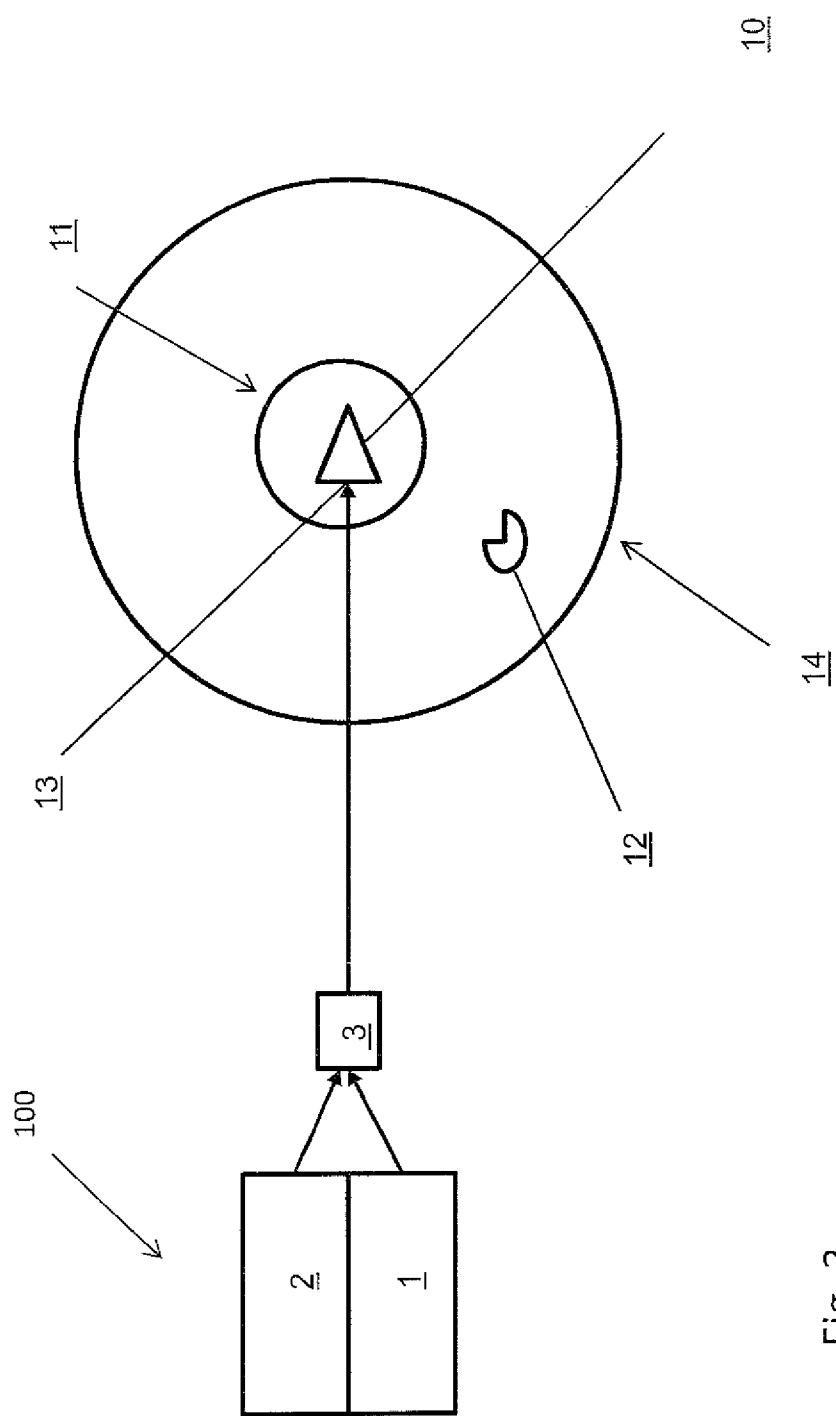


Fig. 3