



US00D865657S

(12) **United States Design Patent** (10) **Patent No.:** **US D865,657 S**
Miyazaki et al. (45) **Date of Patent:** **** Nov. 5, 2019**

(54) **TIRE**
(71) Applicant: **TOYO TIRE & RUBBER CO., LTD.,**
Itami-shi, Hyogo (JP)
(72) Inventors: **Tetsuji Miyazaki**, Itami (JP); **Yoshiki**
Sato, Itami (JP)

D656,090 S * 3/2012 Sato D12/605
D667,369 S * 9/2012 Fontaine D12/605
D681,546 S * 5/2013 Sato D12/605
D701,826 S * 4/2014 Morito D12/605
D730,819 S * 6/2015 Scheifele D12/605
(Continued)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Toyo Tire & Rubber Co., Ltd.,**
Itami-shi (JP)

JP 1391636 S 7/2010
JP 1442260 S 6/2012
JP 1444646 S 6/2012

(**) Term: **15 Years**

Primary Examiner — Michelle E. Wilson

(21) Appl. No.: **29/664,074**

Assistant Examiner — Clese Moore, Jr.

(22) Filed: **Sep. 21, 2018**

(74) *Attorney, Agent, or Firm* — Sterne, Kessler,
Goldstein & Fox P.L.L.C.

(30) **Foreign Application Priority Data**

Mar. 26, 2018 (JP) 2018-006306

(51) **LOC (12) Cl.** **12-15**

(52) **U.S. Cl.**
USPC **D12/605**

(58) **Field of Classification Search**
USPC D12/604, 605
CPC B60C 13/00; B60C 1/00
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D540,740 S * 4/2007 Maxwell D12/605
D569,792 S * 5/2008 Holden D12/605
D574,320 S * 8/2008 Dixon D12/605
D588,529 S * 3/2009 Reese D12/605
D602,427 S * 10/2009 Takahashi D12/605
D605,583 S * 12/2009 Scheifele D12/605
D610,980 S * 3/2010 Shondel D12/605
D610,981 S * 3/2010 Shondel D12/605
D628,959 S * 12/2010 Harvey D12/605
D638,783 S * 5/2011 Endou D12/605
D650,323 S * 12/2011 Morito D12/605
D656,089 S * 3/2012 Miyazaki D12/605

(57) **CLAIM**

The ornamental design for a tire, as shown and described.

DESCRIPTION

FIG. 1 is a front perspective view of a tire showing the claimed design;

FIG. 2 is a front view thereof;

FIG. 3 is a rear view thereof;

FIG. 4 is a left side view thereof, the right side view being a mirror image thereof;

FIG. 5 is a top plan view thereof, the bottom plan view being a mirror image thereof;

FIG. 6 is an enlarged view of the portion between 6-6 and 6'-6' in FIG. 2;


FIG. 7 is an enlarged cross-sectional view taken along line 7-7 in FIG. 6;

FIG. 8 is another enlarged view of the portion between 6-6 and 6'-6' in FIG. 2; and,

FIG. 9 is an enlarged cross-sectional view taken along line 9-9 in FIG. 8.

In the drawings, the broken lines show portions of the tire that form no part of the claimed design.

1 Claim, 9 Drawing Sheets

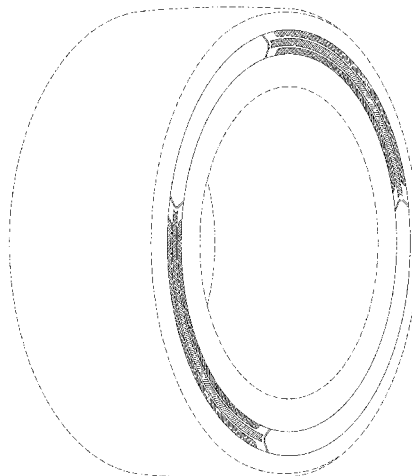

(56)

References Cited

U.S. PATENT DOCUMENTS

D739,344	S	*	9/2015	Kuwano		D12/605
D754,063	S	*	4/2016	Iwabuchi		D12/605
D768,067	S	*	10/2016	Kuwano		D12/605
D769,806	S	*	10/2016	Yasunaga		D12/605
D777,656	S	*	1/2017	Maxwell		D12/605
D791,694	S	*	7/2017	Sato		D12/605
D800,646	S	*	10/2017	Sato		D12/605
D806,642	S	*	1/2018	Kuwano		D12/605
D813,150	S	*	3/2018	Schoeppner		D12/605

* cited by examiner

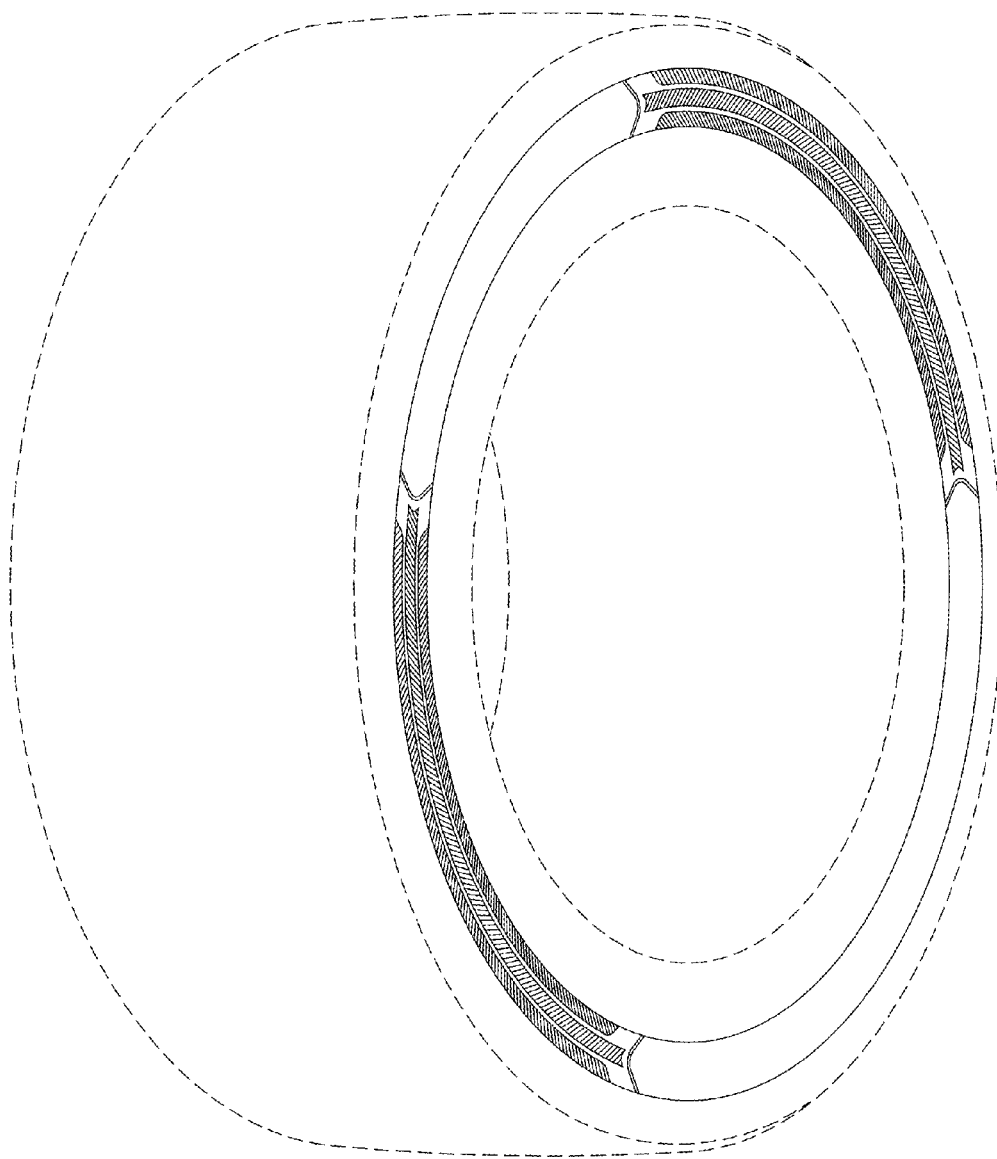


FIG. 1

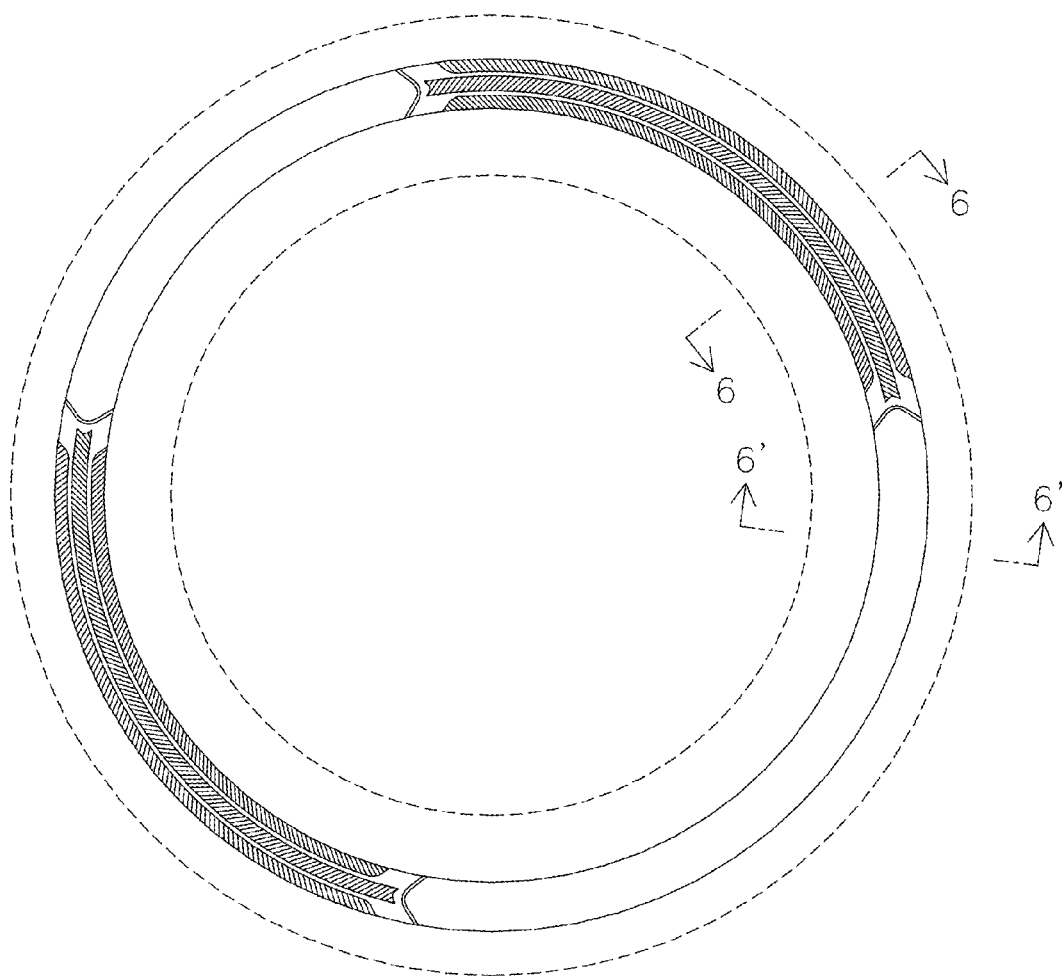


FIG. 2

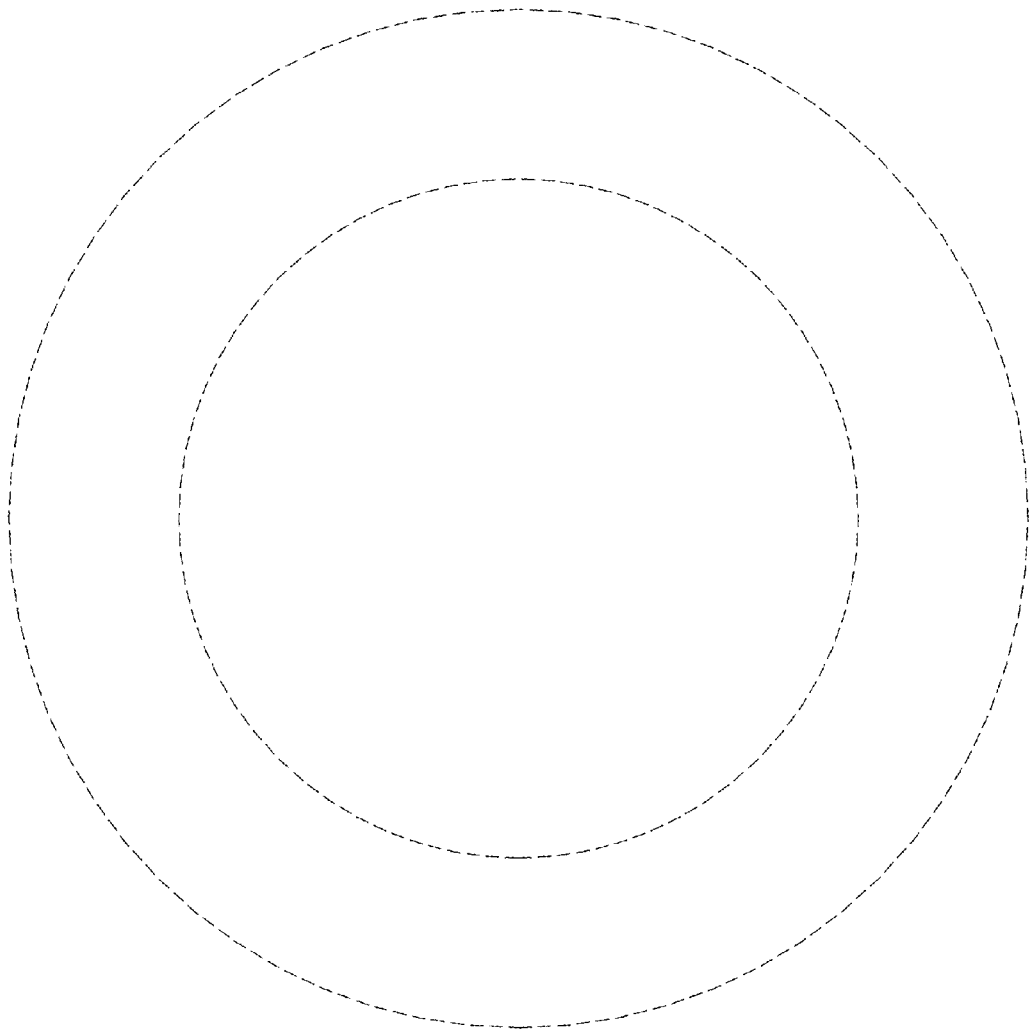


FIG. 3

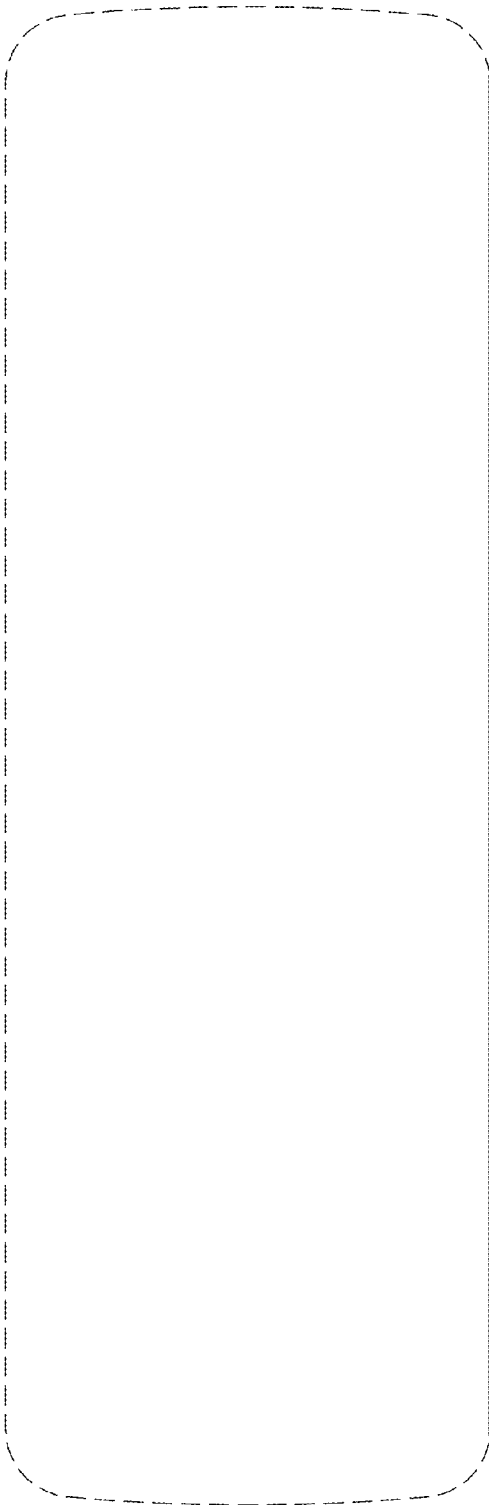


FIG. 4

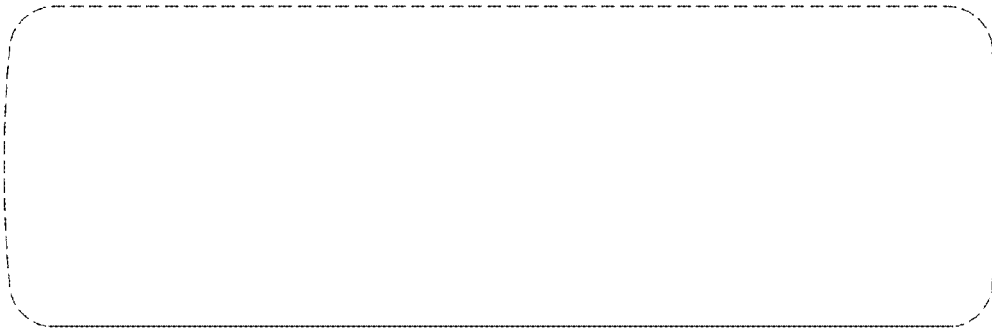


FIG. 5

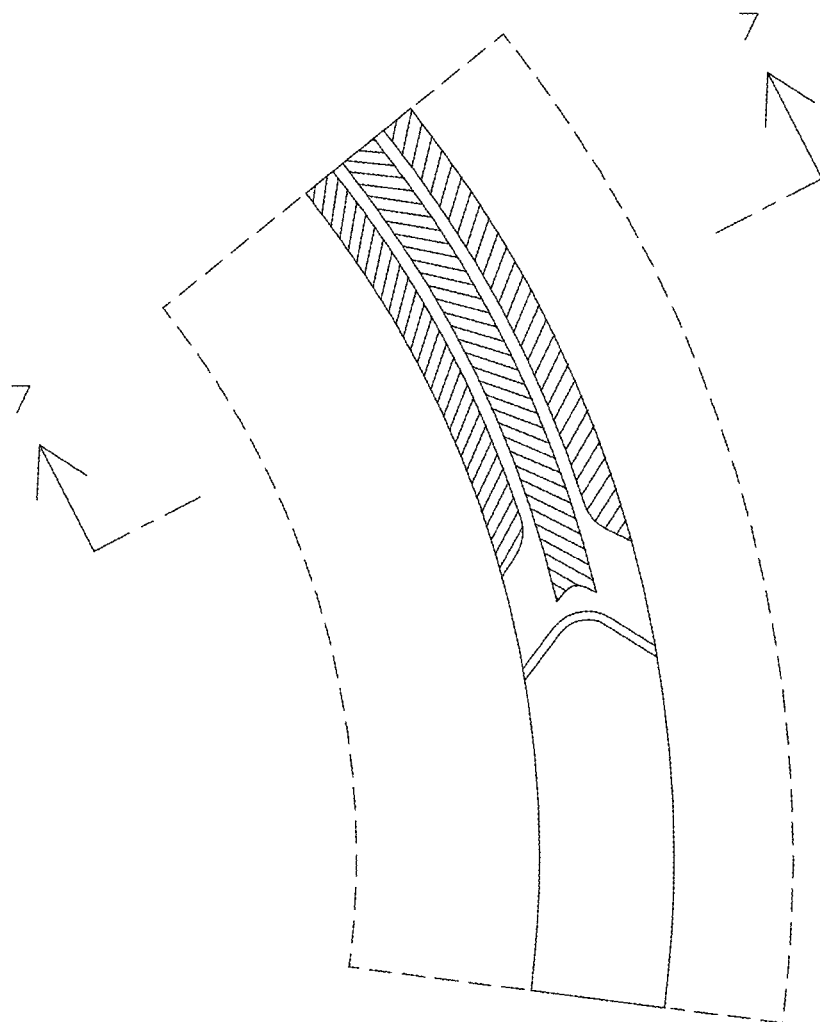


FIG. 6




FIG. 7

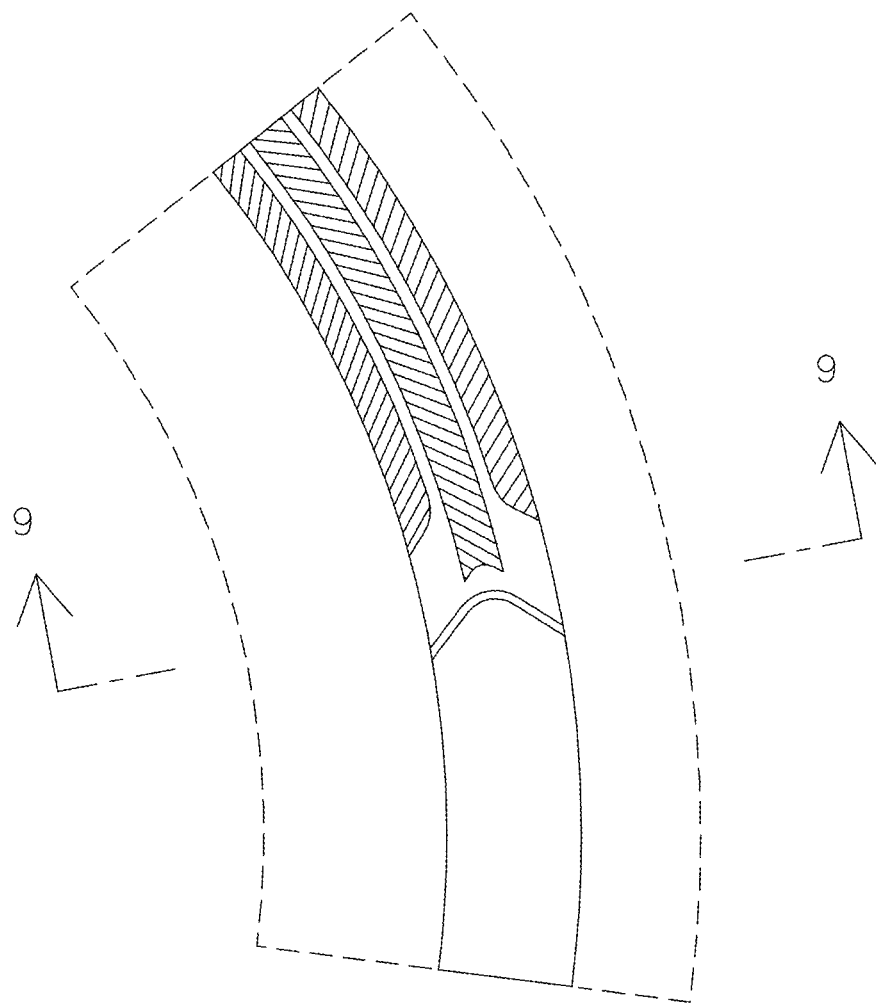


FIG. 8




FIG. 9