



(22) Date de dépôt/Filing Date: 2000/10/06
 (41) Mise à la disp. pub./Open to Public Insp.: 2001/04/08
 (45) Date de délivrance/Issue Date: 2008/08/05
 (62) Demande originale/Original Application: 2 322 909
 (30) Priorité/Priority: 1999/10/08 (KRP1999-43508)

(51) Cl.Int./Int.Cl. *H04N 7/16* (2006.01),
H04L 12/18 (2006.01), *H04N 5/445* (2006.01),
H04N 7/173 (2006.01)
 (72) Inventeur/Inventor:
 KIM, JIN PIL, KR
 (73) Propriétaire/Owner:
 LG ELECTRONICS INC., KR
 (74) Agent: SMART & BIGGAR

(54) Titre : RECEPTION D'UN SIGNAL DE RADIODIFFUSION NUMERIQUE COMPRENANT UNE TABLE DE CANAUX VIRTUELS
 (54) Title: RECEIVING DIGITAL BROADCAST SIGNAL INCLUDING VIRTUAL CHANNEL TABLE

Syntax	Bits	Format
terrestrial_virtual_channel_table_section () {		
table_id	8	0xC8
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bsbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++) {		
short_name	7*16	unicode™BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bsbf
hidden	1	bsbf
reserved	2	'11'
hide_guide	1	bsbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0; i<N;i++) {		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++) {		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		

(57) Abrégé/Abstract:

A virtual channel table in a digital broadcasting signal includes a program number field indicating whether a corresponding virtual channel is an active or an inactive channel. Parsing at a receiver and reading the value of the program number field determines whether the current received channel is active or inactive.

74420-21D

ABSTRACT

A virtual channel table in a digital broadcasting signal includes a program number field indicating whether a corresponding virtual channel is an active or an inactive channel. Parsing at a receiver and reading the value of the program number field determines whether the current received channel is active or inactive.

74420-21D

**RECEIVING DIGITAL BROADCAST SIGNAL INCLUDING VIRTUAL CHANNEL
TABLE**

This application is a divisional of Canadian
Patent application serial no. 2,322,909 filed October 6,
5 2000.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a virtual channel
table for a broadcast protocol and a method of broadcasting
10 using the same.

Discussion of the Related Art

Generally a program and system information
protocol (hereinafter, referred to PSIP) of an advanced
television systems committee (hereinafter, referred to as
15 ATSC) standard for digital television broadcasting contains
a virtual channel table (VCT).

The PSIP typically contains an electronic program
guide (EPG) and system information (SI). The PSIP is
defined as the protocol of the ATSC standard for terrestrial
20 and cable digital television broadcasting, which parses
encoded messages by using a moving picture experts group-2
(MPEG-2; ISO/IEC 13818-1) system to thereby provide various
kinds of information on the broadcast programs. This ATSC
standard is described in "*Program and System Information*
25 *Protocol For Terrestrial Broadcast and Cable*", ATSC Document
A/65, 23 DEC 1997.

In other words, the PSIP transmits and receives
audio/video data with MPEG-2 video and AC-3 audio formats,
and contains several tables for transmitting information on
30 the

74420-21D

channel of each broadcasting station, and information on the programs on each channel. The PSIP has a primary function of conducting the audio and video services of the broadcast corresponding to a desired channel, and an additional function of conducting the electronic program service for the broadcast programs.

5 The channel information for the channel selection and the packet identification (PID) information for reception of the audio and video data are contained in a virtual channel table (VCT), and the electronic program service information on the broadcast programs on each channel is contained in an event information table (EIT). Also, the PSIP contains a system time table (STT) for time information, a rating region table (RRT) for transmitting
10 information on the region and organization for program rating, an extended text table (ETT) for providing an additional explanation on the channel and broadcast program, and a master guide table (MGT) for management of the version of each table mentioned above and the packet identification (PID). These tables are transmitted in data units, which are called sections. Namely, all of the tables have one or more sections as a basic unit.

15 By way of example, the virtual channel table may be divided into 256 sections. A single section may contain information on several virtual channels, but information for a single virtual channel may not be spread over on two or more sections.

Fig. 1 is a diagram illustrating the bit stream syntax of a general virtual channel table for terrestrial broadcast, which has been described in the above-mentioned document A/65.

20 The general virtual channel table contains a transport stream identifier, a major channel number, a minor channel number, a short channel name, a carrier frequency, a program number and the like, and contains additional information in the descriptor(s) thereof.

74420-21D

Referring to Fig. 1, the virtual channel table has the table identifier field of "0xC8", and the value of the packet identification (PID) for the virtual channel table is "0x1FFB". The version number field "version_number" represents the version value of the virtual channel table, the section number field "section_number" represents a corresponding section number, the last section number field "last_section_number" represents a last section number of the virtual channel table, and the section number channel field "num_channels_in_section" represents the number of whole virtual channels existing within the sections of the virtual channel table.

The short name field "short_name" within the statement in the "for_loop" represents the name of the virtual channel, and the major channel number field "major_channel_number" represents a major channel number among the virtual channels defined in the statement mentioned above. Each virtual channel number is connected to the major and minor channel numbers, respectively, and the major and minor channel numbers function as the user reference number for the corresponding virtual channel. In other words, the virtual channel table carries the data for each virtual channel through the statement of the "for_loop".

The program number field "program_number" contains the information for connecting the virtual channel where the MPEG-2 program association table (PAT) and program map table (PMT) are defined, which corresponds to the program numbers in the program association table and the program map table. In this case, the program association table defines the components of the program for every program number, namely, indicates the packet identification of the transport packet

74420-21D

transmitting the program map table. The program map table defines the list and the annex information thereof on the packet identification of the

74420-21D

transport packet transmitting the program identification number and the bit stream of the video and audio signals constituting the program.

The source identifier field "source_id" represents the program source connected to the corresponding virtual channel. In this case, the source means a specific source such as image, text, data or sound. The source identifier field "source_id" has a unique value in the transport stream transmitting the virtual channel table. The descriptor length field "descriptors_length" indicates the whole length of the descriptors of the corresponding virtual channel, and the additional descriptor length field "additional_descriptors_length" indicates the whole length of all of the additional descriptors of the virtual channel table.

10 Fig. 5 shows an exemplary list of descriptors for PSIP tables according to the ATSC standard.

Fig. 2 is a diagram illustrating an example of executing scheduled broadcasting by using four virtual channels in a broadcasting station.

By way of example, it is assumed that the scheduled broadcast as shown in Fig. 2 is executed through the four virtual channels, 51-1, 51-2, 51-3 and 51-8 in an arbitrary broadcast station and a virtual channel table composed of a single section is transmitted.

If the current time is 20:15, the system time table transmits the current time information. In this case, the channels 51-1 and 51-3 broadcasting at the current time 20:15 are defined as the active channels.

20 On the other hand, the channel 51-2 is not broadcasting at the current time and is going to be broadcast the next day, and the channel 51-8 is going to be broadcast next at 06:00. In this case, the channels 51-2 and 51-8, which are not broadcasting at the current time

74420-21D

20:15 and are going to be broadcast in the future, are defined as the inactive channels.

As a result, each channel may be an active or inactive channel, based upon an arbitrary point in time.

5 Within the PSIP, the virtual channel table should contain the active channels as required and may also contain the inactive channels as recommended facts, for conducting the electronic program guide.

10 Therefore, at the current time 20:15 the virtual channel table may contain information on all of the channels 51-1, 51-2, 51-3 and 51-8, and thus a digital television broadcast receiver or a digital cable broadcast receiver receives the virtual channel table to thereby provide the channel selection information to TV viewers.

15 However, as shown in Fig. 1, according to the bit stream syntax of the virtual channel table according to the A/65 standard, the digital television broadcast receiver or the digital cable broadcast receiver cannot discriminate between the active channels (for example, the channels 51-1
20 and 51-3) and the inactive channels (for example, the channels 51-2 and 51-8), when parsing the virtual channel table.

As a consequence, the TV viewers see a black screen because of the information on the inactive channels transmitted from the broadcast station for providing the
25 electronic program guide. The black screen means the black background color is displayed on the screen when an inactive channel not broadcasting at a current time is selected. On the other hand, the character message "service not provided" is displayed on the screen of the black background color by
30 the on-screen display function of the digital television broadcast receiver or the digital cable broadcast receiver. By way of example, if the TV viewer selects the channel 51-2

74420-21D

with a channel up key while viewing the channel 51-1, the audio and video data are not displayed because the channel 51-2 is an inactive channel, such that the black background color is displayed on the screen.

5 The above-mentioned problem may give many inconvenience to the TV viewers at a point of time when digital television broadcast receivers or digital cable broadcast receivers become popular and a large number of virtual channels are broadcast.

10

SUMMARY OF THE INVENTION

 According to one aspect the invention provides a digital television receiver, comprising: receiving means for receiving a digital broadcasting signal including a virtual channel table, the virtual channel table including a program number field indicating whether a corresponding virtual channel is an active or an inactive channel; detecting means for detecting the program number field included in the virtual channel table; and control means for controlling display of the corresponding virtual channel when the virtual channel is selected by a user and the virtual channel is determined to be inactive, wherein said inactive channel is a channel that is not presently carrying a broadcast program; however, the same inactive channel is scheduled to carry a broadcast program at a predetermined later time from a broadcasting station without local viewer interaction, wherein the inactive channel is capable of being automatically skipped.

 According to another aspect the invention provides a digital television receiver, comprising: receiving means for receiving a digital broadcasting signal including a virtual channel table, the virtual channel table including a

74420-21D

program number field indicating whether a corresponding virtual channel is an active or an inactive channel; a program and system information protocol (PSIP) decoder for detecting the program number field included in the virtual channel table and providing an output indicating whether the virtual channel is inactive; and a user interface module for receiving the output of the PSIP decoder and controlling display of the virtual channel when the channel is selected by a user and the channel is determined to be inactive, wherein said inactive channel is a channel that is not presently carrying a broadcast program; however, the same inactive channel is scheduled to carry a broadcast program at a predetermined later time from a broadcasting station without local viewer interaction, wherein the inactive channel is capable of being automatically skipped.

According to another aspect the invention provides a method of controlling display of an inactive channel in a digital broadcast receiver, the method comprising: receiving a digital broadcasting signal comprising a virtual channel table; parsing the virtual channel table; reading a value of a program number field in the parsed virtual channel table to determine whether a corresponding virtual channel is an active or an inactive channel; and controlling display of the virtual channel when the virtual channel is determined to be inactive and is selected by a user, wherein said inactive channel is a channel that is not presently carrying a broadcast program; however, the same inactive channel is scheduled to carry a broadcast program at a predetermined later time from a broadcast station without local viewer interaction.

For example, the value of the program number field "program_number" in the virtual channel table is set to "0",

74420-21D

thereby indicating that the corresponding channel is the inactive channel.

It is to be understood that both the foregoing general description and the following detailed description
5 are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are
10 incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

In the drawings:

FIG. 1 is a diagram illustrating the bit stream
15 syntax of a general virtual channel table for terrestrial broadcast;

FIG. 2 is a diagram illustrating an example of executing schedule broadcasting by using four virtual channels in a broadcast station;

20 FIG. 3 is a diagram illustrating the bit stream syntax of a virtual channel table for terrestrial broadcast according to an embodiment of the present invention;

FIG. 4 is a diagram illustrating the bit stream
syntax of a virtual channel table for cable according to
25 another embodiment of the present invention; and

FIG. 5 is chart listing various descriptors available according to a program and system information protocol of an advanced television systems committee standard digital television broadcast.

74420-21D

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

5 According to the present invention, a virtual channel table for a broadcast protocol comprises identification information capable of identifying and permitting discrimination between active and inactive channels in the bit stream syntax thereof. A transmitting
10 side, namely, a broadcast station transmits the virtual channel table having the identification information to the receivers. Each of the receivers parses the virtual channel table received, thereby determining whether the channel currently selected is an active channel or an inactive
15 channel.

The identification information, which is capable of identifying and permitting discrimination between an active channel and an inactive channel under the standard of the PSIP, is contained in at least one field of the virtual
20 channel table of the above protocol, such that only active channels being currently broadcast are displayed to TV viewers.

Hereinafter, preferred embodiments of a virtual channel table and a method according to the present
25 invention will be in detail described with reference to Figs. 3 and 4.

In order for a digital television receiver and a digital cable broadcast receiver to parse the virtual channel table and thus to determine whether the channel
30 selected currently is an active channel or an inactive

74420-21D

channel, the bit stream syntax of the virtual channel table may be corrected.

For example, the fact that channels 51-2 and 51-8 are not broadcast at the current time 20:15, but are going to be broadcast in the future, should be recognized in a digital television receiver and a cable broadcast receiver. In a preferred embodiment, the identification information capable of identifying an inactive channel is contained in the program number field "program_number", the service location descriptor field "service_location_descriptor" and/or other reserved fields contained in the bit stream syntax of the virtual channel table.

Fig. 3 is a diagram illustrating the bit stream syntax of a virtual channel table for terrestrial broadcast according to an embodiment of the present invention. To indicate that a corresponding channel is an inactive channel, the value of the program number field "program_number" is set to "0". And, since there are no audio and video signals of the current service location descriptor, the value of the number elements field "number_elements" of the service location descriptor "service_location_descriptor" is set to "0". Also, or alternatively, to indicate that the corresponding channel is an inactive channel, the service location descriptor "service_location_descriptor" (see Fig. 5) is not contained in the virtual channel table. In other words, for the digital television receiver and the cable broadcast receiver, the service location descriptor field should be contained in the virtual channel table only in a case where the corresponding channel is the active channel. If the corresponding channel is an inactive channel, however, the service location descriptor field is not contained in the virtual channel table.

74420-21D

In a preferred embodiment, in order to recognize the fact that the corresponding channel is an inactive channel in a more apparent manner, 1 bit of the reserved field of 6 bits for each channel is assigned to define a flag indicative of an inactive channel. In the preferred embodiment, 1 bit in the reserved field between the hidden field "hidden" and the service type field "service_type" in the statement of the "for_loop" is assigned to define a flag indicative of an inactive channel. For example, in a case where the flag indicative of the inactive channel is "1", the corresponding channel is an active channel, and if the flag is "0", the corresponding channel is an inactive channel.

In the preferred embodiment, the above three cases may be added as requirements to the A/65 standard. Any of all of the three cases may be added to the A/65 standard.

As mentioned above, since the information on an inactive channel is contained in the virtual channel table, the digital television receiver can determine whether the virtual channel currently received is an active channel or an inactive channel by parsing only the virtual channel table. For example, if the value of the program number field "program_number" in the virtual channel table is "0", if the value of the information on the inactive channel defined by assigning a predetermined bit in the reserved field is "0", or if the service location descriptor field "service_location_descriptor" is not contained in the virtual channel table, the major channel number field "major_channel_number" and the minor channel number field "minor_channel_number" defined in the bit stream syntax of the virtual channel table currently transmitted can be used to determine that the current virtual channel is an inactive

74420-21D

channel for example by both being assigned a value of "0".

On the other hand, if an inactive channel has been determined under the above process, the digital television receiver can skip the inactive channel, without displaying

5 it on

74420-21D

the screen, upon channel conversion by means of a channel up key or a channel down key.

Fig. 4 is a diagram illustrating the bit stream syntax of a virtual channel table for cable according to another embodiment. As shown, the virtual channel table may be applied to cable broadcasting in the same manner as above.

5 As is apparent from the foregoing description, a virtual channel table for a broadcast protocol, and a method of broadcasting by using the virtual channel table are capable of including the identification information capable of identifying and permitting discrimination between active and inactive channels in a transmitting side, and in a receiving side parsing the virtual channel table to thereby determine whether the channel currently selected is the active
10 channel or the inactive channel. Therefore, inactive channels may be skipped, without being displayed, upon the channel conversion by using a channel up key or a channel down key, such that the TV viewer can enjoy channel surfing in a convenient manner, without viewing a black screen. In addition, the virtual channel table may be transmitted, while containing the inactive channels therein, thereby making it possible to provide a more abundant electronic
15 program service.

It will be apparent to those skilled in the art that various modifications and variation can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and
20 their equivalents.

74420-21D

CLAIMS:

1. A digital television receiver, comprising:

receiving means for receiving a digital
broadcasting signal including a virtual channel table, the
5 virtual channel table including a program number field
indicating whether a corresponding virtual channel is an
active or an inactive channel;

detecting means for detecting the program number
field included in the virtual channel table; and

10 control means for controlling display of the
corresponding virtual channel when the virtual channel is
selected by a user and the virtual channel is determined to
be inactive,

wherein said inactive channel is a channel that is
15 not presently carrying a broadcast program; however, the
same inactive channel is scheduled to carry a broadcast
program at a predetermined later time from a broadcasting
station without local viewer interaction,

wherein the inactive channel is capable of being
20 automatically skipped.

2. The digital television receiver of claim 1,
wherein the virtual channel table is included in a program
and system information protocol (PSIP) for a digital
broadcast.

25 3. The digital television receiver of claim 2,
wherein the digital broadcast is any one of a digital
terrestrial broadcast and a digital cable broadcast.

4. The digital television receiver of claim 1,
wherein the control means identifies the virtual channel as

74420-21D

being inactive when the detected program number field has a value of "0".

5. The digital television receiver of claim 1, wherein the detecting means further detects a reserved field
5 included in the virtual channel table, and the control means identifies the virtual channel as being inactive when at least one bit of the detected reserved field indicates that the virtual channel is inactive.

6. The digital television receiver of claim 1,
10 wherein the detecting means further determines whether a service location descriptor is included in the virtual channel table, and the control means identifies the virtual channel as being inactive when no service location descriptor is found by the detecting means.

15 7. The digital television receiver of claim 1, wherein the active channel represents a channel on which at least one program is being broadcast at the current time.

8. The digital television receiver of claim 1, wherein the control means controls the display of the
20 corresponding virtual channel by inhibiting the display of the virtual channel.

9. The digital television receiver of claim 1, wherein the control means controls the display of the corresponding virtual channel by skipping the display of the
25 virtual channel.

10. A digital television receiver, comprising:

receiving means for receiving a digital broadcasting signal including a virtual channel table, the virtual channel table including a program number field

74420-21D

indicating whether a corresponding virtual channel is an active or an inactive channel;

a program and system information protocol (PSIP) decoder for detecting the program number field included in the virtual channel table and providing an output indicating whether the virtual channel is inactive; and

a user interface module for receiving the output of the PSIP decoder and controlling display of the virtual channel when the channel is selected by a user and the channel is determined to be inactive,

wherein said inactive channel is a channel that is not presently carrying a broadcast program; however, the same inactive channel is scheduled to carry a broadcast program at a predetermined later time from a broadcasting station without local viewer interaction,

wherein the inactive channel is capable of being automatically skipped.

11. The digital television receiver of claim 10, wherein the virtual channel table is included in a program and system information protocol (PSIP) for a digital broadcast.

12. The digital television receiver of claim 11, wherein the digital broadcast is any one of a digital terrestrial broadcast and a digital cable broadcast.

13. The digital television receiver of claim 10, wherein the user interface module identifies the virtual channel as being inactive when the detected program number field has a value of "0".

74420-21D

14. The digital television receiver of claim 10, wherein the PSIP decoder further detects a reserved field included in the virtual channel table, and the user interface module identifies that virtual channel as being
5 inactive when at least one bit of the detected reserved field indicates that the virtual channel is inactive.
15. The digital television receiver of claim 10, wherein the PSIP decoder further determines whether a service location descriptor is included in the virtual
10 channel table, and the user interface module identifies the virtual channel as being inactive when no service location descriptor is found in the virtual channel table.
16. The digital television receiver of claim 10, wherein the active channel represents a channel on which at
15 least one program is being broadcast at the current time.
17. The digital television receiver of claim 10, wherein the user interface module controls the display of the corresponding virtual channel by inhibiting the display of the virtual channel.
- 20 18. The digital television receiver of claim 10, wherein the user interface module controls the display of the corresponding virtual channel by skipping the display of the virtual channel.
19. The digital television receiver of claim 10,
25 wherein the receiving means comprises:
- a demodulator for demodulating the digital broadcasting signal and outputting a baseband signal; and
 - a transport decoder for decoding the baseband signal and providing a PSIP data stream to the PSIP decoder.

74420-21D

20. A method of controlling display of an inactive channel in a digital broadcast receiver, the method comprising:

receiving a digital broadcasting signal comprising
5 a virtual channel table;

parsing the virtual channel table;

reading a value of a program number field in the
parsed virtual channel table to determine whether a
corresponding virtual channel is an active or an inactive
10 channel; and

controlling display of the virtual channel when
the virtual channel is determined to be inactive and is
selected by a user,

wherein said inactive channel is a channel that is
15 not presently carrying a broadcast program; however, the
same inactive channel is scheduled to carry a broadcast
program at a predetermined later time from a broadcast
station without local viewer interaction.

21. The method of claim 20, wherein the virtual
20 channel table is included in a program and system
information protocol (PSIP) for a digital broadcast.

22. The method of claim 21, wherein the digital
broadcast is any one of a digital terrestrial broadcast and
a digital cable broadcast.

25 23. The method of claim 20, wherein the corresponding
virtual channel is determined to be inactive when a value of
the program number field is "0".

24. The method of claim 20, further comprising reading
a value of a reserved field in the parsed virtual channel

74420-21D

table to further determine whether the corresponding virtual channel is inactive.

25. The method of claim 20, further comprising determining whether a service location descriptor is found
5 in the parsed virtual channel table to further determine whether the corresponding virtual channel is inactive.

26. The method of claim 20, wherein the active channel represents a channel on which at least one program is being broadcast at the current time.

10 27. The method of claim 20, wherein the controlling display of the virtual channel comprises inhibiting display of the virtual channel.


28. The method of claim 20, wherein the controlling display of the virtual channel comprises skipping display of
15 the virtual channel.

SMART & BIGGAR
OTTAWA, CANADA
PATENT AGENTS

Syntax	Bits	Format
terrestrial_virtual_channel_table_section () {		
table_id	8	0xC8
section_syntax_indicator	1	'1'
private_indicator	1	'1'
zero	2	'00'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++) {		
short_name	7*16	unicode™ BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
reserved	6	'111111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0;i<N;i++) {		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++) {		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		

FIGURE 1
(Prior Art)

FIG. 2
Background Art

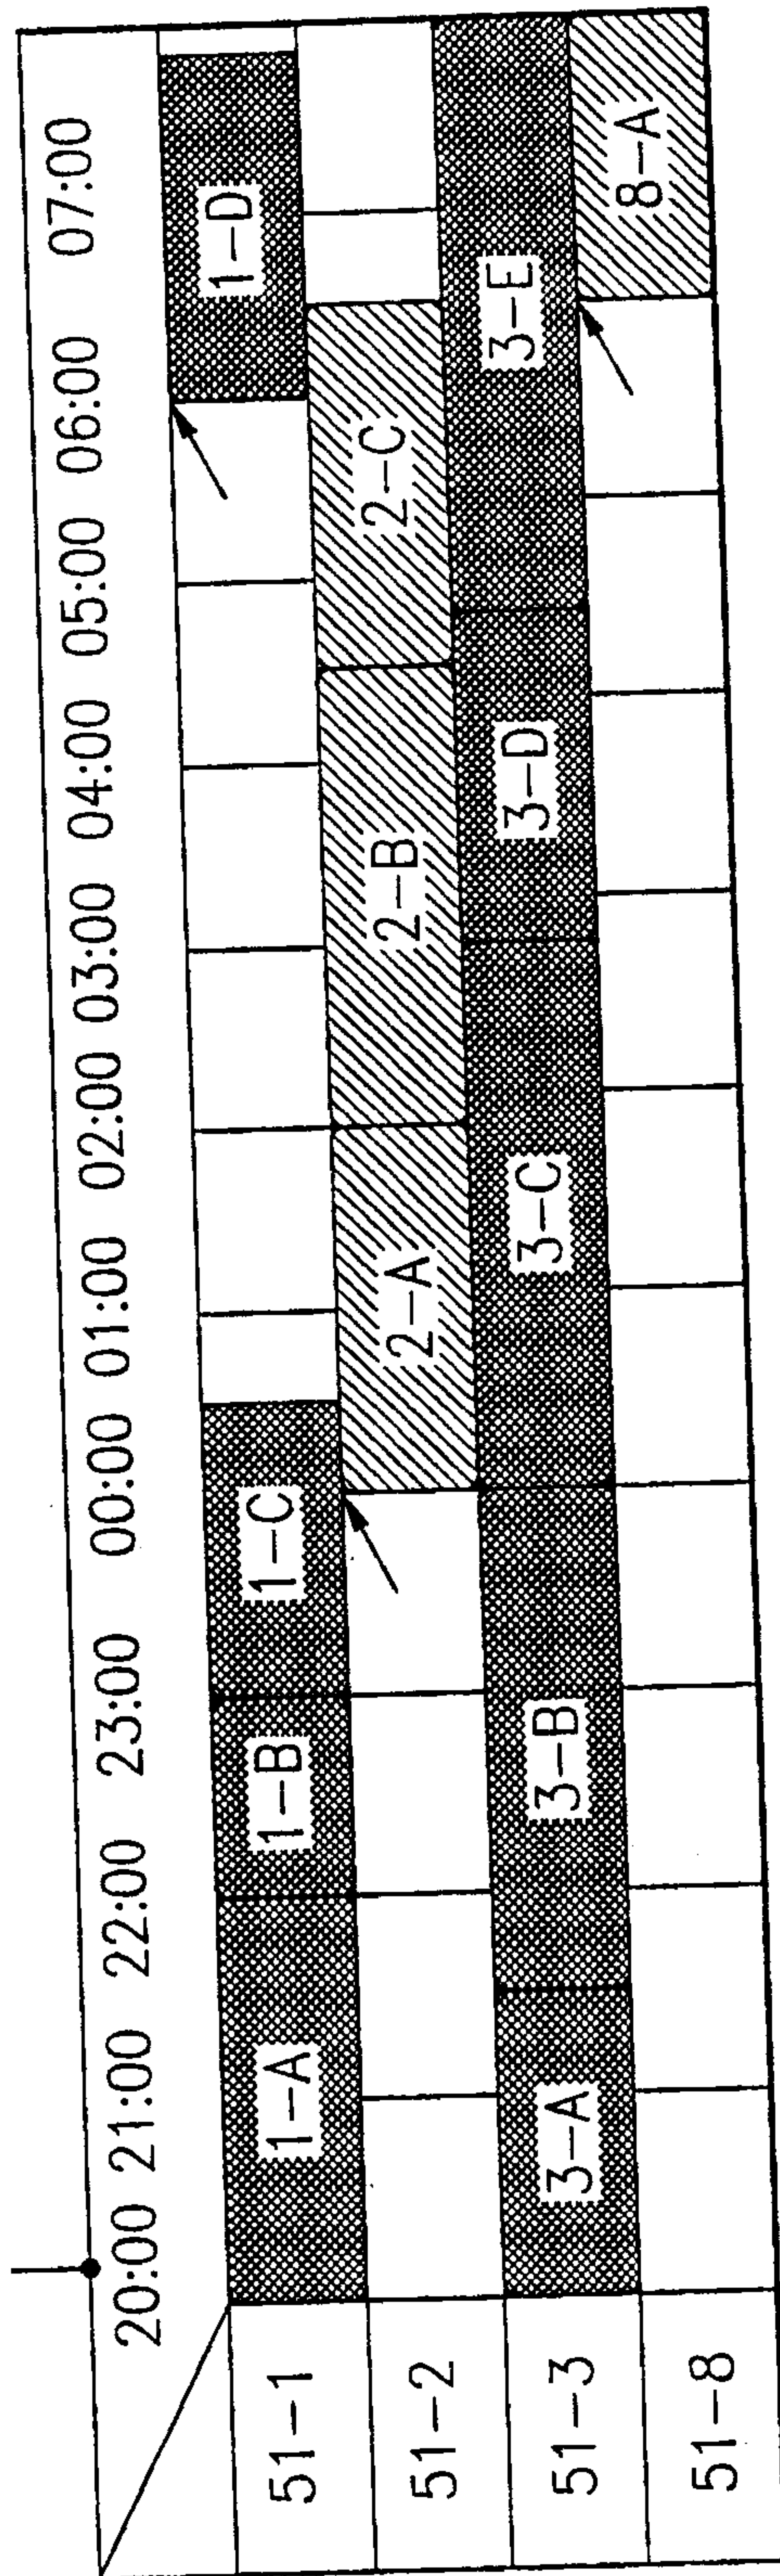

● 현재시간 20:15

Syntax	Bits	Format
terrestrial_virtual_channel_table_section () {		
table_id	8	0xC8
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++) {		
short_name	7*16	unicode™BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
reserved	2	'11'
hide_guide	1	bslbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0;i<N;i++) {		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++) {		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		

FIGURE 3

Syntax	Bits	Format
cable_virtual_channel_table_section () {		
table_id	8	0xC9
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++) {		
short_name	7*16	unicode™BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
path_select	1	bslbf
out_of_band	1	bslbf
hide_guide	1	bslbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0;i<N;i++) {		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++) {		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		

FIGURE 4

Descriptor Name	Descriptor tag	Terrestrial				Cable		
		PMT	MGT	VCT	EIT	PMT	MGT	VCT
stuffing descriptor	0x80	*	*	*	*	*	*	*
AC-3 audio descriptor	0x81	*			*	*		
program identifier descriptor	0x85	*				*		
caption service descriptor	0x86	*			*	*		
content advisory descriptor	0x87	*			*	*		
extended channel name descriptor	0xA0			*				*
service location descriptor	0xA1			*				
time-shifted service descriptor	0xA2			*				*
component name descriptor	0xA3					*		
user private	0xC0-0xFF		*	*	*		*	*

FIGURE 5
(Prior Art)

Syntax	Bits	Format
terrestrial_virtual_channel_table_section () {		
table_id	8	0xC8
section_syntax_indicator	1	'1'
private_indicator	1	'1'
reserved	2	'11'
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	'11'
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
protocol_version	8	uimsbf
num_channels_in_section	8	uimsbf
for(i=0; i<num_channels_in_section;i++) {		
short_name	7*16	unicode™BMP
reserved	4	'1111'
major_channel_number	10	uimsbf
minor_channel_number	10	uimsbf
modulation_mode	8	uimsbf
carrier_frequency	32	uimsbf
channel_TSID	16	uimsbf
program_number	16	uimsbf
ETM_location	2	uimsbf
access_controlled	1	bslbf
hidden	1	bslbf
reserved	2	'11'
hide_guide	1	bslbf
reserved	3	'111'
service_type	6	uimsbf
source_id	16	uimsbf
reserved	6	'111111'
descriptors_length	10	uimsbf
for (i=0;i<N;i++) {		
descriptors()		
}		
}		
reserved	6	'111111'
additional_descriptors_length	10	uimsbf
for(j=0; j<N;j++) {		
additional_descriptors()		
}		
CRC_32	32	rpchof
}		