



(51) International Patent Classification:
C07D 317/12 (2006.01)

(21) International Application Number:
PCT/US2012/041459

(22) International Filing Date:
8 June 2012 (08.06.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/168,330 24 June 2011 (24.06.2011) US

(71) Applicant: **EASTMAN CHEMICAL COMPANY**
[US/US]; 200 South Wilcox Drive, Kingsport, TN 37660
(US).

(72) Inventors: **TERRILL, Daniel, Latham**; 141 Fairfield
Drive, Bristol, TN 37620 (US). **MCMURRAY, Brian,
David**; 10945 Bristol Highway, Hiltons, VA 24258 (US).
BILLODEAUX, Damon, Ray; 113 Blaine Trail,
Longview, TX 75604 (US). **LITTLE, James, Lon**; 3612
Hemlock Park Drive, Kingsport, TN 37663 (US).
HOWARD, Adam, Scott; 241 Ridgeview Drive, Gray, TN
37615 (US).

(74) Agent: **CARMEN, Dennis, V.**; P.O. Box 511, Kingsport,
TN 37662-5075 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PRODUCTION OF CYCLIC ACETALS OR KETALS USING SOLID ACID CATALYSTS

(57) Abstract: A process for making a cyclic compounds such as cyclic acetal or cyclic ketones by feeding aldehyde or ketone compounds and polyhydroxyl compounds to a reaction zone at a molar ratio of polyhydroxyl compounds to aldehyde or ketone compounds of at least 3:1, reacting these compounds in the presence of a solid acid such as an acidic ion exchange resin, to generate a liquid reaction mixture without separating water from the reaction mixture as it is being formed in the reaction mixture, withdrawing the liquid reaction mixture from the reaction zone as a liquid product stream, and feeding the liquid reaction product stream to a distillation column to separate cyclic acetal compounds from unreacted polyhydroxyl compounds, and optionally recycling back the unreacted polyhydroxyl compounds to the reaction zone. The process produces cyclic acetal compounds in yields of at least 90% with long catalyst life. The process is also suitable to make cyclic ketals from ketone compounds.



PRODUCTION OF CYCLIC ACETALS OR KETALS USING SOLID ACID CATALYSTS

1. Field Of The Invention

5 The invention relates to the production of cyclic acetals or ketals at high yields and long catalyst life.

2. Background Of The Invention

10 Ether alcohols, such as 2-butoxyethanol, have important industrial functions in products such as cleaning supplies and coating materials. In the past, the manufacture of these products has been based on a process relying on a reaction between an alcohol and ethylene oxide. This conventional process has proven to be somewhat inefficient, in that it produces various undesirable byproducts along with the ether alcohols.

15 Monoether glycols can also be manufactured in a reaction between aliphatic aldehydes and ethylene glycol, instead of ethylene oxide, under acidic conditions in order to produce cyclic acetals. The acetal of ethylene glycol and butyraldehyde, for example, is described by Hibbert and Timm (Hibbert, H.; Timm, J.A. *J. Am. Chem. Soc.* 1924, 46(5), 1283-1290) and is
20 achieved with a maximum yield of 50%. These cyclic acetals, or ketals when a ketone is substituted for the aldehyde, can then be subjected to hydrogenolysis in the presence of palladium and phosphoric acid catalysts. Such a process is described in U.S. Patent No. 4,484,009.

25 The reaction of the polyhydroxyl compounds with aldehydes or ketones is an equilibrium reaction with the acetal product and by-product water. Yield of acetal or ketal is reduced via hydrolysis of the acetal by the co-product water. Thus, it is desirable to remove water from the reaction system to increase yield of the acetal.

30 The separation of water from the reaction mixture has been difficult since it often forms an azeotrope with the aldehyde reactants and with the cyclic acetal products. Entrainers have been employed to remove water

through azeotropic distillation. Sulzbacher and coworkers, for example, describe removing the water by using benzene during the preparation of a number of acetals of ethylene glycol (Sulzbacher, M. et.al. *J. Am. Chem. Soc.* 1948, 70(8), 2827-2828) . The environmental and health impact of benzene is
5 an obvious concern in this method. Dessicants such as calcium chloride (DE 419223; Brönsted and Grove *J. Am. Chem. Soc.* 1930, 52(4), 1394-1403) may be employed in the reaction vessel to remove water as it is formed, but disposal of the generated solid waste is an economic and environmental concern.

10 Another method as described by Astle and coworkers, involves heating the glycol and aldehyde over an heterogeneous acidic resin and distilling out the acetal and water as they are formed (Astle, M.J. et al, *Ind. Eng. Chem.* 1954, 46(4), 787-791). This method generally had low yields with one example for the manufacture of 2-butoxyethanol reported as having a yield of
15 about 92% using a molar ratio of ethylene glycol to butyraldehyde of about 1.3:1. In these reactions, water was being separated from the reaction mixture in the flask as the water was being formed, and upon completion, the reaction mixture in the flask was filtered and phase separated. The removal of water from the reaction mixture as it was being formed follows from the
20 understanding that the reaction of the polyhydroxyl compounds with aldehydes is an equilibrium reaction with the acetal product and by-product water, and the yield of acetal is reduced via hydrolysis of the acetal by the co-product water or can be increased with the removal of water as it is formed.

One pot reaction systems have also been reported, that is, reacting an
25 aldehyde and a polyhydroxyl with hydrogen in the presence of a noble metal catalyst directly to the desired ether alcohol. For example, U.S. Pat. No. 5,446,210 describes a process for the production of hydroxy ether hydrocarbons in a one pot system by reacting a polyhydroxyl with an aldehyde and hydrogen in the presence of a noble metal catalyst where the
30 molar ratio of polyhydroxyl to aldehyde compound ranges from 5:1 to 1:5 is described, but with these molar ratios, the yield was low in the range of 35 to

50% when including the bis- types of by-products with low selectivity to the mono-ether products.

US Publication No. 2010/0048940 also describes a one pot system in which a polyhydroxyl and a aldehyde compound and hydrogen are reacted together in the presence of a hydrogenolysis catalyst to provide the polyhydroxyl ether, where the molar ratio of polyhydroxyl to aldehyde exceeds 5:1 to improve selectivity and yield. An example of a two stage process in which the acetal compound was first synthesized and then subjected to hydrogenolysis was reported without describing the yield value of the acetal produced, although the yield to the 2-butoxyethanol by hydrogenolysis of the acetal was reported as having a selectivity of about 61%.

In US Patent 5917059 to BASF Aktiengesellschaft, the authors generate cyclic acetals and ketals by reacting a molar excess of aldehydes and ketones with polyhydroxyl compounds in the presence of an acid catalyst. The water is removed by continuously distilling unreacted aldehydes or ketone starting materials, thus co-distilling the formed water in the water/aldehyde azeotrope, and further replacing the distilled aldehyde or ketone with fresh aldehyde or ketone. The aldehydes and ketones act not only as a reactant but also as a medium for transporting the water produced in the reaction. This method requires large excess of aldehyde (e.g. 4:1 molar ratio of aldehyde:alcohol) to be successful.

Reactive distillation is employed in US Patent 6,015,875 and US Patent 7,534,922 B2 to generate low boiling acetals. The authors make use of heterogeneous acids in the packing of the column and feed low boiling starting materials such as methanol, ethanol, formaldehyde, and acetaldehyde. The formed acetals are removed overhead above the distillation reaction zone and the co-product water is removed below the distillation reaction zone. This method limits the types of usable reactants to those producing materials that boil at a temperature lower than water.

As can be seen from the available literature, there exists a continued need to produce cyclic acetal or ketal compounds in high yield with a long catalyst life using a simple economic process.

5

3. Brief Summary of the Invention

Cyclic acetals and ketals can now be produced in high yield with a long life non-exotic catalyst in a simple method which does not require removal of water as it is generated. Contrary to the expectation that yields would be
10 unacceptably low unless water is removed during its formation as a by-product, the process of the invention allows one to react all starting materials in the liquid phase in one reaction zone to make a reaction mixture which is removed in the liquid phase and subsequently distilled to produce the desired cyclic acetal or ketal in high yields.

15 There is now provided a continuous process for making a cyclic acetal or ketal compounds comprising:

- a. feeding a carbonyl composition comprising an aldehyde compound, a ketone compound, or a combination thereof, and a polyhydroxyl composition comprising a polyhydroxyl compound, to a reaction zone at a
20 molar ratio of all polyhydroxyl compounds to all carbonyl compounds fed to the reaction zone of at least 3:1; and
- b. reacting the carbonyl composition with the polyhydroxyl compound in the presence of a solid acid to generate a liquid reaction mixture comprising cyclic compounds, water, and unreacted polyhydroxyl
25 compounds; and
- c. without separating water from the reaction mixture as it is being formed in the reaction mixture, withdrawing the liquid reaction mixture from the reaction zone as a liquid product stream; and
- d. feeding the liquid reaction product stream directly or indirectly to a
30 distillation column to separate cyclic compounds from unreacted polyhydroxyl compounds and withdrawing from the distillation column an

overhead product stream and a bottoms stream, wherein the overhead product stream comprises cyclic compounds, unreacted polyhydroxyl compounds and water and is rich in the concentration of cyclic compounds by moles relative to the bottoms stream, and the bottoms stream
5 comprises unreacted polyhydroxyl compounds and is rich in the concentration of unreacted polyhydroxyl compounds by moles relative to the overhead product stream;
wherein the selectivity to cyclic compounds in the overhead product stream is at least 90%.

10 The yield of cyclic acetal or ketal compounds taken in an overhead product stream can also be at least 90%.

In the process of the invention, one may also recycle to the reaction zone at least a portion of unreacted polyhydroxyl compounds withdrawn from the distillation column in the bottoms stream. Reaction by-products other than
15 water may also be withdrawn from the bottoms stream to produce a polyhydroxyl rich stream and an organic by-product rich stream, following which at least a portion of the polyhydroxyl compounds in the polyhydroxyl rich stream can be recycled to the reaction zone.

4. Brief Description Of The Drawings

20 Figure 1 is a process flow diagram for the production of cyclic acetal or ketal compounds in a reaction zone followed by distillation, separation, and recycling a portion of polyhydroxyl compounds to the reaction zone.

5. Detailed Description of the Invention

25 There is now provided a continuous process for making cyclic compounds. By a cyclic compound is meant a compound having a ring structure that has two oxygen atoms in the ring structure that are single bonded to the same carbon atom in the ring structure. The cyclic compounds can be cyclic acetal compounds or cyclic ketal compounds. The cyclic
30 compounds are made by feeding carbonyl compounds and a polyhydroxyl composition comprising a polyhydroxyl compound, to a reaction zone at a

molar ratio of all polyhydroxyl compounds and all aldehyde or ketone compounds fed to the reaction zone of at least 3:1. By carbonyl compounds is meant aldehyde compounds, ketone compounds (depending upon whether one desires to make an acetal or ketal), or a mixture of the two.

5 The carbonyl composition fed to the reaction zone contains one or more types of aldehyde or ketone compounds. Aldehyde compounds contain at least one aldehyde functionality. The aldehyde and ketone compounds can be represented by the Formula I:



in which R¹ and R² are independently hydrogen or a C₁-C₅₀ alkyl, C₂-C₅₀ alkenyl, aryl-C₁-C₅₀ alkyl, aryl-C₂-C₅₀ alkenyl-, or C₃-C₁₂ cycloalkyl, and wherein R¹ and R² are optionally connected through one or more carbon atoms, and wherein the alkyl, alkenyl, aryl, and cycloalkyl groups of R¹ and R² are optionally saturated or unsaturated, and branched or unbranched or substituted or unsubstituted with 1, 2, or 3 groups comprising -OH, halogen, dialkylamino, C₁-C₆ alkyl, aldehyde, ketone, carboxylic acid, ester, ether, alkynyl, dialkylamide, anhydride, carbonate, epoxide, lactone, lactam, phosphine, silyl, thioether, thiol, aryl, phenol, or combinations thereof; and wherein when one of R¹ or R² is hydrogen, the compound will be an aldehyde and wherein when neither R¹ and R² are hydrogen the compound is a ketone.

The aldehyde compound may have, if desired, at least one aldehyde functional group wherein the aldehyde carbon atom is bonded to a (i) branched or unbranched C₁-C₉ alkyl group or (ii) an aryl or alicyclic group which is optionally substituted with a branched or unbranched C₁-C₉ alkyl group.

Examples of aldehyde compounds include, but are not limited to, benzaldehyde, acetaldehyde, propionaldehyde, butyraldehyde, isobutyraldehyde, pentaldehyde, 2-methylbutyraldehyde, 3-methylbutyraldehyde, n-pentanal, isopentanal, hexaldehyde, heptaldehyde, 2-

ethylhexaldehyde, octanal, nonanal, n-decanal, 2-methylundecanal, lauryl aldehyde, myristyl aldehyde, cetyl aldehyde, stearyl aldehyde, behenyl aldehyde, glutaraldehyde, acrolein, crotonaldehyde, oleyl aldehyde, linoleyl aldehyde, linolenyl aldehyde, erucyl aldehyde, cinnamaldehyde, 1,3-cyclohexanedicarboxaldehyde, 1,4-cyclohexanedicarboxaldehyde, and combinations thereof.

Examples of ketone compounds include, but are not limited to, acetone, methyl ethyl ketone (2-butanone), methyl propyl ketone (2-pentanone), methyl isopropyl ketone (3-methyl-2-butanone), methyl isobutyl ketone (4-methyl-2-pentanone), 2-hexanone, 2-heptanone (methyl amyl ketone), 2-octanone, and acetophenone.

The polyhydroxyl composition fed to the reaction zone contains one or more types of polyhydroxyl compounds. Polyhydroxyl compounds have at least two hydroxyl (-OH) functionalities. The polyhydroxyl compounds may contain ether or ester linkages in the longest carbon chain.

Suitable polyhydroxyl compounds for the present invention include, but are not limited to ethylene glycol, 1,2-propanediol, 1,3-propanediol, 1,4-butanediol, 1,3-butanediol, 1,2-butanediol, 1,2-pentanediol, 2,4-pentandiol, 2,2-dimethyl-1,3-propanediol, diethyleneglycol, and triethyleneglycol, glycerin, trimethylolpropane, xylitol, arabitol, 1,2- or 1,3-cyclopentanediol, 1,2- or 1,3-cyclohexanediol, and 2,3-norbornanediol.

The cumulative amount of polyhydroxyl compounds and carbonyl compounds fed to the reaction zone are at a molar ratio of polyhydroxyl compounds relative to carbonyl compounds (aldehyde or ketone compounds) of at least 3:1, or at least 4:1, or more than 5:1, or at least 6:1, or at least 7:1, or at least 8:1, or at least 9:1, or at least 10:1, or at least 13:1. There is no particular upper limit. It is economically desirable to limit the amount of polyhydroxyl compounds that need to be separated and recycled balanced against the need to use an excess sufficient to enhance selectivity and yield to the desired cyclic acetal or ketal. Practically, a molar ratio of polyhydroxyl

compounds to carbonyl compounds does not need to be more than 30:1, or not more than 20:1, and even not more than 15:1.

The molar ratio of polyhydroxyl compounds to carbonyl compounds is determined by the total amount fed to the reaction zone. If a recycle stream
5 of polyhydroxyl compounds is fed to the reaction zone, this quantity should be factored into the molar ratio.

The polyhydroxyl composition and the carbonyl compounds composition may be fed as separate streams or as a combined stream into the reaction zone. If viscosity variances between the two are sufficiently
10 great, it is desirable to pre-mix at least a portion of the polyhydroxyl composition with at least a portion of the carbonyl compounds to increase the yield and improve the number of contact sites between the aldehyde or ketone functionalities and hydroxyl functionalities. As shown in Figure 1, a polyhydroxyl composition stream 1 and a carbonyl compound composition
15 stream 2 are premixed in a mixing zone prior to entering reaction zone through a reactant feed stream 3. It is also possible to feed the recycle stream 10 containing unreacted polyhydroxyl compounds into the mixing zone to adequately mix and uniformly disperse or dissolve all the carbonyl compounds in the polyhydroxyl composition, especially if the polyhydroxyl
20 composition has a significantly higher viscosity than the carbonyl composition.

Either or both the polyhydroxyl composition and the carbonyl composition may be pre-heated if the viscosity of either or both are too high to provide satisfactory mixing or if either or both are solids at ambient conditions. The polyhydroxyl compounds and the carbonyl compounds should be in the
25 liquid state upon entry into the reaction zone.

Polyhydroxyl compounds and the carbonyl compounds fed to the reaction zone are reacted in the presence of solid acidic particles. The particles are in the solid phase (heterogeneous) dispersed in the liquid reaction medium under reaction conditions inside the reaction zone. The
30 acidic particles may be a fixed bed or may be dispersed and mobile and fed to the reaction zone separately or premixed into one or both of the polyhydroxyl

composition stream(s) 1, the carbonyl composition stream(s) 2, the recycle stream(s) 10, or the reactant stream 3 fed to the reaction zone. To avoid having to filter the solids from the product stream, it is desirable to use a fixed catalyst bed. The reaction zone is desirably liquid full and the reaction mixture in the reaction zone flows in the direction of the feed entry points to the effluent locations. In a horizontal vessel, this can be a horizontal flow from left to right or right to left depending on the feed/effluent configuration. In a vertically oriented vessel, this can be from top to bottom or bottom to top. In one embodiment, the reaction mixture inside the reaction zone flows in an upward direction of bottom to top. By having the feed entry points at or near the bottom of the reaction zone and the effluent at the top of the reaction zone, better mixing is obtained and the residence time for contacting the solid acid is improved.

The reaction zone can be contained in any suitable vessel. In one embodiment, the reaction vessel is a pipe or tank having an L/D ratio of more than 1:1, or more than 2:1, or more than 3:1, or more than 4:1, or more than 5:1, or more than 6:1, or more than 7:1, or more than 8:1, or more than 9:1, or more than 10:1.

The reaction vessel may be mechanically agitated. Practically, the reaction vessel is not mechanically agitated, especially if a fixed catalyst bed is employed. For example, a pipe loaded with solid acid catalyst can be used without mechanical agitation, although if desired the pipe may contain weirs or baffles to provide turbulent flow induced agitation. In a fixed bed design, the solid catalyst particles can be retained between a support plate and a bed limiter.

The reaction can proceed well under atmospheric pressure and at elevated pressure. The pressure within the reaction zone can be at least 0.1 atm, or at least 0.5 atm, or at least 1 atm, or at least 1.05 atm, or at least 1.1 atm, or at least 1.5 atm, or at least 2 atm, or at least 3 atm, or at least 4 atm. For most applications, the pressure does not need to exceed 10 atm, or exceed 5 atm, or exceed 3 atm, or exceed 2 atm.

Inside the reaction zone, polyhydroxyl compounds react with carbonyl compounds to produce cyclic acetals or cyclic ketals or a mixture thereof, water, and by-products. The cyclic acetal, for purposes of this description, is the desired principal product produced from the reaction of the starting aldehydes and starting polyhydroxyl compounds. The principal product, the cyclic acetal, is the cyclic reaction product of one mole of the starting aldehyde compound with one mole of the starting polyhydroxyl compound releasing one mole of water. Examples of by-products in reaction mixture to make cyclic acetals are aldehyde-aldehyde reaction products, polyhydroxyl-polyhydroxyl reaction products, the secondary reaction products between cyclic acetals with any other reactants or with itself, internal re-arrangement of the cyclic acetal ring and any further reaction products resulting from the ring re-arrangement, or a combination thereof. Since a high molar excess of polyhydroxyl compound is used, unreacted polyhydroxyl compounds will also be present in the reaction mixture. The reaction mixture may also contain unreacted aldehyde compounds.

The same applies to the production of cyclic ketals. The cyclic ketal, for purposes of this description, is the desired principal product produced from the reaction of the starting ketones and starting polyhydroxyl compounds. The principal product, the cyclic ketal, is the cyclic reaction product of one mole of the starting ketone compound with one mole of the starting polyhydroxyl compound releasing one mole of water. Examples of by-products in reaction mixture to make cyclic ketals are ketone-ketone reaction products, polyhydroxyl-polyhydroxyl reaction products, the secondary reaction products between cyclic ketals with any other reactants or with itself, internal re-arrangement of the cyclic ketal ring and any further reaction products resulting from the ring re-arrangement, or a combination thereof. Since a high molar excess of polyhydroxyl compound is used, unreacted polyhydroxyl compounds will also be present in the reaction mixture. The reaction mixture may also contain unreacted ketone compounds.

The yield of a product compound (not by-products or water), whether one desires to determine the yield of cyclic compounds, an acetal compound, or a ketal compound, is determined by dividing the moles of product compounds produced by the moles of reactant fed in the lowest molar quantity, multiplied by 100. For example, the yield of cyclic compounds is determined by dividing the moles of cyclic compounds produced by the moles of corresponding aldehyde and/or ketone compounds fed, multiplied by 100. The yield of cyclic acetal compounds is determined by dividing the moles of cyclic acetal compounds produced by the moles of aldehyde compounds fed, multiplied by 100. The yield of cyclic ketal compounds is determined by dividing the moles of cyclic ketal compounds produced by the moles of ketone compounds fed, multiplied by 100.

Selectivity of cyclic compounds is determined by dividing the moles of cyclic compounds produced by the moles of their respective aldehyde or ketone compounds converted, multiplied by 100. Selectivity to the cyclic acetal is determined by dividing the moles of cyclic acetal compounds produced by the moles of aldehyde compounds converted, multiplied by 100. Selectivity to the cyclic ketal is determined by dividing the moles of cyclic ketal compounds produced by the moles of ketone compounds converted, multiplied by 100.

Conversion to cyclic compounds is determined by dividing the moles of cyclic compounds converted by the moles of the respective aldehyde or ketone compounds fed, multiplied by 100. Conversion to cyclic acetals is determined by dividing the moles of cyclic acetal compounds converted by the moles of aldehyde compounds fed, multiplied by 100. Conversion to cyclic ketals is determined by dividing the moles of cyclic ketal compounds converted by the moles of ketone compounds fed, multiplied by 100.

In the process of the invention, high yields of cyclic compounds are obtainable without the necessity of separating the by-product water from the reaction mixture as it is being formed in the reaction mixture. Even though the reaction is an equilibrium reaction with the presence of water having the

capability to hydrolyze the acetal or ketal product and lower yield, the reaction of polyhydroxyl compounds in high molar excess with aldehyde compounds in the presence of the solid acid keeps the selectivity and yield of cyclic acetal high. This has the advantage that water is not required to be removed by
5 distillation or other means in the reaction zone where the ion exchange catalyst is present and as it is being formed in order to obtain high yields. Further, the reaction processing window is widened and not constrained by the boiling point ranges of the reactants and reaction products and by-products. Furthermore, the catalyst life of solid acids is long and after 500
10 hours of continuous operation does not need to be replaced or regenerated. In the process of the invention, the catalyst life (period of time before catalyst activity diminishes by 30% from its activity as a fresh load) is at least 1 month, or at least 6 months, or at least 1 year, or at least 2 years, or at least 3 years.

The cyclic reaction products formed in the reaction mixture contain an
15 acetal moiety or a ketal moiety or both. The cyclic compounds produced in the process of the invention have two oxygen atoms single bonded to the same carbon atom in the ring structure. Suitable cyclic acetal and ketal moieties include 1,3-dioxolane moieties and 1,3-dioxane moieties, although larger ring compounds having oxygen atoms in the 1,3 position are also
20 contemplated.

The cyclic compounds produced in the process of the invention that includes a cyclic acetal moiety or a cyclic ketal moiety may be represented by the general Formula II:



wherein R^1 , R^2 , R^3 , and R^4 are independently H; a branched or un-branched C_1 - C_{50} alkyl, C_2 - C_{50} alkenyl, aryl- C_1 - C_{50} alkyl, aryl- C_2 - C_{50} alkenyl-, C_3 - C_{12} cycloalkyl, or a C_3 - C_{50} carboxylate ester; and wherein R^1 and R^2 may optionally be bonded to each other through one or more
5 carbon atoms, and wherein R^1 , R^2 , R^3 , and R^4 optionally containing 1, 2, or 3 oxygen atoms in the alkyl or alkenyl group, and wherein the alkyl, alkenyl, aryl, and cycloalkyl groups of R^1 , R^2 , R^3 , and R^4 are optionally substituted with 1, 2, or 3 groups independently selected from -OH, halogen, dialkylamino, aldehyde, ketone, carboxylic acid,
10 ester, ether, alkynyl, dialkylamide, anhydride, carbonate, epoxide, lactone, lactam, phosphine, silyl, thioether, thiol, and phenol;

wherein any one or both of R^3 and R^4 are optionally independently a hydroxyl, halogen, dialkylamino, amine, aldehyde, ketone, carboxylic acid, ester, ether, alkynyl, dialkylamide, anhydride,
15 carbonate, epoxide, lactone, lactam, phosphine, silyl, thioether, thiol, or phenol;

wherein R^5 is branched or unbranched divalent alkyl or divalent alkenyl group each having 1 to 20 carbon atoms and optionally containing 1, 2, or 3 oxygen atoms in the alkyl or alkenyl group and optionally
20 substituted with -OH, halogen, dialkylamino, aldehyde, ketone, carboxylic acid, ester, ether, alkynyl, aryl, dialkylamide, anhydride, carbonate, epoxide, lactone, lactam, phosphine, silyl, thioether, thiol, and phenol; and

wherein n is an integer selected from 0 or 1.

25 R^1 , R^2 , R^3 , and R^4 may independently be H, or a branched or un-branched C_1 - C_6 alkyl group. Or, R^1 , R^2 , R^3 , and R^4 may independently be H, or a branched or un-branched C_1 - C_4 alkyl group. R^1 may be a branched or unbranched C_1 - C_6 alkyl group while R^2 is a hydrogen atom to provide a cyclic acetal.

30 R^5 may be a branched or unbranched divalent alkyl group having 1 to 6, or 1 to 4, or 1 to 3, or 1 to 2 carbon atoms.

Particularly useful cyclic acetals for this invention leading to useful materials of commerce include 1,3-dioxolanes having R1 being an alkyl group that can lead to "E-series" type solvents. Likewise, 1,3-dioxolanes having R1 being an alkyl group and R3 being a methyl
5 group can lead to "P-series" type solvents.

Examples of cyclic acetals include 2-propyl-1,3-dioxolane, 2-propyl-1,3-dioxane, 2-ethyl-1,3-dioxolane, 2-ethyl-1,3-dioxane, 2-methyl-1,3-dioxolane, 2-methyl-1,3-dioxane, 2-propyl-4-methyl-1,3-dioxane, 5,5-dimethyl-2-propyl-1,3-dioxane, 5,5-dimethyl-2-ethyl-1,3-dioxane, 2-ethyl-1,3-dioxepane, 2-ethyl-
10 1,3,6-trioxocane, 4-methanol-2-propyl-1,3-dioxolane, or 4-methanol-2-propyl-1,3-dioxane, 4-methanol-2-propyl-1,3-dioxolane, and 2-propyl-1,3-dioxane-4-ol.

Examples of cyclic ketals include 2,2-dimethyl-1,3-dioxolane, 2,2-dimethyl-1,3-dioxane, 2,2,4-trimethyl-1,3-dioxolane, 2,2-dimethyl-1,3-dioxepane, 4-methanol-2,2-dimethyl-1,3-dioxane, 2,2-dimethyl-1,3-dioxan-4-
15 ol, 2,2-dimethyl-1,3,6-trioxocane, 2-isopropyl-2-methyl-1,3-dioxolane, 2-isopropyl-2-methyl-1,3-dioxane, 2-isopropyl-2,4-dimethyl-1,3-dioxolane, 2-isopropyl-2-methyl-1,3-dioxepane, 4-methanol-2-isopropyl-2-methyl-1,3-dioxane, 2-isopropyl-2-methyl-1,3-dioxan-4-ol, 2-isopropyl-2-methyl-1,3-6-
20 trioxocane, 2-methyl-2-pentyl-1,3-dioxolane, 2-methyl-2-pentyl-1,3-dioxane, 2,4-dimethyl-2-pentyl-1,3-dioxolane, 2-methyl-2-pentyl-1,3-dioxepane, 2-methyl-2-pentyl-4-methanol-1,3-dioxolane, 2-methyl-2-pentyl-1,3-dioxan-4-ol, 2-methyl-2-pentyl-1,3-6-trioxocane,

The reaction proceeds in the presence of a solid acid which remains
25 solid under reaction conditions. The solid acid is desirably a Brønsted acid or contains Brønsted acid sites. The reaction can proceed, for example, in the presence of a solid ion exchange resin, desirably a solid acidic ion exchange resin. The solid acid can be a weak or strong acid. Strongly acidic ion exchange resins such as macroreticulated polymeric material derived from
30 styrene or styrene and acrylic resins, such as divinylbenzene, containing pendant sulfonic acid groups are suitable. Examples of such resins include

those available from Dow Chemical Company and those formerly offered by Rohm and Haas, commercially available under the trade names of Amberlyst and Amberlite. For example, suitable ion exchange resins include Amberlyst® 15, Amberlyst 15DRY, Dowex® Monosphere 99 H, and Lewatit®
5 M S100, SP112, K1221, and K2641, available from Bayer AG. Other solid acids include polymers containing acid functionality such as sulfonated polymers, as examples Amberlyst, Dowex, Smopex (polypropylene polymer manufactured by Johnson Matthey), Nafion (PTFE polymer), alumina, silica, mixtures of silica and alumina, zeolites, such as ZSM-5, aluminum
10 phosphates, titanium oxides, tungsten on silica, heteropoly acids such as phosphomolybdates or phosphovanadates, and zirconia.

The reaction mixture is not treated to separate water from the reaction mixture prior to withdrawing the reaction mixture from the reaction zone. The reaction zone is liquid full with the liquid in the reaction zone being well mixed
15 or proceeding in plug flow. The reaction temperature is not particularly limited. The reaction conditions inside the reaction zone desirably keep the reaction mixture in a liquid state and are not set to exceed the boiling point of any ingredients under the reaction conditions. Suitable reaction temperatures are at least -15°C, or at least 0°C, or at least 15°C, or at least 25°C, or at least
20 30°C, or at least 40°C, or at least 50°C and desirably less than 110°C, up to 100°C, or up to 90°C, or up to 80°C.

The reaction mixture is withdrawn from the reaction zone as a liquid product stream line 4 as illustrated in Figure 1. The product stream is considered a liquid product stream if water, cyclic compounds, and
25 polyhydroxyl compounds are present in the product stream as a liquid and have not been subjected to temperatures above their boiling points in the reaction zone under reaction zone conditions.

The liquid product stream removed from the reaction zone is also a unique composition. There is now provided a liquid composition comprising
30 water, polyhydroxyl compounds, and cyclic compounds, each in the following mole percentages based on the moles of all liquids in the composition:

- a. water: at least 2 mole%, or at least 3 mole%, or at least 6 mole%, or at least 9 mole%, or at least 12 mole%, and up to 35 mole%, or up to 25 mole%, or up to 20 mole%, or up to 18 mole%;
- b. polyhydroxyl compounds: at least 50 mole%, or at least 60 mole%, or at least 70 mole%, or at least 75 mole%, or at least 80 mole%, and up to 95 mole%, or up to 90 mole%;
- c. cyclic compounds: at least 2 mole%, or at least 3 mole%, or at least 6 mole%, or at least 9 mole%, or at least 12 mole%, and up to 35 mole%, or up to 25 mole%, or up to 20 mole%, or up to 18 mole%;
- wherein the liquid composition optionally contains carbonyl compounds which, if present, do not exceed 20% of the number of moles of cyclic compounds, and wherein the cumulative amount of all liquid ingredient in the liquid composition other than a), b), c), and carbonyl compounds, if present, does not exceed 10 mole%, and the cyclic compounds comprise cyclic acetals, cyclic ketals, or a combination thereof.

The liquid composition optionally contains carbonyl compounds (i.e. aldehyde and/or ketone compounds) which, if present, do not exceed a cumulative amount of 10%, or do not exceed 5%, of the number of moles of cyclic compounds, and wherein the amount of any other liquid ingredient in the liquid composition does not exceed 8 mole%, or does not exceed 5 mole%.

The cyclic compound in the liquid product stream may be a cyclic acetal or a cyclic ketal. The liquid product stream line 4 is fed directly or indirectly to a distillation column to separate the cyclic compounds and water as one or more overhead product streams and unreacted polyhydroxyl compounds as one or more bottoms streams. The overhead product stream(s) may be a single overhead product stream as shown in line 5 of Figure 1 or multiple overhead product streams. The overhead product stream(s) exiting the distillation column is desirably a vapor stream(s). At least a portion of the condensable compounds in these vapor streams are desirably condensed for use as reflux and/or to isolate useful cyclic acetal

products and thereafter purify the concentration of the liquid cyclic acetal products through conventional concentration and/or separation techniques. As shown in Figure 1, the distillation column has an overhead product stream line 5, which is desirably a vapor when exiting the distillation column and may be condensed if desired. The overhead product stream exiting the column is rich in the concentration by weight of cyclic compounds relative to the concentration by weight of cyclic compounds present in bottoms stream, or in other words, the quantity of cyclic compounds in the overhead product stream is greater than the quantity of cyclic compounds withdrawn from the distillation column as a bottoms stream. It is preferred that the same holds true for water in that water is present in the overhead product stream and the overhead product stream is rich in concentration relative to the concentration in the bottoms stream. By rich is meant a higher concentration (in mole%) in one stream than the concentration of the same ingredient in the comparative stream, and that the concentration is measured against all compounds which condense at 0°C or higher (condensables). While the overhead product stream may contain unreacted polyhydroxyl compounds, the overhead product stream is depleted (concentration by moles is less) in the quantity of this ingredient relative to its quantity (concentration by moles) present in the bottoms stream. Thus, the bottoms stream is enriched in the number of unreacted polyhydroxyl compounds relative to the number present in the overhead product stream. The bottoms stream exits the distillation column as a liquid stream. The bottoms stream may also contain by-products other than water. It is desirable that if by-products are present, that the quantity present in the bottoms stream is greater than the quantity in the overhead product stream.

The number of theoretical stages or plates in the distillation column can be from about 5 to about 100, or about 10-30 plates.

The overhead product stream can be subjected to condensation in a condenser. The condensate is collected in receiver or reflux drum and optionally separated by any conventional means, such as a decanter. The

upper organic rich phase of the condensate in the receiver is withdrawn and recovered as product and can be further processed and purified to isolate a purified cyclic compound stream. The lower phase of the receiver is water rich, withdrawn from the receiver, and sent to a water treatment facility or further processed. Instead of a condenser, the overhead product stream can be fed to a second distillation column to separate water and unreacted carbonyl compounds from the desired cyclic compounds.

Table 1 below illustrates the mole% ranges (concentration ranges) for each ingredient in the overhead product stream removed from the distillation column train and after decanting (including the combination of the aqueous and organic phases), wherein the stated mole% is based on the weight of all ingredients within the overhead stream:

Table 1

Ingredient	Mole%	Mole%	Mole%
Water	30-50%	47-50%	48-49%
Unreacted Carbonyl Compounds	0.1-20%	0.2-5%	1.5-2.0%
By-Products	0-10%	0-1.0%	0.4-0.6%
Cyclic Compounds (acetals, ketals, or a combination)	30-50%	47-50%	48.5-49.5%
Polyhydroxyl Compounds	0-20%	0-1.0%	0.4-0.6%

The values in Table 1 above also apply to the mole% ranges for each ingredient in the overhead product stream, wherein the stated mole percentages are based on the cumulative moles of all fresh feeds entering the process.

The product stream exiting the reaction zone may optionally be subjected to one or more process steps prior to entering the distillation column. For example, if a mobile solid acid catalyst is used, the product stream can be filtered to remove the solid catalyst prior to distillation.

5 The bottoms stream 6 can be subjected to further process steps if desired. For example, the unreacted polyhydroxyl compounds present in the bottoms stream may be separated from the bottoms stream by any conventional separation technique. One such advantageous technique is feeding the bottoms stream to a settling tank and phase separating the
10 unreacted polyhydroxyl compounds from the by-products. The by-products advantageously phase separate as a top layer and can be decanted and removed from the bottom polyhydroxyl layer as a by-product stream 7 while the bottom polyhydroxyl layer can be removed at a location below the by-product layer such as depicted in streams 9 and 10. Alternatively, the
15 bottoms stream may be subjected to an extraction separation technique whereby a hydrocarbon extractant acting as a solvent for the more hydrophobic by-products is mixed with the bottoms stream to assist in the separation of the by-products stream. For example, organic solvents may be used in the extraction of byproducts and introduced into an extraction zone
20 through stream 8. Suitable solvents include liquid hydrocarbons with four carbons to more than twenty carbons, saturated and unsaturated, with or without cyclic structures, aliphatic and cyclic ethers, esters, fatty acids, halogenated hydrocarbons, aliphatic nitriles, and aliphatic and aromatic amines. Specific examples of organic solvents include heptane, octane, and
25 nonane.

Often the polyhydroxyl compounds are separated from the bottoms stream, at least a portion can be recycled back to the reaction zone. As shown in Fig 1, stream 10, a portion or all of the polyhydroxyl compounds separated from the bottoms stream and exiting the mixer/settler vessel are
30 returned to a mixing zone feeding the reaction zone. It is desirable to feed the recycle stream 10 to the mixing zone if a mixing zone is present to uniformly

disperse the carbonyl compounds in the polyhydroxyl composition. A portion of the polyhydroxyl compounds separated from the bottoms stream may be purged through stream 9 and further processed to purify and re-use the purge stream.

5 The process of the invention is capable of producing a cyclic compound yield of at least 90%, or at least 91%, or at least 92%, or at least 93%, or at least 94%, or at least 95%, or at least 96%, or at least 97%, and up to 100%, or up to 99.5%, or up to 99%, or up to 98.5%, or up to 98% based on the amount of aldehyde compounds fed to the reaction zone. The yield
10 can be conveniently determined by measuring the production of cyclic compounds in the overhead product stream removed from the distillation column.

 It is desirable to convert at least 90%, or at least 91%, or at least 92%, or at least 93%, or at least 94%, or at least 95%, or at least 96%, or at least
15 97%, or at least 98%, or at least 99%, and up to 100%, or up to 99.5%, or up to 99% of the aldehyde compounds.

 The selectivity to the cyclic compounds can be at least 90%, or at least 91%, or at least 92%, or at least 93%, or at least 94%, or at least 95%, or at least 96%, or at least 97%, or at least 98%, or at least 99%, and up to 100%,
20 or up to 99.5%, or up to 99%.

 The process of the invention may be run in a batch mode, a semi-continuous mode, or a continuous mode. In a continuous mode and in a steady state operation, the process of the invention has a capacity of producing at least 70 metric tons/yr of cyclic compounds, or at least 85, or at
25 least 90, or at least 110 metric tons/yr.

 The cyclic compounds in the separated cyclic compound stream can be converted through hydrogenolysis to provide the corresponding ether alcohol solvents. For example, the following cyclic acetals 2-propyl-1,3-dioxolane, 2-propyl-1,3-dioxane, 2-ethyl-1,3-dioxolane, 2-ethyl-1,3-dioxane, 2-
30 methyl-1,3-dioxolane, 2-methyl-1,3-dioxane, 5,5-dimethyl-2-propyl-1,3-dioxane, 2-ethyl-1,3-dioxepane, 2-ethyl-1,3,6-trioxocane, 4-methanol-2-

propyl-1,3-dioxolane, or 2-propyl-1,3-dioxane-4-ol, are suitable to make their respective solvents ethylene glycol monobutyl ether, 3-butoxy-1-propanol, ethylene glycol monopropyl ether, 3-propoxy-1-propanol, ethylene glycol monoethyl ether, 3-ethoxy-1-propanol, 3-butoxy-2,2-dimethyl-1-propanol, 4-propoxy-1-butanol, and diethylene glycol monobutyl ether, 3-butoxy-1,2-propanediol, and 2-butoxy-1,3-propanediol through hydrogenolysis.

Examples

The following apparatus was used for Examples 1-7. A glass, jacketed vessel was used as the reactor. It was maintained as liquid full by using an up-flow orientation. The solid catalyst was contained in the reactor. A distillation column was also used. The distillation column had two sections each being 1" vacuum-jacketed glass columns filled with 0.24" Pro-Pak distillation random packing. The upper section had 15" of packing, while the lower section had 30" of packing. The bottom reboiler was a 1-liter glass, hot-oil jacketed vessel attached to the bottom of the lower column section. The top of the upper section was connected to a glass, jacketed, reflux splitter with a magnetic swing-arm controller and a glass, jacketed condenser. The attached vent hose was connected to an ice trap, pressure controller, and vacuum pump. Vacuum-hose tubing was used to connect equipment. The liquid stream from the column base was connected by tubing to a positive displacement pump.

The tubing from the discharge of this pump was connected to a section which had two embodiments: a settler and an extractor. Each will be described. As a settler, tubing from the positive displacement pump was connected to a 120-ml glass, jacketed vessel. This vessel had two exit ports, one on the top and one on the bottom. During operations, it was maintained liquid full. The top port was connected to another positive displacement pump capable of removing byproduct material. The bottom port was connected by tubing to feed-material pumps described shortly. As an extractor, a glass feed vessel contained a solvent, e.g. octane. This solvent feed vessel was

connected to a positive displacement pump. The tubing from this pump and the tubing from column bottom pump are connected together. This combined stream was connected to a glass, 30-ml vessel maintained liquid-full which contained a magnetically-driven stirrer. This mixed stream was connected to
5 a 120-ml glass, jacketed vessel. This vessel had two exit ports, one on the top and one on the bottom. During operations, it was maintained liquid full. The top port was connected to another positive displacement pump capable of removing material enriched in byproduct material. The bottom port was connected by tubing to feed-material pumps described below.

10 Glass feed vessels were used which contained aldehyde compound feed material and polyhydroxyl compound feed material, separately. Each was connected by tubing to its own positive displacement pump. Tubing from these two feed-material pumps and tubing from the settler/extractor were connected together. The combined stream from these pumps was connected
15 to a glass, 30-ml liquid-full vessel which contained a magnetically-driven stirrer. A top exit port from the 30-ml vessel was connected to be bottom of the reactor vessel, completing the liquid circuit. A process control system was utilized to monitor temperatures and pump flow rates, and control the distillation column reflux splitter using a column temperature set point.
20 Nominal rates were 1 ml/min for fresh aldehyde compound feed, 1 ml/min for fresh polyhydroxyl compound feed, and 8 ml/min for unconverted recycled material.

When AMBERLYST® 15DRY was used as catalyst, it was prepared as follows. It was rinsed in DI water three times, and allowed to stand for one
25 hour or more in the polyhydroxyl compound. It was filtered and charged to the reactor.

In the examples given, the aldehyde used is n-butyraldehyde, and the polyhydroxyl compound is ethylene glycol.

Example 1: AMBERLYST® 15DRY Catalyst, 50-ml Reactor, No settler or extractor

AMBERLYST® 15DRY was prepared as described above and loaded into a 50-ml glass reactor. The reactor jacket oil-bath temperature was set to 45°C. No settler or extractor was installed. The process ran for 60 hours continuously, and samples were taken periodically. The conversion data showed no decrease, indicating no loss in catalyst activity. The overall conversion, selectivity, and yield were high: 93.1%, 99.0%, and 92.2%, respectively.

10

Example 2: AMBERLYST® 15DRY Catalyst, 100-ml Reactor, No settler or extractor

AMBERLYST® 15DRY was prepared as described above and loaded into a 100-ml glass reactor. The reactor jacket oil-bath temperature was set to 45°C. No settler or extractor was installed. The process ran for 70 hours continuously, and samples were taken periodically. The conversion data showed no decrease, indicating no loss in catalyst activity. The overall yield overall conversion, selectivity, and yield were high: 98.0%, 99.4%, and 97.4%, respectively.

15

Example 3: AMBERLYST® 15DRY Catalyst, 150-ml Reactor, No settler or extractor

AMBERLYST® 15DRY was prepared as described above and loaded into a 150-ml glass reactor. The reactor jacket oil-bath temperature was set to 45°C. No settler or extractor was installed. The process ran for 76 hours continuously, and samples were taken periodically. The conversion data showed no decrease, indicating no loss in catalyst activity. The overall conversion, selectivity, and yield were high: 97.7%, 99.4%, and 97.1%, respectively.

20

Example 4: AMBERLYST® 15DRY Catalyst, 150-ml Reactor, Heptane Settler Without Mixer

AMBERLYST® 15DRY was prepared as described above and loaded into a 150-ml glass reactor. Using a pump, heptane was added intermittently into the mixer, and a heptane-rich stream enriched in reaction byproducts was pumped and removed from the top of the settler. The reactor jacket oil-bath temperature was set to 45 °C. A 15-ml settler was installed in the settler zone, but no 30-ml mixer was installed. The process ran for 97 hours continuously, and samples were taken periodically. The conversion data showed no decrease, indicating no loss in catalyst activity. The overall conversion, selectivity, and yield were high: 98.0%, 99.5%, and 97.5%, respectively.

Example 5: AMBERLYST® 15DRY Catalyst, 150-ml Reactor, Mixer-Settler with Heptane Solvent

AMBERLYST® 15DRY from Example 4 was re-used. The reactor jacket oil-bath temperature was set to room temperature (22 °C). A 30-ml mixer followed by a 120-ml settler was installed in the separation zone. Using a pump, heptane was added intermittently into the mixer, and a heptane-rich stream enriched in reaction byproducts was removed from the top of the settler. The process ran for 96 hours continuously, and samples were taken periodically. Since the catalyst was re-used from the previous example, the accumulated catalyst operating time was 97-193 hours. The conversion data showed no decrease, indicating no loss in catalyst activity. The overall conversion, selectivity, and yield were high: 98.2%, 99.5%, and 97.7%, respectively.

Example 6: AMBERLYST® 15DRY Catalyst, 50-ml Reactor, Mixer-Settler with Octane Solvent

AMBERLYST® 15DRY from Example 5 was re-used. The reactor jacket oil-bath temperature was set to room temperature (22 °C). A 30-ml

mixer followed by a 120-ml settler was installed in the separation zone. Using a pump, octane was added intermittently into the mixer, and an octane-rich stream enriched in reaction byproducts was removed from the top of the settler. The process ran for 71 hours continuously. Because the catalyst was re-used from the previous example, the accumulated catalyst operating time was 193-264 hours. The conversion data showed no decrease, indicating no loss in catalyst activity. The overall conversion, selectivity, and yield were high: 97.8%, 99.3%, and 97.1%, respectively.

10 Example 7: AMBERLYST® 15DRY Catalyst, 100-ml Reactor, Settler, No Mixer or Solvent

AMBERLYST® 15DRY was prepared as described above and loaded into a 100-ml glass reactor. The reactor jacket oil-bath temperature was set to room temperature (22 °C). No mixer or solvent was used. A 120-ml settler was installed in the separation zone. A second, less-dense liquid phase was occasionally, intermittently removed from the top of the settler. The settler jacket set-point temperature was 60 °C. The process ran for 562 hours continuously, and samples were taken periodically. The conversion data showed no decrease, indicating no loss in catalyst activity. The overall conversion, selectivity, and yield were high: 96.8%, 98.0%, and 94.9% respectively.

What We Claim Is:

1. A process for making a cyclic compound composition comprising:
 - a. feeding a carbonyl composition comprising an aldehyde
5 compound, a ketone compound, or a combination thereof, and a polyhydroxyl composition comprising a polyhydroxyl compound, to a reaction zone at a molar ratio of all polyhydroxyl compounds to all carbonyl compounds fed to the reaction zone of at least 3:1; and
 - b. reacting the carbonyl composition with the polyhydroxyl
10 compound in the presence of a solid acid to generate a liquid reaction mixture comprising cyclic compounds, water, and unreacted polyhydroxyl compounds; and
 - c. without separating water from the reaction mixture as it is being formed in the reaction mixture, withdrawing the liquid reaction mixture
15 from the reaction zone as a liquid product stream; and
 - d. feeding the liquid reaction product stream directly or indirectly to a distillation column to separate cyclic compounds from unreacted polyhydroxyl compounds and withdrawing from the distillation column an overhead product stream and a bottoms stream, wherein the
20 overhead product stream comprises cyclic compounds, unreacted polyhydroxyl compounds and water and is rich in the concentration of cyclic compounds by moles relative to the bottoms stream, and the bottoms stream comprises unreacted polyhydroxyl compounds and is rich in the concentration of unreacted polyhydroxyl compounds by
25 moles relative to the overhead product stream;wherein the selectivity to cyclic compounds in the overhead product stream is at least 90%.
2. The process of claim 1, wherein at least a portion of unreacted
30 polyhydroxyl compounds are recycled back to the reaction zone.

3. The process of claim 1, wherein the bottoms stream further comprises reaction by-products, and wherein the reaction by-products are separated from unreacted polyhydroxyl compounds to produce a polyhydroxyl rich stream and a by-product rich stream.

5

4. The process of claim 1, wherein said molar ratio is at least 5:1.

5. The process of claim 1, wherein the carbonyl compounds and the polyhydroxyl compounds are premixed together prior to entry into the reaction vessel.

10

6. The process of claim 1, wherein the reaction vessel contains a fixed bed of solid acid.

15

7. The process of claim 6, wherein the reaction zone is liquid full.


8. The process of claim 7, wherein the reaction mixture flows in an upward direction in a vertically oriented reaction zone.

20

9. The process of claim 8, wherein the reaction vessel is a pipe.

10. The process of claim 1, wherein the cyclic compounds contain a moiety represented by the Formula II:

25



30

- wherein R^1 , R^2 , R^3 , and R^4 are independently H; a branched or un-branched C_1 - C_{50} alkyl, C_2 - C_{50} alkenyl, aryl- C_1 - C_{50} alkyl, aryl- C_2 - C_{50} alkenyl-, C_3 - C_{12} cycloalkyl, or a C_3 - C_{50} carboxylate ester; and wherein the alkyl, alkenyl, aryl, and cycloalkyl groups of R^1 , R^2 , R^3 , and R^4 ,
- 5 wherein R^1 and R^2 may optionally be bonded to each other through one or more carbon atoms, and wherein R^1 , R^2 , R^3 , and R^4 optionally containing 1, 2, or 3 oxygen atoms in the alkyl or alkenyl group, and optionally substituted with 1, 2, or 3 groups independently selected from -OH, halogen, dialkylamino, aldehyde, ketone, carboxylic acid,
- 10 ester, ether, alkynyl, dialkylamide, anhydride, carbonate, epoxide, lactone, lactam, phosphine, silyl, thioether, thiol, and phenol;
- wherein any one or both of R^3 and R^4 are optionally independently a hydroxyl, halogen, dialkylamino, amine, aldehyde, ketone, carboxylic acid, ester, ether, alkynyl, dialkylamide, anhydride,
- 15 carbonate, epoxide, lactone, lactam, phosphine, silyl, thioether, thiol, or phenol;
- wherein R^5 is branched or unbranched divalent alkyl or divalent alkenyl group each having 1 to 20 carbon atoms and optionally containing 1, 2, or 3 oxygen atoms in the alkyl or alkenyl group and
- 20 optionally substituted with -OH, halogen, dialkylamino, aldehyde, ketone, carboxylic acid, ester, ether, alkynyl, aryl, dialkylamide, anhydride, carbonate, epoxide, lactone, lactam, phosphine, silyl, thioether, thiol, and phenol; and
- wherein n is an integer selected from 0 or 1.

25

11. The process of claim 1, wherein the solid acid comprises an acidic ion exchange resin.
12. The process of claim 1, wherein the reaction conditions within the
- 30 reaction zone retain the reaction mixture in a liquid state and are not set to

exceed the boiling point of any ingredients in the reaction mixture under the operating conditions of the reaction zone.

13. The process of claim 1, wherein the temperature in the reaction zone
5 ranges from -15°C to 110°C.

14. The process of claim 1, wherein the yield of cyclic compounds in the overhead product stream is at least 90%.

10 15. The process of any one of claims 1-13, wherein the carbonyl compounds comprise propionaldehyde, butyraldehyde, isobutyraldehyde, 2-ethylhexaldehyde, 1,3-cyclohexanedicarboxaldehyde, 1,4-cyclohexanedicarboxaldehyde, or combinations thereof, and the polyhydroxyl compound comprises ethylene glycol, or 1,2-propanediol or combinations
15 thereof.

16. The process of any one of claims 1-13, wherein the cyclic compounds comprise 2-propyl-1,3-dioxolane, 2-propyl-1,3-dioxane, 2-ethyl-1,3-dioxolane, 2-ethyl-1,3-dioxane, 2-methyl-1,3-dioxolane, 2-
20 methyl-1,3-dioxane, 2-propyl-4-methyl-1,3-dioxane, 5,5-dimethyl-2-propyl-1,3-dioxane, 5,5-dimethyl-2-ethyl-1,3-dioxane, 2-ethyl-1,3-dioxepane, 2-ethyl-1,3,6-trioxocane, 4-methanol-2-propyl-1,3-dioxolane, or 4-methanol-2-propyl-1,3-dioxane, or combinations thereof.

25

17. The process of any one of claims 1-13, wherein the process is continuous and the yield of cyclic compounds is at least 95%.

18. A liquid composition comprising water, polyhydroxyl compounds, and
30 cyclic acetal compounds, each in the following mole percentages based on the moles of all liquids in the composition:

- a) water: at least 2 mole%
- b) polyhydroxyl compounds: at least 50 mole%
- c) cyclic compounds: at least 2 mole%

wherein the liquid composition optionally contains cyclic compounds which, if
5 present, do not exceed 20% of the number of moles of cyclic compounds, and
wherein the cumulative amount of any other liquid ingredient in the liquid
composition does not exceed 10 mole%, and wherein the cyclic compounds
comprise cyclic acetals, cyclic ketals, or a combination thereof.

10 19. The liquid composition of claim 18, comprising the following mole
percentages:

- a) water: at least 3 mole% and up to 25 mole%;
- b) polyhydroxyl compounds: at least 50 mole% and up to 95
mole%;
- 15 c) cyclic compounds: at least 3 mole% and up to 25 mole%;

20. The liquid composition of claim 19, comprising the following mole
percentages:

- a) water: at least 9 mole% and up to 25 mole%;
- 20 c) cyclic compounds: at least 9 mole% and up to 25 mole%.

1/1

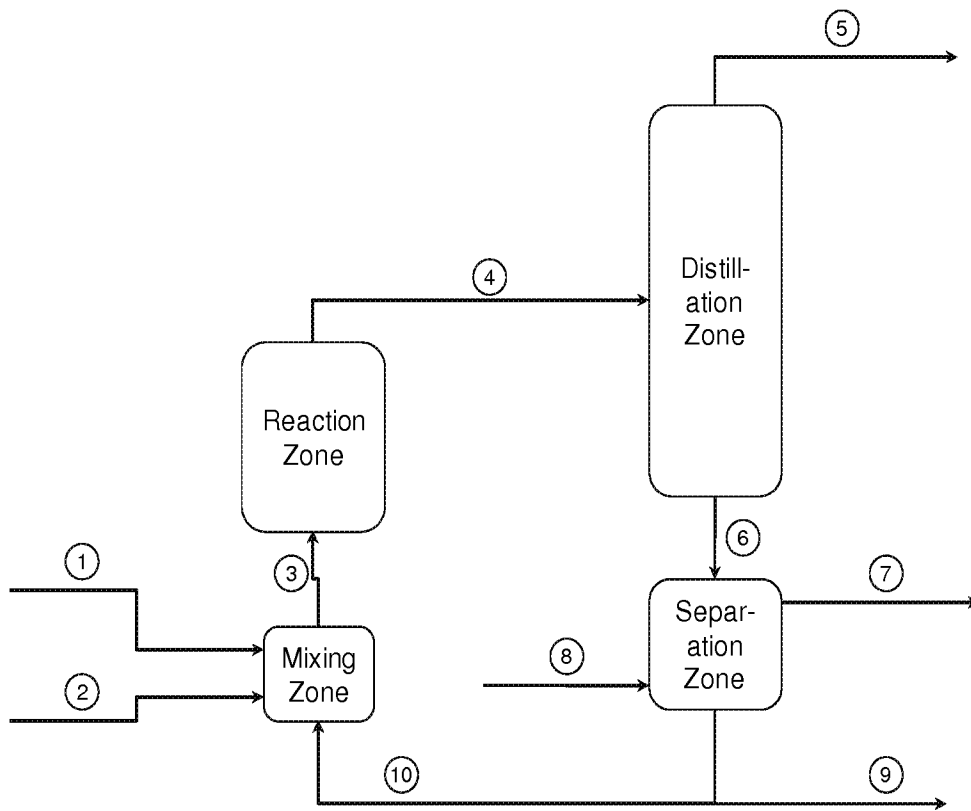


Figure 1

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/041459

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C07D317/12
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 C07D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 906 246 A1 (ARKEMA FRANCE [FR]) 28 March 2008 (2008-03-28) page 2, lines 5-9; claims 1,3 page 4, lines 12-25 page 1, lines 26-31	1-20
A	----- WO 03/002547 A1 (UNIV MICHIGAN STATE [US]) 9 January 2003 (2003-01-09) claim 1	1-20
A	----- US 5 917 059 A (BRUCHMANN BERND [DE] ET AL) 29 June 1999 (1999-06-29) cited in the application the whole document ----- -/-	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 August 2012

Date of mailing of the international search report

28/08/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Schuemacher, Anne

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/041459

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006/129000 A1 (GORING MATTHIAS [DE] ET AL GOERING MATTHIAS [DE] ET AL) 15 June 2006 (2006-06-15) cited in the application the whole document -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/041459

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2906246	A1	28-03-2008	NONE
WO 03002547	A1	09-01-2003	CA 2451763 A1 09-01-2003 EP 1406886 A1 14-04-2004 US 6548681 B1 15-04-2003 US 2003187281 A1 02-10-2003 WO 03002547 A1 09-01-2003
US 5917059	A	29-06-1999	AT 194984 T 15-08-2000 CA 2219540 A1 15-05-1998 DE 19647395 A1 20-05-1998 DK 842929 T3 20-11-2000 EP 0842929 A1 20-05-1998 ES 2149538 T3 01-11-2000 US 5917059 A 29-06-1999
US 2006129000	A1	15-06-2006	NONE