

(51) International Patent Classification:
C09C 1/30 (2006.01)(21) International Application Number:
PCT/US2013/031274(22) International Filing Date:
14 March 2013 (14.03.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/615,654 26 March 2012 (26.03.2012) US
61/745,906 26 December 2012 (26.12.2012) US(71) Applicant: CABOT CORPORATION [US/US]; Two
Seaport Lane, Suite 1300, Boston, MA 02210-2019 (US).

(72) Inventors; and


(71) Applicants : GARCIA, Angelica, Maria Sanchez
[VE/US]; 65 Beacon Street, Apt. 203, Somerville, MA
02143 (US). SIMS, Elizabeth [US/US]; 5 Hawthorne
Lane, Bedford, MA 01730 (US). SULLIVAN, Sean
[US/US]; 62 Springvale Avenue, Lynn, MA 01904 (US).
GRAHAM, Geary [US/US]; 109 Clover Avenue, Savoy,
IL 61874 (US). KAMBARA, Hajime [JP/US]; 2 Old
Lowell Road, Westford, MA 01886 (US).(74) Agent: HILL, Gregory, M.; Cabot Corporation, 157 Con-
cord Road, Billerica, MA 01821 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TREATED FUMED SILICA

FIG. 1

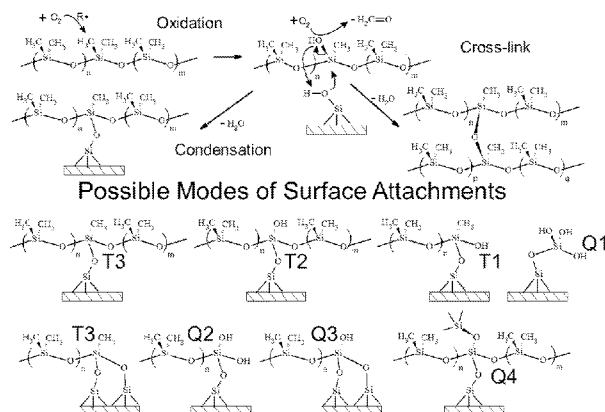

(57) Abstract: Disclosed herein are treated fumed silica particles comprising a modified polydialkylsiloxane on the surface thereof, a method for preparing treated fumed silica particles, and a rheological system comprising a polar liquid and treated fumed silica particles. Also disclosed are toner compositions comprising toner particles and treated fumed silica particles comprising a modified polydialkylsiloxane.

TREATED FUMED SILICA

RELATED APPLICATIONS

[0001] This application claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Application No. 61/615,654, filed March 26, 2012, and U.S. Provisional Application No. 61/745,906, filed December 26, 2012, the disclosures of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] Disclosed herein are treated fumed silica particles. Also disclosed are the use of the treated fumed silica particles in adhesive, sealant, and toner compositions.

BACKGROUND

[0003] Structured fluids with a relatively high resistance to flow (yield stress) are highly demanded in the adhesives, gel coats, composites, and coatings markets. One method of modifying the rheological properties of such compositions is to incorporate particles, particularly fumed silica particles, into the composition. Fumed silica has a low bulk density and high surface area, and its three-dimensional structure results in viscosity-increasing, thixotropic behavior when used as a thickener or reinforcing filler. When used in a matrix (e.g., polymer, solvent, resin, etc.), the flow properties of the composition are determined by particle-matrix and particle-particle interactions. In order to obtain desirable properties, the particle-particle interactions must be strong enough relative to the particle-matrix interactions to form a network of particles in the composition. If the particle-particle interactions are weaker or smaller in number than the particle-matrix interactions, the system will act as a suspension and a network will not be formed. Thus, in polar systems, highly hydrophobic particles have been used as rheological control agents. However, highly hydrophobic particles can be difficult to disperse in a polar matrix, and may tend to remain agglomerated as they were in the powder form, thereby reducing the number of contact points that are necessary to create a strong network. This not only creates difficulties in processing, but also may result in sub-optimal initial or retained yield-stress properties.


Thus, there is a need for treated silica particles that can provide improved rheological performance.

[0004] Electrophotographic image formation comprises developing an electrostatic latent image formed on a photoreceptor with a toner comprising a colorant dispersed in a binder resin, transferring the toner image to a receiving paper, and fixing the transferred toner image by means of, for example, a hot roll. The photoreceptor is cleaned after the transferring step to prepare for the next latent image formation.

[0005] Silica particles are often combined with toner particles to improve one or more selected properties of the toner particles, including fluidity, transferability, fixability, and cleaning properties. Typically, the silica particles are subjected to a chemical treatment to render the surface of the particles hydrophobic. However, there is a continued need for developing treated silicas to provide desired properties applicable for toner compositions.

SUMMARY

[0006] One embodiment provides a treated fumed silica particle comprising a modified polydialkylsiloxane on the surface thereof. The modified polydialkylsiloxane (i) comprises a relative proportion of T2 groups of 20% or less, and a relative proportion of T1 groups of 10% or less; and (ii) comprises groups having the structure:

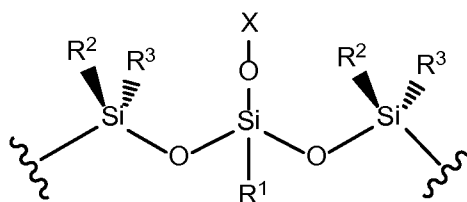


wherein X is a trialkylsilyl or dialkylsilyl; and R^1 , R^2 and R^3 are independently hydroxyl, alkyl, alkoxy, silyl, or siloxy. The treated fumed silica particle has a surface silanol content of about 1 to about 2.2 SiOH/nm². Also provided is a rheological system comprising the treated fumed silica particle and a polar liquid.

[0007] Another embodiment provides a method for preparing a treated fumed silica particle comprising (a) dispersing 1-30 wt% polydialkylsiloxane-treated silica particles with 0-15 wt% water to provide a water-in-silica dispersion; (b) combining the water-in-silica dispersion with a treating agent to provide a reaction mixture, wherein the treating agent

comprises (i) a silazane, or (ii) an alkoxysilane or siloxane and an amine; and (c) maintaining the reaction mixture in an inert atmosphere at 25-300 °C for 5 min-24 hours to provide the treated fumed silica particle.

[0008] Another embodiment provides a toner composition comprising toner particles and treated fumed silica particles, wherein the fumed silica particles comprise a modified polydialkylsiloxane on the surface thereof, and wherein:

(a) the modified polydialkylsiloxane (i) comprises a relative proportion of T2 groups of 20% or less, and a relative proportion of T1 groups of 10% or less; and (ii) comprises groups having the structure:

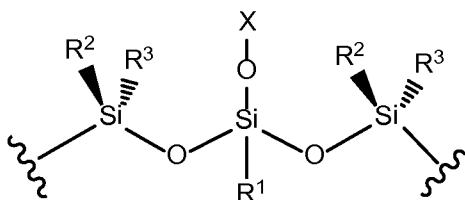

wherein X is a trialkylsilyl or dialkylsilyl; and R^1 , R^2 and R^3 are independently hydroxyl, alkyl, alkoxy, silyl, or siloxy; and

(b) the silica particle has a surface silanol content of about 1 to about 2.2 SiOH/nm².

[0009] Another embodiment provides a toner composition comprising toner particles and treated fumed silica particles, the treated fumed silica particles prepared by a method comprising:

(a) dispersing 1-30 wt% polydialkylsiloxane-treated silica particles with 0-15 wt% water to provide a water-in-silica dispersion;

(b) combining the water-in-silica dispersion with a treating agent to provide a reaction mixture, wherein the treating agent comprises (i) a silazane, or (ii) an alkoxysilane or siloxane and an amine; and

(c) maintaining the reaction mixture in an inert atmosphere at 25-300 °C for 5 min-24 hours to provide the treated fumed silica particle.

BRIEF DESCRIPTION OF THE DRAWING(S)

[0010] Figure 1 is a schematic illustration of PDMS attachment to the surface of a silica particle in the presence of air; and

[0011] Figure 2 is a graphical representation of the performance (initial yield stress and percent retained yield stress) of PDMS-treated materials before and after treatment with HMDZ.

DETAILED DESCRIPTION

[0012] Disclosed herein are treated fumed silica particles comprising a modified polydialkylsiloxane on the surface thereof. Also disclosed are toner compositions comprising toner particles and the treated fumed silica particles.

[0013] Fumed silica comprises microscopic droplets of amorphous silica fused into branched, chainlike, three-dimensional secondary particles which then agglomerate into tertiary particles. Fumed silica typically has a high surface area (e.g., 50-600 m²/g) and low bulk density (e.g., 0.03-0.2 g/cm³). Any suitable fumed silica can be used, such as commercially available fumed silicas including, but not limited to ULTRABOND™ 4740 and Cabot CAB-O-SIL® TS720 both by Cabot Corporation). In one embodiment, the treated fumed silica particles disclosed herein have a surface area ranging from 30 m²/g to 350 m²/g.


[0014] The surface chemistry of untreated fumed silica is dominated by silanol groups. However, fumed silica can be treated with a hydrophobic treating agent to reduce or substantially eliminate surface silanol groups in an effort to render the silica particle partially or completely hydrophobic. When a silica particle is treated with a polydialkylsiloxane (PDAS), for instance, the PDAS chain reacts with one or more silanol groups on the silica surface replacing them with siloxane bonds between the silica atoms of the PDAS and the surface silicon atoms. Thus, a hydrophobically treated silica has a reduced surface silanol content as compared to the untreated silica.

[0015] The PDAS itself comprises silicon atoms with functional groups, which can be classified according to the number of Si-O-Si bonds associated therewith. Thus, for instance, a T1 group is a silicon atom with three functional groups and only a single Si-O-Si

bond; a T2 group is a silicon atom with two functional group and two Si-O-Si bonds; and a T3 group is a silicon atom with a single functional group and three Si-O-Si bonds.

[0016] The functional groups of a PDAS chain often are alkyl or other hydrocarbon containing groups that impart hydrophobic properties. However, during the treatment or post-processing of the silica, the functional groups can be oxidized resulting in a certain proportion of silanol groups on the PDAS chain itself, sometimes referred to as silanol-on-silane.

[0017] The treated silica particle provided herein comprises a modified PDAS having the structure:

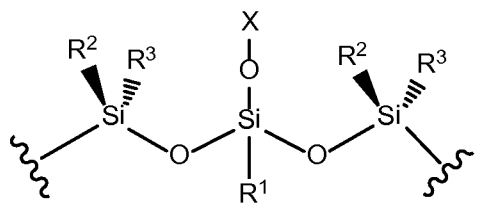

wherein X is a trialkylsilyl or dialkylsilyl, such as trimethylsilyl, and R^1 , R^2 and R^3 are independently hydroxyl, alkyl, alkoxy, silyl, or siloxy. In one embodiment, R^1 is hydroxyl, alkyl, alkoxy, silyl, or siloxy and R^2 and R^3 are alkyl. In another embodiment, R^1 , R^2 , and R^3 , are independently methyl or ethyl.

[0018] The modified polydialkylsiloxane also comprises a relative proportion of T2 groups of about 20% or less, such as about 18% or less, about 16% or less, about 14% or less, about 10% or less, or about 1% or less, and a relative proportion of T1 groups of about 10% or less, such as about 8% or less, about 6% or less, about 4% or less, or about 1% or less.

[0019] In one embodiment, the treated fumed silica particle has a surface silanol content of about 1 to about 2.2 SiOH/nm^2 , for instance, about 1.1 to about 2.2 SiOH/nm^2 , about 1.2 to about 2.2 SiOH/nm^2 , about 1.3 to about 2.2 SiOH/nm^2 , about 1.4 to about 2.2 SiOH/nm^2 , about 1.5 to about 2.2 SiOH/nm^2 , about 1.6 to about 2.2 SiOH/nm^2 , about 1.7 to about 2.2 SiOH/nm^2 , or about 1.8 to about 2.2 SiOH/nm^2 .

[0020] Without wishing to be bound by any theory or mechanism of action, it is believed that a treated fumed silica particle as described herein has a balance of

hydrophobic properties exerted by the modified PDAS and hydrophilic properties provided by the surface silanol concentration, which allows the particle to provide superior rheological performance properties when combined with a polar matrix fluid.

[0021] The treated fumed silica particle can be further characterized by its surface energy (SEP04). SEP04 can be measured as described in U.S. Patent No. 7,776,603 B2, which is herein incorporated by reference. Briefly, this method identifies the surface properties of a particulate material by means of measuring the spreading pressure of a gas, e.g., water, ethylamine, or chloroform, on the particulate material of interest. In some embodiments, the treated fumed silica particles have a SEP04 value of about 1 mJ/m² or more, about 2 mJ/m² or more, about 3 mJ/m² or more, about 4 mJ/m² or more, about 5 mJ/m² or more, about 6 mJ/m² or more, or about 10 mJ/m² or more.

[0022] The treated fumed silica particles also can be characterized by initial yield stress (IYS) when incorporated in a polar liquid matrix. Yield stress can be determined from a rheological experiment using any of the viscoplastic models available in the literature (Macosko, *Rheology: Principles and Measurements and Applications*, VCH, New York (1994)). One example of a protocol for determining yield stress is described in the Examples provided herein. In one embodiment, the treated fumed silica particles exhibit an IYS of about 30 Pa or more, about 50 Pa or more, about 70 Pa or more, or even about 90 Pa or more, as measured using the protocol described in the Examples.

[0023] The treated fumed silica particles can be characterized by their ability to retain a yield stress over time. The retained yield stress can be measured according to following equation: Retained Yield Stress (%) = Yield Stress at Time t_2 / Yield Stress at Time t_1 , where t_1 is less than t_2 , at a given temperature T. The retained yield stress may be measured after any duration of time (t) subsequent mixing of the particles with the polar matrix liquid, such as 1 minute, 10 minutes, 1 hour, 1 day, 5 days, 10 days, 20 days, 30 days, 50, days, or 100 days, at any temperature (T), such as 0°C, 20°C, 40°C, 60°C, 80°C, or 100°C. In one embodiment, the retained yield stress is about 60% or more, about 70% or more, about 80% or more, about 90% or more, or even about 100% when measured after 28 days or longer at 60°C (i.e., Retained Yield Stress (%) = 100* (Yield Stress after 28 days @ 60°C / Yield Stress on Day 1)).

[0024] In one embodiment, the treated fumed silica particle has a relatively short wet-in time, which refers to the amount of time it takes to incorporate treated fumed silica material into a polar liquid matrix, such as an epoxy resin. In one embodiment, the particles exhibit a wet-in time about 15 minutes or less, such as about 10 minutes or less, about 8 minutes or less, about 6 minutes or less, or about 5 minutes or less when mixed into an Bisphenol A diglycidyl ether epoxy resin (e.g., Epon 828 by MOMENTIVE®) at a concentration of 4wt%.

[0025] Also disclosed herein are methods for preparing treated fumed silica particles having properties as described herein. The method comprises (a) dispersing polydialkylsiloxane-treated silica particles with water to provide a water-in-silica dispersion; (b) combining the water-in-silica dispersion with a treating agent to provide a reaction mixture; and (c) maintaining the reaction mixture in an inert atmosphere to provide the treated fumed silica particle.

[0026] Any suitable amount of polydialkylsiloxane-treated silica particles and water can be combined to provide the water-in-silica dispersion. In one embodiment, the silica and water are used in proportions sufficient to provide a “dry” dispersion, also referred to as “dry water.” In one embodiment, the method comprises dispersing 1-30 wt% polydialkylsiloxane-treated silica particles with 0-15 wt% water to provide the water-in-silica dispersion. In another embodiment, the water-in-silica dispersion comprises greater than a stoichiometric amount of water relative to the treating agent.

[0027] In one embodiment, the treating agent comprises (i) a silazane, or (ii) an alkoxysilane or siloxane and an amine. Examples of suitable treating agents include hexamethyldisilazane (HMDZ), vinyl silazane (VHMDZ), methoxytrimethylsilane or trimethylmethoxysilane used in combination with an amine, or combinations thereof. The amine can be a primary, secondary, or tertiary amine, including ammonia. Multiple treating agents can be used, either simultaneously or sequentially.

[0028] The treating agent can be combined with the water-in-silica dispersion in any suitable proportion to provide a reaction mixture. In one embodiment, the method comprises combining about 1-15 wt% of a treating agent based on the weight of the dry silica with the water-in-silica dispersion.

[0029] The treating agent can be combined with the water-in-silica dispersion in any suitable manner. For instance, the treating agent can be aerosolized or atomized and combined with the water-in silica dispersion.

[0030] The reaction mixture can be maintained in an inert atmosphere for a duration and at a temperature sufficient to provide a particle with the desired characteristics. In one embodiment, the reaction mixture is maintained at a temperature ranging from 25-300°C, such as from 25-100°C, or even from 25-60°C. The reaction mixture can be maintained for any suitable time, such as from 5 min-24 hours, from 5 min-6 hours, or even from 5-60 min. In one embodiment, the reaction mixture can be maintained with agitation or under fluidizing conditions.

[0031] In one embodiment, the method disclosed herein uses a polydialkylsiloxane (PDAS)-treated fumed silica particle as a starting material. Any suitable PDAS-treated silica particle can be used. For example, a PDAS-treated silica particle with a carbon content of about 5-7%, a surface silanol content of about 0-1.5 SiOH/nm², and/or a silanol on silane content of about 0.1 SiOH/nm² or lower can be used. PDAS-treated silica particles are commercially available, some of which are identified in the Examples.

[0032] The method can further comprise venting byproducts of the reaction from the reaction mixture. In one embodiment, the reaction mixture byproducts are vented at a temperature ranging from 60-300°C.

[0033] In one embodiment, the method produces a treated fumed silica particle that exhibits an increased initial yield stress (IYS) as compared to the PDAS-treated silica particle used as starting material when incorporated into a polar matrix fluid. The relative change in IYS is determined according to the following equation: Relative Change IYS (%) = $(IYS_{\text{post-treatment}} - IYS_{\text{pre-treatment}} / IYS_{\text{pre-treatment}}) \times 100\%$, wherein $IYS_{\text{post-treatment}}$ refers to the IYS of the treated fumed silica particle resulting from the methods disclosed herein, and $IYS_{\text{pre-treatment}}$ refers to the IYS of the PDAS-treated silica starting material. The IYS of the particles produced by the inventive method desirably exhibit an IYS that is higher than the IYS of the starting PDAS-treated fumed silica particle, such as 1% higher, 5% higher, 20% higher, 50% higher, or 100% higher, or more. The IYS can be measured by the method described in the Examples.

[0034] One embodiment provides a rheological system comprising a polar liquid and a treated fumed silica particle. The rheological system comprises any amount of treated fumed silica particles. In one embodiment, the rheological system comprises from 0.5-15% by weight of the treated fumed silica particles.

[0035] The polar liquid can be any polar liquid, including, but not limited to, polar sealants and adhesives, particularly epoxies. Suitable polar compositions include, for instance, unsaturated polyester resins, polyurethane, silane-terminated polymers, vinyl ester resins, acrylates, cyanoacrylates, methylmethacrylates, polyvinyl acetate, polyvinyl alcohol, polyvinyl ethers, ethylene-vinyl acetate, ethylene-acrylic acid copolymers, polyvinyl acetates, polystyrene, polyvinyl chloride, styrene-butadiene rubber, chloroprene rubber, nitrile rubber, butyl rubber, polysulphide, polyethylene, polypropylene, fluorinated hydrocarbons, polyamides, saturated polyesters and copolyesters, phenol-formaldehyde resins, cresol-/resorcinol-formaldehyde resins, urea-formaldehyde resins, melamine-formaldehyde resins, polyimides, polybenzimidazoles, polysulphones, silicones, silane-crosslinked polymers or mixtures thereof.

[0036] The rheological system can further comprise additives typically included in adhesive or sealant compositions. Non-limiting examples of such additives include solvents, water, surfactants, fillers, thixotropic agents in addition to the disclosed treated silica, adhesion promoters, colorants, catalysts, and aging inhibitors. In one embodiment, the rheological system does not contain additives that are not typically contained in an adhesive or sealant composition other than the treated fumed silica disclosed herein.

[0037] In one embodiment, the rheological system exhibits a high retained yield stress. The retained yield stress can be determined according to following equation: Retained Yield Stress (%) = $100 * (\text{Yield Stress at Time } t_2 / \text{Yield Stress at Time } t_1)$, at a given temperature T. The retained yield stress may be measured after any duration of time (t) subsequent mixing of the particles with the polar matrix liquid, such as 1 minute, 10 minutes, 1 hour, 1 day, 5 days, 10 days, 20 days, 30 days, 50, days, or 100 days, at any temperature (T), such as 0°C, 20°C, 40°C, 60°C, 80°C, or 100°C. In one embodiment, the retained yield stress is about 60% or more, about 70% or more, about 80% or more, about

90% or more, or even about 100% when measured after 28 days or longer at 60°C (i.e., Retained Yield Stress (%) = Yield Stress after 28 days @ 60°C / Yield Stress on Day 1).

[0038] In one embodiment, the rheological system retains a high percentage of its viscosity over time. In one embodiment, the retained viscosity is about 60% or more, about 70% or more, about 80% or more, about 90% or more, or even about 100% over a period of 28 days when measured by the same method described herein for determining yield stress, with viscosity extracted at a shear rate ranging from 0.01 to 1000 s⁻¹, e.g., a shear rate ranging from 0.01 to 10 s⁻¹.

[0039] One embodiment provides a toner composition comprising the treated fumed silica particles and toner particles. The toner particles can be any suitable toner particles. Suitable toner particles typically comprise a colorant and a binder resin.

[0040] The colorant can be any suitable colorant. A wide range of colored pigments, dyes, or combinations of pigments and dyes can be used as the colorant. The colorant can be blue, brown, black such as carbon black, cyan, green, violet, magenta, red, yellow, as well as mixtures thereof. Suitable classes of colored pigments and dyes include, for example, anthraquinones, phthalocyanine blues, phthalocyanine greens, diazos, monoazos, pyranthrone, perylenes, heterocyclic yellows, quinacridones, and (thio)indigoids. The colorant can be present in any suitable amount, e.g., an amount sufficient to provide the desired color to the toner composition. Generally, the colorant is present in an amount of about 1% by weight to about 30% by weight of the toner composition; however, lesser or greater amounts of the colorant can be utilized.

[0041] The binder resin can be any suitable binder resin. Illustrative examples of suitable binder resins include homopolymers and copolymers of polyesters, polyamides, polyolefins, styrene acrylates, styrene methacrylates, styrene butadienes, crosslinked styrene polymers, epoxies, polyurethanes, vinyl resins, including homopolymers or copolymers of two or more vinyl monomers, polyesters, and mixtures thereof. In one embodiment, the binder resin can include (a) homopolymers of styrene and its derivatives and copolymers thereof such as polystyrene, poly-p-chlorostyrene, polyvinyltoluene, styrene p-chlorostyrene copolymer, and styrene vinyltoluene copolymer, (b) copolymers of styrene and acrylic acid ester such as styrenemethyl acrylate copolymer, styrene ethyl

acrylate copolymer, styrene-n-butyl acrylate copolymer, and styrene-2-ethylhexyl acrylate copolymer, (c) copolymers of styrene and methacrylic acid ester such as styrene methyl methacrylate, styrene ethyl methacrylate, styrene n-butyl methacrylate, and styrene 2-ethylhexyl methacrylate, (d) multi-component copolymers of styrene, acrylic acid ester, and methacrylic acid ester, (e) styrene copolymers of styrene with other vinyl monomers such as acrylonitrile, vinyl methyl ether, butadiene, vinyl methyl ketone, acrylonitrile-indene, and maleic acid ester, (f) polymethyl methacrylate, polybutyl methacrylate, polyvinyl acetate, polyvinyl butyral, polyacrylic acid resin, phenolic resin, aliphatic or alicyclic hydrocarbon resin, petroleum resin, and chlorin paraffin, and (g) mixtures thereof. Other types of suitable binder resins are known to those skilled in the art. The binder resin can be present in any suitable amount, typically about 60 wt. % to about 95 wt. % (e.g., about 65 wt. % to about 90 wt. %, or about 70 wt. % or about 85 wt. %) of the toner composition.

[0042] The surface-treated silica particles can be present in any suitable amount in the toner composition. The surface-treated silica particles can be present in an amount of about 0.01 wt. % or more (e.g., about 0.05 wt. % or more, about 0.1 wt. % or more, about 0.5 wt. % or more, about 1 wt. % or more, about 2 wt. % or more, about 3 wt. % or more, about 4 wt. % or more, or about 5 wt. % or more) based on the total weight of the toner composition. In addition, the surface-treated silica particles can be present in an amount of about 10 wt. % or less (e.g., about 8 wt. % or less, about 6 wt. % or less, about 5 wt. % or less, or about 4 wt. % or less) based on the total weight of the toner composition. For example, the surface-treated silica particles can be present in an amount of about 0.01 wt. % to about 10 wt. % (e.g., about 0.1 wt. % to about 8 wt. %, about 0.5 wt. % or about 5 wt. %, or about 0.1% to 4%) based on the total weight of the toner composition (e.g., the total weight of the toner particles). For example, the treated fumed silica can be present in the toner composition with a loading ranging from 0.1% to 4% by weight relative to the formulated toner.

[0043] Optional additives can be present in the toner composition, such as, for example, magnetic material; carrier additives; positive or negative charge controlling agents such as quaternary ammonium salts, pyridinium salts, sulfates, phosphates, and carboxylates; flow aid additives; silicone oils; waxes such as commercially available

polypropylenes and polyethylenes; and other known additives. Generally, these additives are present in an amount of about 0.05 wt. % to about 30 wt. % (e.g., about 0.1 wt. % to about 25 wt. %, or about 1 wt. % to about 20 wt. %) of the toner composition; however, lesser or greater amounts of the additives can be utilized depending on the particular system and desired properties.

[0044] Conventional equipment for dry blending of powders can be used for mixing or blending the surface-treated silica particles with toner particles to form a toner composition.

[0045] The toner composition can be prepared by a number of known methods, such as admixing and heating the surface-treated silica particles, the colorants, the binder resin, and optional charge-enhancing additives and other additives in conventional toner (melt) extrusion devices and related equipment. Conventional equipment for dry blending of powders may be used. Other methods include spray drying, melt dispersion, extrusion processing, dispersion polymerization, and suspension polymerization, optionally followed by mechanical attrition and classification to provide toner particles having a desired average size and a desired particle size distribution. Compounding of the pigment and other ingredients with the resin is generally followed by mechanical attrition and classification to provide toner particles having a desired particle size and particle size distribution. Chemical toners, also known as chemically prepared toners, are produced in a liquid phase; the resin particles are generally formed in the presence of the colorant. For example, a process has been developed in which a polymer latex is combined with an aqueous pigment dispersion and agglomerated using a coagulant to form polymer particles. Another process involves the aqueous suspension polymerization of a dispersion of pigment in at least one monomer. Also, a pigment/polyester resin dispersion has been prepared and combined with water, followed by evaporation of the solvent.

[0046] The toner composition can be used alone in mono-component developers or can be mixed with suitable dual-component developers. The carrier vehicles which can be used to form developer compositions can be selected from various materials. Such materials typically include carrier core particles and core particles overcoated with a thin layer of film-forming resin to help establish the correct triboelectric relationship and charge level with

the toner employed. Suitable carriers for two-component toner compositions include iron powder, ferrite powder, and nickel powder, all of which are typically coated with a resin coating such as an epoxy or fluorocarbon resin, and any other carrier known to those of skill in the art.

[0047] As is known to those of ordinary skill in the art, toners may optionally include other additives, for example, for providing free flow control, lubrication, and improved developing and running performance. Such additives may include, for example, inorganic powders including metal oxides of magnesium, zinc, aluminum, cerium, cobalt, iron, zirconium, chromium, manganese, strontium, tin, or antimony; composite metal oxides including calcium titanate, magnesium titanate, or strontium titanate; metal salts including calcium carbonate, magnesium carbonate, or aluminum carbonate; clay minerals such as kaolin; phosphoric acid compounds such as apatite; silicon compounds such as silicon carbide or silicon nitride; or carbon powders such as carbon black and graphite powder. Organic particles or composite particles may also be added, including, e.g., resin particles such as polyamide resin particles, silicone resin particles, silicone rubber particles, urethane resin particles, melamine-formaldehyde resin particles, or acrylic resin particles; or composite particles of any of rubber, wax, fatty acid compound or resin with particles of an inorganic material such as metal, metal oxide or salt, or carbon black. A lubricant powder may also be added and may include, for example, fluorine resins such as Teflon and polyvinylidene fluoride; fluorine compounds such as carbon fluoride; fatty acid metal salts such as zinc stearate; fatty acids, or fatty acid derivatives such as fatty acid esters; molybdenum sulfide; amino acid, or amino acid derivatives.

[0048] The tribocharge of toner compositions containing the treated silica particles can be either positive or negative. The tribocharge of a toner composition containing the treated silica particles is affected by the presence of the treated particles. Without wishing to be bound by any theory, it is thought that the presence of the treated silica particles stabilizes and increases the positive or negative tribocharge of toner compositions containing the silica particles. Tribocharge measurements can be made using suitable techniques and equipment known in the art (e.g., Vertex T-150 tribocharger). Measurements can be made after conditioning the toner particles (e.g., of a toner

composition comprising about 4 wt. % treated silica particles) overnight in a standard humidity chamber at 30° C. and 80% relative humidity (HH) and at 18° C. and 15% relative humidity (LL).

[0049] Toner compositions containing the treated silica particles can be formulated, for example, by mixing 4 wt. % of the treated particles in a laboratory blender with pulverized styrene acrylate toner particles free of any external additives and having an average diameter of 9 µm. Toner compositions containing the treated particles can be developed, for example, by rolling for 30 minutes at a 2/98 wt. % toner/carrier ratio in glass jars. The carrier can be 70 µm Cu--Zn ferrite coated with silicone resin. Samples can be conditioned in a standard humidity chamber at either a high humidity and high temperature (30° C and 80% relative humidity) or at a low humidity and low temperature (18° C and 15% relative humidity) overnight.

[0050] Without wishing to be bound by any theory, it is believed that the treated fumed silica particles disclosed herein provide one or more of the following properties:

- high absolute levels of (negative) tribocharging, which tends to improve image density on the printed page;
- excellent humidity resistance, which can enable a consistent level of tribocharging and thus print performance across a range of ambient relative humidity and temperature conditions;
- good transfer efficiency due to the lubrication effect of the treatment in aiding movement of the toner from the cartridge, through the machine, and onto the paper with minimal waste.

[0051] It had not been previously believed possible to achieve this performance with prior art treatments of fumed silica.

EXAMPLES

Example 1

[0052] This example illustrates the preparation of treated silica particles according to the claimed invention.

[0053] The characteristics of various PDMS-treated starting materials are listed in Table 1 (Samples 1-9) and Table 2 (Samples 10-16). ^{29}Si NMR was used to characterize the functional groups (Figure 1).

Table 1

PDMS-treated starting materials	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Sample 8	Sample 9
M ($/\text{nm}^2$)	0.10	0.08	0.09	0.08	0.07	0.08	0.08	0.07
D1 ($/\text{nm}^2$)	0.37	0.38	0.34	0.37	0.65	0.34	0.31	0.27
D2 ($/\text{nm}^2$)	0.83	0.85	0.81	0.82	0.80	0.82	0.77	0.80
(D1+D2) ($/\text{nm}^2$)	1.20	1.23	1.15	1.19	1.45	1.16	1.08	1.07
T1	0.03	0.04	0.05	0.04	0.05	0.02	0.04	0.04
T2	0.05	0.11	0.11	0.13	0.10	0.04	0.11	0.12
T3	0.07	0.17	0.17	0.19	0.12	0.05	0.14	0.19
TT1 (%)	20	13	15	11	19	18	14	10
TT2 (%)	33	34	33	36	37	36	38	34
Q2 ($/\text{nm}^2$)	0.15	0.14	0.15	0.13	0.14	0.14	0.16	0.10
Q3 ($/\text{nm}^2$)	1.75	1.74	1.68	1.70	1.68	1.75	1.67	1.57
Q4 ($/\text{nm}^2$)	1.44	1.57	1.45	1.52	1.38	1.42	1.49	1.50
Silanol on silica ($/\text{nm}^2$)	2.05	2.04	1.99	1.96	1.96	2.06	2.01	1.79
Silanol on silane ($/\text{nm}^2$)	0.47	0.57	0.55	0.60	0.55	0.41	0.50	0.46

Table 2

PDMS-treated starting materials	Sample 10	Sample 11	Sample 12	Sample 13	Sample 14	Sample 15	Sample 16
Initial Yield Stress, IYS (Pa)	49.6	48.9	48.0	54.7	54.6	52.9	57.4
Retained Yield Stress (%)	99.7	91.6	78.5	91.3	101.0	81.0	88.2
Carbon content (%)	4.97	5.52	5.5	5.58	5.55	5.46	5.642
M (/nm ²)	0.00	0.07	0.07	0.07	0.07	0.04	0.04
D1 (/nm ²)	0.34	0.36	0.25	0.25	0.28	0.24	0.25
D2 (/nm ²)	1.13	0.79	0.86	0.77	0.83	0.82	0.80
(D1+D2) (/nm ²)	1.47	1.15	1.11	1.01	1.11	1.06	1.05
T1	0.00	0.01	0.04	0.00	0.04	0.00	0.00
T2	0.00	0.01	0.06	0.09	0.08	0.05	0.07
T3	0.00	0.02	0.15	0.15	0.18	0.04	0.16
TT1 (%)	0	25	15	0.0	12.4	0.0	0.0
TT2 (%)	0	25	26	37.9	27.6	57.1	30.4
Q2 (/nm ²)	0.11	0.10	0.02	0.04	0.05	0.08	0.06
Q3 (/nm ²)	1.65	1.27	1.61	1.27	1.38	1.48	1.33
Q4 (/nm ²)	1.81	1.51	1.82	1.40	1.65	1.42	1.62
Silanol on silica (/nm ²)	1.86	1.47	1.65	1.34	1.49	1.64	1.43
Silanol on silane (/nm ²)	0.34	0.40	0.39	0.34	0.44	0.29	0.32

[0054] Some of the PDMS-treated starting materials were then treated with HMDZ, according to the general treatment procedure, as follows:

- 1) Hydrophobic PDMS-treated fumed silica particles generally containing 5-5.5% carbon and a silica surface silanol content between 0 and 1.5 SiOH/nm², a silanol on silane content of > 0.1 /nm² were fed into a reactor vessel with fluidization capabilities (mechanical or pneumatic).
- 2) A higher than stoichiometric amount of water with respect to the silazane treating agent (e.g., HMDZ) was added and mixed into the dry powder in the form of "dry water." Dry water is a "water-in-air" emulsion formed using hydrophobic fumed silica as the surface active ingredient and mixing 1-30 % hydrophobic silica with 70-99 % water. Unless stated otherwise, the dry water was prepared using 80% water and 20% PDMS-treated silica.
- 3) Treating agent (e.g., HMDZ) was added to the hydrophobic base silica product by atomizing the treating agent while fluidizing the bed for optimal dispersion and distribution of the same.

- 4) The hydrophobic silica product containing the treating agent was maintained at temperatures between 25-300 °C for anywhere from 5 min to 24 h under nitrogen atmosphere to allow the reaction of the treating agent with the surface of the silica and/or the reactive groups present on the hydrophobic siloxane layer.
- 5) After the reaction was completed, the byproducts of the reaction were stripped off of the powder/gas mixture and vented or collected for recycling/disposal. This stripping step can be carried out at temperatures between 60-250 °C.

[0055] The initial yield stress and retained yield stress were determined for each sample. Briefly, the rheological properties were tested as follows: a 15wt% masterbatch was prepared by measuring the appropriate amount of Bisphenol A diglycidyl ether epoxy resin (e.g., Epon 828 by Momentive®) and silica and mixing the two components in a dual asymmetric-type mixer (e.g., DAC 150 FVZ, Flacktek). This procedure was done in two steps: step 1) 1.5 min @ 2000rpm, and step 2) 15 min @ 3500rpm. Satisfactory dispersion was confirmed by measuring for a Hegman grind of 5. The masterbatch was diluted down to a silica concentration of 4wt% by adding adequate amounts of masterbatch and epoxy resin into a separate cup. The final mixing of the diluted dispersion was done in a dual asymmetric-type mixer at 2000rpm for 1.5min. In all cases, the concentrations were prepared to within 0.001wt%. Table 3 shows the amounts of resin and silica for the masterbatch and also the amounts of masterbatch and resin for the final 4wt% concentration sample.

Table 3

Masterbatch Component	Wt (g)	Letback Component	Wt(g)
Epoxy resin	42.5000	Masterbatch Mixture	5.3333
Silica	7.5000	Epoxy resin	14.6667
Total	50.0000	Total	20.0000

[0056] The yield stress of fumed silica in epoxy dispersions was determined using a stress-controlled stepped flow experiment. The stress-controlled step flow experiment was performed as follows: (1) load the sample in a stress-controlled rheometer (e.g., TA Instruments AR2000ex) fitted with a 40 mm diameter flat plate, send to the gap (500

micron), and trim the excess around the plate, (2) perform a pre-shear at 10 s^{-1} for 2min, (3) equilibrate for 10 min, and (4) perform a continuous stress sweep from 2500 Pa to 0.001 Pa. The data obtained in the stress-controlled stepped flow experiment is fitted to the Herschel-Bulkley model to provide the reported yield-stress values.

[0057] Retained yield stress was determined by measuring the initial yield stress at a first time point, aging the sample, and measuring the yield stress at a second time point after aging. To age a sample, the 4wt% sample prepared according to the procedure described above was placed in an oven at 60°C for 28 days. After the 28 days, the sample was removed and allowed to cool down to room temperature. The rheology profile was measured according to the method described above.

[0058] Table 4 lists the characteristics of treated silica particles according to the claimed invention and the reaction conditions (wt% HMDZ, reaction time, addition of dry water) used to produce the same (Samples 17-26).

Table 4

	Sample 17	Sample 18	Sample 19	Sample 20	Sample 21	Sample 22	Sample 23	Sample 24	Sample 25	Sample 26
PDMS-treated starting material	Sample 12	Sample 12	Sample 12	Sample 13	Sample 13	Sample 13	Sample 13	Sample 12	Sample 12	Sample 12
Initial Yield Stress, IYS (Pa)	55.1	54.9	58.4	67.4	65.6	67.9	67.4	49.8	50.9	50.4
Retained Yield Stress (%)	97.9	93.3	90.9	95.5	93.6	90.0	90.1	90.4	92.1	89.2
Carbon content (%)	5.9	5.9	6.0	5.9	5.9	6.0	6.0	5.6	5.6	5.6
M (/nm ²)	0.71	0.77	0.80	0.57	0.58	0.70	0.73	0.24	0.29	0.25
D1 (/nm ²)	0.30	0.28	0.28	0.28	0.30	0.24	0.28	0.31	0.26	0.26
D2 (/nm ²)	0.77	0.77	0.72	0.80	0.80	0.76	0.81	0.92	0.84	0.87
(D1+D2) (/nm ²)	1.07	1.04	1.00	1.08	1.10	1.00	1.09	1.22	1.09	1.13
T1	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00
T2	0.05	0.09	0.05	0.07	0.10	0.09	0.09	0.10	0.07	0.09
T3	0.15	0.15	0.17	0.18	0.20	0.19	0.20	0.18	0.15	0.16
TT1 (%)	0.0	0.0	0.0	16.3	0.0	0.0	0.0	0.0	0.0	0.0
TT2 (%)	24.8	37.5	23.3	23.1	33.5	31.6	31.6	35.6	32.9	36.0
Q2 (/nm ²)	0.08	0.11	0.14	0.08	0.11	0.06	0.13	0.08	0.10	0.09
Q3 (/nm ²)	1.85	1.80	1.72	1.53	1.69	1.72	1.61	1.70	1.52	1.63
Q4 (/nm ²)	2.32	2.35	2.28	2.00	2.14	2.26	2.22	1.92	1.70	1.97
Silanol on silica (/nm ²)	2.01	2.02	2.00	1.69	1.89	1.84	1.87	1.89	1.71	1.84
Silanol on silane (/nm ²)	0.35	0.37	0.34	0.45	0.40	0.33	0.38	0.41	0.33	0.35
Process conditions										
Reaction time (min)	60	360	1200	180	360	180	360	60	360	1200
Reaction temperature (°C)	25	25	25	25	25	25	25	25	25	25
Concentration of HMDZ (%)	5	5	5	3	3	5	5	3	3	3
Dry water addition (Y/N)	Y	Y	Y	Y	Y	Y	Y	N	N	N

[0059] Table 5 lists the characteristics of treated silica particles according to the claimed invention prepared at a commercial scale (Samples 27-29). In the preparation of these Samples, the reaction temperature was held at 25 °C for a designated period of time, and then the temperature was increased to expedite the stripping off of reaction byproducts. Samples 27 and 29 were held at 25 °C for approximately 30 min. Sample 28 was held at 25 °C for less than 30 min. It was found that this variation in reaction time did not affect the performance of the resulting material, but reduced the cycle time significantly. In the preparation of Samples 27-29, 5 wt% HMDZ and dry water were used.

Table 5

	Sample 27	Sample 28	Sample 29
PDMS-treated starting material	Sample 16	Sample 16	Sample 16
Initial Yield Stress, IYS (Pa)	74.8	72.8	73.4
Retained Yield Stress (%)	91.2	93.4	96.9
Carbon content (%)	6.2	6.1	6.1

[0060] The results are reported in Figure 2. Figure 2 shows that the rheological performance (initial yield stress and percent retained yield stress) of PDMS-treated materials greatly improves after treatment with HMDZ in accordance with the claimed invention.

Example 2:

[0061] This example illustrates a method of determining the wet-in time (incorporation time) of treated silica particles into a polar resin.

[0062] The ease with which a treated silica material incorporates into a polar resin such as epoxy can be measured by recording the time that takes to incorporate 5.1493g of treated silica into 115g of epoxy resin (e.g., Epon 828 by MOMENTIVE®). Using a Cowles blades mixer such as the Dispermat AE with a 3cm diameter blade, mixing of the pure epoxy resin (115g $\pm$ 0.005) can be started at a speed of 1000 rpm. After 2 min, the silica powder (5.1493g $\pm$ 0.005g) can be added in batches of a few grams, ensuring that after each addition the powder completely disappears from the surface of the vortex created by the mixer. Once the total amount of powder was added, the time that took to complete the addition is recorded.

[0063] The treated silica particles, as disclosed herein, have a wet-in time that is significantly less than that of the PDMS-treated silica particle starting materials.

Example 3

[0064] This Example describes the preparation and evaluation of toner compositions comprising the treated fumed silica particles.

[0065] Hydrophobicity (Methanol wettability): The hydrophobicity of the treated silica of ("S-Sample A" prepared according to Examples 27-29 of Example 1) was measured with a powder wettability measuring instrument WET-100P (manufactured by Rhesca Company, Limited). Assuming as 100% the transmittance of light of pure water at 780 nm in wavelength, the wettability was measured in the following way. The treated silica ($0.20 \text{ g} \pm 0.01 \text{ g}$) was added to 50 ml of pure water, where, with stirring by means of a magnetic stirrer (300 rpm), methanol was poured beneath the liquid surface (flow rate: 2.5 ml/5 minutes). The fine silica powder floated on the liquid surface. When the fine silica powder dispersed in the methanol/water mixed solvent, the wettability was determined as being the methanol concentration (% by volume) at a point of time where the transmittance of light at 780 nm in wavelength reached 50%. This result is compared with three control samples: Comparative Sample (i) PDMS-treated silica (base silica is CAB-O-SIL[®] M-5, Cabot Corporation); Comparative Sample (ii) HMDZ/PDMS-treated silica (base silica is CAB-O-SIL[®] HS-5, Cabot Corporation); and Comparative Sample (ii) HMDZ/PDMS-treated silica (base silica is CAB-O-SIL[®] M-5, Cabot Corporation). The HMDZ/PDMS-treatment results from spraying OH-terminated PDMS onto HMDZ-treated silica. The results are shown in Table 6.

Table 6

Sample	Treatment	% Methanol
S-Sample A	PDMS/HMDZ	79
Comp (i)	PDMS	73
Comp (ii)	HMDZ/PDMS	66
Comp (iii)	HMDZ/PDMS	68

[0066] The sample of Example 1 provided a higher methanol concentration, demonstrating that the treated silicas disclosed herein improve hydrophobicity.

[0067] Preparation of Toner Sample A (T-Sample A): Toner was prepared by mixing 50 g polyester toner (size of 8-12 μm , Sinonar, TW) and 1 wt % of the treated silica of using a kitchen blender. To avoid overheating the toner, the blender was pulsed at 5 s intervals for 3 minutes. After blending, the toner-additive mixture was rolled an additional one hour in glass jars for 60 min at about 265 rpm.

[0068] Tribocharge of Toner: Sample A was added to a carrier, 75 micrometer silicone-coated Cu--Zn ferrite particles, at 2 wt % loading. The carrier-toner mixtures were placed in glass jars and put in a humidity chamber for conditioning. HH conditioning was performed at 30°C and 80% relative humidity; LL conditioning was performed at 18°C and 15% relative humidity. After conditioning, the glass jar containing the sample was closed with a plastic cap. The toner was developed by rolling the jar on a roll mill at 185 RPM for 30 min; the jar was then removed from the roller and a sample removed and immediately tested for tribocharge. Similar toner-carrier samples were made with Comparative Samples (i)-(iii) (T-Comp (i)-(iii)). The results are listed in Table 7.

Table 7

Toner	Treatment	Silica Loading	L/L ($\mu\text{C/g}$)	H/H ($\mu\text{C/g}$)	HH/LL
T-Sample A	PDMS/HMDZ	1%	-102	-37	0.37
T-Comp (i)	PDMS	1%	-100	-31	0.31
T-Comp (ii)	HMDZ/PDMS	1%	-102	-32	0.31
T-Comp (iii)	HMDZ/PDMS	1%	-78	-21	0.27

[0069] It can be seen that toners prepared with the treated silicas disclosed herein demonstrate improved tribocharge at HH conditions and HH/LL performance.

[0070] Flowability (Cohesion) of Toner: Cohesion is one of the means for indicating the flowability of toner. It is assumed that the greater the toner in cohesion, the worse in flowability. The equipment used for measuring the cohesion of the toner used was a powder tester (product of Hosokawa Micron Co., Ltd).

[0071] A vibration table was fitted with a 200 mesh screen, a 100 mesh screen, and a 60 mesh screen. The screens were positioned in the order of opening size so that the 60 mesh screen was placed at the top. Toner (5 grams) was placed on the 60 mesh screen. The vibration table was set to have 21.7 V in input voltage, and a vibratory amplitude within a range of 60-90 μm . The table was vibrated for roughly 15 seconds. The amount of toner remaining on each screen was weighed. Cohesion was obtained with the following equation:

Cohesion = (weight g of sample on 60 mesh screen) x 100/5 g + ((weight g of sample on 100 mesh screen)x100/5g) x 3/5 + ((weight g of sample on 200 mesh screen) x 100/5 g) x 1/5

[0072] Cohesion was measured for toners made with Sample A and Comparative Samples (i)-(iii), and the results are shown in Table 8.

Table 8

Toner additive	Treatment	Silica Loading	Cohesion (%residual)
Sample A	PDMS/HMDZ	1%	7.6
Comp (i)	PDMS	1%	12.4
Comp (ii)	HMDZ/PDMS	1%	14.4
Comp (iii)	HMDZ/PDMS	1%	15.3

[0073] It can be seen that toners prepared with the treated silicas disclosed herein demonstrate improved flowability (reduced cohesion).

[0074] All references, including publications, patent applications, and patents, cited herein are hereby incorporated by reference to the same extent as if each reference were individually and specifically indicated to be incorporated by reference and were set forth in its entirety herein.


[0075] The use of the terms “a” and “an” and “the” are to be construed to cover both the singular and the plural, unless otherwise indicated herein or clearly contradicted by context. The terms “comprising,” “having,” “including,” and “containing” are to be construed as open-ended terms (i.e., meaning “including, but not limited to,”) unless otherwise noted. Recitation of ranges of values herein are merely intended to serve as a shorthand method of referring individually to each separate value falling within the range, unless otherwise indicated herein, and each separate value is incorporated into the specification as if it were individually recited herein. All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., “such as”) provided herein, is intended merely to better illuminate the claimed invention and does not pose a limitation on the scope of the claimed invention unless otherwise

claimed. No language in the specification should be construed as indicating any non-claimed element as essential to the practice of the claimed invention.

CLAIMS

1. A treated fumed silica particle comprising a modified polydialkylsiloxane on the surface thereof, wherein

(a) the modified polydialkylsiloxane (i) comprises a relative proportion of T2 groups of 20% or less, and a relative proportion of T1 groups of 10% or less; and (ii) comprises groups having the structure:

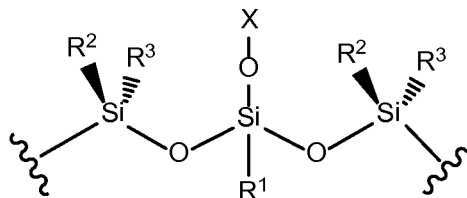

wherein X is a trialkylsilyl or dialkylsilyl; and R^1 , R^2 and R^3 are independently hydroxyl, alkyl, alkoxy, silyl, or siloxy; and

(b) the silica particle has a surface silanol content of about 1 to about 2.2 SiOH/nm².

2. The treated fumed silica particle of claim 1, wherein the particle has a surface energy (SEP04) value of about 4 mJ/m² or more.

3. The treated fumed silica particle of claim 1 or 2, wherein R^1 is hydroxyl, alkyl, alkoxy, silyl, or siloxy; and R^2 and R^3 are alkyl.

4. The treated fumed silica particle of claim 1 or 2, wherein R^1 , R^2 , and R^3 are methyl or ethyl.

5. The treated fumed silica particle of any one of claims 1-4, wherein X is trimethylsilyl.

6. The treated fumed silica particle of any one of claims 1-5, wherein the particles exhibit an initial yield stress of 70 Pa or more.

7. The treated fumed silica particle of any one of claims 1-6, wherein the particles exhibit a retained yield stress after 28 days of about 90% or more.

8. The treated fumed silica particle of any one of claims 1-7, wherein the particle exhibit a wet-in time of about 15 minutes or less when mixed into an epoxy system in a concentration of 4wt%.

9. A method for preparing a treated fumed silica particle comprising

(a) dispersing 1-30 wt% polydialkylsiloxane-treated silica particles with 0-15 wt% water to provide a water-in-silica dispersion;

(b) combining the water-in-silica dispersion with a treating agent to provide a reaction mixture, wherein the treating agent comprises (i) a silazane, or (ii) an alkoxysilane or siloxane and an amine; and

(c) maintaining the reaction mixture in an inert atmosphere at 25-300°C for a time ranging from 5 min to 24 hours to provide the treated fumed silica particle.

10. The method of claim 9, wherein the reaction mixture comprises 1-15 wt% of the treating agent based on the weight of the dry silica.

11. The method of claim 9 or 10, wherein the treating agent is atomized when combined with the water-in silica dispersion.

12. The method of any one of claims 9-11, wherein the treating agent is hexamethyldisilazane.

13. The method of any one of claims 9-11, wherein the treating agent is trimethylmethoxysilane.


14. The method of any one of claims 9-13, wherein the amine is a primary amine.

15. The method of any one of claims 9-14, wherein the reaction mixture is maintained at 25-60°C for a time ranging from 10 min to 6 hours.

16. The method of any one of claims 9-15, wherein the reaction mixture is maintained under fluidizing conditions.

17. The method of any one of claims 9-16, wherein the water-in-silica dispersion comprises greater than a stoichiometric amount of water relative to the treating agent.

18. The method of any one of claims 9-17, wherein the polydialkylsiloxane-treated silica particle comprises 5-7% carbon, a surface silanol content of 0-1.5 SiOH/nm², and a silanol on silane content of 0.1 SiOH/nm² or lower.
19. The method of any one of claims 9-18, further comprising venting byproducts of the reaction at a temperature ranging from 60 to 300°C.
20. A rheological system comprising a polar liquid and the treated fumed silica particles of any one of claims 1-8.
21. The rheological system of claim 20, wherein the system comprises 0.5-15 % by weight of the treated fumed silica particles.
22. The rheological system of claim 20 or 21, wherein the polar fluid is selected from the group consisting of epoxy resins, unsaturated polyester resins, polyurethane, silane-terminated polymers, vinyl ester resins, acrylates, polyvinyl acetate, polyvinyl alcohol, polyvinyl ethers, ethylene-vinyl acetate, ethylene-acrylic acid copolymers, polyvinyl acetates, polystyrene, polyvinyl chloride, styrene-butadiene rubber, chloroprene rubber, nitrile rubber, butyl rubber, polysulphide, polyethylene, polypropylene, fluorinated hydrocarbons, polyamides, saturated polyesters and copolyesters, phenol-formaldehyde resins, cresol-/resorcinol-formaldehyde resins, urea-formaldehyde resins, melamine-formaldehyde resins, polyimides, polybenzimidazoles, polysulphones or mixtures thereof.
23. The rheological system of any one of claims 20-22 wherein the relative change in initial yield stress is 20% higher or more than the starting treated fumed silica particle when dispersed into an epoxy system at a concentration of 4 wt%.
24. The rheological system of any one of claims 20-23, wherein the retained viscosity of the system over a period of 28 days is about 90% or higher.
25. A toner composition comprising toner particles and treated fumed silica particles, wherein the fumed silica particles comprise a modified polydialkylsiloxane on the surface thereof, and wherein:
- (a) the modified polydialkylsiloxane (i) comprises a relative proportion of T2 groups of 20% or less, and a relative proportion of T1 groups of 10% or less; and (ii) comprises groups having the structure:

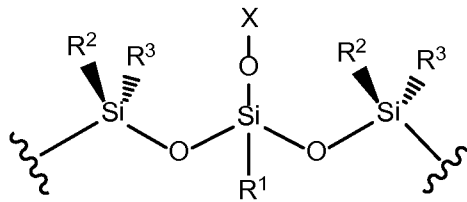

wherein X is a trialkylsilyl or dialkylsilyl; and R^1 , R^2 and R^3 are independently hydroxyl, alkyl, alkoxy, silyl, or siloxy; and

(b) the silica particle has a surface silanol content of about 1 to about 2.2 SiOH/nm².

26. The toner composition of claim 25, wherein the particle has a surface energy (SEP04) value of about 4 mJ/m² or more.

27. The toner composition of claim 25 or 26, wherein R^1 is hydroxyl, alkyl, alkoxy, silyl, or siloxy; and R^2 and R^3 are alkyl.

28. The toner composition of any one of claims 25-27, wherein R^1 , R^2 , and R^3 , are methyl or ethyl.

29. The toner composition of any one of claims 25-28, wherein X is trimethylsilyl.

30. A toner composition comprising toner particles and treated fumed silica particles, the treated fumed silica particles prepared by a method comprising:

(a) dispersing 1-30 wt% polydialkylsiloxane-treated silica particles with 0-15 wt% water to provide a water-in-silica dispersion;

(b) combining the water-in-silica dispersion with a treating agent to provide a reaction mixture, wherein the treating agent comprises (i) a silazane, or (ii) an alkoxysilane or siloxane and an amine; and

(c) maintaining the reaction mixture in an inert atmosphere at 25-300 °C for 5 min-24 hours to provide the treated fumed silica particle.

31. The toner composition of claim 30, wherein the reaction mixture comprises 1-15 wt% of the treating agent based on the weight of the dry silica.

32. The toner composition of claim 30 or 31, wherein the treating agent is atomized when combined with the water-in silica dispersion.

33. The toner composition of any one of claims 30-32, wherein the treating agent is hexamethyldisilazane.

34. The toner composition of any one of claims 30-32, wherein the treating agent is trimethylmethoxysilane.

35. The toner composition of any one of claims 30-34, wherein the amine is a primary amine.

36. The toner composition of any one of claims 30-35, wherein the reaction mixture is maintained at 25-60°C for a time ranging from 10 min to 6 hours.

37. The toner composition of any one of claims 30-36, wherein the reaction mixture is maintained under fluidizing conditions.

38. The toner composition of any one of claims 30-37, wherein the water-in-silica dispersion comprises greater than a stoichiometric amount of water relative to the treating agent.

39. The toner composition of any one of claims 30-38, wherein the polydialkylsiloxane-treated silica particle comprises 5-7% carbon, a surface silanol content of 0-1.5 SiOH/nm², and a silanol on silane content of 0.1 SiOH/nm² or lower.

40. The toner composition of any one of claims 30-39, wherein the method further comprises venting byproducts of the reaction at a temperature ranging from 60 to 300°C.

FIG. 1


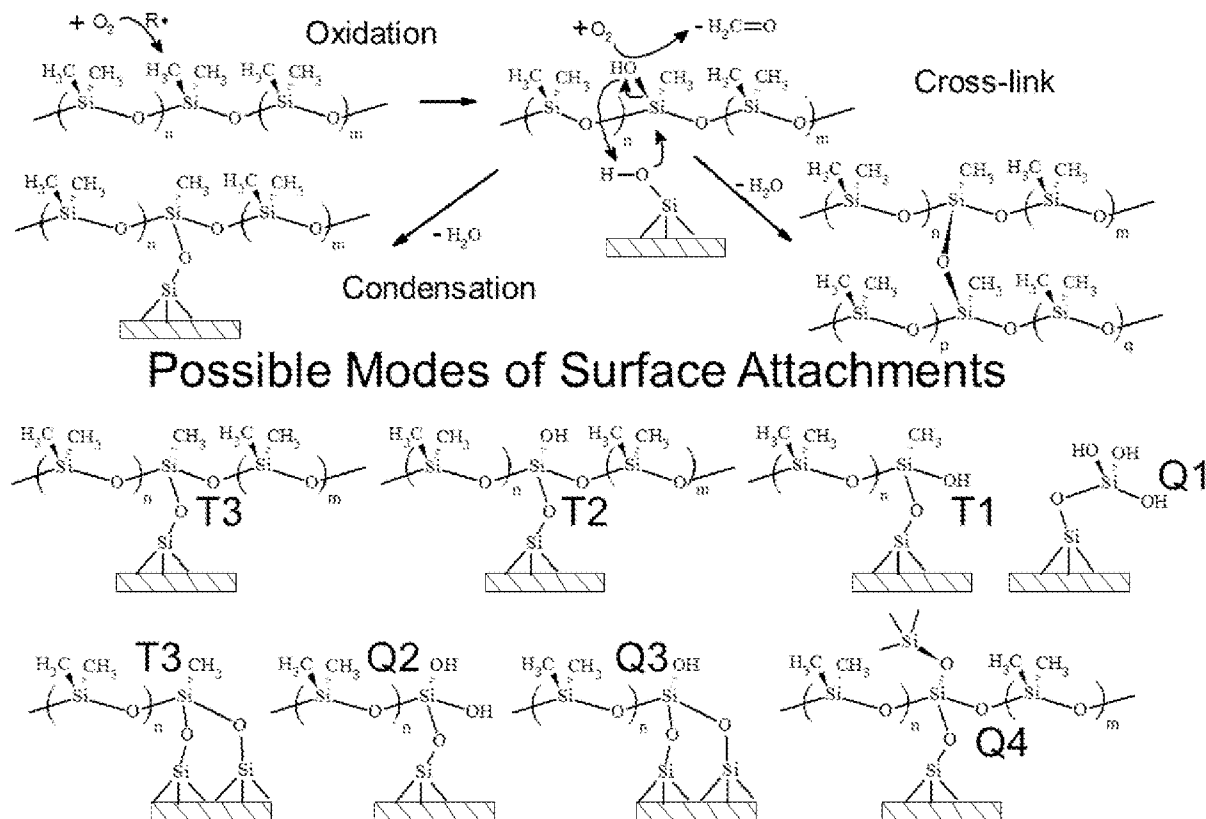


FIG. 2

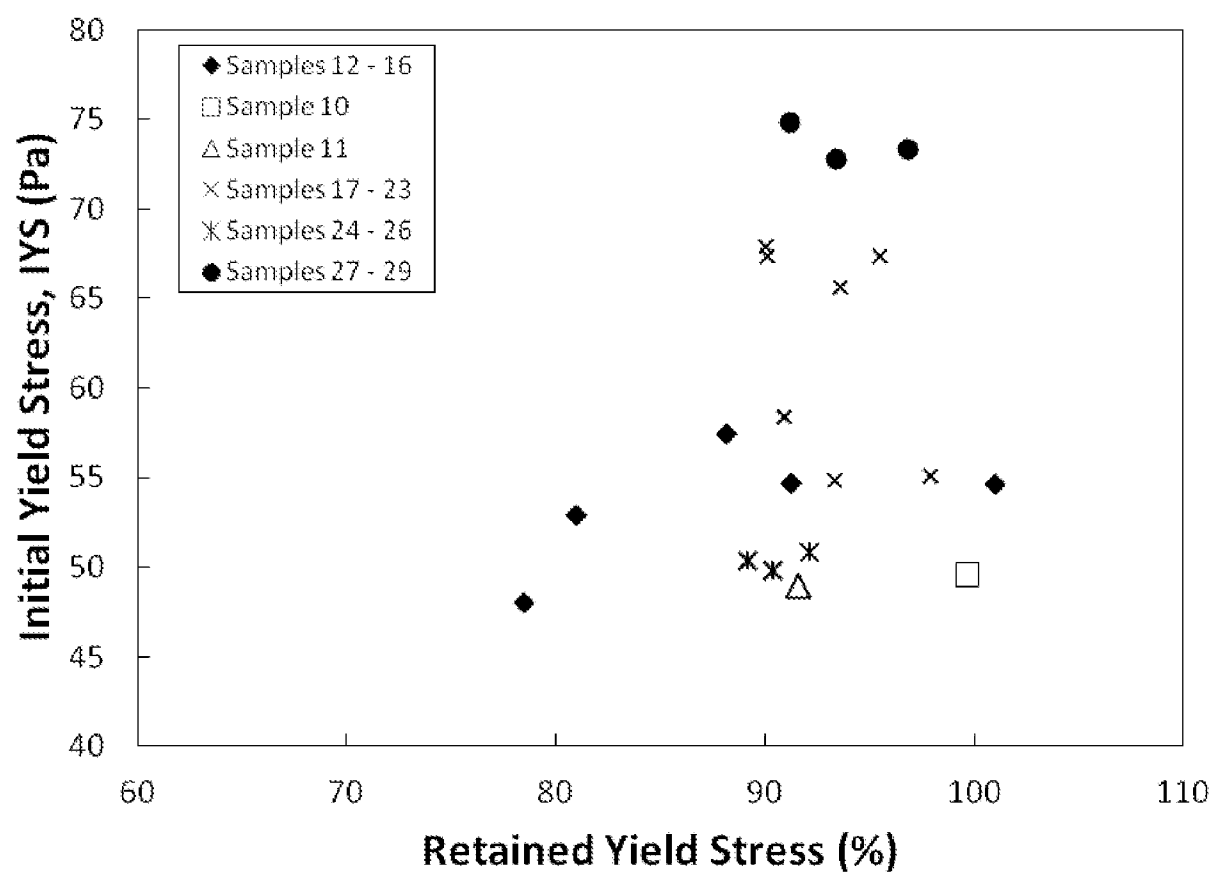

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/031274

A. CLASSIFICATION OF SUBJECT MATTER
INV. C09C1/30
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C09C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/138715 A1 (BARTHEL HERBERT [DE] ET AL) 24 July 2003 (2003-07-24) paragraphs [0016] - [0180] examples 1.1-2.13 -----	1-40
X	JP 2011 064868 A (CANON KK) 31 March 2011 (2011-03-31) abstract paragraphs [0010] - [0211] examples 1-18 -----	1-40
X	US 2010/288795 A1 (LORTZ WOLFGANG [DE] ET AL) 18 November 2010 (2010-11-18) paragraphs [0021] - [0109] table 1 ----- -/-	1-8, 20-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 June 2013

Date of mailing of the international search report

27/06/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Marino, Emanuela

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/031274

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2002 256170 A (TOKUYAMA CORP) 11 September 2002 (2002-09-11) abstract paragraphs [0003] - [0052] examples 1-4 -----	1-8
A	US 2006/110542 A1 (DIETZ THOMAS [US] ET AL) 25 May 2006 (2006-05-25) the whole document -----	1-40
A	US 2008/069753 A1 (FLOESS JOACHIM K [US] ET AL) 20 March 2008 (2008-03-20) the whole document -----	1-40

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/031274

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003138715	A1	24-07-2003	CN 1405084 A 26-03-2003
			DE 10145162 A1 10-04-2003
			EP 1302444 A1 16-04-2003
			JP 4118637 B2 16-07-2008
			JP 4688895 B2 25-05-2011
			JP 2003176122 A 24-06-2003
			JP 2008189545 A 21-08-2008
			US 2003138715 A1 24-07-2003

JP 2011064868	A	31-03-2011	NONE

US 2010288795	A1	18-11-2010	CN 101925299 A 22-12-2010
			DE 102008006883 A1 13-08-2009
			EP 2268138 A2 05-01-2011
			JP 2011510938 A 07-04-2011
			US 2010288795 A1 18-11-2010
			WO 2009095141 A2 06-08-2009

JP 2002256170	A	11-09-2002	JP 4828032 B2 30-11-2011
			JP 2002256170 A 11-09-2002

US 2006110542	A1	25-05-2006	CN 101410461 A 15-04-2009
			EP 1954766 A2 13-08-2008
			JP 2009513808 A 02-04-2009
			US 2006110542 A1 25-05-2006
			WO 2007051747 A2 10-05-2007

US 2008069753	A1	20-03-2008	CN 101517012 A 26-08-2009
			EP 2066754 A2 10-06-2009
			JP 2010503604 A 04-02-2010
			US 2008069753 A1 20-03-2008
			WO 2008033506 A2 20-03-2008
