



(86) Date de dépôt PCT/PCT Filing Date: 2001/10/16

(87) Date publication PCT/PCT Publication Date: 2002/04/25

(85) Entrée phase nationale/National Entry: 2002/05/27

(86) N° demande PCT/PCT Application No.: US 2001/042754

(87) N° publication PCT/PCT Publication No.: 2002/032250

(30) Priorités/Priorities: 2000/10/17 (09/690,311) US;
2001/08/14 (09/929,508) US

(51) Cl.Int.⁷/Int.Cl.⁷ A44C 7/00


(71) Demandeur/Applicant:
REIL, VLADIMIR, US

(72) Inventeur/Inventor:
REIL, VLADIMIR, US

(74) Agent: MACRAE & CO.

(54) Titre : SYSTEMES DE PERCAGE DES OREILLES AVEC DES CREOLES A ARTICULATION

(54) Title: EAR PIERCING SYSTEMS WITH HINGED HOOP EARRINGS

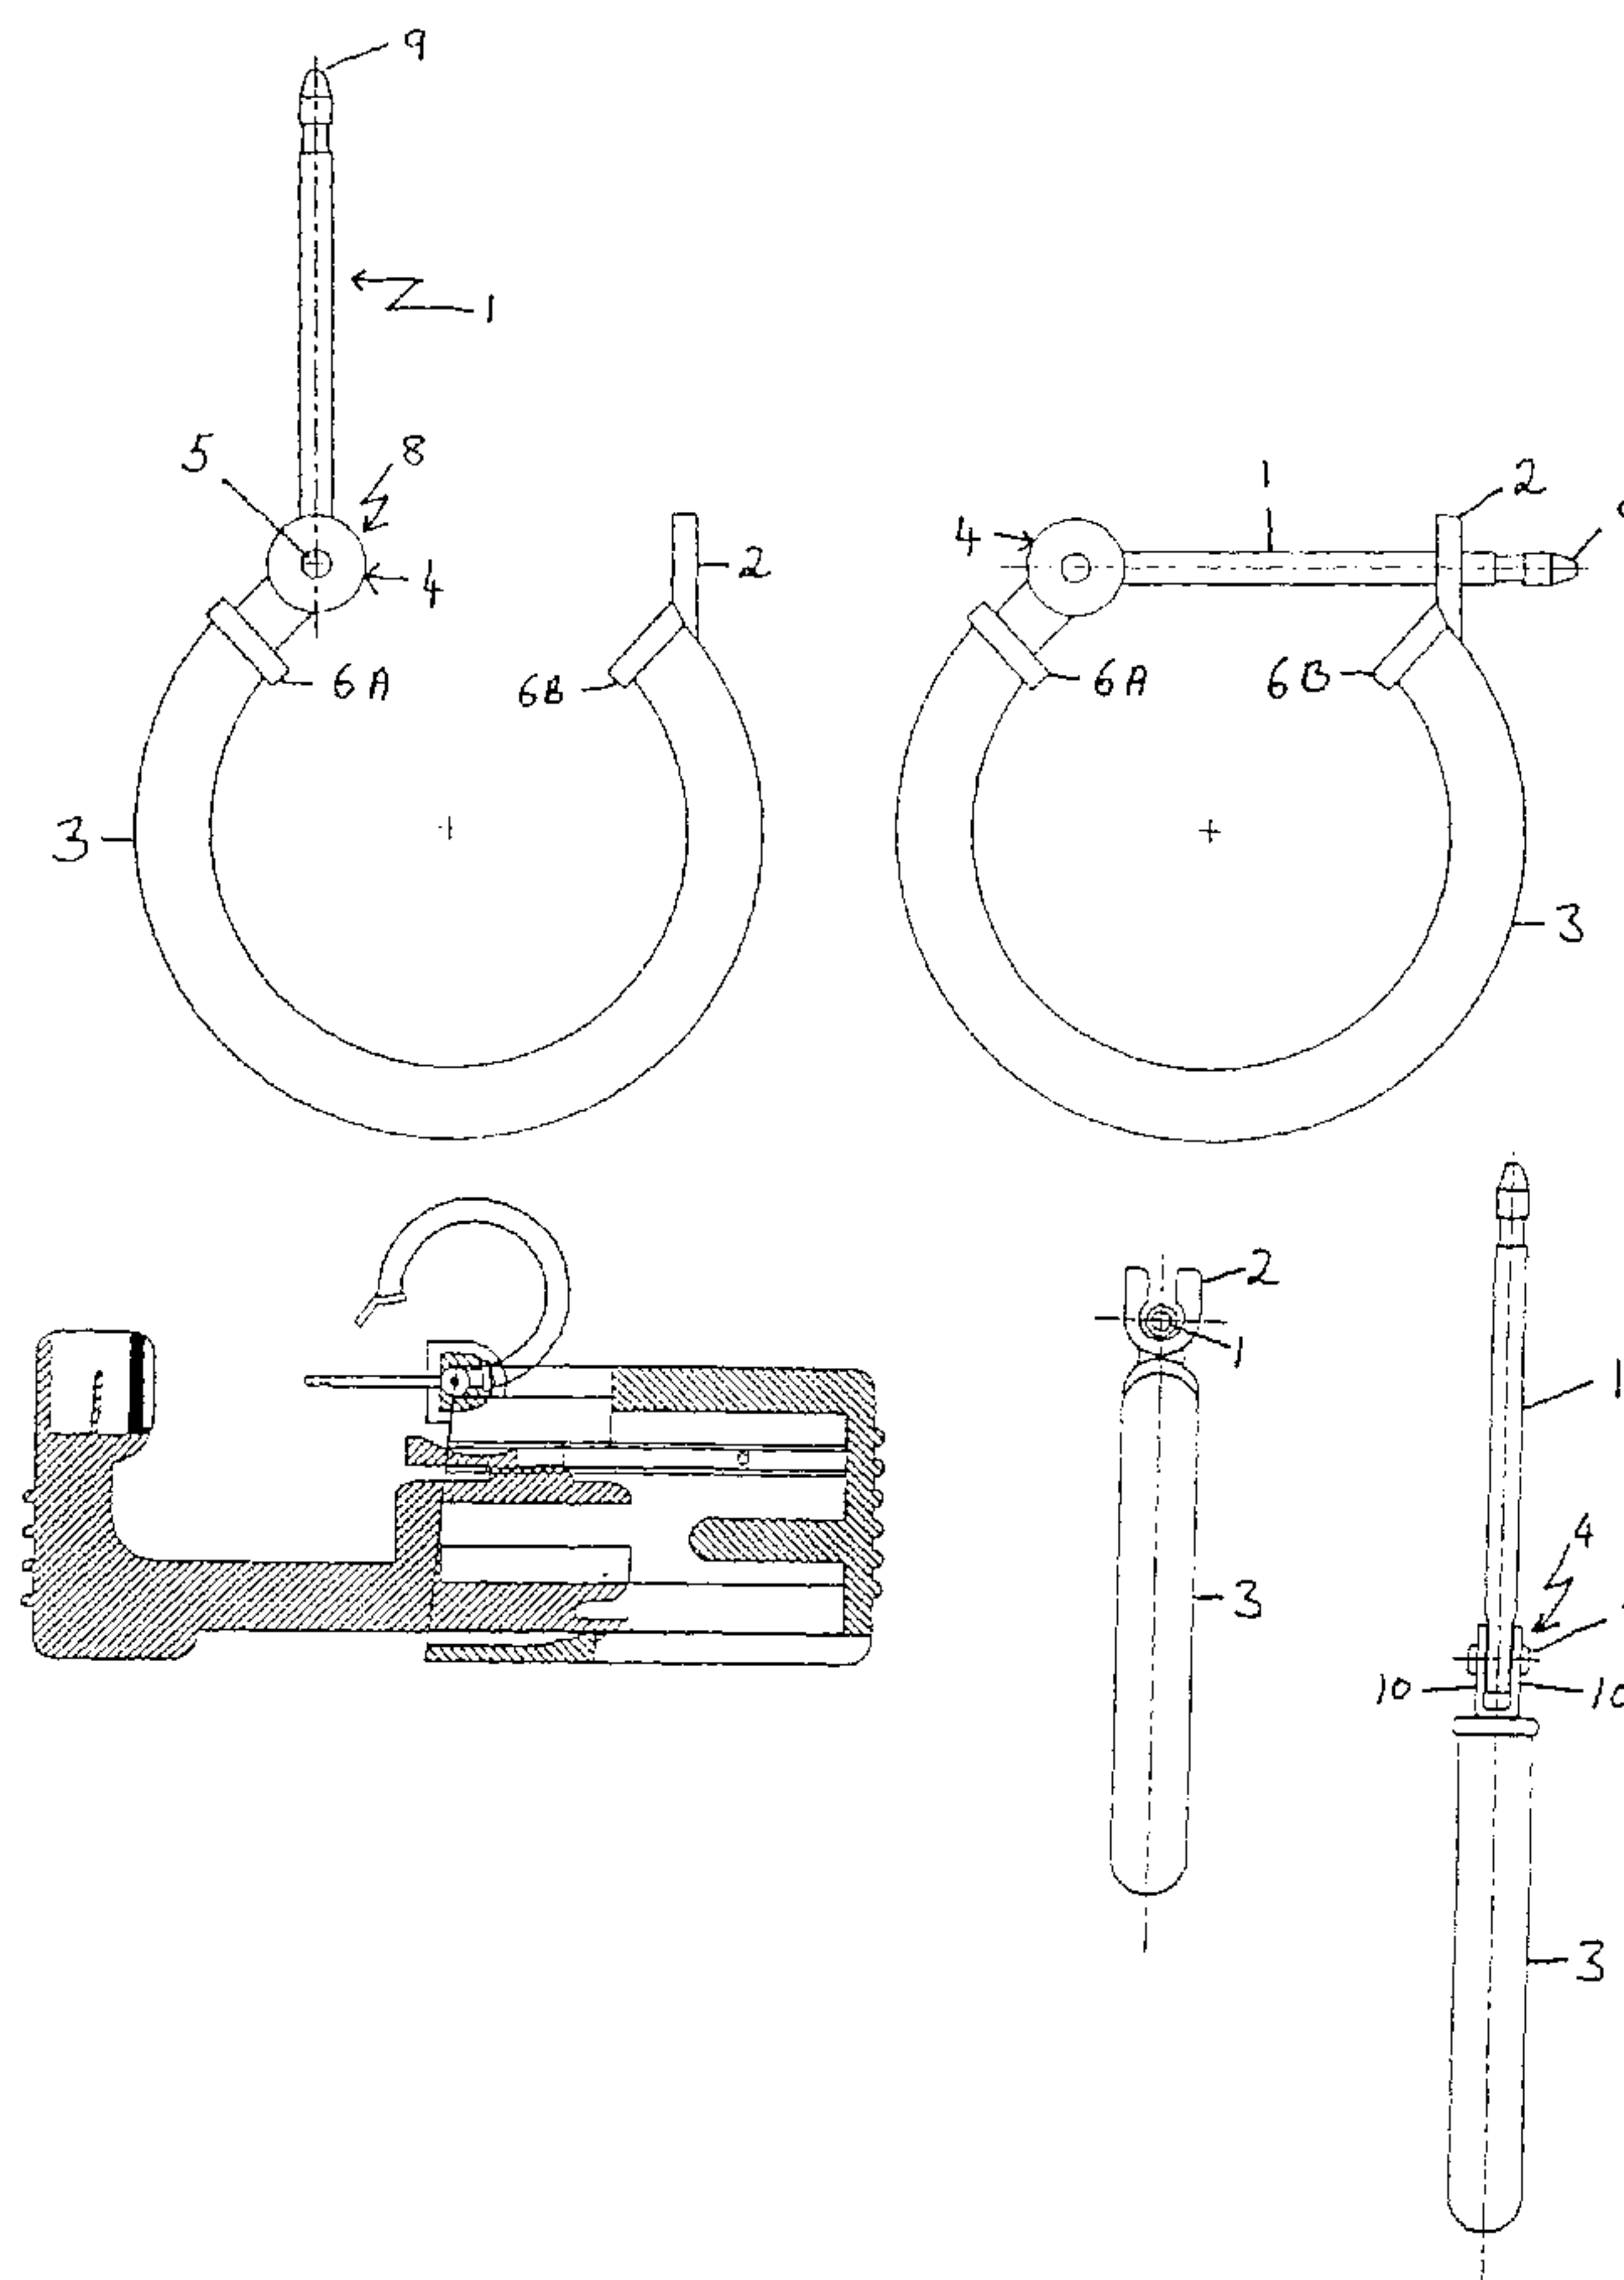

(57) Abrégé/Abstract:

A system for providing safe, effective ear-piercing is provided. The invention provides an earring cartridge carrying a stud having a post in a stud post holder assembly and a nut in slidably aligned, spaced apart, and oppositely opposed placement so that an

(57) Abrégé(suite)/Abstract(continued):

ear part may be placed between the post and the nut for piercing wherein a torque-like force is produced on the stud post holder assembly causing the assembly to rotatably open when the earring cartridge is compressed to bring the stud towards the nut for engaging the post with the nut. The earring cartridge of the invention is adaptable for use with traditional style ear-piercing studs or with the novel hinged hoop earrings of the present invention. Also provided is a novel nut with a backing shield that prevents the nut from sliding down along the stud post. A vertically stackable packing box maintains a sterile environment in which an earring cartridge with an ear-piercing earring stud may be transported and stored. An earring-cartridge stud gun provides a cradle into which the earring cartridge may fit. The stud gun can be loaded and unloaded using the packing box in such a way that the operator need not touch the cartridge during either loading or unloading.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 April 2002 (25.04.2002)

PCT

(10) International Publication Number
WO 02/32250 A1

(51) International Patent Classification⁷: **A44C 7/00**

(21) International Application Number: PCT/US01/42754

(22) International Filing Date: 16 October 2001 (16.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/690,311 17 October 2000 (17.10.2000) US
09/929,508 14 August 2001 (14.08.2001) US

(71) Applicant and

(72) Inventor: REIL, Vladimir [CA/US]; 521 West Rosecrans Avenue, Los Angeles, CA 90248-1514 (US).

(74) Agent: YADAV, Rajiv; McCutchen, Doyle, Brown & Enersen, LLP, Three Embarcadero Center, Ste. 1800, San Francisco, CA 94111 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: EAR PIERCING SYSTEMS WITH HINGED HOOP EARRINGS

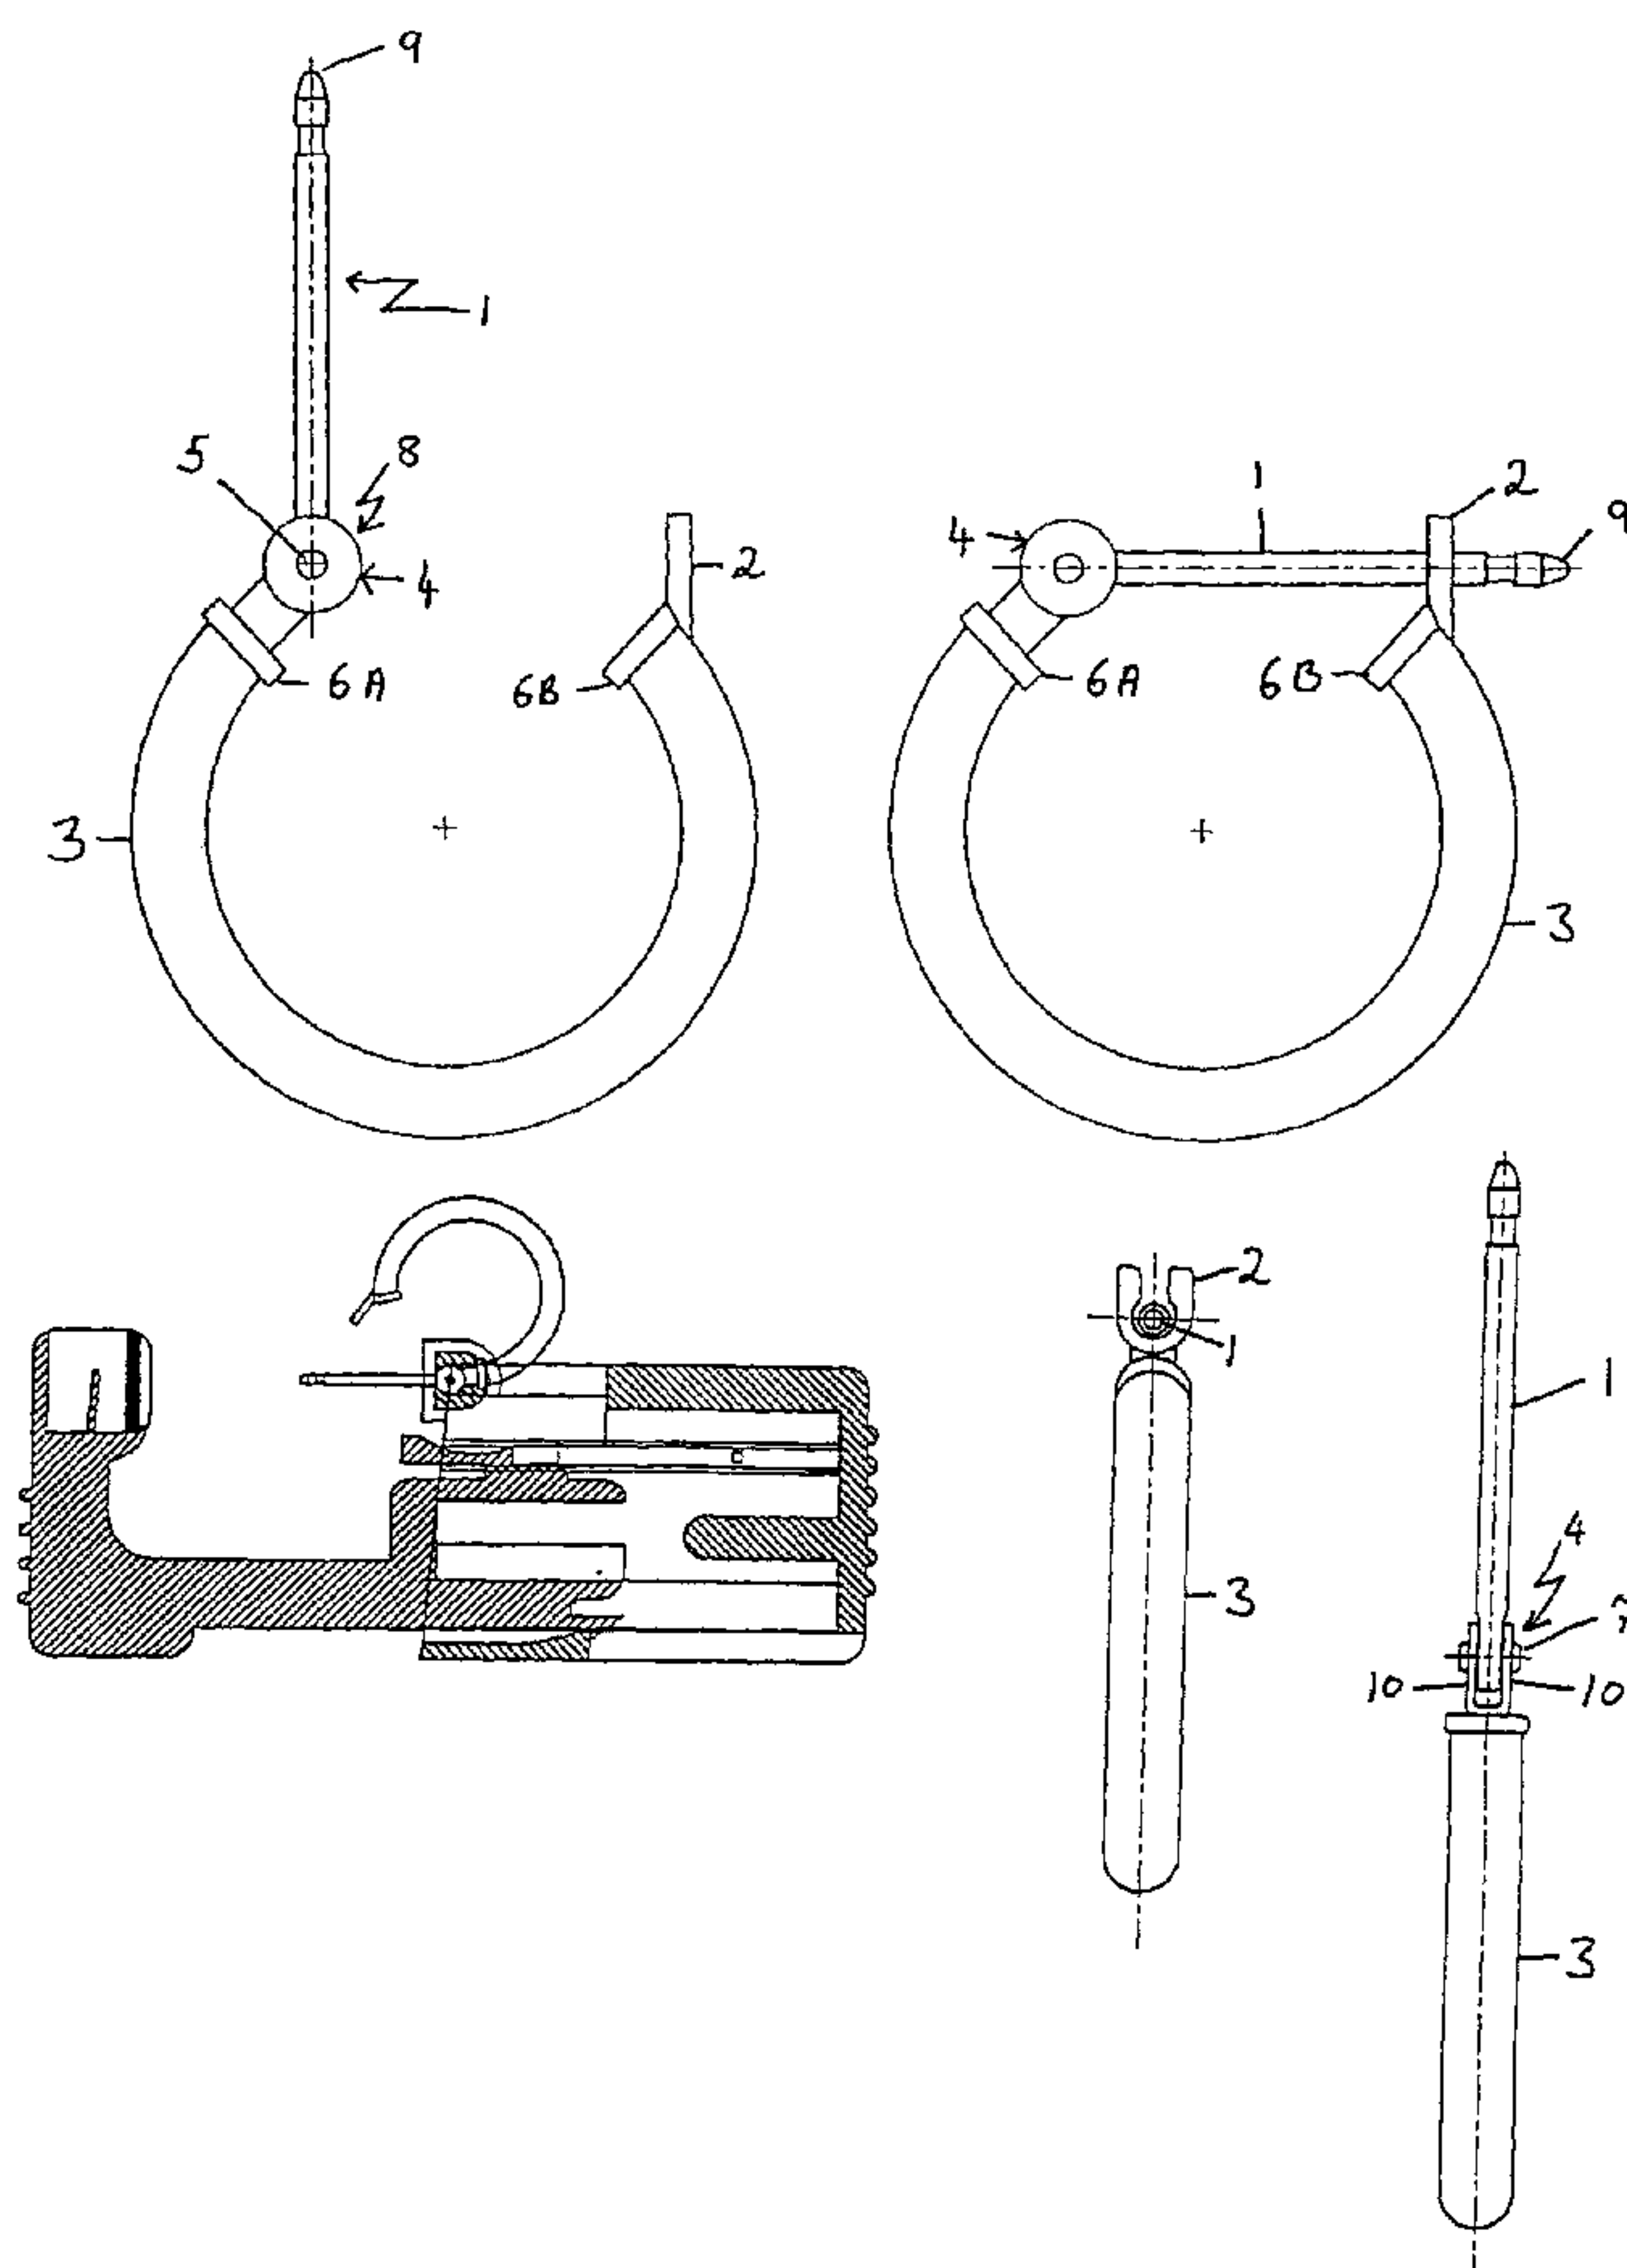

(57) Abstract: A system for providing safe, effective ear-piercing is provided. The invention provides an earring cartridge carrying a stud having a post in a stud post holder assembly and a nut in slidably aligned, spaced apart, and oppositely opposed placement so that an ear part may be placed between the post and the nut for piercing wherein a torque-like force is produced on the stud post holder assembly causing the assembly to rotatably open when the earring cartridge is compressed to bring the stud towards the nut for engaging the post with the nut. The earring cartridge of the invention is adaptable for use with traditional style ear-piercing studs or with the novel hinged hoop earrings of the present invention. Also provided is a novel nut with a backing shield that prevents the nut from sliding down along the stud post. A vertically stackable packing box maintains a sterile environment in which an earring cartridge with an ear-piercing earring stud may be transported and stored. An earring-cartridge stud gun provides a cradle into which the earring cartridge may fit. The stud gun can be loaded and unloaded using the packing box in such a way that the operator need not touch the cartridge during either loading or unloading.

WO 02/32250 A1

EAR PIERCING SYSTEMS WITH HINGED HOOP EARRINGS

RELATED APPLICATION DATA

5 This application claims priority to United States Patent Application serial no. 09/690,311 filed on October 17, 2000 and United States Patent Application serial no. 09/929,508, filed August 14, 2001.

FIELD OF THE INVENTION

10 This invention relates to ear-piercing devices and, more particularly, to an ear-piercing cartridge and stud gun system with a stackable packing box for the cartridge.

BACKGROUND OF THE INVENTION

15 Ear piercing, an increasingly commonplace fashion statement, is rapidly becoming a routine procedures, often performed by laypersons without medical experience or training. Today a number of manually operated devices that allow for the safe, hygienic, user-friendly piercing of ears are available. Examples of such systems are disclosed in U.S. Pat. No. 5,496,343 issued to Reil on March 5, 1996, Application Ser. No. 292,249 filed August 18, 1994, U.S. Patent No. 5,792,170 issued to Reil on August 11, 1998, Application Ser. No. 754,411 filed November 21, 1996, and U.S. Patent No. 5,868,774 ("the '774 Patent") issued to Reil on February 9, 1999, Application Ser. No. 8,763 filed January 19, 1998, all of which are incorporated herein by this reference.

25 The various ear-piercing systems that exist today essentially comprise a stud (also called an earring or a piercing earring) with a post (also called a pin or a piercing pin) and a nut (sometimes called a clasp or an earring clasp) that are mounted in an earring cartridge. During the ear piercing process, the ear is placed between the post and

the nut and the cartridge is squeezed, either manually or by placing it in a stud gun, which causes the post to pierce the ear and engage the nut.

From a fashion standpoint, one of the most desirable earring designs is in the form of a hoop but, heretofore, hoop earrings have not been commonly used with ear-piercing systems. By and large, the studs in use today have designs that are symmetrical about the post. A primitive hoop earring ear-piercing system is disclosed in U.S. Patent no. 5,004,471 ("the '471 Patent") but the disclosed design is not a fully closeable hoop thereby creating an unsightly design. The stud post (or piercing pin) is engaged by the nut (or clasp), leaving the hoop open. This is because the stud post is rigidly attached to the hoop of the stud, which implies that the hoop cannot be rotated to engage the piercing pin. Further, the open end of the hoop is not adapted to engage the piercing pin (or stud). Apart from its untoward appearance, the design disclosed in the '471 Patent also poses a danger of scratching and injury to the wearer because of the open end of the hoop. Therefore, there exists a need today for a hoop earring that is fully closeable.

Additionally, the existing designs for earring nuts (or clasps) are such that the open end of the stud post sticks out of the nut after the stud post is engaged by the nut. This presents a potential for injury to the wearer of the earring because the open end of the stud post can scratch the wearer's neck behind the ear. Therefore, there is a need for an improved earring nut that will remove this potential for injury.

Further, the existing ear-piercing cartridges suffer from a number of drawbacks. To illustrate these drawbacks, consider the '774 Patent, which represents the state-of-the-art in ear-piercing design. The '774 Patent describes an ear-piercing apparatus that is comprised of an earring cartridge which holds an earring stud and an earring nut in two opposed jaws, i.e., an earring jaw and a nut jaw. The stud is held within a stud post holder assembly (also called "pierced-ear earring cartridge" in the Reil '774 Patent), which is a module that disassembles into two pieces. One of these pieces has a frangible and breakable tab at its rear.

Although, the '774 Patent describes a simple, easy to use ear-piercing system, when it is used to pierce an ear, the two pieces of the stud post holder assembly may stay

attached to the stud and, therefore, sometimes require manual removal from the earring. Even when the two pieces come off the stud, they fall out of the assembly, sometimes into the ear or onto the body of the subject whose ears are being pierced and at other times onto the floor.

5 Moreover, the reliance of the '774 Patent on the frangible tab has design limitations. First, the breaking of the tab causes an unwanted noise that is often a source of distress or concern for the customer. Second, the use of the frangible tab leads to only discrete control over the ear-piercing process. In the invention of the '774 Patent, when the earring assembly is squeezed, either holding it in a hand or mounted in an
10 ear-piercing gun, the presence of the frangible tab implies that once the earring assembly is squeezed to the point of breaking the tab, the ear is pierced automatically. Thus, it prevents continuous control of the exact location and timing of the ear-piercing process. Because of the lack of continuous control over the location and timing of the ear-piercing process, the technician who is piercing the ear has to use guesswork to line the
15 stud post with the desired piercing area. This causes him to sometimes miss the exact spot that he wanted to pierce.

Additionally, the ear-piercing system of the '774 Patent and its predecessors have not been designed for use with the novel hinged hoop earrings described above.

20 Finally, the '774 Patent discloses a sterilizable blister pack for storing and transporting the earring cartridge. While such a packing is a convenient, effective sterilizable packing for the cartridge, it does not provide rigid, vertical stackable storage for earring cartridges.

SUMMARY OF THE INVENTION

25 The present invention solves the preceding problems, representing a quantum improvement in the design and operation of ear-piercing systems. It provides an improved hoop ear-piercing earring design that is fully closeable and that is hinged to allow for free rotation of the hoop. Further, the invention provides an ingenious earring cartridge system that can be adapted for use with hinged hoop earrings of the present invention as well as with traditional symmetrical ear-piercing earrings and that provides

for complete and instantaneous release of the cartridge assembly from the stud and nut once the ear is pierced. Additionally, the earring cartridge of the invention allows the technician to exercise continuous control over the ear-piercing process, thereby allowing him to align the stud post and the location to be pierced right up to the point of piercing.

5 This leads to greatly increased accuracy of the ear-piercing process as compared to the prior art. The invention also provides an improved earring nut for use with the traditional ear-piercing earring, which includes a flat shield for isolating the open end of the stud post from the body of the earring wearer. The improved nut design also ensures correct spacing between the head of the stud and the nut, preventing the nut from
10 traveling too far down the stud post and squeezing the pierced area, which can inhibit healing.

In a general embodiment, the present invention is an earring cartridge and stud gun system for providing sterile ear piercing comprising an earring cartridge carrying a stud having a post in a stud post holder assembly and a nut in slidably aligned, spaced
15 apart, and oppositely opposed placement so that an ear part may be placed between the post and the nut for piercing wherein a torque-like force is produced on the stud post holder assembly causing the assembly to rotatably open after the earring cartridge is compressed to bring the stud towards the nut for engaging the post with the nut. The rotatable opening of the stud post holder assembly facilitates the disengagement of the
20 assembly from the earring stud after the stud has connected to the nut, eliminating the need to touch the ears of the customer to confirm the stud-nut connection or to remove the assembly after the ear piercing is completed.

In a preferred embodiment, the earring cartridge comprises a nut jaw for holding the nut and an earring jaw for holding the stud post holder assembly, which carries the
25 stud. The assembly is in two halves with each half having a front stud head adaptor, a main body and an L-shaped terminal member having a base and a leg. The terminal members ride in intermediate channels in the earring jaw and when the earring cartridge is squeezed the main body of the post holder assembly moves relative to the flexible tang, engaging it, and the bases of the terminal members slide over a hump juxtaposed
30 with the tang.

The invention also provides for convenient hygienic transport and storage of the cartridge in the form of a stackable packing box which contains a robust seal to maintain the cartridge in a sterile environment.

5 If the invention is used with a stud gun, the earring cartridge is used by placement while loading within the cradle of the gun, the cradle receiving and removing the earring cartridge from the stackable packing box to provide and maintain the stud and the nut assembly in an aligned position for piercing the ear without any necessity of coming in direct contact with the sterile earring cartridge with the hands of the operator. After the ear is pierced, the stackable packing box can be used to unload the cartridge from the stud gun. Thus, the packing box allows the operator to load and unload the cartridge from the stud gun without touching the cartridge.

OBJECTS OF THE INVENTION

It is an object of the invention to provide a freely rotatable hinged hoop earring ear-piercing system that is closeable.

15 It is a further object of the present invention to provide a more effective means by which ears may be pierced. In particular, the present invention seeks to provide an ear-piercing system in which the stud holding module separates from the stud cleanly after the ear is pierced. Further, the present invention provides a system whereby the components of the stud holder module remain within the earring cartridge after an ear is pierced. This eliminates the possibility of the module components falling into the ear or body of the subject being pierced or onto the floor, forcing the ear piercer to look for them following the ear piercing operation.

25 It is another object of the present invention to provide a higher level of accuracy for ear-piercing by means that are more controllable and more expertly handled by persons without the requirement of a high degree of training. In particular, the present invention seeks to provide an ear-piercing system that can be finely controlled by the ear-piercer whereby the ear-piercer need not commit to piercing an ear until he is certain of piercing the precise spot that he wants to.

Additionally, the invention seeks to provide a safe earring nut for use with traditional style ear-piercing earrings that protects the wearer from being scratched by the open end of the stud post.

5 It is yet another object of the present invention to provide an ear-piercing methodology that creates, protects and maintains sterile ear-piercing instruments prior to the actual piercing. It is an additional object of the present invention to provide sterilizable and sterile means by which the disposable, one-use, ear-piercing cartridges may be transported and stored in a sterile condition until ready for use. It is yet another object of the present invention to provide a sterilizable and sterile stackable packing
10 boxes that facilitates engagement and disengagement by an earring cartridge with a stud gun and which earring cartridge is resistant to reuse to ensure that the same is not reused.

It is an additional object of the present invention to provide a hand-held stud gun that can engage the earring cartridge of the invention to better control the cartridge during the ear-piercing process.

15 These and other objects and advantages of the present invention will be apparent from a review of the following specification and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 presents four views of the hinged hoop earring.

FIG. 2 presents two elevations views of the safety clasp of the invention.

20 FIG. 3 is an exploded perspective view of the ear-piercing system of the present invention.

FIG. 4A is a side cross-sectional view of the ear-piercing cartridge.

FIG. 4B is a side cross-sectional view of nut jaw.

25 FIG. 5A is a side cross-sectional view of the earring jaw with the stud post holder assembly.

FIG. 5B is a front cross-sectional view of the earring jaw and stud post holder assembly.

FIG. 6 presents three top views of the earring cartridge as the stud is being driven toward the clutch. FIG. 6B shows the stud engaged with the clutch and FIG. 6C shows the sequential action of the stud post holder assembly opening up to release the stud.

FIG. 7 is a side cross-sectional view of a stud gun.

FIG. 8 is a three dimensional view of a stud gun loaded with an earring cartridge.

FIG. 9 is a side cross-sectional view of an earring cartridge inside a stackable packing box.

FIG. 10A and 10B are the plan and elevation views of the packing box lid.

FIG. 11A and 11B are the plan and elevation views of the packing box bottom.

FIG. 12A and 12B show two alignments of a hinged hoop earring.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Generally, the figures show the construction and operation of the ear-piercing system of the present invention. Referring to Figure 1A, the hinged hoop earring of the present invention is comprised of a stud hoop 3 that has a first terminal 6A and a second terminal 6B. The hinged hoop earring is further comprised of stud post 1 that has a first pointed end 9 and a second end 8 that encloses a hole 5, a hinge 4 attached to the first terminal 6A of the stud hoop 3 and a latch 2 attached to the second terminal 6B of stud hoop 3. As shown in Figure 1C, latch 2 is a U-shaped member that is adapted to receive stud post 1, which snaps into place when it is pushed into latch 2. The distance between the two arms of latch 2 is somewhat less than the diameter of stud post 1 but the arms flex when stud post 1 is pushed through them, which causes stud post 1 to snap into its resting position. The hinged hoop earring is shown in the open position in Figure 1A and in a closed position in Figure 1B. To go from the open to the closed position, latch 2 and stud post 1 are rotatably moved relative to each other around hinge 4 until stud post

1 snaps into latch 2. Figure 2 provides further details of hinge 4. Referring to Figure 1D, hinge 4 is comprised of two substantially flat vertical members 10. The second end 8 of stud post 1 is hinged between vertical members 10 by a pivot pin 7 that is received through hole 5 of stud post 1 and attached at either end to the vertical members 10
5 whereby stud post 1 and stud hoop 3 are free to rotate around the axis of pivot pin 7.

Referring to Figure 2 earring nut (or clasp) of the invention comprises a front plate 11 that contains a hole sizeably adapted to receive stud post 1 and a shield 13 aligned with the hole in the front plate such that shield 13 forms an intervening surface between open end 9 of stud post 1 and the earring wearer. Shield 13 also prevents the
10 nut from sliding along the stud post towards the ear, thereby maintaining enough distance between the nut and the ear to promote healing. The earring nut is for use with traditional ear-piercing earrings.

Referring to Figures 3-8, the earring-cartridge-and-stud gun system of the present invention is comprised of earring-cartridge stud gun 12, and earring cartridge 14 that is
15 preferably adaptable to fit in the cradle of stud gun 12. Figure 4A depicts a vertical section through earring cartridge 14 that is loaded with a stud P and a nut N. When used with traditional-style ear-piercing earrings, nut N is generally a metallic component that may have an ornamental purpose. In this case the nut usually is left on the stud post after the ear-piercing process is completed. However, when used with hinged hoop earrings,
20 nut N is a disposable nut usually made of a plastic material or the like. Once a subject's ear is pierced with a hinged hoop earring, the stud hoop is swung around the ear and the stud post is snapped into the latch. The disposable nut is then removed from the stud post.

Initially, stud P is fitted within a stud post holder assembly 116, which is then
25 fitted within earring cartridge 14. Earring cartridge 14 fits within cradle 74 of earring-cartridge stud gun 12 so that a person's entire hand, not just the fingers, may be used to wield and control the pierced-ear earring prior to and during the ear-piercing process. The cartridge is also provided with a plurality of ribs 180, 181 on its outside surface so that the cartridge itself may be used without the stud gun for ear piercing, if so
30 desired.

As shown in FIG. 4A, generally, earring cartridge 14 comprises a stud post holder assembly 116 for holding stud P, an earring jaw 112 for movably carrying stud post holder assembly 116, and a nut jaw 114 for alignedly holding nut N opposite stud P, nut jaw 114 having a nut jaw extension 154 for slidably engaging nut jaw 114 with earring jaw 112. The two slidably connected portions of earring cartridge 14, nut jaw 114 and earring jaw 112, are also shown in Figures 4B and 5, respectively. Nut jaw extension 154 and stud post holder assembly 116 interact to produce a torque-like force on the stud post holder assembly 116 causing it to rotatably open after earring cartridge 14 is compressed to bring earring jaw 112 towards nut jaw 114, engaging post P with nut N.

Referring to Figures 5-6, stud post holder assembly 116 for holding the stud is in two halves, 113, 115 each half comprising main body 121, 123, front stud head adaptors 117, 119 attached to the front side of the body and L-shaped terminal members with legs 125, 127 and bases 204, 205 attached to the rear side of the body 121, 123. Front stud head adaptors 117, 119 are recessed to receive, in one embodiment, the stud head or, in another embodiment, the hinge of the hinged hoop earring.

Stud post holder assembly 116 may be modified to accommodate the hinged hoop earring by making a through hole in the stud post holder assembly, adaptably sized to hold a hinged hoop earring stud (not shown). In one embodiment, when the stud post holder assembly is used with a hinged hoop earring, it may not include the front stud head adaptor. In a preferred embodiment, when the stud head adaptors are included for use with hinged hoop earrings, they are recessed to receive the hinge of the hinged hoop earring. Further, the top surface of the earring jaw can be provided with a radial cavity such that a stud post holder assembly carrying a hinged hoop can be accommodated in it. Enough room is provided so that a hinged hoop earring can be held within the stud post holder assembly such that the hoop can curve away from the stud (FIG. 12B) or, in an alternative arrangement, curve towards the stud (FIG. 12A).

As shown in Figures 5 and 6, stud post holder assembly 116 fits within a top channel 201 of earring jaw 112. The body of each half of stud post holder assembly 116 is held within the top channel such that stud post holder assembly 116 can slide in and

out of earring jaw 112. A bottom channel 120 within earring jaw 112 is adapted for slidably engaging nut jaw extension 154 (see Figure 5B). Bottom channel 120 with its base 152 serves as a guidance and alignment means for nut jaw extension 154.

5 Earring jaw 112 further comprises a nut jaw retention system comprising a bottom side 152 of earring jaw 112 adjacent the bottom channel and defining an opening 155 between an interior and an exterior of earring jaw 112. Opening 155 is parallel to a length of the bottom side and extends from a rear portion of earring jaw 112 to a point just past a midpoint between the rear portion and a front portion of earring jaw 112 and accommodates an extending tongue 168 with a hook coupled to nut jaw 114. When
10 tongue 168 is introduced into opening 155 the hook may travel along opening 155 and may be caught at a forward end thereof at the point just past the midpoint.

Earring jaw 112 also comprises a biasing engagement mechanism for engaging earring jaw 112 and nut jaw 114 that tends to urge earring jaw 112 away from nut jaw 114. In the embodiment shown in Figure 5A, the mechanism comprises a spring post
15 140 which is coupled centrally to an interior rear wall of the bottom channel, and extends into the bottom channel generally parallel to a bottom side approximately one-quarter the distance between a rear and a front of earring jaw 112. A spring is disposed around the spring post 140.

Additionally, earring jaw 112 comprises a plurality of ribs 180, which are present
20 on an exterior of earring jaw 112, generally opposite the bottom channel, ribs 180 providing means by which secure manual engagement may be made of the exterior of earring jaw 112.

Nut jaw 114 optionally comprises nut holding means for holding a nut corresponding to an earring post in alignment with earring post, extension means for
25 extending the nut holding means away from earring jaw 112 and slidable engagement means for slidably engaging earring jaw 112, the slidable engagement means coupled to the extension means. As shown in Figure 4B, in a preferred embodiment, the nut holding means further comprise a nut holder 191 and support means 199 for supporting the nut holder in a spaced apart relationship with extension means 154. Further, nut

holder 191 may define first and second nut grooves within which an earring nut N may fit. The first nut groove 192 is perpendicular to second nut groove 193; and a finger 190, rises up from the floor of block 191 in the first groove, which is capable of engaging with slight compression a nut fitted in the first and second nut grooves whereby the nut
5 may be securely held in place by finger 190 in the first and second grooves of the block yet easily disengaged from the block.

Also, support means 199 for supporting the nut holder may comprise an upright portion 194 supporting the block away from extension means 154 whereby a void is defined between the upright portion, the extension means, and earring jaw 112 to
10 provide room for an ear, the upright portion having a width approximately the same as the width of earring jaw 112 to provide means by which nut jaw 114 may be manually engaged.

As with earring jaw 112, a plurality of ribs 181 is present on an outward facing portion of upright portion 194 opposite the void, and provides means by which secure
15 manual engagement may be made of the exterior of nut jaw 114.

The extension means comprise a base portion which is coupled to the nut holding means. The base portion has a width approximately the same as the width of earring jaw 112 to provide means by which the nut holding means may be sturdily supported and provides a means by which nut jaw 114 may be engaged by earring jaw 112 thereby
20 obstructing further slidable travel of nut jaw 114 into earring jaw 112. Further, a neck portion is coupled to the base portion and has a width approximately the same as the width of bottom channel 120 so that the neck portion may slide into bottom channel 120. The extension means may further comprise a tongue portion 168, which extends from the neck portion and terminates in a hook. Tongue portion 168 descends at an angle
25 from the neck portion whereby the catch may engage a terminal end of opening 155 present in a bottom side of earring jaw 112.

In one embodiment, the slideable engagement means comprise an elongated portion slidably engaging the interior of the bottom channel. The elongated portion may define a bore wherein the bore is defined by first and second nut jaw extension 169,170,

first nut jaw extension 169 defining the upper part of the bore and the second nut jaw extension 170 defining the lower part of the bore. The first and second nut jaw extension 169, 170 have oppositely opposed curved sections that serve to retain the biasing means within the bore and that serve to define corresponding gaps between the first and second
5 nut jaw extension 169, 170 and wherein the biasing means is a spring (not shown).

Referring to Figure 4B, nut jaw 114 also comprises a flexible tang 160 and a hump 161 juxtaposed with flexible tang 160 such that when the rear end of the body of stud post holder assembly 116 is located ahead of the front of the flexible tang 160, bases 204, 205 of the terminal members are forced up onto hump 161. The rear end of the
10 body of the stud post holder assembly is the end that has the terminal members attached to it. The front of the tang is the end of the tang that is closest to the nut jaw in the assembled configuration of the earring cartridge.

In one embodiment, the length of flexible tang 160 is shorter than that of legs 125, 127 of the terminal members. Additionally, in a preferred embodiment, flexible
15 tang 160 is moldably attached to the hump 161. Further, hump 161 may be attached to the upper surface of nut jaw extension 169. As can be seen in Figure 4B, the invention also provides that flexible tang 160 is flared upward to engage the underside of post holder assembly 116 pushing up on said assembly in a spring-like fashion. The engagement of tang 160 with post holder assembly 116 causes relative movement
20 between assembly 116 and the earring jaw, causing body parts 121, 123 (Figure 6B) to slide out of the earring jaw after the ear is pierced. This allows the assembly 116 to open once assembly 116 moves past tang 160 because until the body parts of the assembly move out of the earring jaw, the two halves of the assembly are constrained together, holding the stud in place. Even when tang 160 is absent, the engagement of nut N with
25 stud P causes relative movement between assembly 116 and the earring jaw causing body parts 121, 123 (Figure 7B) to slide out of the earring jaw after the ear is pierced and the nut is engaged by the stud.

Referring to Figure 5A and 5B, earring jaw 112 may further comprise two intermediate channels 208 configured to adaptably receive legs 125, 127 of the terminal
30 member of each half of stud post holder assembly 116 whereby the legs slide within

intermediate channels 208 when stud post holder assembly 116 slides in and out of earring jaw 112.

5 A preferred embodiment of the invention provides a peg and hole alignment system for the two halves of stud post holder assembly 116 comprising a peg jutting out of the outer surface of one body and the other body having a cavity sized to adaptably receive the peg such that when the two halves of stud post holder assembly 116 are assembled together in alignment the peg is received within the cavity.

10 The operation of the earring cartridge can be understood by reference to Figures 6A-6C. Normally, the earring cartridge spring or other biasing means forces the nut jaw away from the earring jaw as far as the bottom slot and the hooked tongue will allow. Ample room is provided between the nut jaw and the earring jaw for the insertion of an ear to be pierced. Once the ear is placed between the nut jaw and the earring jaw, and necessarily between earring stud or post P and earring nut N, earring cartridge 14 is compressed manually or for example, by squeezing an earring cartridge stud gun,
15 described below, within which the earring cartridge can be placed. The compression of earring cartridge 14 brings the base of L-shaped terminal members 203 over the hump causing a torque-like force to be applied on the two halves of stud post holder assembly 116.

20 At this point, if the ear piercer is satisfied and ready to pierce the ear, he firmly squeezes earring cartridge 14 (or the stud gun) causing the flexible tang to move past the back end of assembly 116, which leaves the flexible tang free to rise up and above the plane of the post holder assembly bottom. This drives earring stud or post P through the ear and into the flanged aperture and through the earring nut. In so doing, the elongated portion of the nut jaw compresses the earring cartridge spring and travels to the rear of
25 the earring jaw.

During this operation, stud post holder assembly 116 is held in place, the flexible tang (moving with the elongated nut jaw portion) moves along the bottom side of stud post holder assembly 116 until it finally reaches the back end of stud post holder assembly 116.

Upon full compression of earring cartridge 14, the ear has been pierced; and earring post P has engaged nut N. Pressure is then released from the hand upon earring-cartridge 14 (or upon the earring-cartridge stud gun), pierced-ear earring cartridge halves 113 and 115 open up away from pierced-ear earring E, pierced-ear earring nut N is disengaged from nut jaw 114, the ear has been pierced, and the earring-cartridge stud gun with earring cartridge 14 may then be removed from the area adjacent the pierced ear. Because of termini portions 125 and 127 being retained, as seen in FIG. 6C, stud-holder halves 113 and 115 do not fall away, and preclude reloading of the cartridge to negate sterility. That is, the right-angle protuberances at the ends of termini portions 125 and 127 captively retain cartridge halves 113 and 115 to prevent reloading of a stud and reuse of the earring cartridge.

The earring-cartridge stud gun 12 is shown in FIGS. 7-8 and fully described in U.S. Patent No. 5,868,774 but is also described here for the sake of completeness. Figures 7 and 8 show that two inter-fitting portions comprise earring-cartridge stud gun 12: grip 20 and plunger 22. Plunger 22 fits within grip 20 and slidably travels there-through, a generally short distance, namely, that distance necessary to pierce the ear with the stud portion of the pierced-ear earring. That distance of travel is approximately one-half inch and plunger 22 is easily controlled by the hand of the operator. The length of the plunger-grip assembly is approximately two-and-one-half inches taken along line 5--5 shown in FIG. 8.

As shown in FIG. 7, plunger 22 is biased by biasing means, such as spring 24, away from grip 20. Oppositely disposed stud-gun spring posts 26a, b serve to hold spring 24 in place between grip 20 and plunger 22 in a normally-opposed position. Plunger 22 is held in captive association with grip 20 as set forth in more detail below.

Plunger 22 may be hollow in order to conserve cost, weight and to allow for greater ease of manufacturing. On the inside of plunger 22 within grip 20, lower abutment stop 28 and an upper abutment stop 30 serve to limit the forward travel of plunger 22 into the interior of grip 20. The distance between the contact surfaces of abutment stops 28, 30, and grip 20 is approximately one-half inch. Abutment stops 28,

30 may be formed of the same material as plunger 22 and may be molded as an integral unit with plunger 22.

Upper abutment stop 30 is formed in an L-shape (in cross section) so as to accommodate traveling portion 40 of cradle 74 provided by earring-cartridge stud gun 12 for earring cartridge 14. Traveling portion 40 has a depending projection 42 that fits within notch 44 provided between upper abutment stop 30 and plunger 22. Tongue 46 projects laterally forward and away from plunger 22 to act as an additional travel limiting stop as will be seen. A cradle backstop 48 serves to provide the retaining support and abutment at the back of earring cartridge 14 once it is fitted into earring-cartridge stud gun 12 and more specifically, cradle 74 thereof.

Traveling portion 40 is molded as one piece with plunger 22 or may be welded thereto so as to be integral with plunger 22. Traveling portion 40 travels with plunger 22 due to its connection with upper abutment stop 30 via depending portion 42. Along with plunger 22, traveling portion 40 slidably travels along any surface of grip 20 with which it may come into contact except where abutment occurs.

Grip portion 20 has a front-curved surface 60 adapted to fit against the fingers of the hand. In conjunction with rear-curved surface 62 of plunger 22, the portion of earring cartridge stud gun 12 engaged by a person's hand fits comfortably within the hand due to complementary curved surfaces 60, 62. Grip portion 20 is approximately two inches in height, about three inches in overall width, and defines upper slot 64 through which cradle backstop 48 travels. An abutment or end wall 66 of slot 64 of grip portion 20 serves to prevent the rearward travel of cradle backstop 48 beyond that shown. Abutment 66 between cradle backstop 48 holds plunger 22 in sliding association with grip 20, even though biasing means 24 normally urges them apart.

Projecting forwardly from the top of grip 20 is a cradle extension 70 that terminates in a cradle forestop 72. The area defined between cradle forestop 72 and cradle backstop 48 serves to define a cradle 74 within which earring cartridge 14 may fit and be telescopically compressed during the ear-piercing process. Provided beneath upper surface 76 and above lower surface 78 of cradle extension 70 is a tongue groove

80. Tongue groove 80 provides travel room for tongue 46 as it travels forward. As tongue 46 is captively retained between upper surface 76 and lower surface 78 of cradle extension 70, greater stability and alignment is provided during the ear-piercing process as cradle 74 maintains its relative geometry and shape during the piercing process.

5 In order to provide additional support to cradle extension 70, integrally molded cradle extension support 90 extends forward of tongue groove 80 and terminates below forestop 72. Cradle extension support 90 provides additional support to cradle extension 70.

10 The interior of cradle 74 has additional means by which earring cartridge 14 is held and maintained in position. Thus, oppositely disposed across cradle 74 adjacent forestop 72 are two side supports 100a, b. Cradle side supports 100a, b project upwardly approximately an eighth of an inch and provide additional side securement and positioning for earring cartridge 14. The interior of backstop 48 and forestop 72 may have notches or ridges by which to engage ribs 180, 181 present on earring cartridge 14.

15 In one embodiment, a small extension or finger (not shown) may extend upwardly from upper surface 76 of cradle extension 70 adjacent forestop 72 to frictionally engage the front end of earring cartridge 14. Both backstop 48 and forestop 72 may have side flange projections 82 to better engage and secure earring cartridge 14 in cradle 74.

20 The earring-cartridge and the earring-cartridge stud gun may be made of lightweight but durable plastics that are easily formed into the appropriate shapes for use as set forth above. In preferred embodiments, the stud gun and/or the cartridge may be made from one or more plastic materials including, but not limited to, the following materials: polyester, polycarbonate, paper, foil, polyimide, polyethylene, polyvinyl chloride, polystyrene, and acrylonitrile-butadiene-styrene (ABS) polymers.

25 Alternatively, the stud gun and/or the cartridge may be made from non-plastic materials such as metal or paper.

Referring to Figure 9, earring cartridge 14 with earring stud P and nut N fits within stackable box 16. Earring-cartridge box 16 is a sealable container within which earring cartridge 14 and pierced-ear earring (N and P) may be transported and stored

until ready for use. Box 16 allows and maintains sterilization of earring cartridge 14, and pierced-ear earring (N and P).

As shown in Figure 9, earring cartridge box 16 is constructed to conform to the top of earring cartridge 14. Conforming top 300 of box 16 conforms to the top exterior of earring cartridge 14 for a close but not constricting fit. Internal indentations 301, 302 provide gripping means by which top 300 grips earring cartridge 14 inside. As earring cartridge 14 may take a variety of shapes, including shapes that accommodate hinged hoops, the shape achieved by conforming top 300 of box 16 may also take the same variety of shapes in order to accommodate earring cartridge 14.

The plan and elevation views of conforming top 300 are shown in Figures 10A and 10B, respectively. The packing box design allows the cradle of the earring-cartridge stud gun to fit within box 16 past flange 304. This allows the earring-cartridge stud gun to engage earring cartridge 14 and remove it from box 16. This provides means by which the sterile nature of earring cartridge 14 and pierced-ear earring (N and P) may be maintained once the seal on earring-cartridge box 16 has been broken. Additionally, earring cartridge 14 may be reinserted back into box 16 after the ear-piercing process has been performed by fitting earring-cartridge box 16 over earring cartridge 14 and removing earring cartridge 14 from the cradle of the earring-cartridge stud gun.

During manufacture and prior distribution, earring cartridge 14 is fitted with a pierced ear earring (N and P) within a stud post holder assembly 116. The earring cartridge is then fitted within conforming top 300 of earring cartridge box 16. The bottom of earring cartridge 14 is above flange 304 and within the confines of box 16. Sterilizing gas or the like may be introduced into the confines of the earring-cartridge box 16 so as to sterilize its entire contents and any exposed surfaces, including earring cartridge 14 and pierced-ear earring E. Medical-grade Tyvak paper backing or the like (not shown) may be adhesively or otherwise sealingly attached to flange 304. If desired, sterilizing gas may be trapped within earring-cartridge box 16 to preserve and maintain the sterile environment previously established. Obviously, other sterilizing procedures may be used.

The bottom of box 16 is sealed with a lid 310, which is shown in plan and elevation views in Figures 11A and 11B respectively. Lid 310 snaps shut over flange 304, thereby providing protection for the paper backing used to seal conforming top 300. Lid 310 is provided with pegs 311 which can fit into corresponding holes 305 of the conforming top of another packing box. Thus, this peg and hole arrangement can be used to vertically stack the packing box on top of each other.

Once the lid is snapped onto the flange of top 300, sealed, earring-cartridge box 16 may then be transported and stored until ready for use, maintaining earring cartridge 14 and its pierced-ear earring (N and P) in a sterile condition until ready to use.

Generally, earring-cartridge packing box 16 is made of clear or other see-through plastics or materials so that earring cartridge 14 and its pierced-ear earring (N and P) may be easily visible prior to the ear-piercing process. However, it may also be made of opaque or translucent material. In preferred embodiments, the packing box may be made from one or more plastic materials including, but not limited to, the following materials: polyester, polycarbonate, paper, foil, polyimide, polyethylene, polyvinyl chloride, polystyrene, and acrylonitrile-butadiene-styrene (ABS) polymers. Alternatively, the box may be made from non-plastic materials such as metal or paper.

In operation, earring-cartridge box 16 with sterilized earring cartridge 14 is used in conjunction with the earring-cartridge stud gun as follows. Earring-cartridge box 16 is opened by snapping apart lid 310. The paper backing is then removed from its adhesive attachment with flange 304. This exposes the bottom of earring cartridge 14 and provides access to the cradle to the interior of earring-cartridge box 16. The cradle of the stud gun is then brought into the confines of earring-cartridge box 16 to engage the bottom of earring cartridge 14. Once the cradle has securely engaged earring cartridge 14, box 16 is then removed from the top of earring cartridge 14. The ear to be pierced may then be pierced by placing the ear between the nut jaw and post P of the earring E. The plunger and the grip of the stud gun are then pressed together to force the earring post into earring nut N, piercing the ear lobe, as described more fully above.

Conforming top 300 may then be re-fitted over the used earring cartridge whereby earring cartridge 14 may be engaged within top 300 and removed from cradle 74. Following that top 300 may be sealed shut by snapping its lid 310 back on. By using packing box 16, earring cartridge 14 need never be touched by human hands or other
5 contaminating surface prior to, during, or after the ear-piercing process because the operator can load and unload the stud gun by holding the packing box, without touching the cartridge.

Thus, in the instant invention a cartridge 14 is now designed not merely as a container for the pierced-ear earring and earring Nut N, but also acts as a loading tool by
10 which the earring-cartridge stud gun may be loaded. Moreover, cartridge 14 is stored and transported in stackable packing boxes 300, which provide sealed secure storage for the cartridge before and after use and which are adapted for convenient vertical stacking. It can be readily seen that by using the system disclosed that sterility and ease of handling for user of the system is accomplished.

15 While the present invention has been described with reference to particular embodiments, it is recognized that additional variations of the present invention may be devised without departing from the inventive concept as set forth in the following claims.

CLAIMS

WHAT IS CLAIMED IS:

1. A hinged hoop earring for use with an ear piercing system, the hinged hoop earring comprising:
 - a stud hoop;
 - a stud post having a free end and a connected end;
 - 5 a hinge attached to a first end of the stud hoop, the stud post pivotally mounted on the hinge so that the connected end of the stud post is connected to the hinge; and
 - a latch attached to a second end of the stud hoop, wherein the latch is adapted to receive a part of the stud post that is proximate to the free end of the stud post.
- 10 2. The hinged hoop earring of claim 1, wherein the length of the stud post is in the range of about 5 mm to about 25 mm.
3. The hinged hoop earring of claim 1, wherein the length of the stud post is in the range of about 10 mm to about 20 mm.
- 15 4. The hinged hoop earring of claim 1, wherein the length of the stud post is about 12 mm.
5. The hinged hoop earring of claim 1, wherein the diameter of the stud hoop is in the range of about 5 mm to 25 mm.
6. The hinged hoop earring of claim 1, wherein the diameter of the stud hoop is in the range of about 10 mm to 20 mm.
- 20 7. The hinged hoop earring of claim 1, wherein the diameter of the stud hoop is about 13 mm.

8. The hinged hoop earring of claim 1, wherein the stud post has a cylindrical cross-section.

9. The hinged hoop earring of claim 8, wherein the diameter of the stud post is in the range of about 0.1 to 1 mm.

5 10. The hinged hoop earring of claim 8, wherein the diameter of the stud post is about 0.75 mm.

11. The hinged hoop earring of claim 10, wherein the free end of the stud post is tapered to a point such that the diameter of the stud post at the free end is in the range of about 0.01 mm to about 0.4 mm.

10 12. The hinged hoop earring of claim 10, wherein the free end of the stud post is tapered to a point such that the diameter of the stud post at the free end is about 0.2 mm.

13. An earring cartridge for providing sterile body piercing comprising:
a stud post holder assembly for carrying a stud;

15 an earring jaw for carrying said stud post holder assembly; and
and a nut jaw for alignedly holding a nut in spaced apart, and oppositely
opposed placement so that an ear part may be placed between said stud and
said nut for piercing,
wherein said nut jaw slidably engages with said earring jaw for relative
20 movement between the nut jaw and the earring jaw, and wherein said nut jaw
and the stud post holder assembly interact to produce a torque-like force on
the stud post holder assembly causing it to rotatably open after said earring
cartridge is compressed to bring said earring jaw towards said nut jaw for
engaging said stud with said nut.

25 14. The earring cartridge of claim 13 wherein the stud post holder
assembly for holding the stud is in two halves, each half comprising a main body, a
front stud head adaptor attached to the front side of the body and an L-shaped

terminal member having a base and a leg attached to the rear side of the body,
wherein the front stud head adaptor is recessed to receive the stud head.

15. The earring cartridge of claim 13 wherein the stud post holder
assembly for holding the stud is in two halves, each half comprising a main body, and
5 an L-shaped terminal member having a base and a leg attached to the rear side of the
body, wherein the body forms a through hole adapted to hold the hinged hoop earring
of claim 1.

16. The earring cartridge of claim 15 wherein each half of the stud post
holder assembly further comprises a front stud head adaptor attached to the front side
10 of said main body, wherein the front stud head adaptor is recessed to receive the hinge
of the hinged hoop earring..

17. The earring cartridge of claim 15 wherein the top surface of the earring
jaw has a radial cavity adapted to accommodate the hinged hoop earring stud.

18. The earring cartridge of claim 15 wherein the hinged hoop earring is
15 held within the stud post holder assembly such that the hoop curves away from the
stud.

19. The earring cartridge of claim 15 wherein the hinged hoop earring is
held within the stud post holder assembly such that the hoop curves towards the stud.

20. The earring cartridge of claim 15 wherein said nut is a disposable nut
20 that encloses a through hole adaptably sized to receive the stud post.

21. The earring cartridge of claim 14 wherein the nut comprises a backing
shield to prevent the end of the stud post from contacting a subjects' body after the
stud post is engaged by the nut.

22. The earring cartridge of claim 14 wherein the nut comprises means to
25 prevent the nut from sliding along the stud post towards the ear, thereby maintaining
enough distance between the nut and the ear to promote healing. .

23. The earring cartridge of claim 13 wherein the earring jaw has a top channel for holding the body of each half of the stud post holder such that said stud post holder assembly can slide in and out of the earring jaw.

24. The earring cartridge of claim 13 wherein the earring jaw has a bottom
5 channel adapted for slidably engaging nut jaw extension.

25. The earring cartridge of claim 24 wherein the earring cartridge further comprises a nut jaw retention system comprising:
a bottom side of said earring jaw adjacent said bottom channel and defining an opening between an interior and an exterior of said earring jaw, said opening
10 parallel to a length of said bottom side and extending from a rear portion of said earring jaw to a point just past a midpoint between said rear portion and a front portion of said earring jaw, said opening accommodating a hook coupled to said nut jaw introduced into said opening whereby said hook may travel along said opening and may be caught at a forward end thereof at said point
15 just past said midpoint.

26. The earring cartridge of claim 25 wherein the earring jaw further comprises a biasing engagement mechanism for engaging said earring jaw and said nut jaw that also tends to urge said earring jaw away from said nut jaw comprising:
a spring post, said spring post coupled centrally to an interior rear wall of said bottom
20 channel, said spring post extending into said bottom channel generally parallel to a bottom side approximately one-quarter the distance between a rear and a front of said earring jaw.

27. The earring cartridge of claim 26 wherein said earring jaw further comprises:
25 a plurality of ribs, said plurality of ribs present on an exterior of said earring jaw, generally opposite said bottom channel, said ribs providing means by which secure manual engagement may be made of the exterior of said earring jaw.

28. The earring cartridge of claim 27 wherein

said nut jaw further comprises:

nut holding means for holding a nut corresponding to an earring post in alignment with said earring post;

5 extension means for extending said nut holding means away from said earring jaw; and

slidable engagement means for slidably engaging said earring jaw, said slidable engagement means coupled to said extension means.

29. The earring cartridge of claim 28 wherein said nut holding means further comprises:

10 a nut holder; and

support means for supporting said nut holder in a spaced apart relationship with said extension means.

30. The earring cartridge of claim 29 wherein said nut holder further

15 comprises:

a block, said block coupled to said support means and defining first and second nut grooves within which an earring nut may fit, said first nut groove perpendicular to said second nut groove; and

20 a finger, said finger rising up from a floor of said block in said first groove, said finger capable of engaging with slight compression a nut fitted in said first and second nut grooves whereby said nut may be securely held in place by said finger in said first and second grooves of said block yet easily disengaged from said block.

31. The earring cartridge claim 30 wherein said support means for supporting said nut holder further comprises:

25 an upright portion supporting said block away from said extension means whereby a void is defined between said upright portion, said extension means, and said earring jaw to provide room for an ear, said upright portion having a

width approximately the same as a width of said earring jaw to provide means by which said nut jaw may be manually engaged; and a plurality of ribs, said plurality of ribs present on an outward facing portion of said upright portion opposite said void, said ribs providing means by which secure manual engagement may be made of the exterior of said nut jaw.

32. The earring cartridge of claim 29 wherein said extension means further comprises:

a base portion coupled to said nut holding means, said base portion having a width approximately the same as a width of said earring jaw to provide means by which said nut holding means may be sturdily supported and to provide means by which said nut jaw may be engaged by said earring jaw thereby obstructing further slidable travel of said nut jaw into said earring jaw; and a neck portion, said neck portion coupled to said base portion and having a width approximately the same as a width of said bottom channel so that said neck portion may slide into said bottom channel.

33. The earring cartridge of claim 32 wherein said extension means further comprises:

a tongue portion, said tongue portion extending from said neck portion and terminating in a hook, said tongue portion descending at an angle from said neck portion whereby said catch may engage a terminal end of an opening present in a bottom side of said earring jaw.

34. The earring cartridge of claim 29 wherein said slidable engagement means further comprises:

an elongated portion slidably engaging the interior of said bottom channel.

35. The earring cartridge of claim 34 wherein said elongated portion defines a bore wherein said bore is defined by first and second nut jaw extensions, said first nut jaw extension extending above said bore and said second nut jaw extension, said first and second nut jaw extensions having oppositely opposed curved sections that serve to retain said biasing means within said bore and that serve to

define corresponding gaps between said first and second nut jaw extensions and wherein said biasing means is a spring.

36. The earring cartridge of claim 14 wherein said earring jaw further comprises:

5 two intermediate channels configured to adaptably receive the leg of the terminal member of each half of the stud post holder assembly whereby the legs slide within said intermediate channels when said stud post holder assembly slides in and out of the earring jaw.

10 37. The earring cartridge of claim 36 wherein the earring cartridge further comprises a flexible tang and a hump juxtaposed with the flexible tang such that when the rear end of the body of the stud post holder assembly is located ahead of the front of the flexible tang, the bases of the terminal members are forced up onto the hump.

38. The earring cartridge of claim 37 wherein the flexible tang is shorter than the legs of the terminal members.

15 39. The earring cartridge of claim 38 wherein the flexible tang is moldably attached to the hump.

40. The earring cartridge of claim 39 wherein the hump is attached to the upper surface of nut jaw extension.

20 41. The earring cartridge of claim 40 wherein said flexible tang is flared upward to engage an underside of said post holder assembly, whereby the stud post holder assembly moves relative to the earring jaw after the ear is pierced causing the main body of each half of the stud post holder assembly to slide out of the earring jaw.

25 42. The earring cartridge of claim 14 further comprising an alignment system for the two halves of the stud post holder assembly comprising a peg jutting out of the outer surface of one body and the other body having a cavity sized to

adaptably receive the peg such that when the two halves of the stud post holder assembly are assembled together in alignment the peg is received within the cavity.

43. The earring cartridge of claim 13 further comprising a stackable packing box for housing the earring cartridge during transport and storage, said box
5 being congruently configured to said earring cartridge and conformably accommodating said earring cartridge and being sealable to medically seal said earring cartridge within it.

44. The earring cartridge of claim 43 wherein the stackable packing box further comprises:
10 a conforming top and a lid wherein either one of the conforming top or the lid has a plurality of pegs and the other has a plurality of holes adapted to receive the pegs whereby when a first box is placed on top of a second box the pegs in the first box fit within the holes in the second box thereby allowing the packing boxes to be stacked.

15 45. The earring cartridge of claim 44 wherein the conforming top further comprises:
a seal to temporarily seal said earring cartridge within said stackable packing box whereby said earring cartridge may be placed and sealed within said box for transport and storage, and thereafter said box being unsealed to expose said
20 earring cartridge for use.

46. The earring cartridge and stud gun system comprising:

the earring cartridge of claim 13; and

an earring cartridge stud gun for engaging an earring cartridge, comprising a grip; a plunger, said plunger slidably engaging said grip; biasing means for biasing
25 said plunger away from said grip, said grip having a front curved surface conformably engageable with the fingers of the hand of an operator, a cradle extension projecting forward of said front curved surface, said cradle extension having an upper surface spaced apart from a lower surface to define a tongue groove; and a cradle forestop

projecting upwardly from an end of said cradle extension, said plunger having a rear curved surface conformably engageable with the heel of the hand of an operator; and a travelling portion coupled to said rear surface, said travelling portion adapted to compress an earring cartridge when the earring cartridge is placed in said cradle and
5 said grip and said plunger are squeezed by said hand; and wherein said travelling portion has a cradle backstop; and a tongue, said tongue being coupled to said cradle backstop and travelling into a tongue groove defined in said grip when said plunger and said grip are squeezed, and wherein first and second stops are coupled to said plunger, said first and second stops abutting said grip when said grip and said plunger
10 are squeezed, said first and second stops limiting the slidable insertion of said plunger into said grip whereby; a post held by the earring cartridge may engage a nut held by the earring cartridge without damaging said nut.

47. The earring cartridge and stud gun system of claim 46 further comprising a stackable packing box for housing the earring cartridge during transport
15 and storage, said box being congruently configured to said earring cartridge and conformably accommodating said earring cartridge and being sealable to medically seal said earring cartridge within it.

48. The earring cartridge and stud gun system of claim 47 wherein the stackable packing box further comprises:
20 a conforming top and a lid wherein either one of the conforming top or the lid has a plurality of pegs and the other has a plurality of holes adapted to receive the pegs whereby when a first box is placed on top of a second box the pegs in the first box fit within the holes in the second box thereby allowing the packing boxes to be stacked.

25 49. The earring cartridge and stud gun system of claim 48 wherein the conforming top further comprises:
a seal to temporarily seal said earring cartridge within said stackable packing box whereby said earring cartridge may be placed and sealed within said box

for transport and storage, and thereafter said box being unsealed to expose said earring cartridge for use.

50. The earring cartridge and stud gun system of claim 49 whereby said earring cartridge is used by placement within said cradle, said cradle receiving and
5 removing said earring cartridge from said stackable packing box to provide and present said stud and said nut in aligned position for piercing said body part without the necessity of handling said earring cartridge with the hands of the operator.

51. An earring cartridge carrying a hinged hoop stud for providing sterile ear piercing comprising:

10 a stud post holder assembly for holding the stud in two halves, each half comprising a main body, and an L-shaped terminal member having a base and a leg attached to the rear side of the body, wherein the two halves form a through hole adapted to hold a hoop earring stud;
an alignment system for the two halves of the stud post holder assembly
15 comprising a peg jutting out of the outer surface of one body and the other body having a cavity sized to adaptably receive said peg such that when the two halves of the stud post holder assembly are assembled together in alignment said peg is received within said cavity;
an earring jaw for movably carrying said stud post holder assembly, wherein
20 the earring jaw has a top channel for holding the body of each half of the stud post holder such that said stud post holder assembly can slide in and out of the earring jaw, a bottom channel adapted for slidably engaging nut jaw extension, two intermediate channels configured to adaptably receive the legs of the terminal member of each half of the stud post holder assembly whereby the
25 legs slide within said intermediate channels when said stud post holder assembly slides in and out of the earring jaw, and a plurality of ribs, said plurality of ribs present on an exterior of said earring jaw, generally opposite said bottom channel, said ribs providing means by which secure manual engagement may be made of the exterior of said earring jaw;
30 a nut jaw for alignedly holding a disposable nut opposite said stud, said nut

jaw having a nut holder and a nut jaw extension for slidably engaging the nut jaw with said earring jaw, wherein

the nut holder comprises a block, said block coupled to a support means for supporting the nut holder and defining first and second nut grooves within

5 which the disposable nut may fit, said first nut groove perpendicular to said second nut groove, and a finger, said finger rising up from a floor of said block in said first groove, said finger capable of engaging with slight compression the disposable nut fitted in said first and second nut grooves whereby said nut may be securely held in place by said finger in said first and

10 second grooves of said block yet easily disengaged from said block, wherein the support means for supporting the nut holder comprise an upright portion supporting said block away from said nut jaw extension whereby a void is defined between said upright portion, said nut jaw extension, and said earring jaw to provide room for an ear, said upright portion having a width

15 approximately the same as the width of said earring jaw to provide means by which said nut jaw may be manually engaged, and a plurality of ribs, said plurality of ribs present on an outward facing portion of said upright portion opposite said void, said ribs providing means by which secure manual engagement may be made of the exterior of said nut jaw, and

20 the nut jaw extension comprises a base portion coupled to said nut holding means, said base portion having a width approximately the same as the width of said earring jaw to provide means by which said nut holding means may be sturdily supported and to provide means by which said nut jaw may be engaged by said earring jaw thereby obstructing further slidable travel of said

25 nut jaw into said earring jaw; a neck portion, said neck portion coupled to said base portion and having a width approximately the same as a width of said bottom channel so that said neck portion may slide into said bottom channel, and a tongue portion, said tongue portion extending from said neck portion and terminating in a hook, said tongue portion descending at an angle from

30 said neck portion whereby said catch may engage a terminal end of an opening present in a bottom side of said earring jaw, and an elongated portion slidably

engaging the interior of said bottom channel, wherein said elongated portion defines a bore wherein said bore is defined by first and second extensions, said first extension extending above said bore and said second extension, said first and second extensions having oppositely opposed curved sections that serve to retain a spring within said bore and that serve to define corresponding gaps between said first and second extensions;

a nut jaw retention system comprising a bottom side of said earring jaw adjacent said bottom channel and defining an opening between an interior and an exterior of said earring jaw, said opening parallel to a length of said bottom side and extending from a rear portion of said earring jaw to a point just past a midpoint between said rear portion and a front portion of said earring jaw, said opening accommodating a hook coupled to said nut jaw introduced into said opening whereby said hook may travel along said opening and may be caught at a forward end thereof at said point just past said midpoint;

a biasing engagement mechanism for engaging said earring jaw and said nut jaw that also tends to urge said earring jaw away from said nut jaw comprising a spring post, said spring post coupled centrally to an interior rear wall of said bottom channel, said spring post extending into said bottom channel generally parallel to a bottom side approximately one-quarter the distance between a rear and a front of said earring jaw; and

a flexible tang and a hump juxtaposed with the flexible tang such that when the rear end of the body of the stud post holder assembly is located ahead of the front of the flexible tang, the bases of the terminal members are forced up onto the hump and wherein the flexible tang is shorter than the legs of the terminal members and wherein the hump is attached to the upper surface of nut jaw extension and wherein said flexible tang is flared upward to engage an underside of said post holder assembly, whereby the stud post holder assembly moves relative to the earring jaw after the ear is pierced causing the main body of each half of the stud post holder assembly to slide out of the earring jaw.

30 52. An earring cartridge system for use with a hinged hoop stud comprising:

the earring cartridge of claim 51; and an earring cartridge stud gun.

53. The earring cartridge of claim 51 further comprising:

5 a stackable packing box for housing the earring cartridge during transport and storage, said box being congruently configured to said earring cartridge and conformably accommodating said earring cartridge and being sealable to medically seal said earring cartridge within it.

54. The earring cartridge of claim 53 wherein the stackable packing box further comprises:

10 a conforming top and a lid wherein either one of the conforming top or the lid has a plurality of pegs and the other has a plurality of holes adapted to receive the pegs whereby when a first box is placed on top of a second box the pegs in the first box fit within the holes in the second box thereby allowing the packing boxes to be stacked.

15 55. The earring cartridge of claim 54 wherein the cartridge housing member further comprises:

a seal to temporarily seal said earring cartridge within said stackable packing box whereby said earring cartridge may be placed and sealed within said box for transport and storage, and thereafter said box being unsealed to expose said earring cartridge for use.

20

25 56. A method of ear-piercing using an earring cartridge and a stud gun with a cradle for holding the earring cartridge, wherein the earring cartridge comprises a stackable packing box for housing the earring cartridge, the stackable box comprising a top that conforms to the shape of the earring cartridge, a removable seal to seal the bottom of the box and a lid to cover said bottom, the method comprising:

- opening the lid to expose the seal;
- removing the seal while holding the top;
- loading the earring cartridge on to the cradle of the stud gun while holding the top in an aligned position with the cradle so that the cradle engages the earring
- 5 cartridge and the top can be removed from the cartridge;
- performing the ear-piercing operation;
- unloading the cartridge from the stud gun using the top; and
- replacing the lid so as to seal the bottom of the stackable packing box.

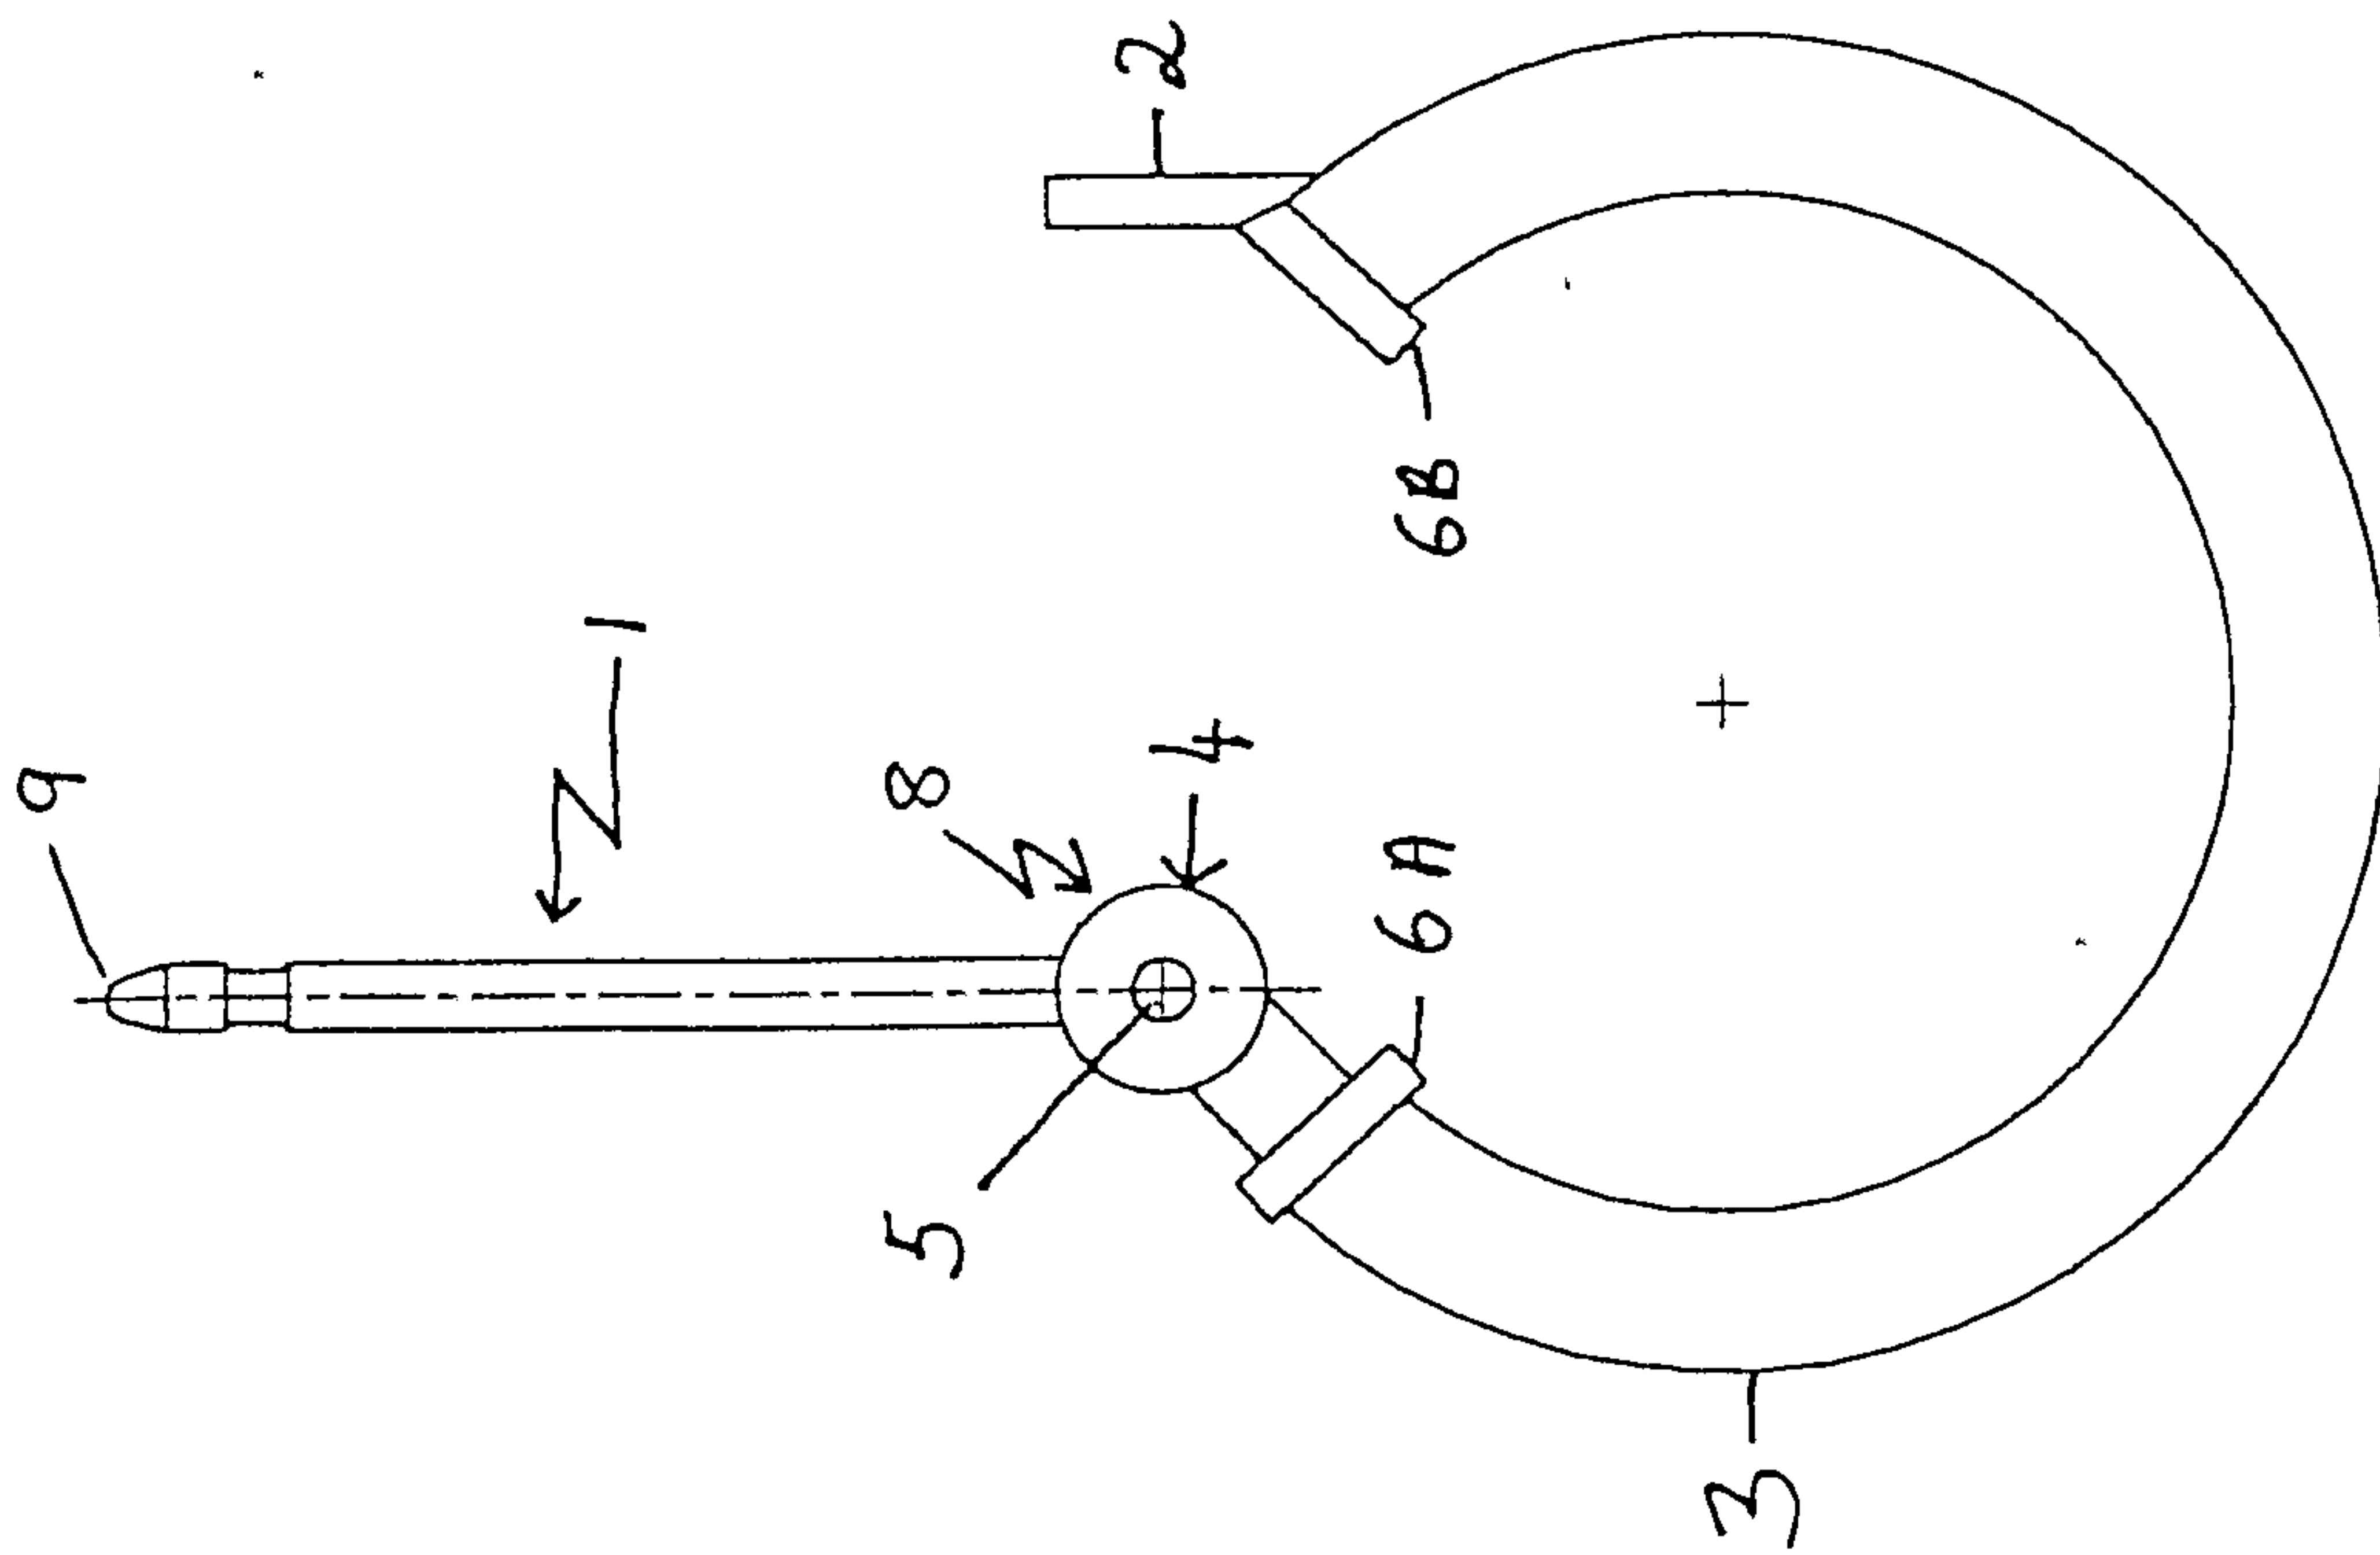


FIG. 1A

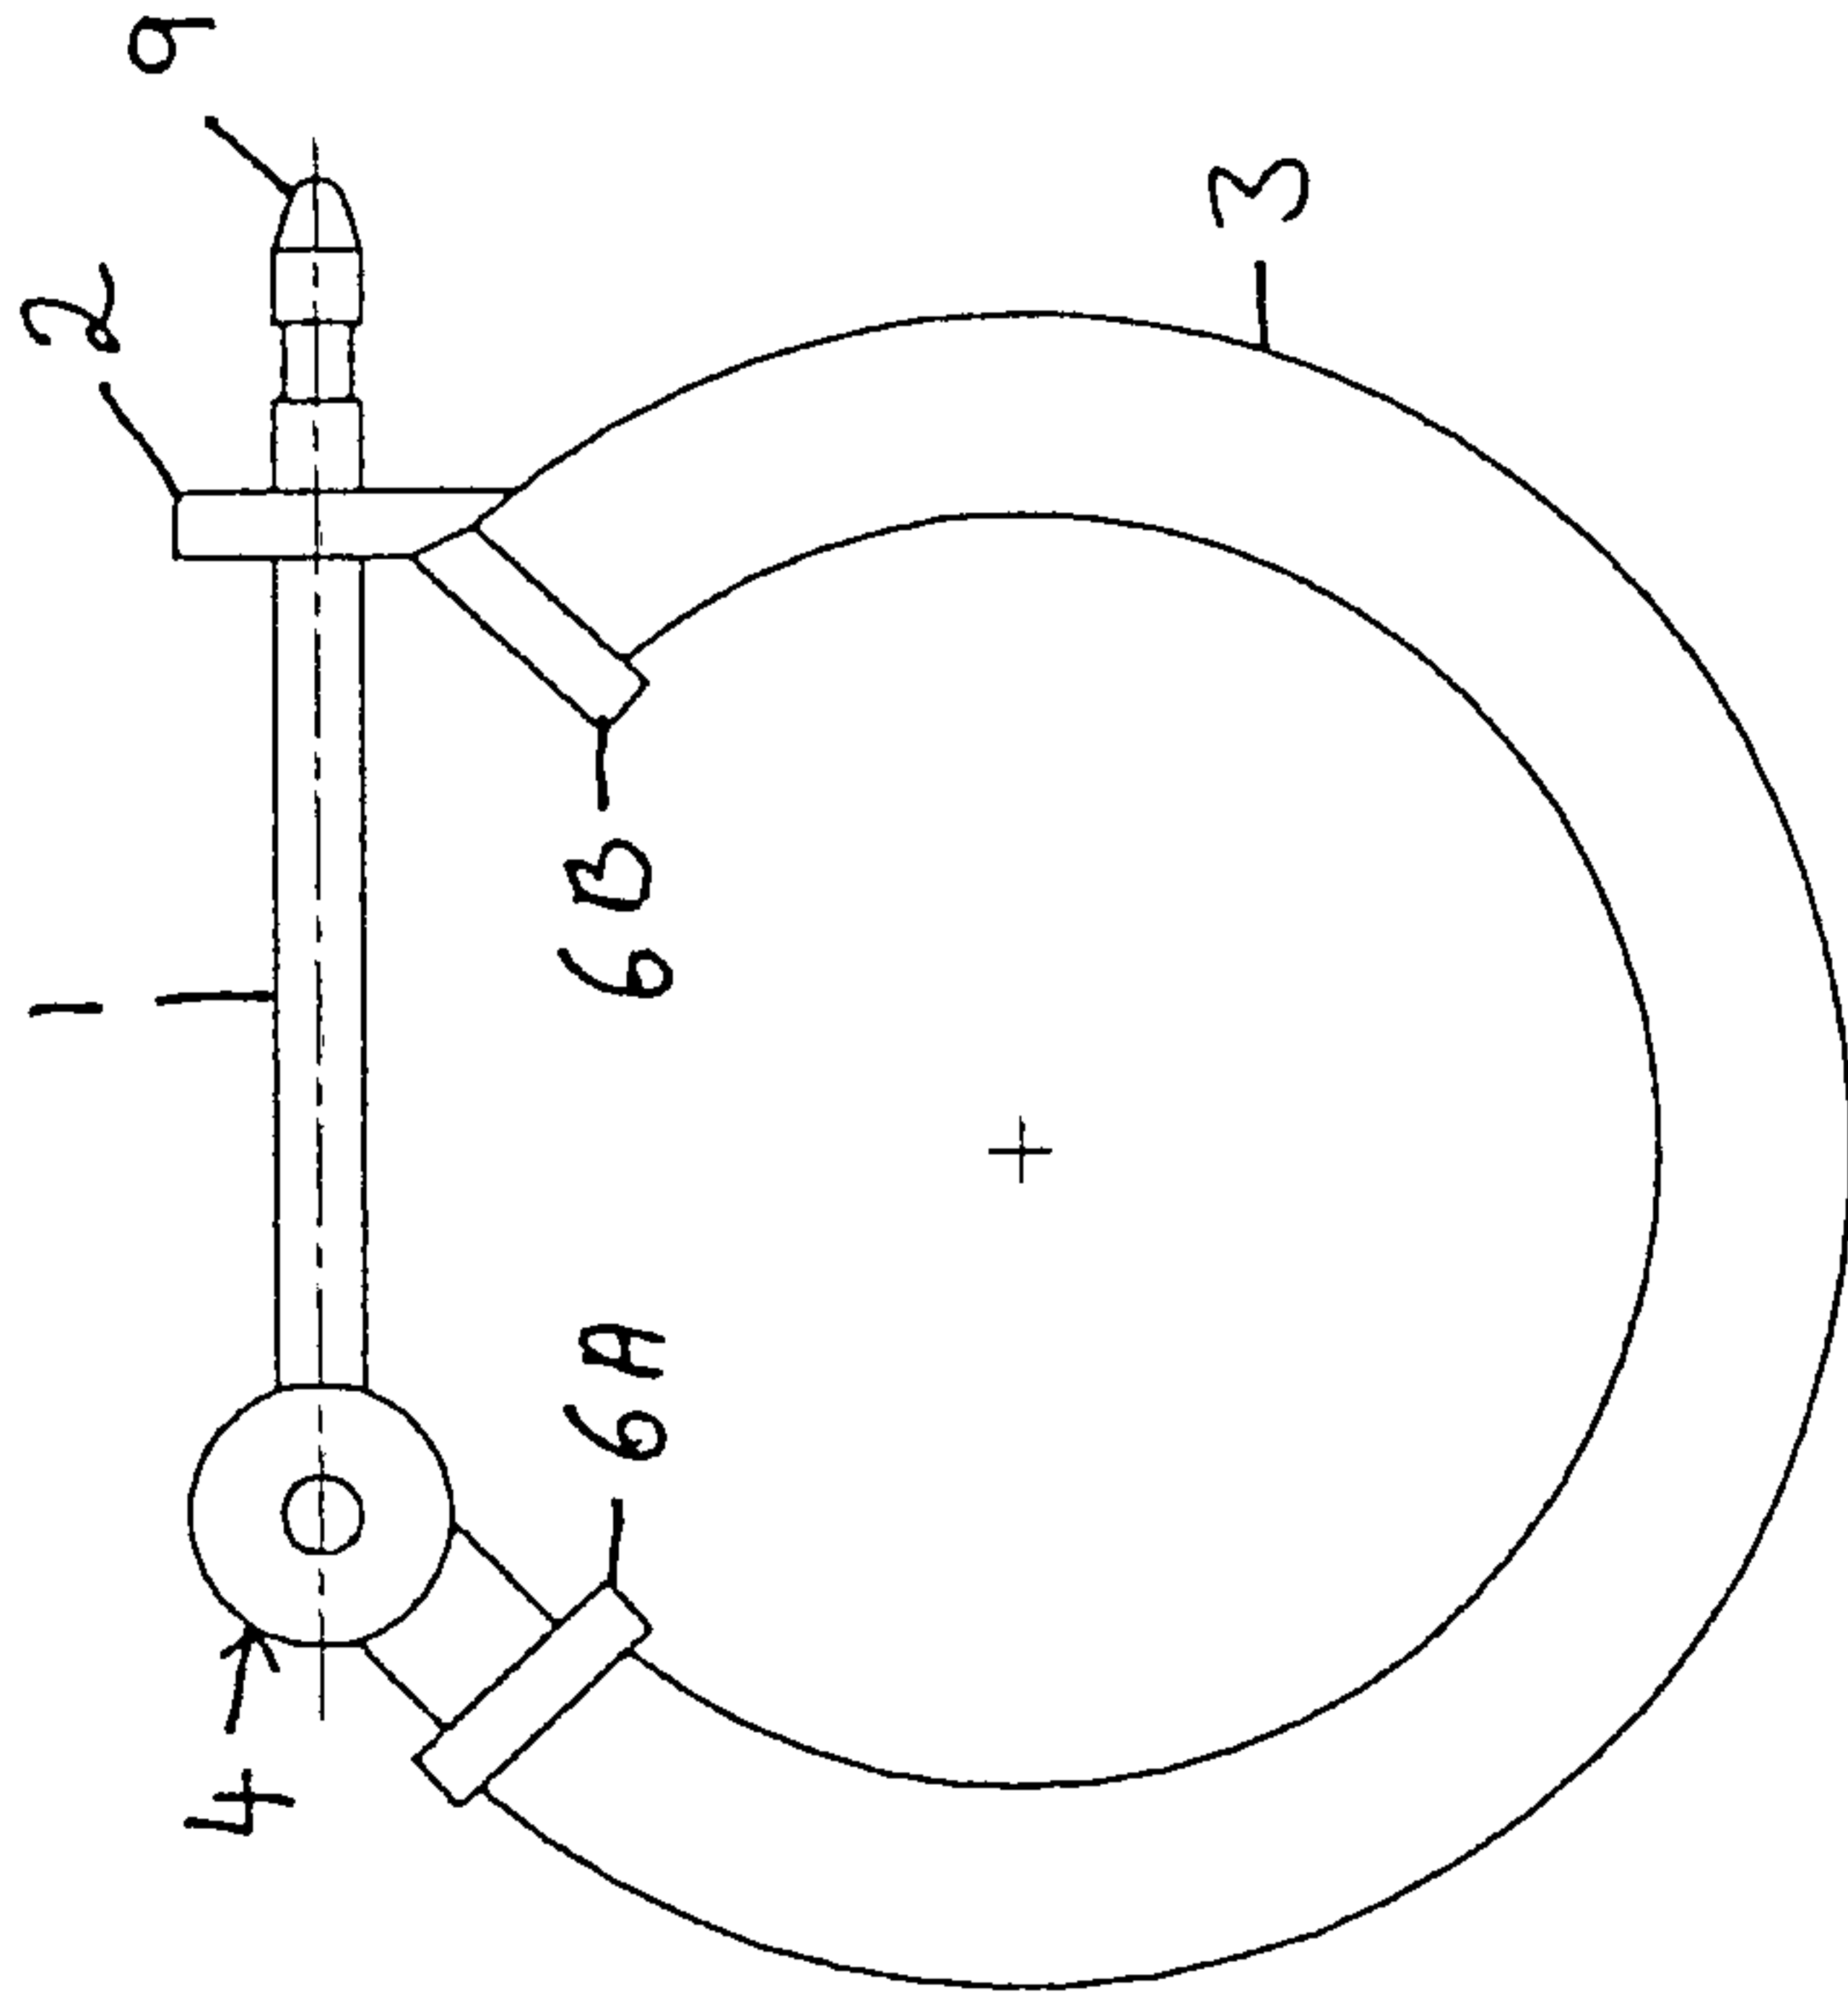


FIG. 1B

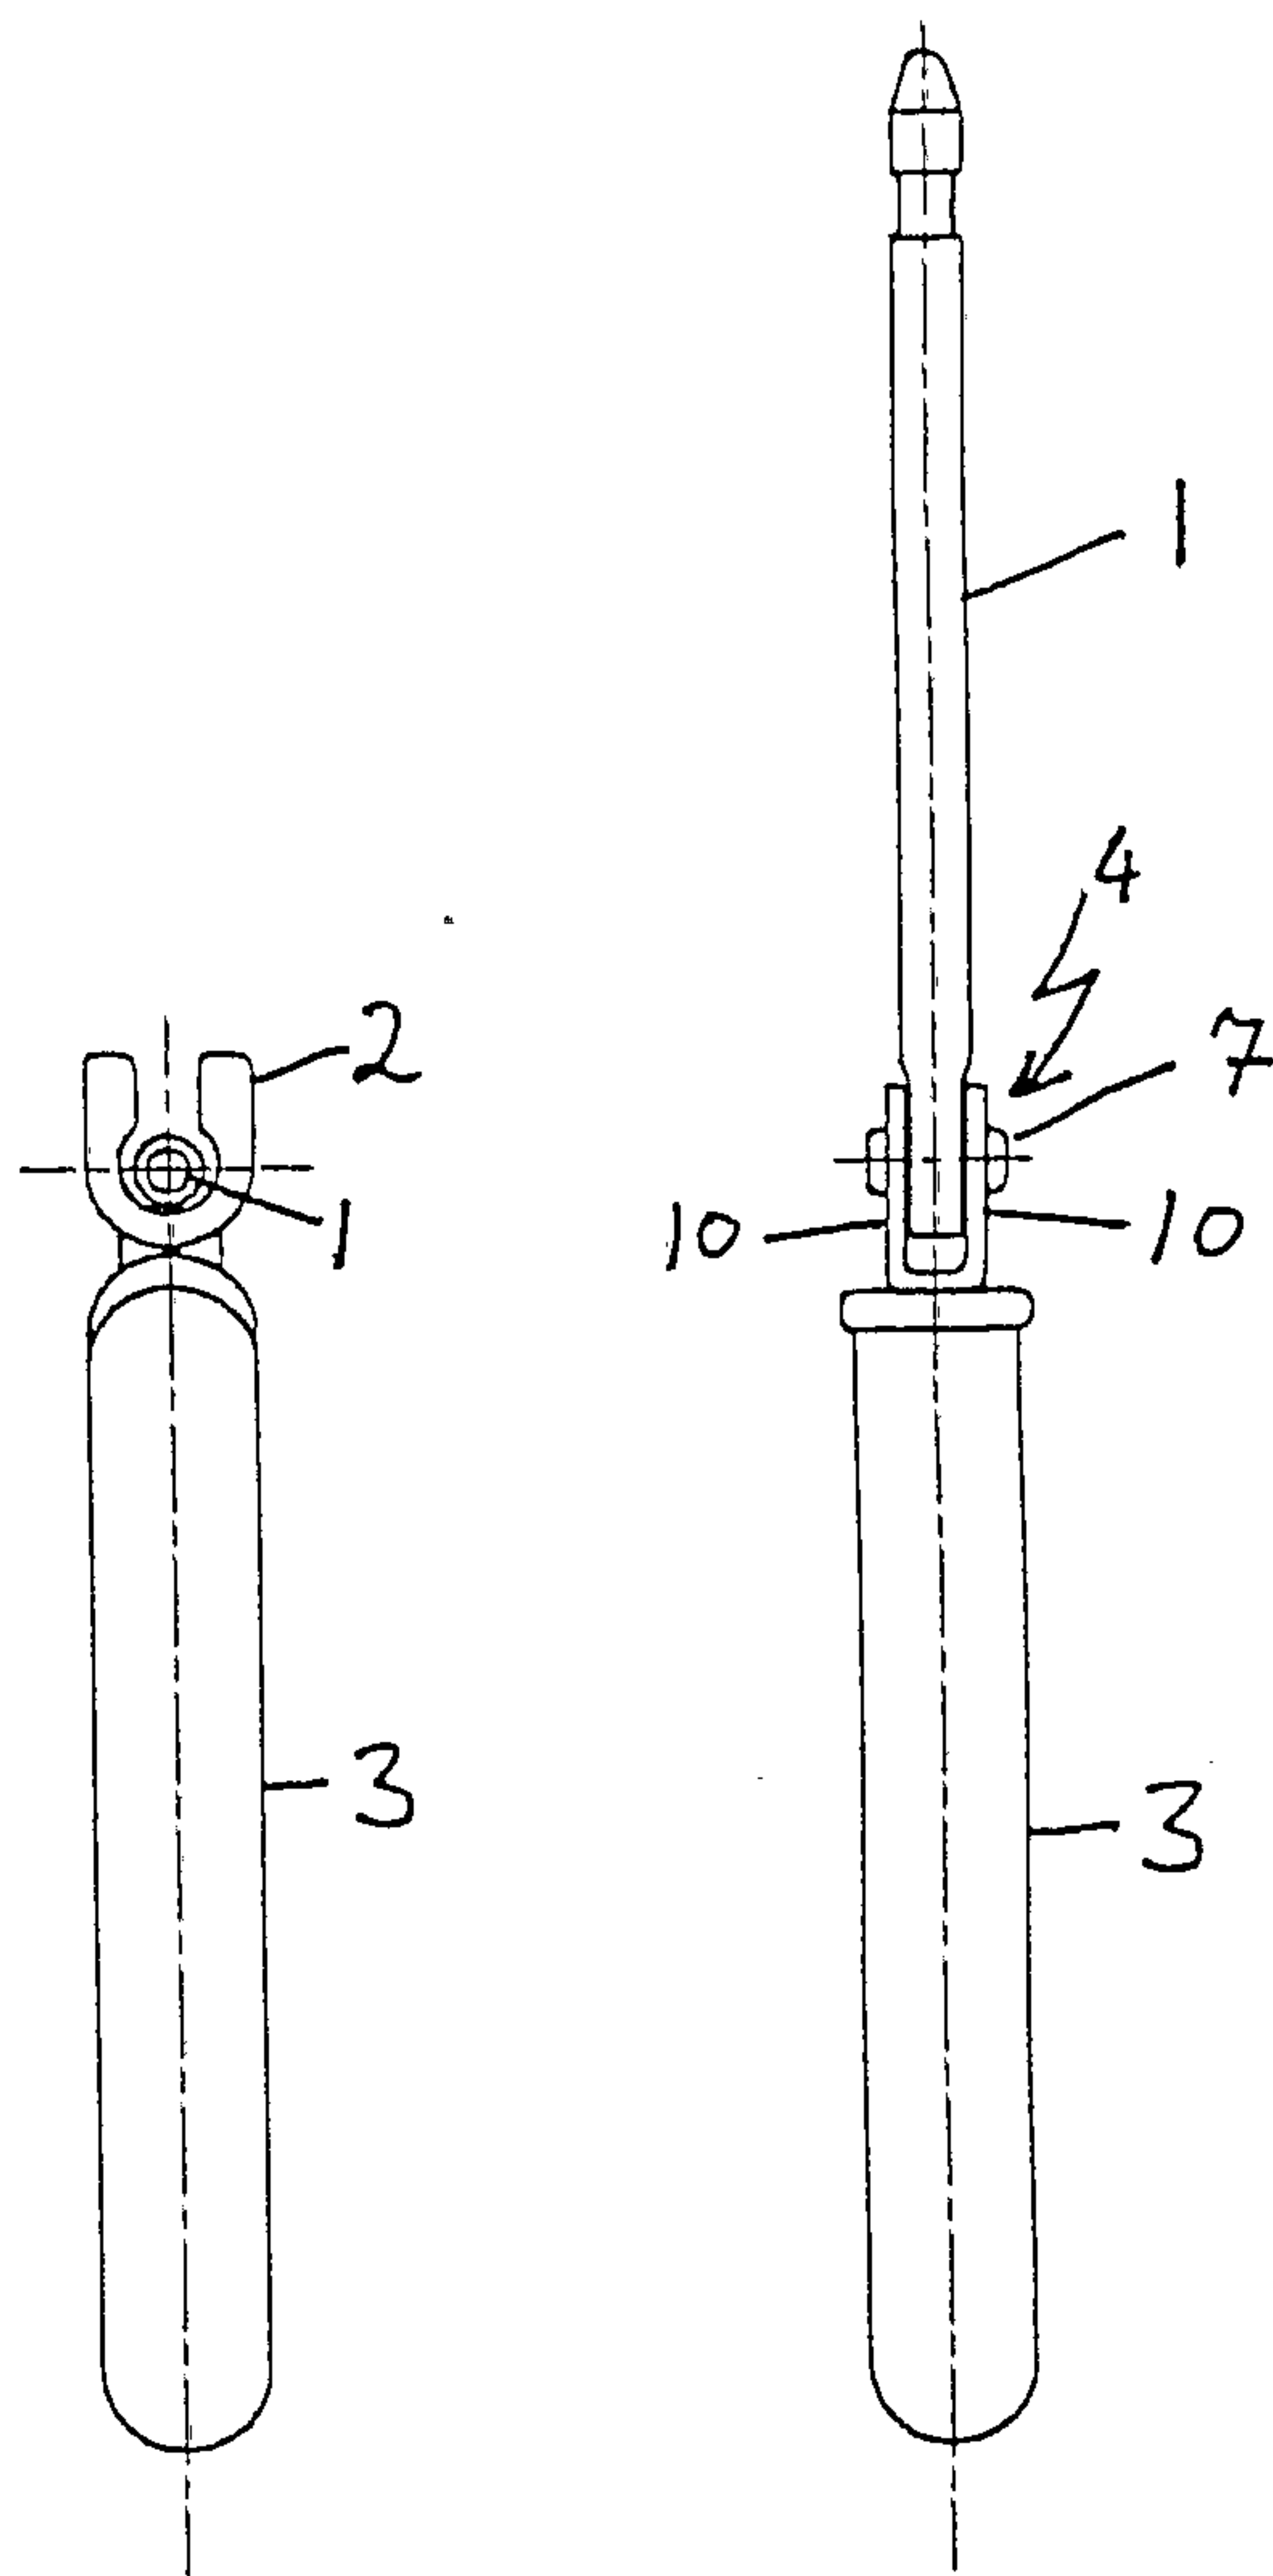


FIG. 1C

FIG 1.D

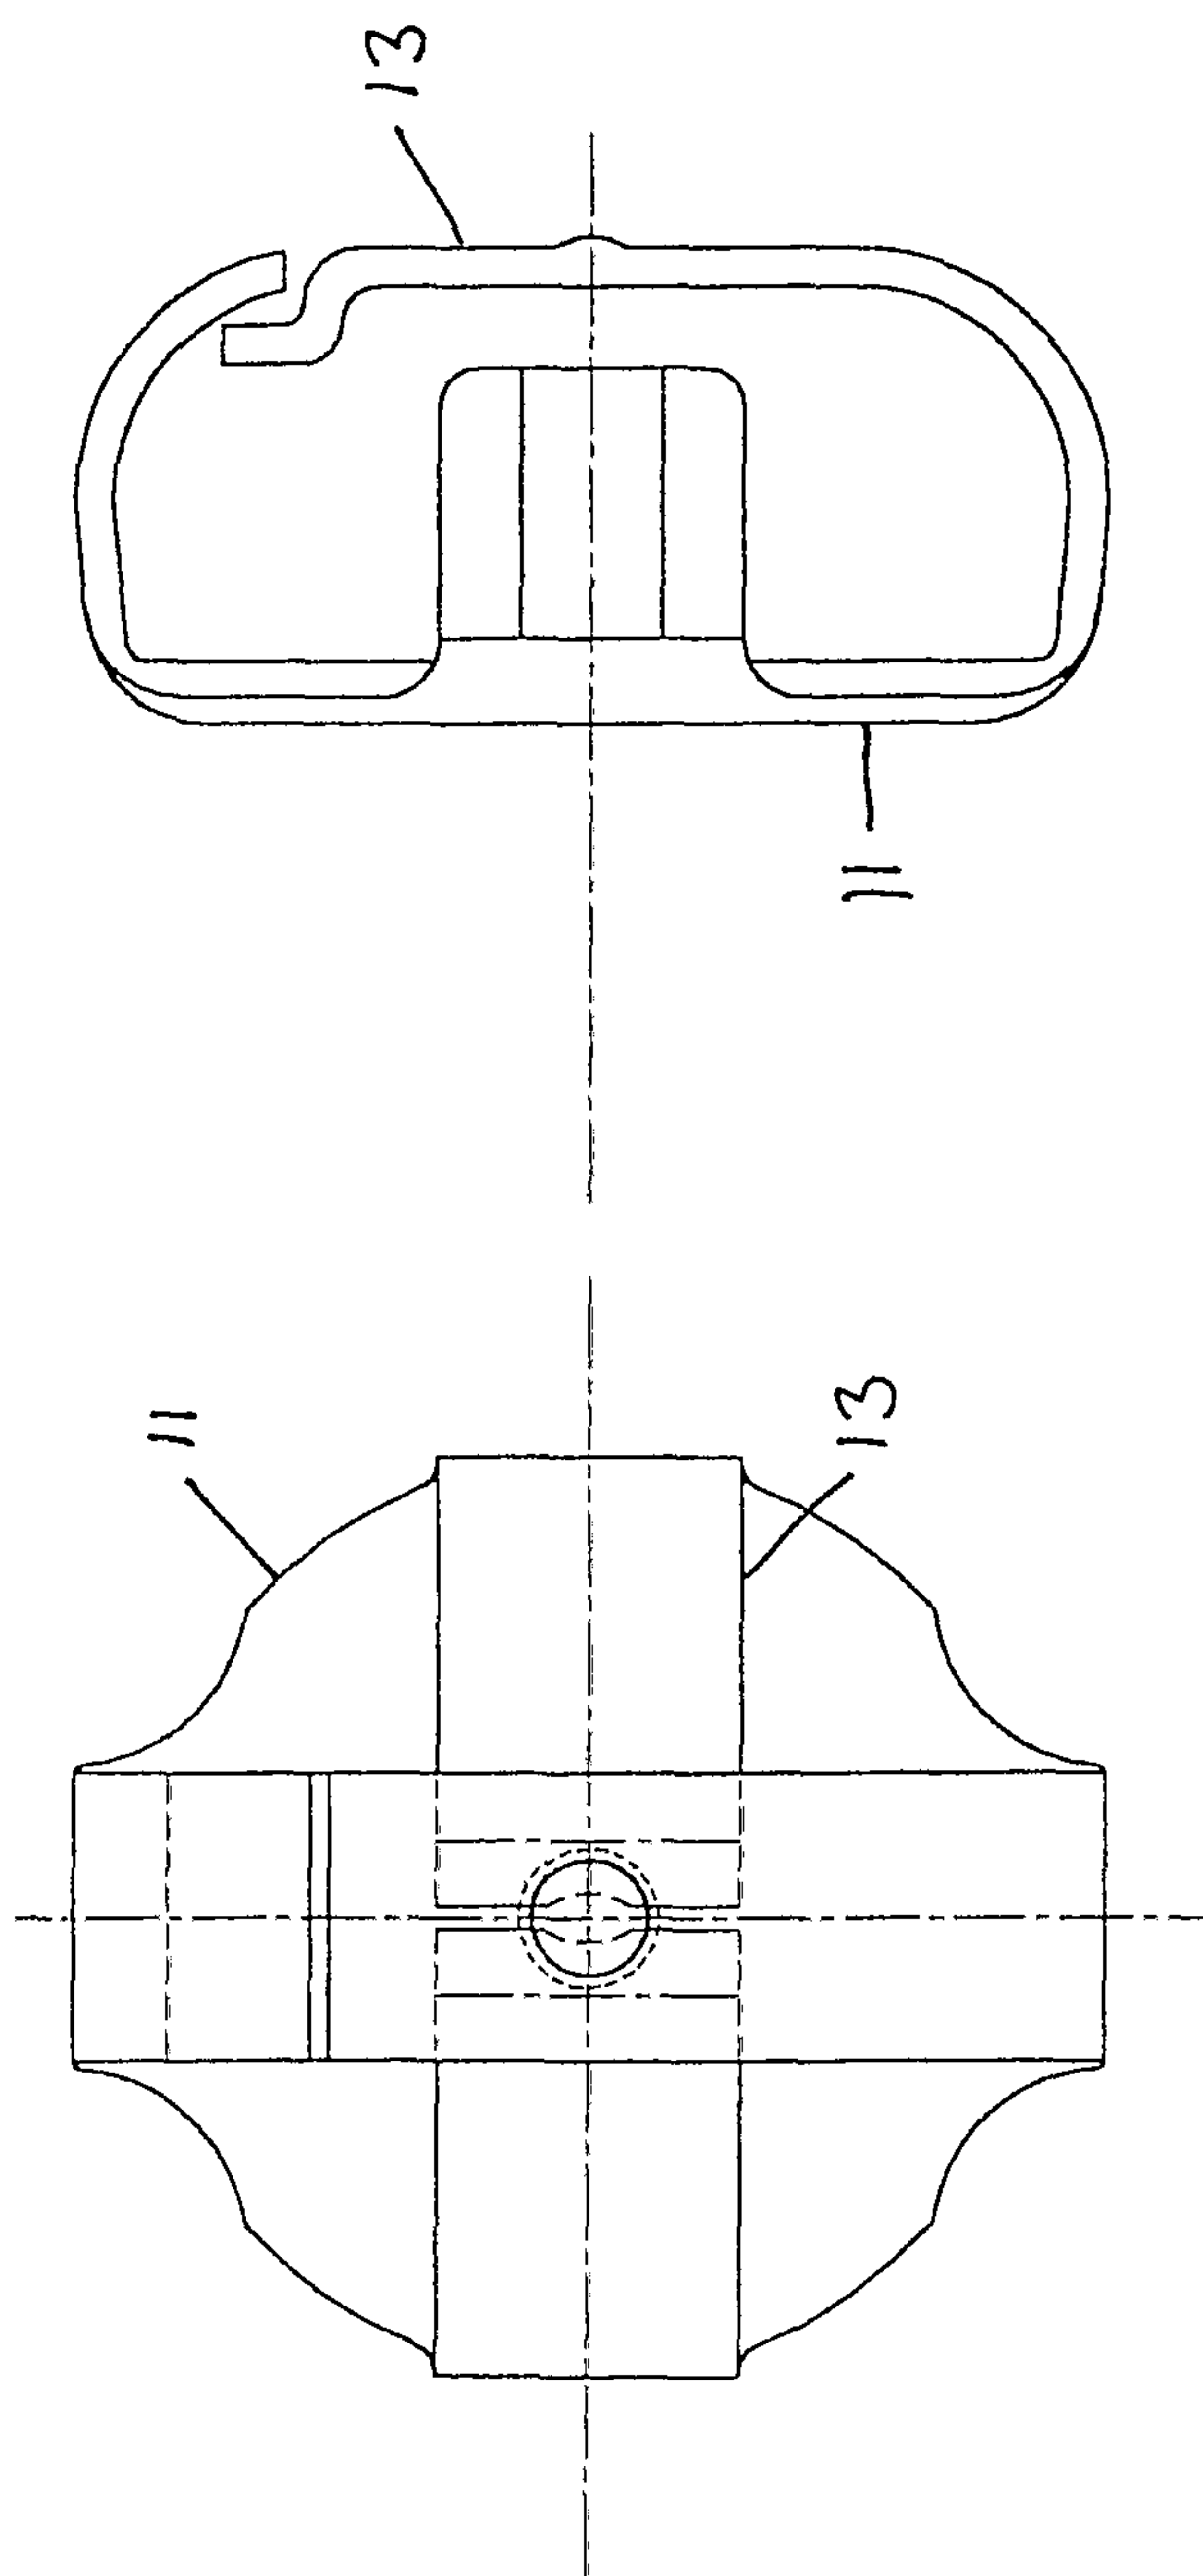


FIG. 2B

FIG. 2A

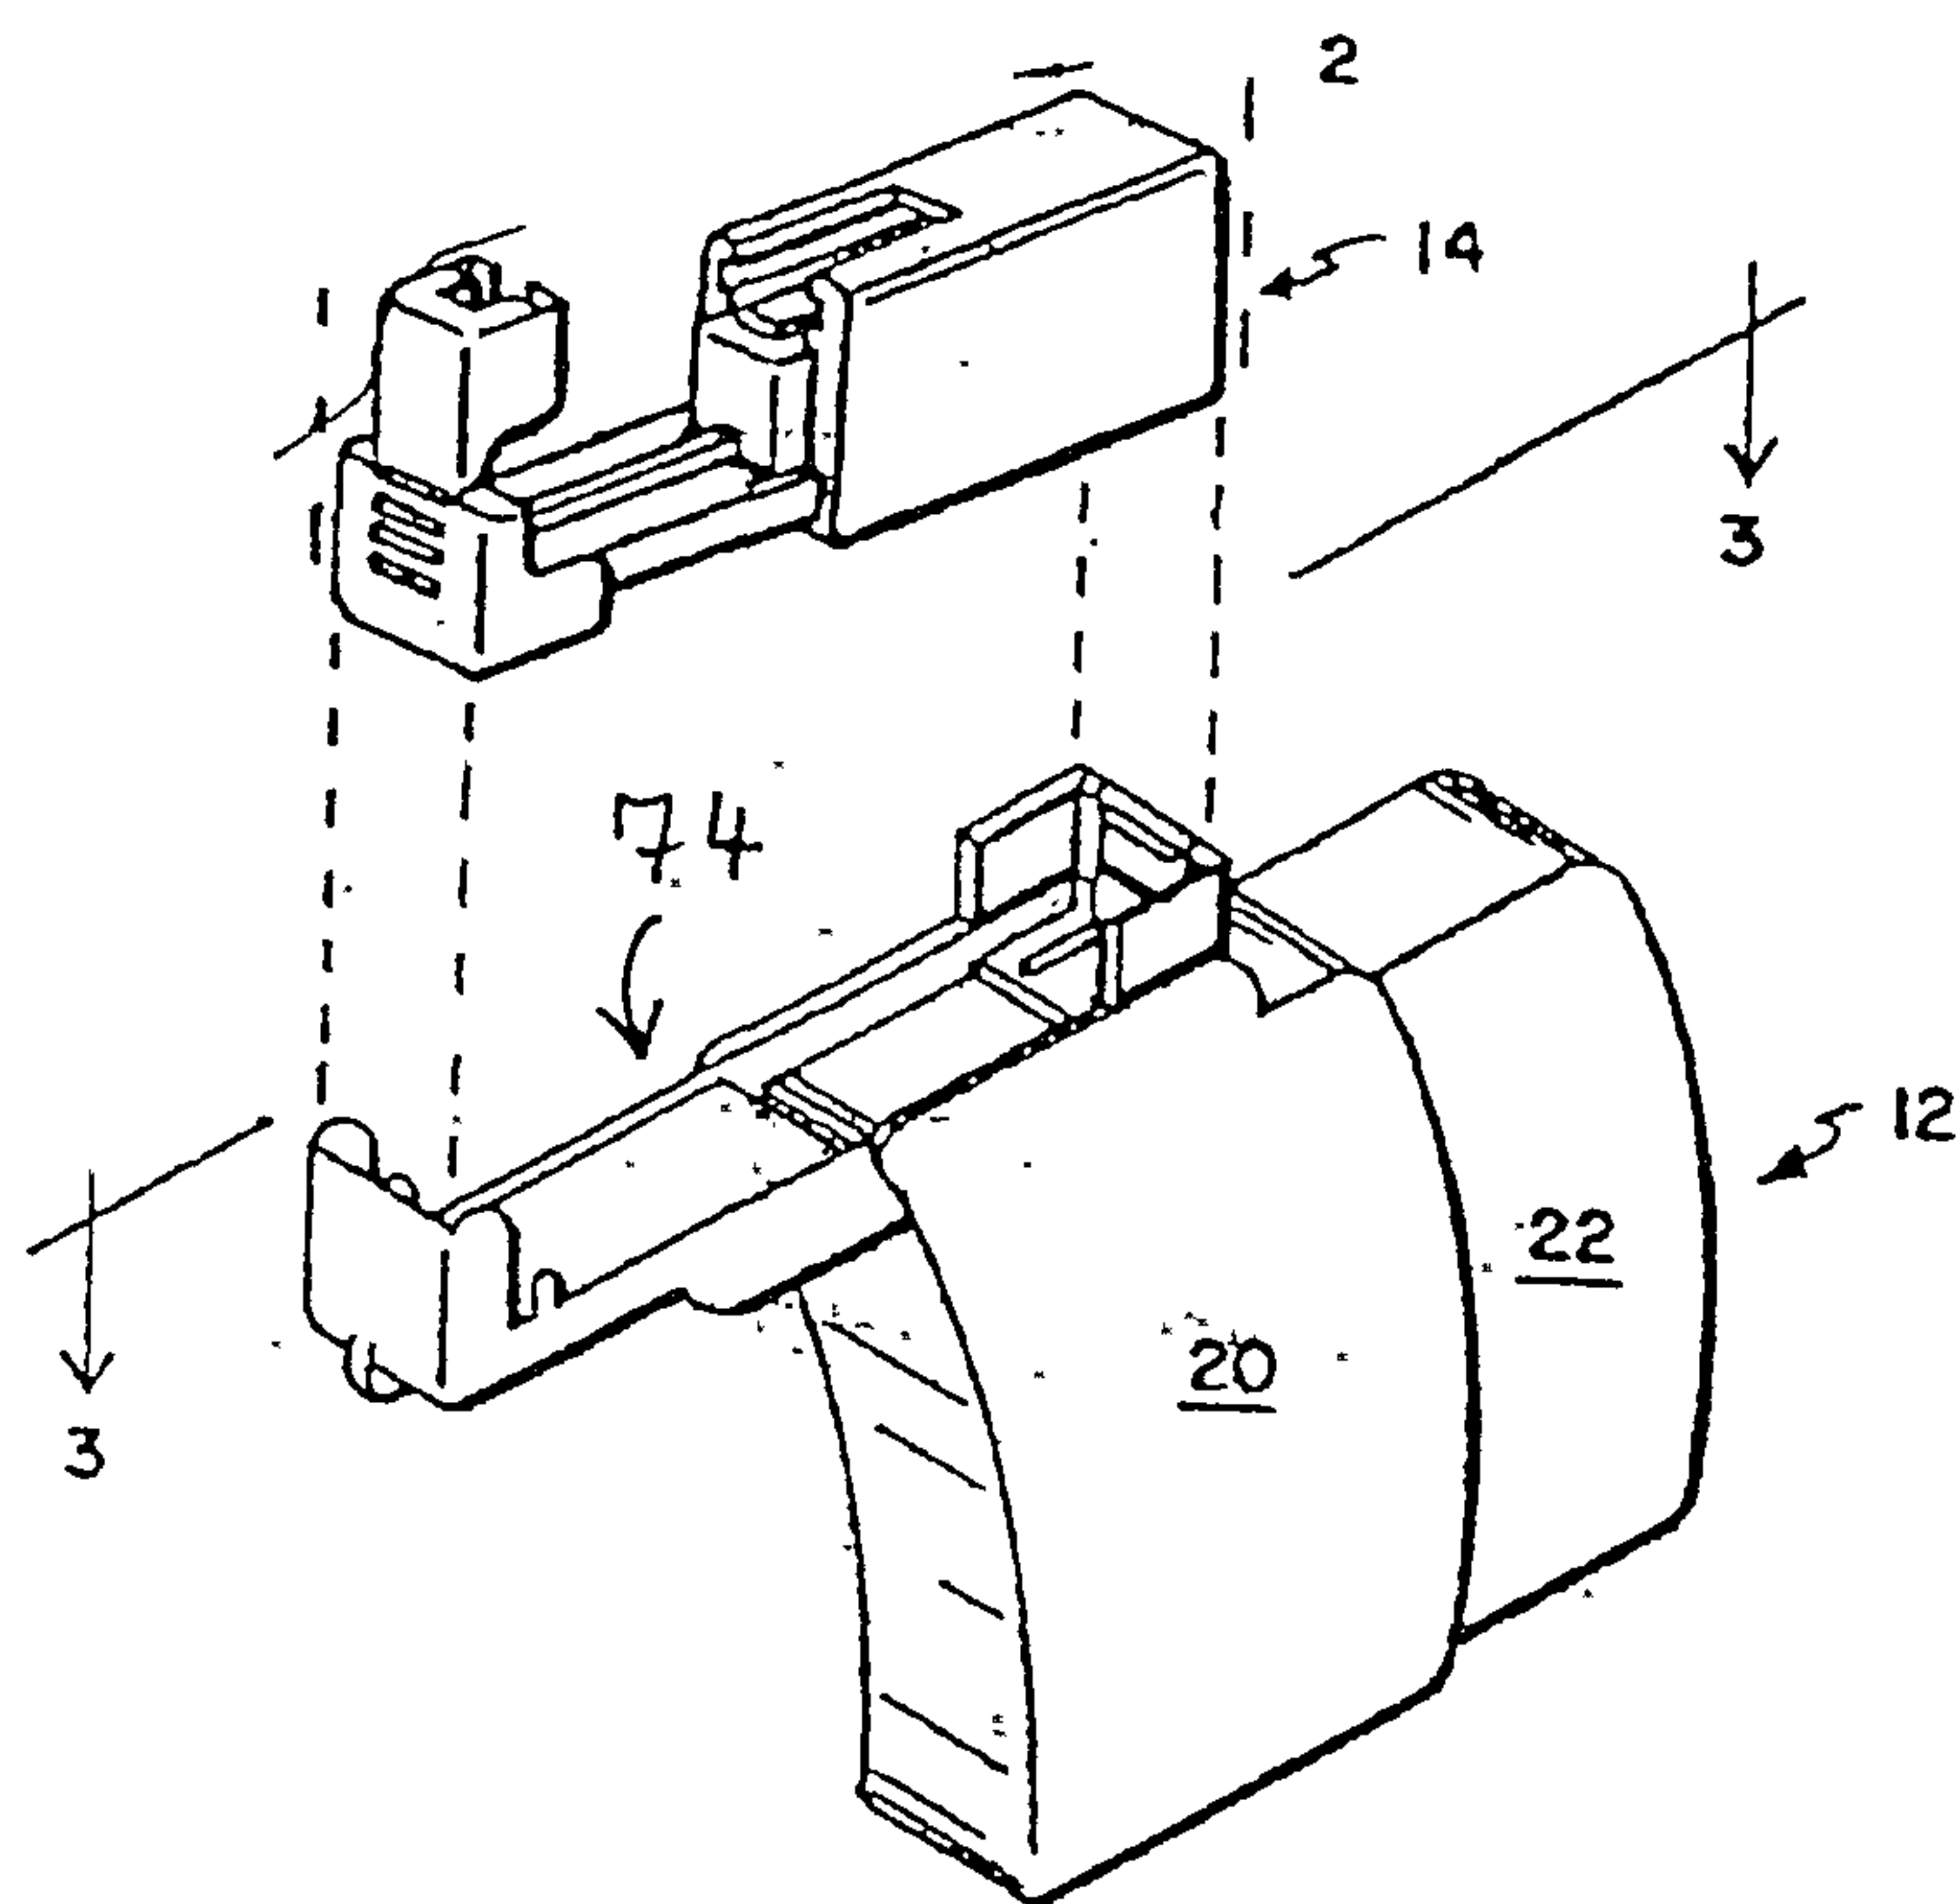


FIG. 3

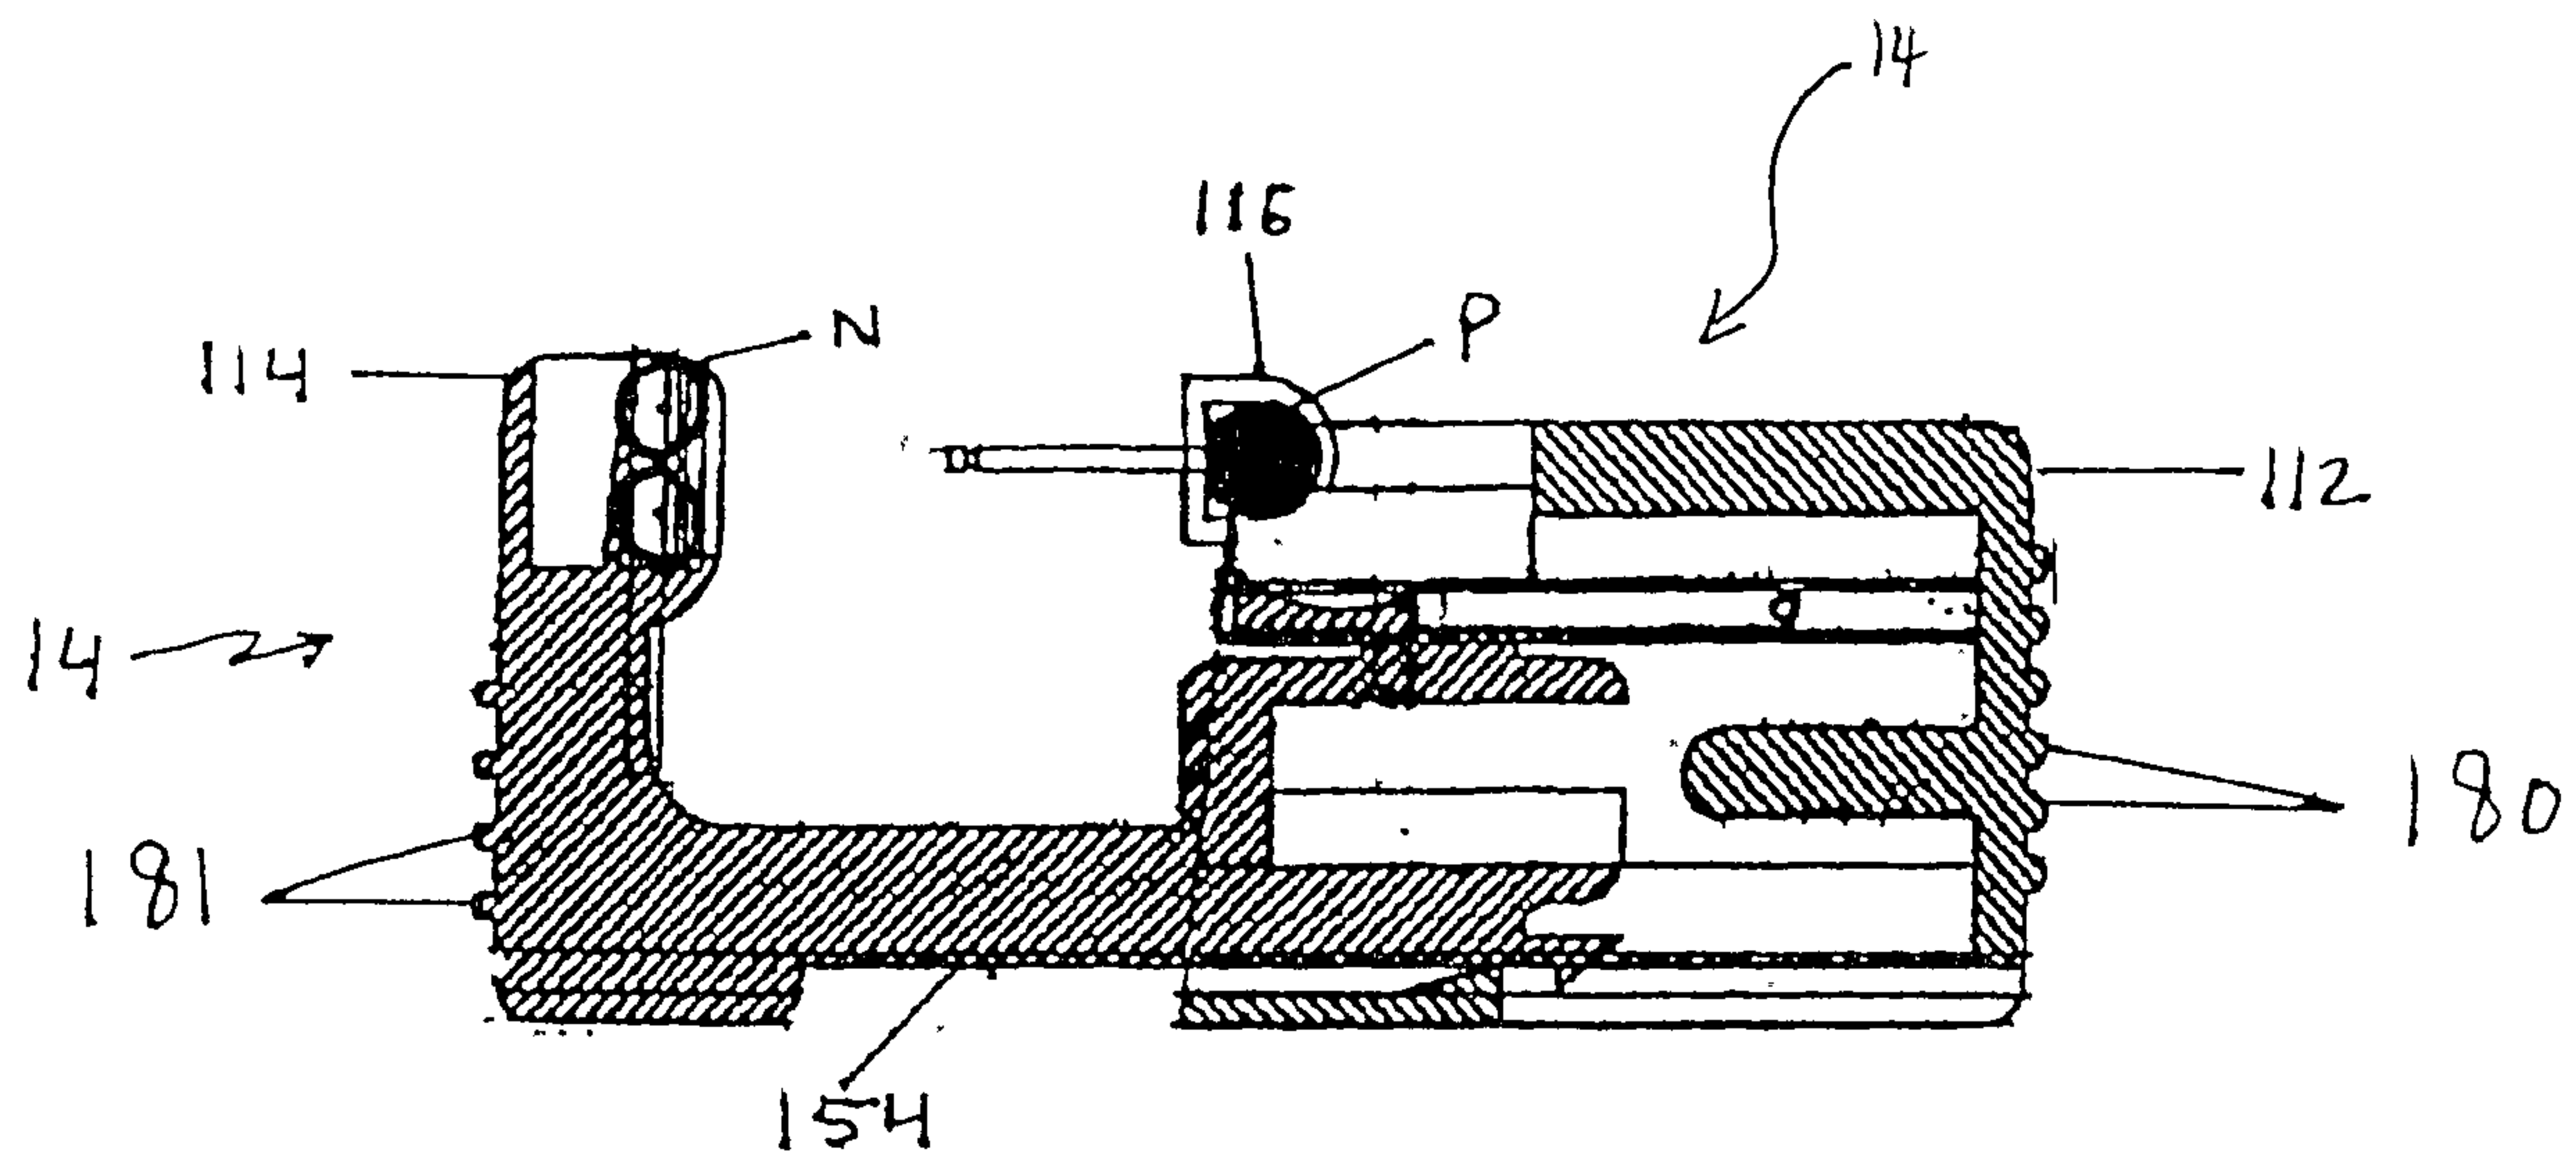


FIG. 4A

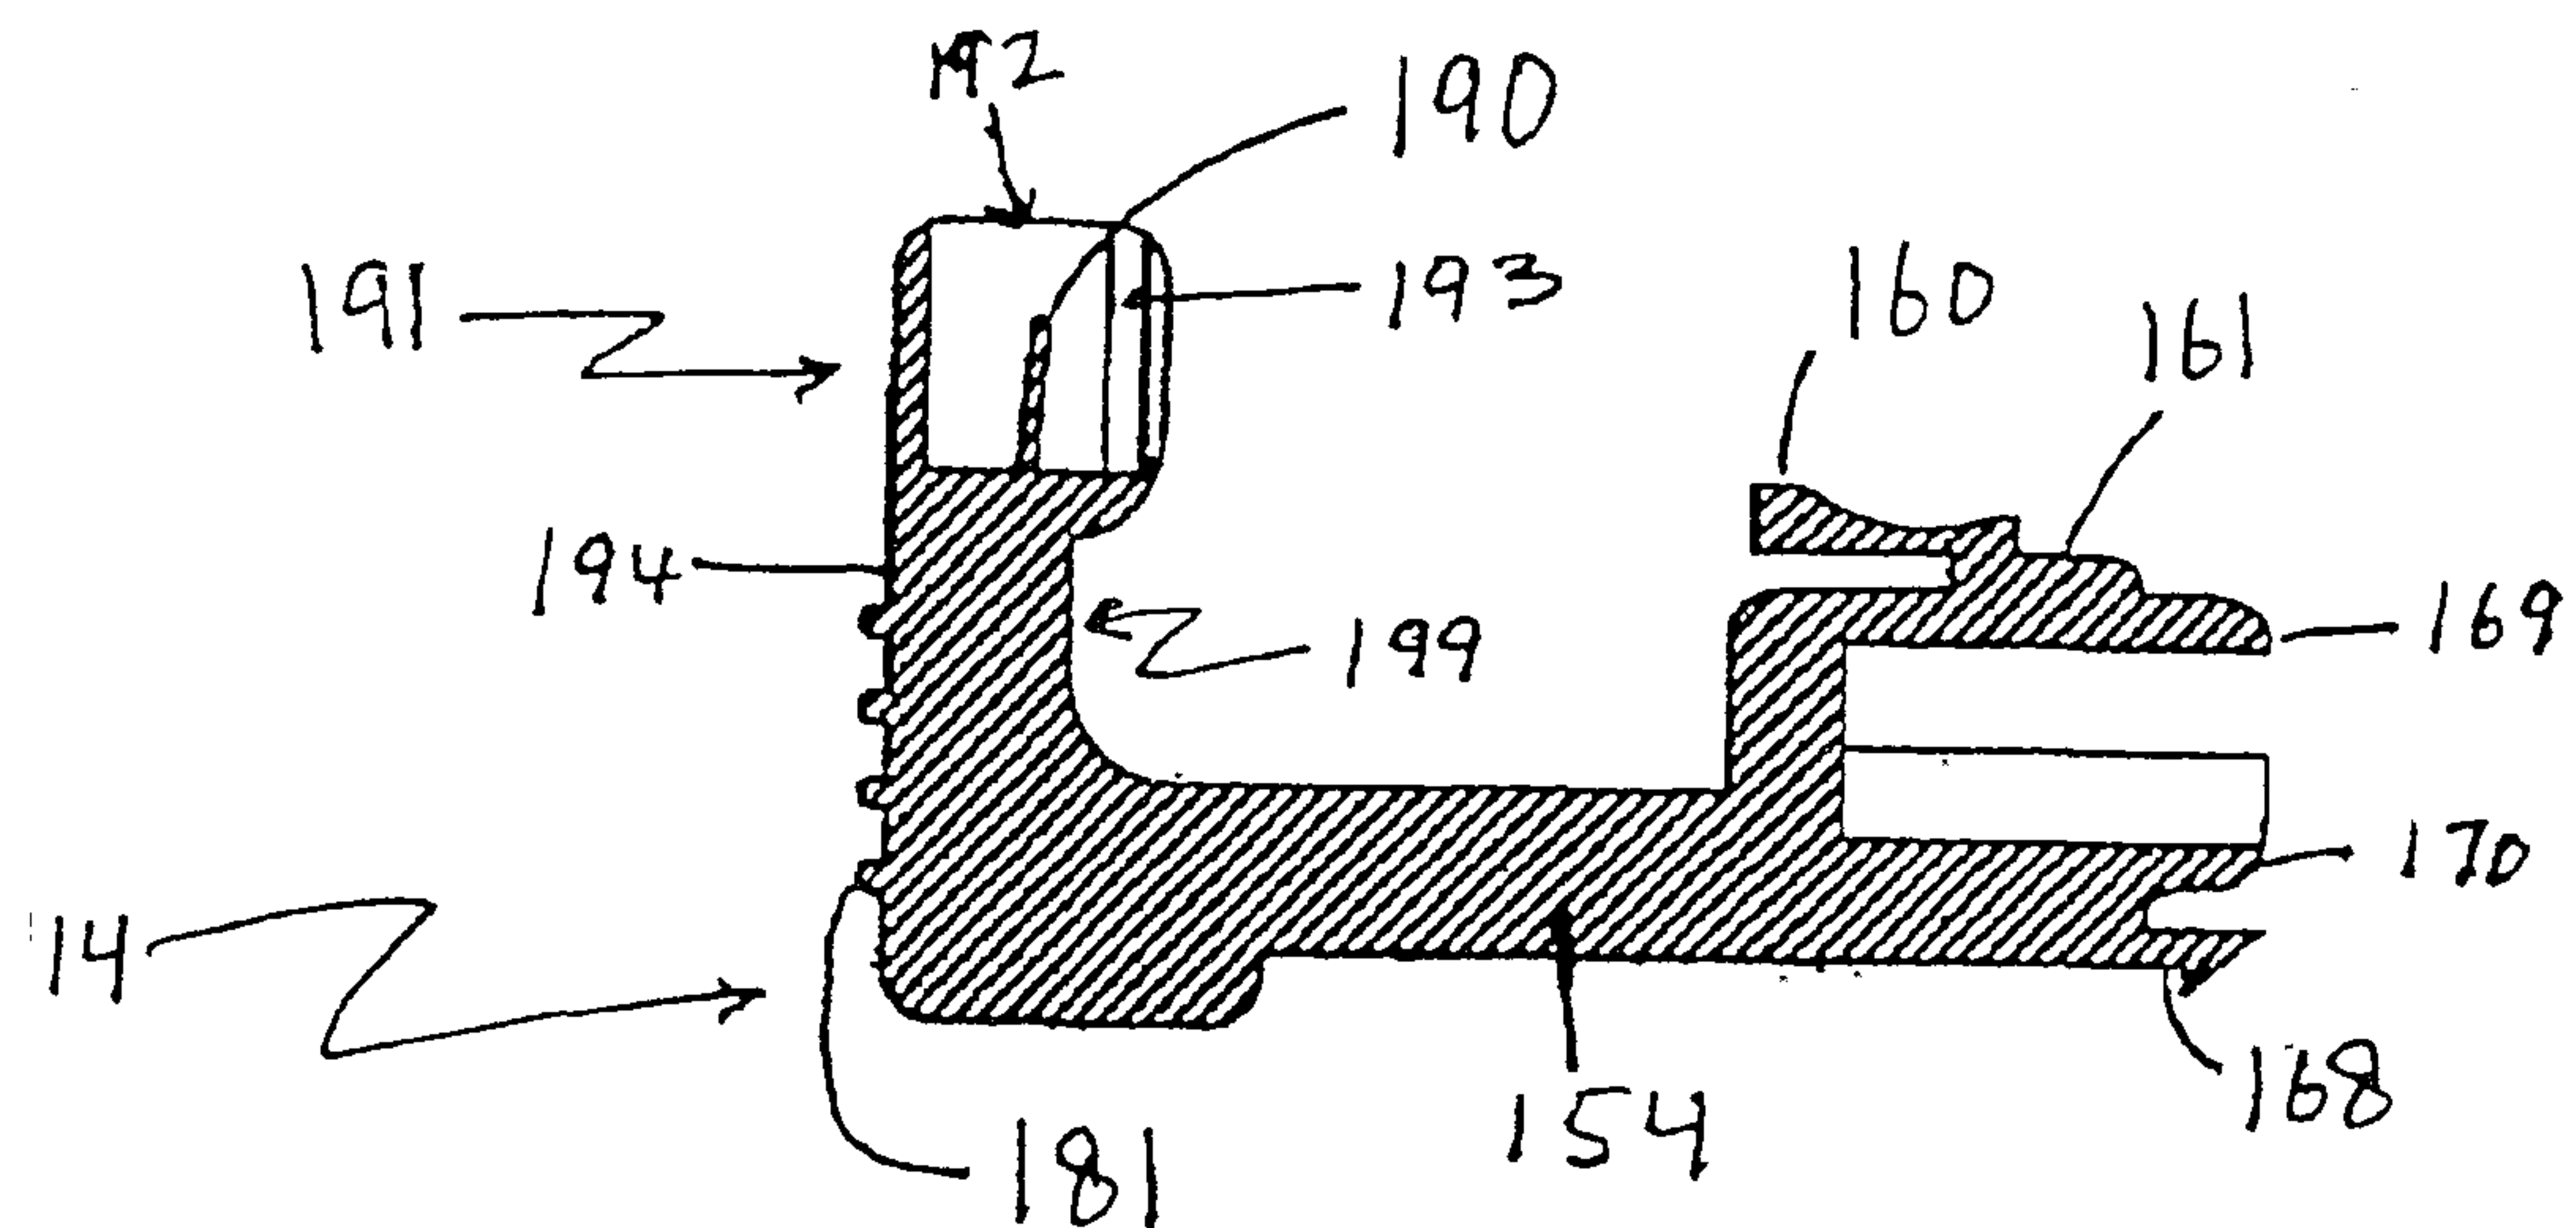


FIG. 4B

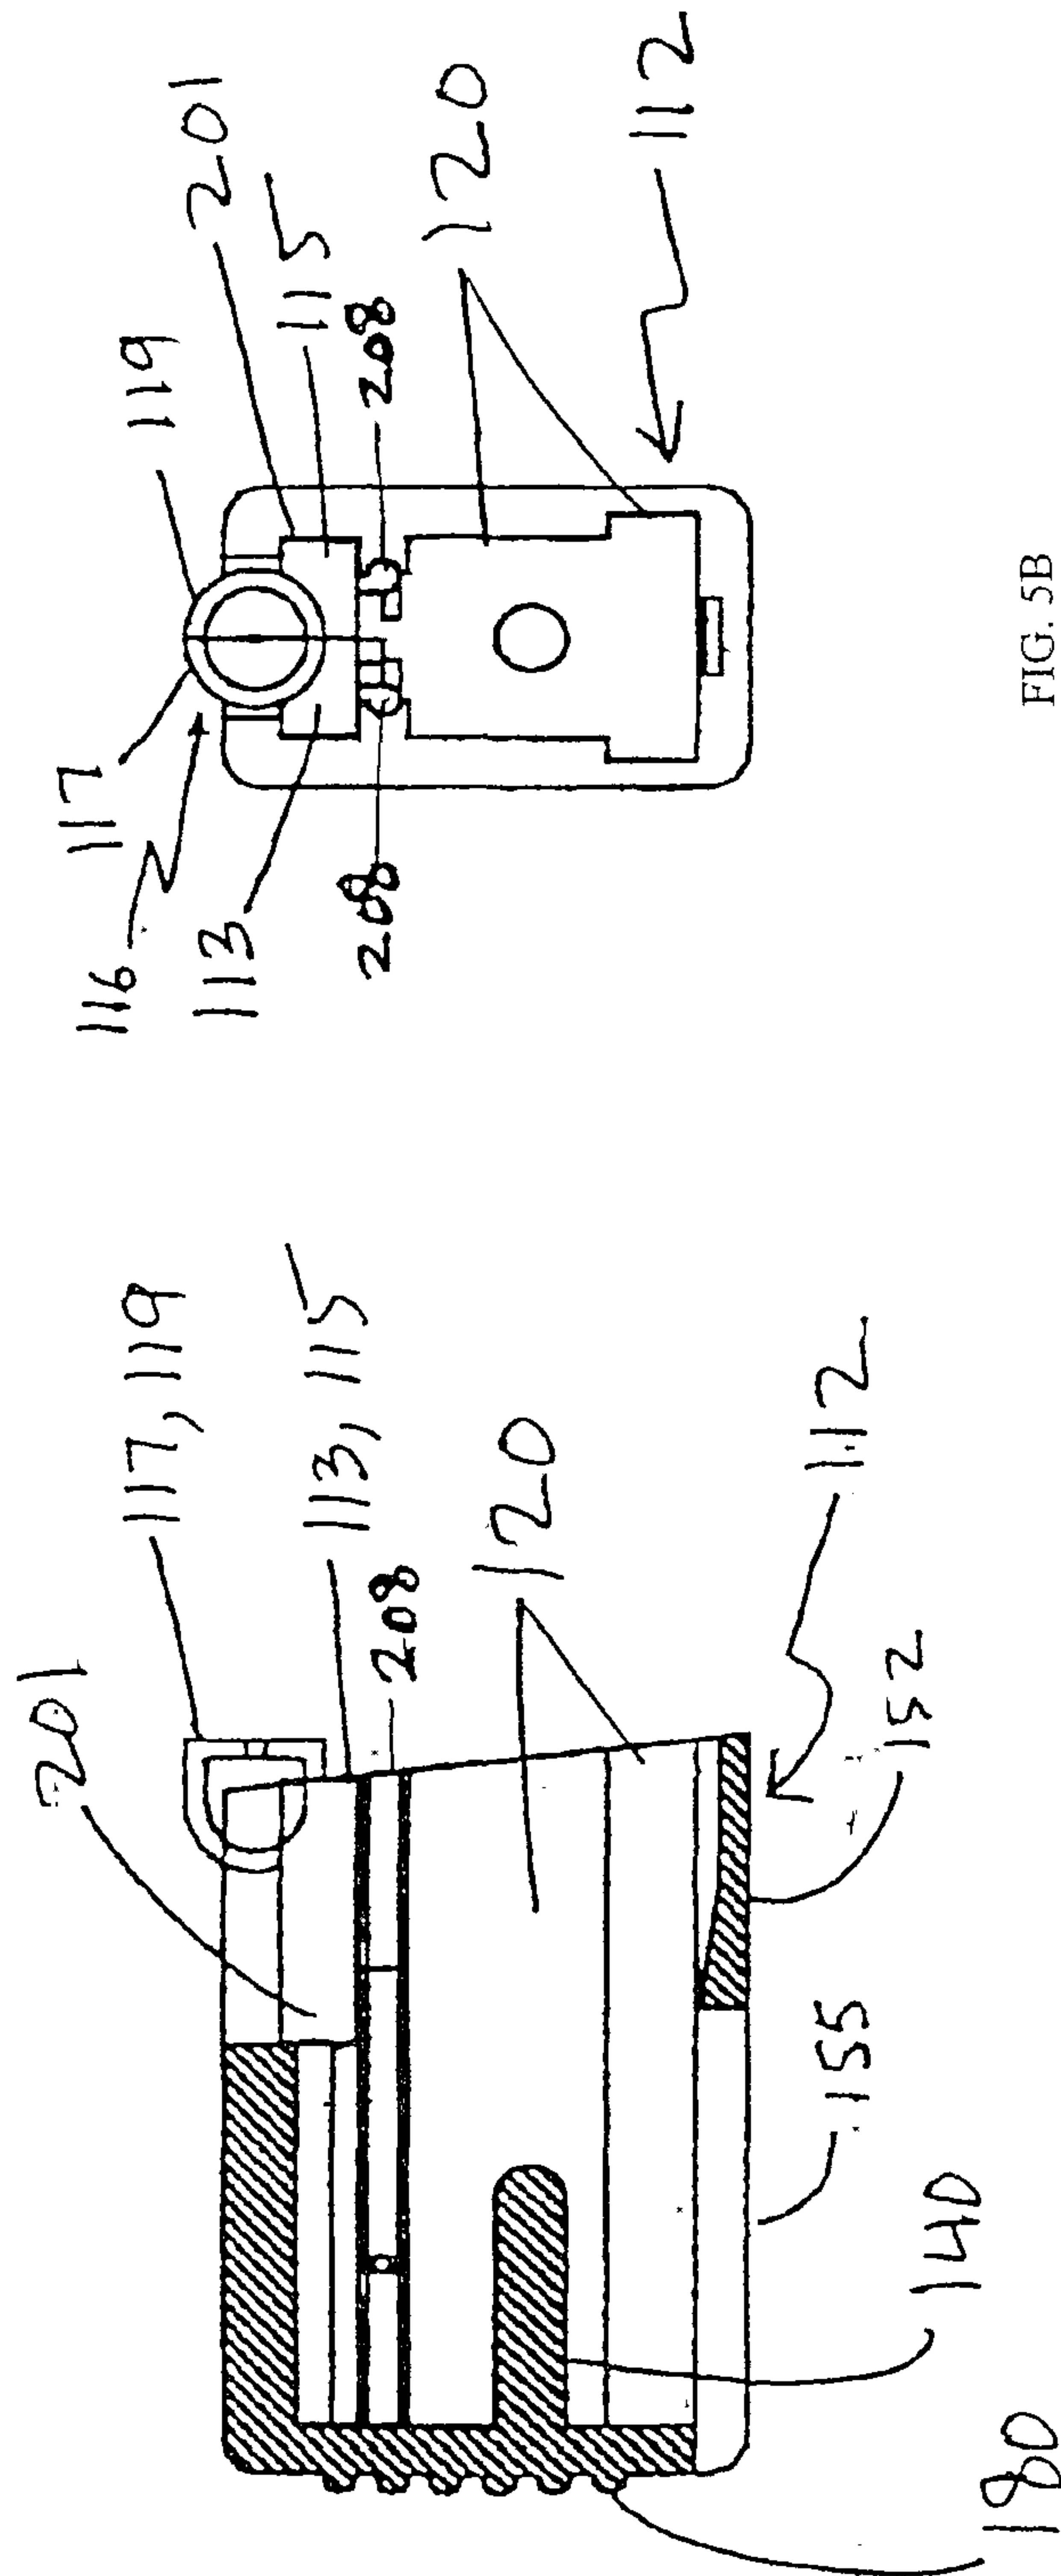


FIG. 5B

FIG. 5A

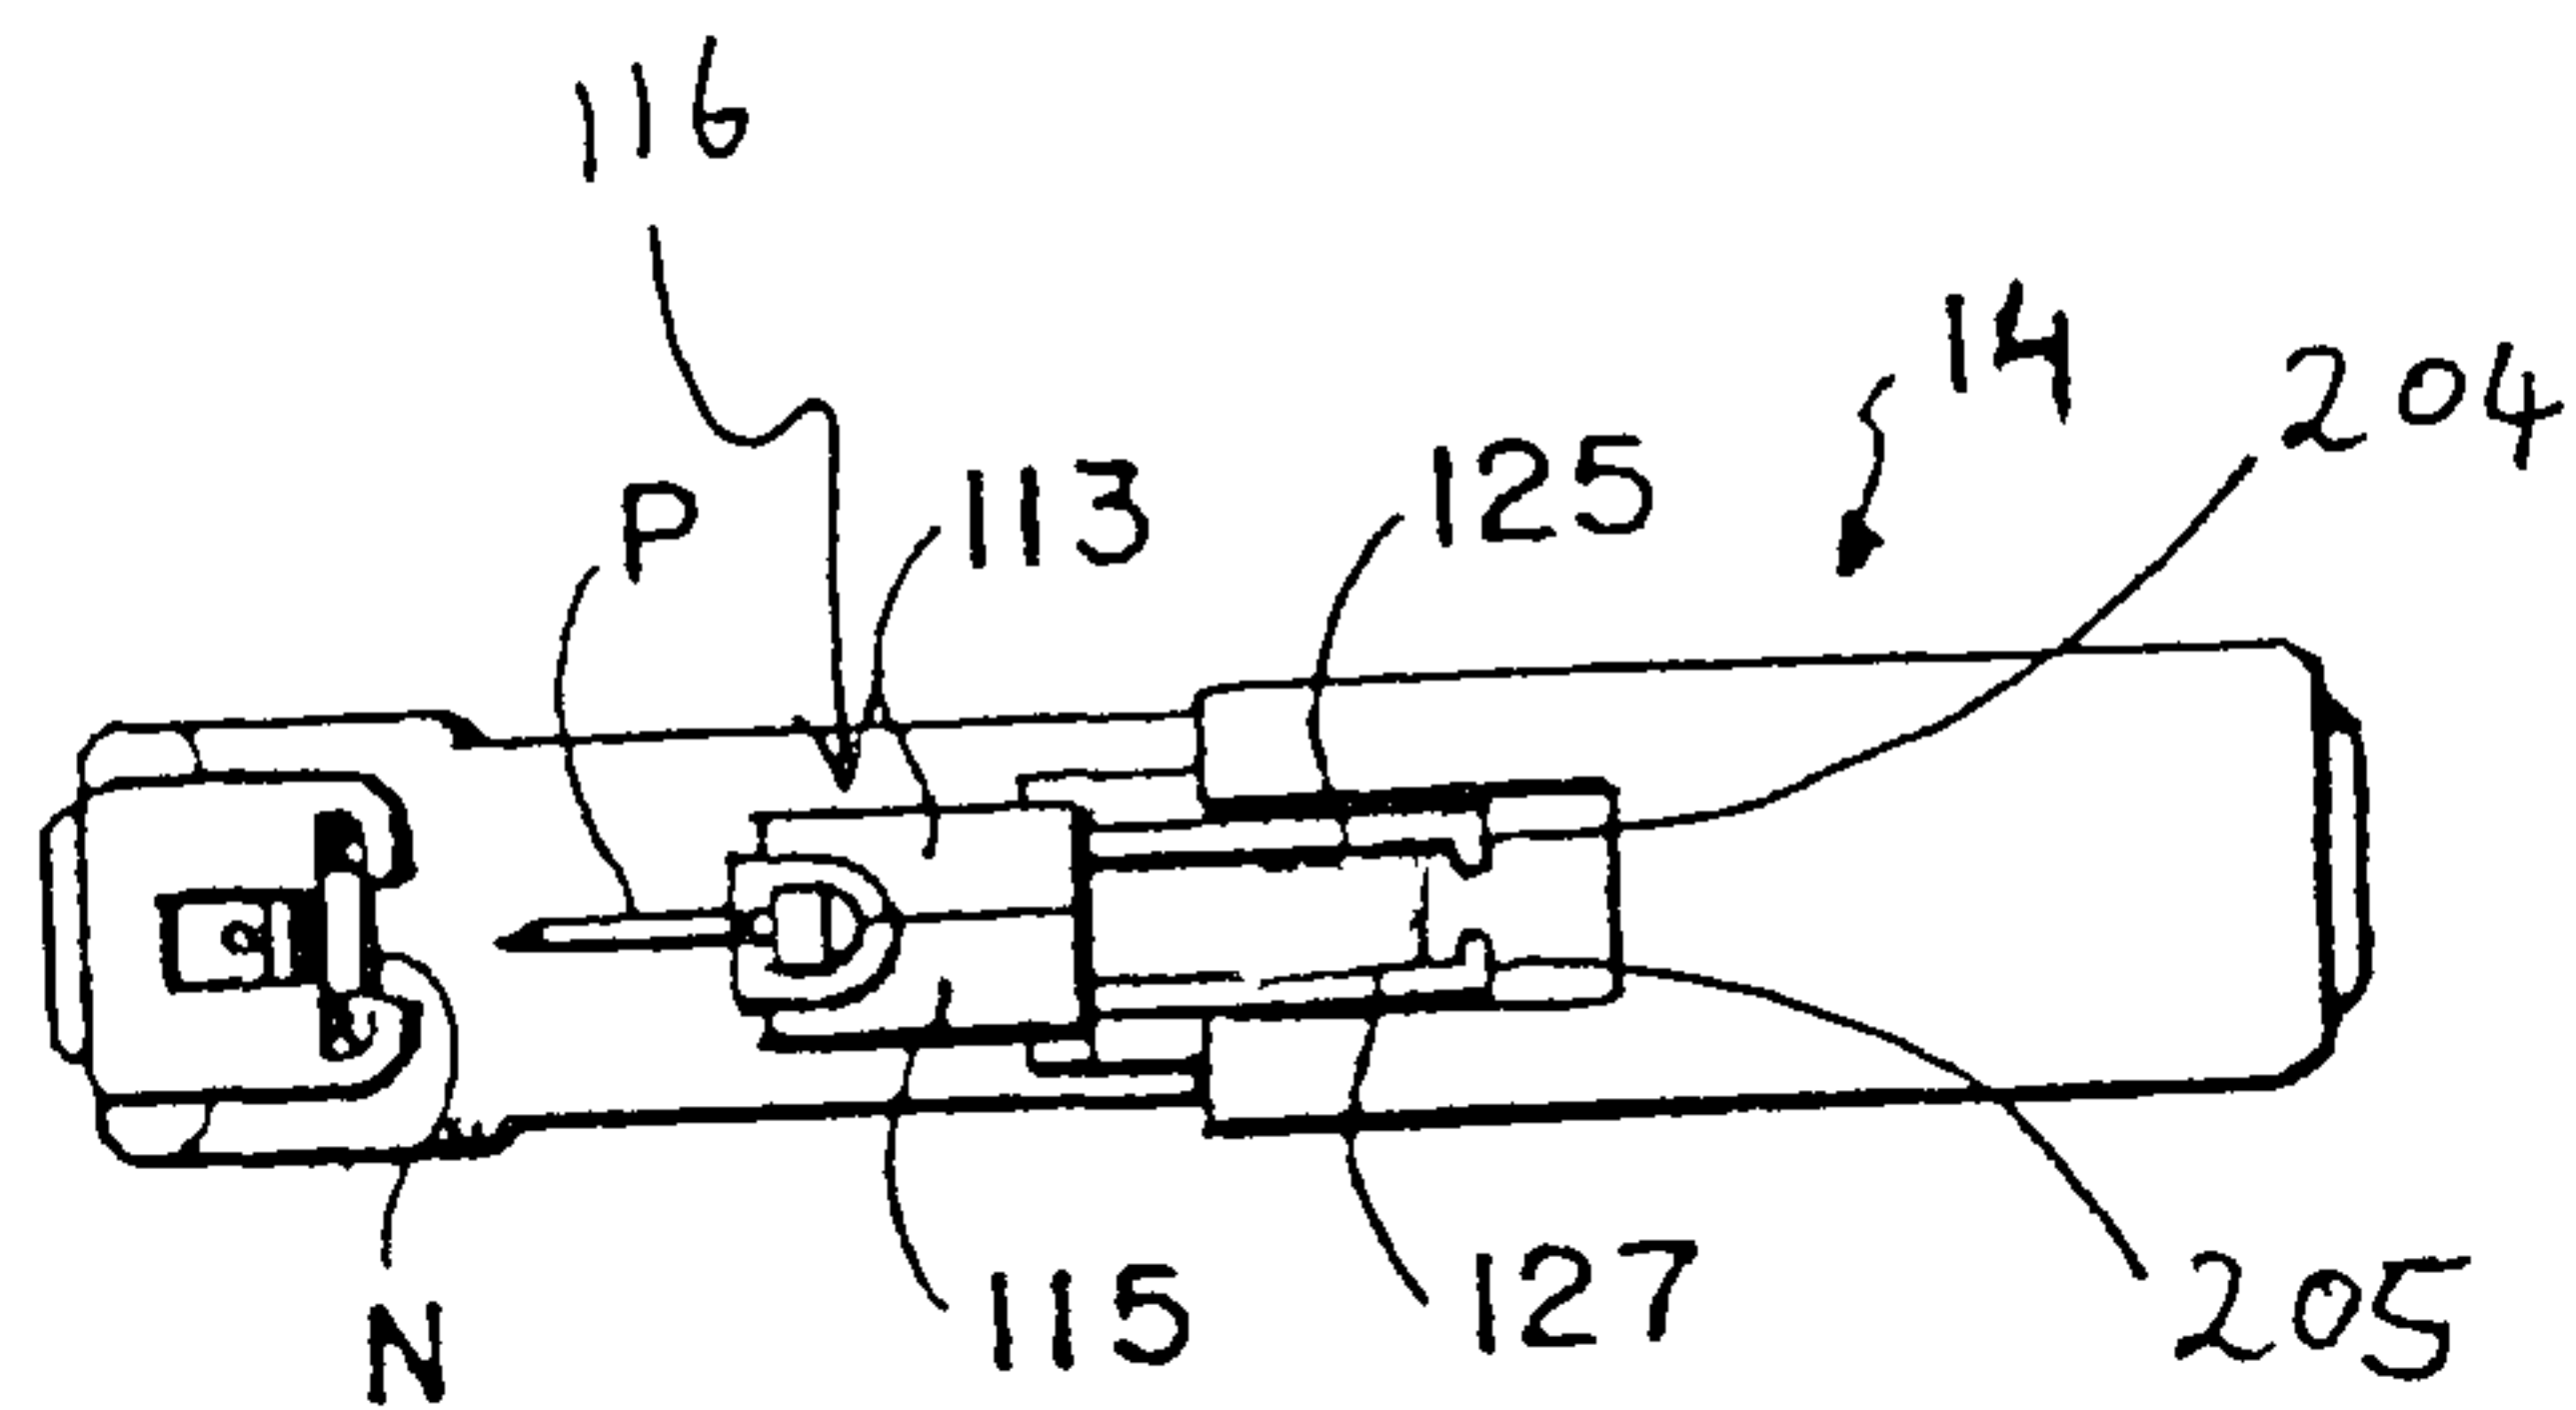


FIG. 6A

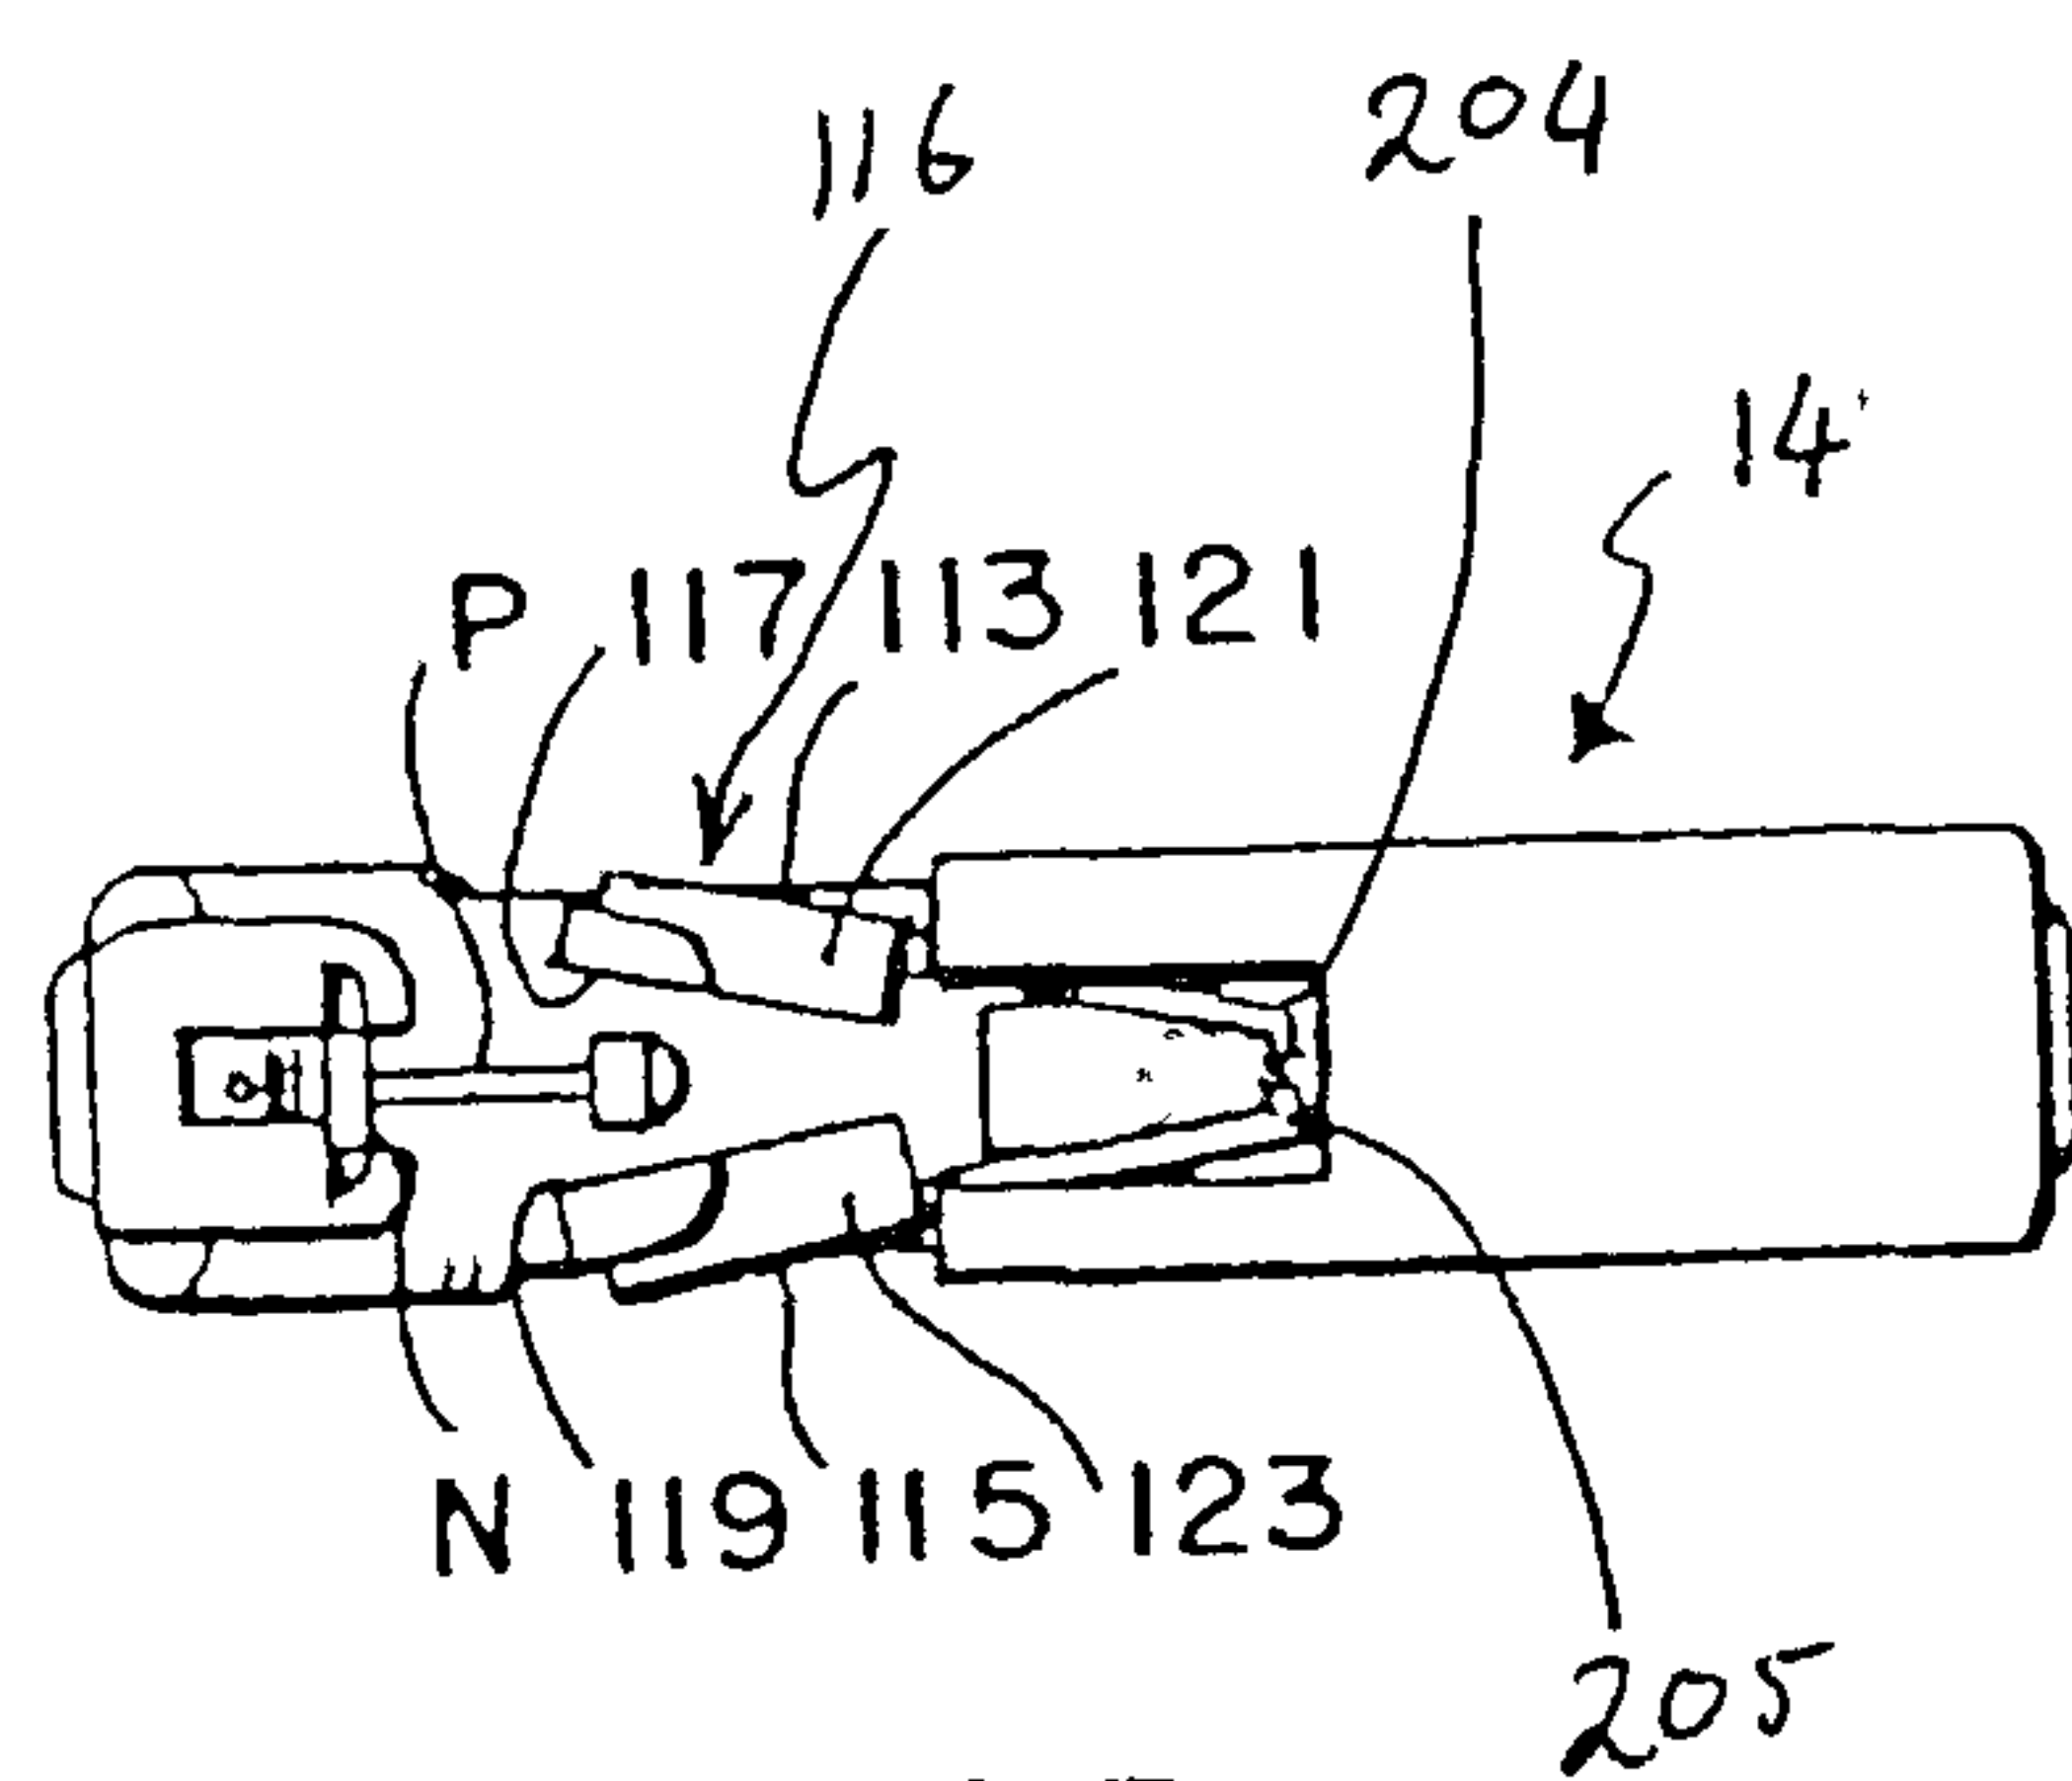


FIG. 6B

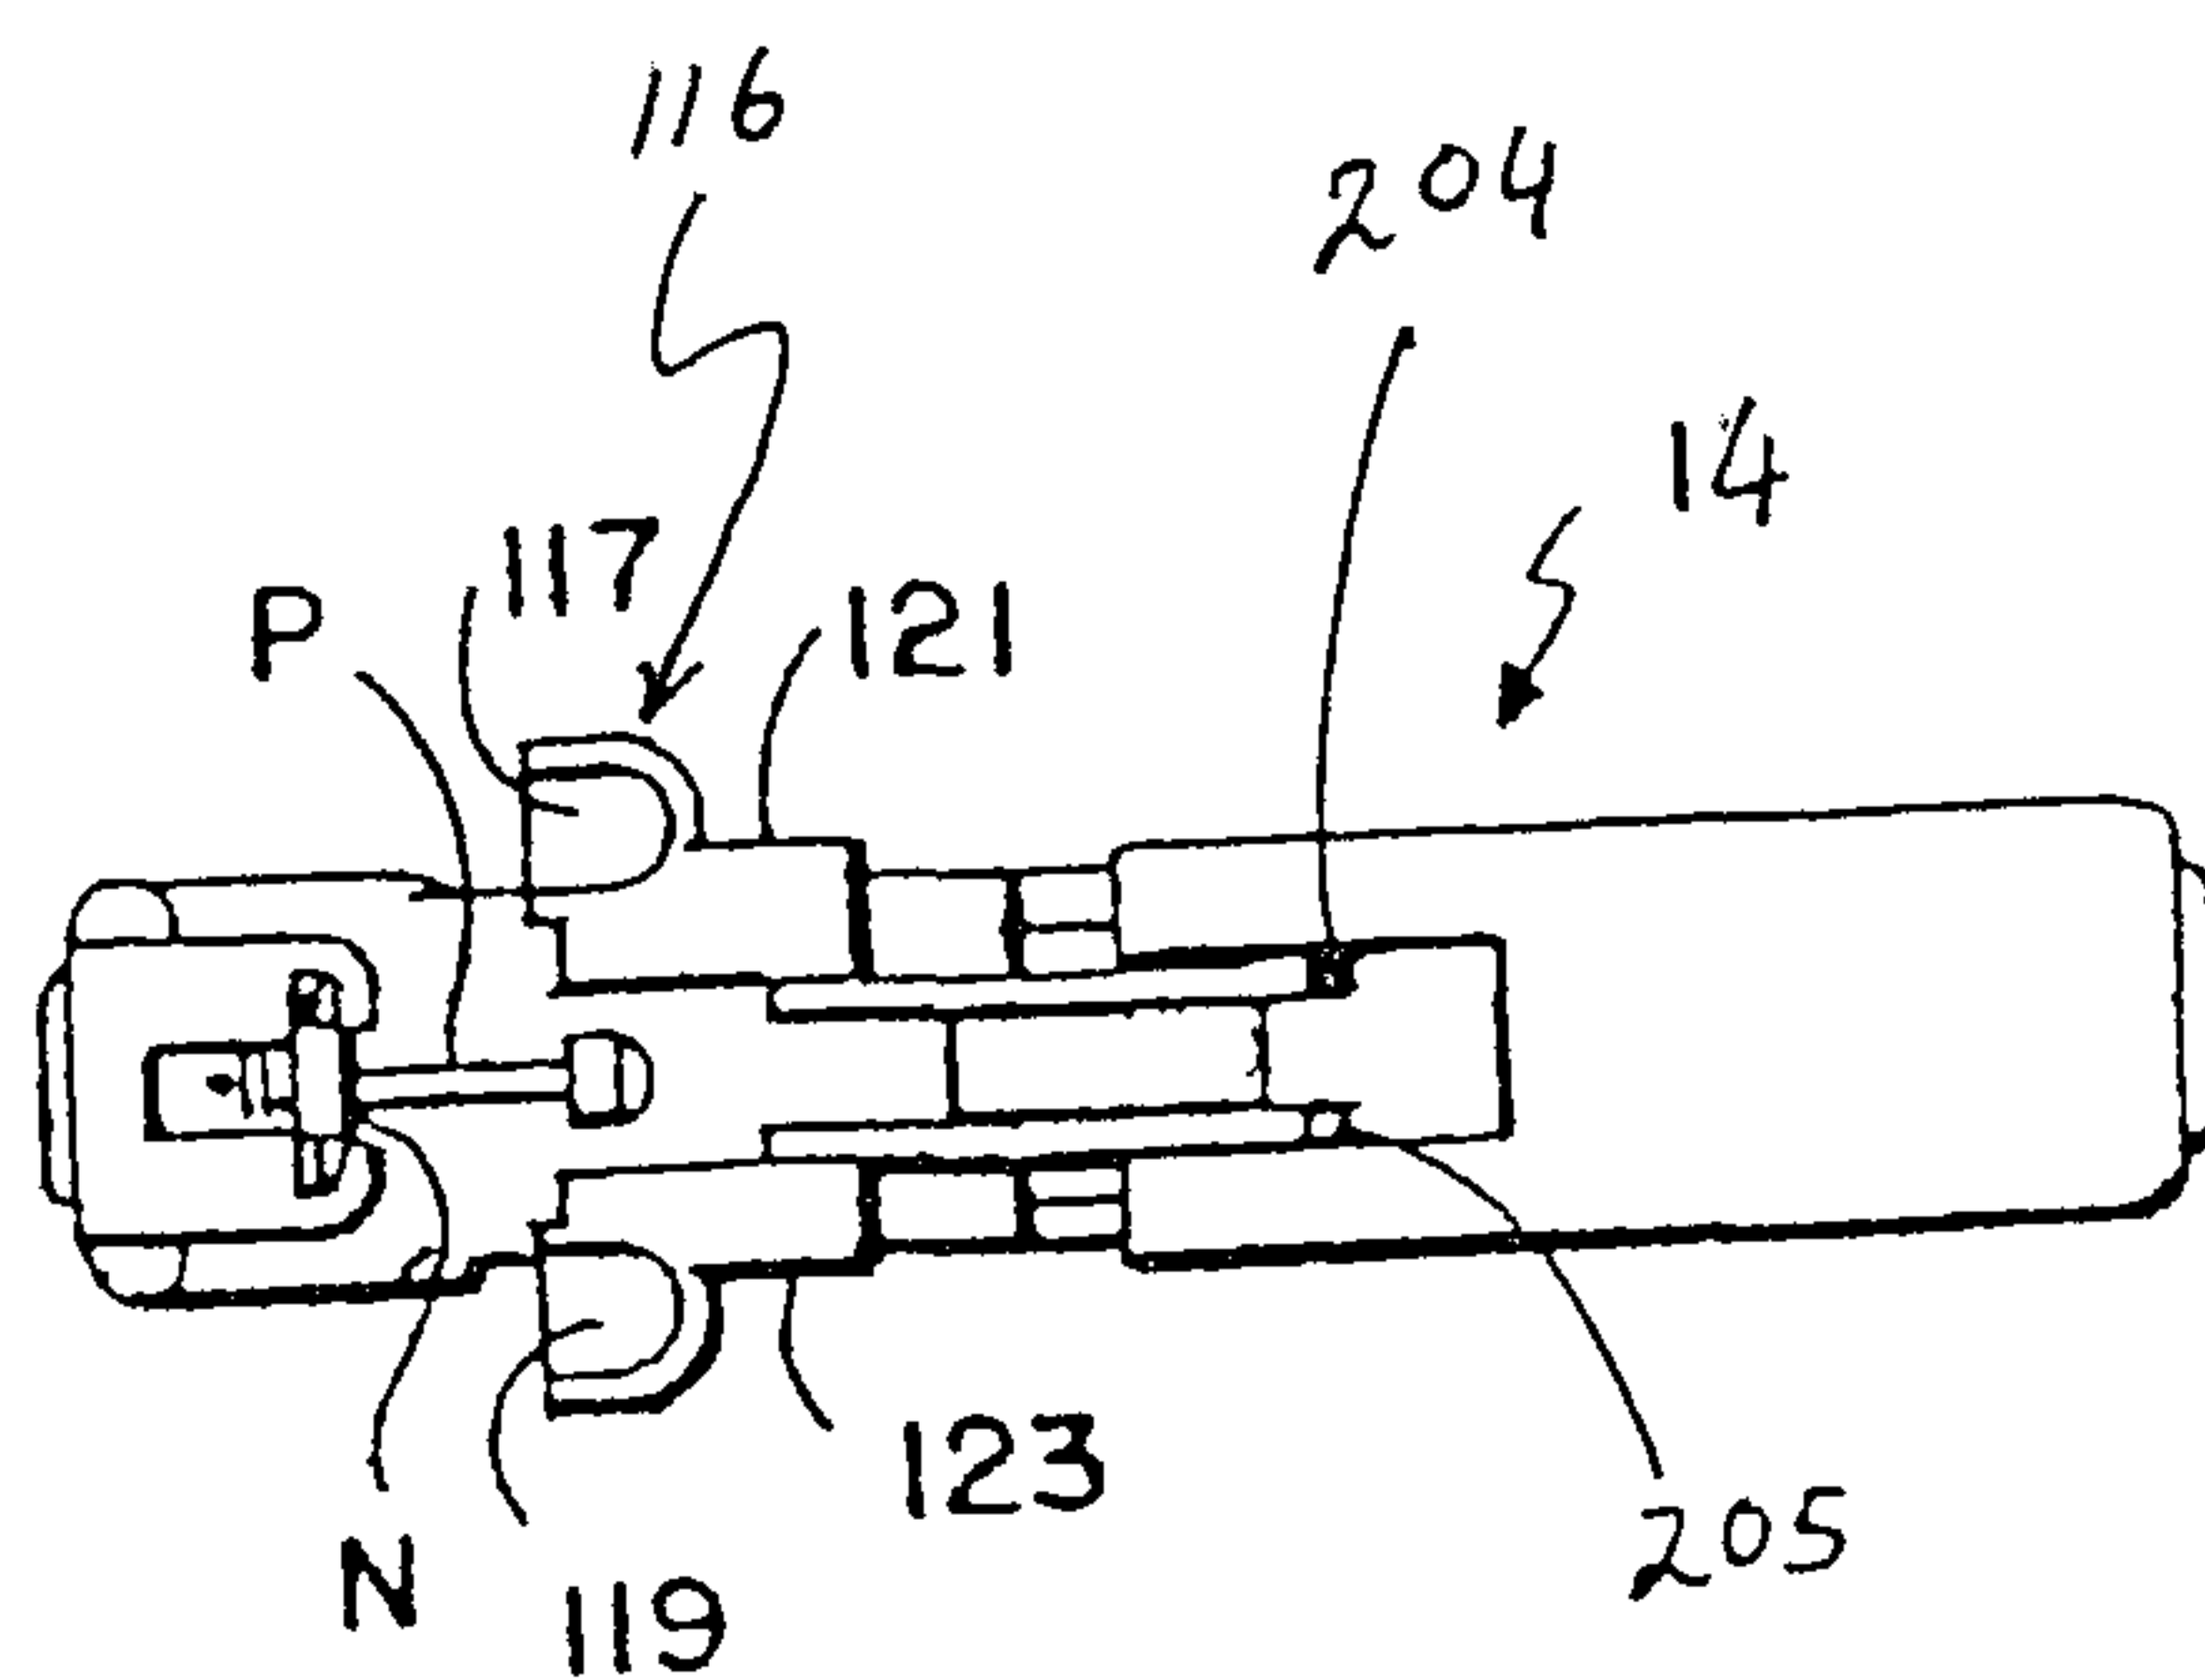


FIG. 6C

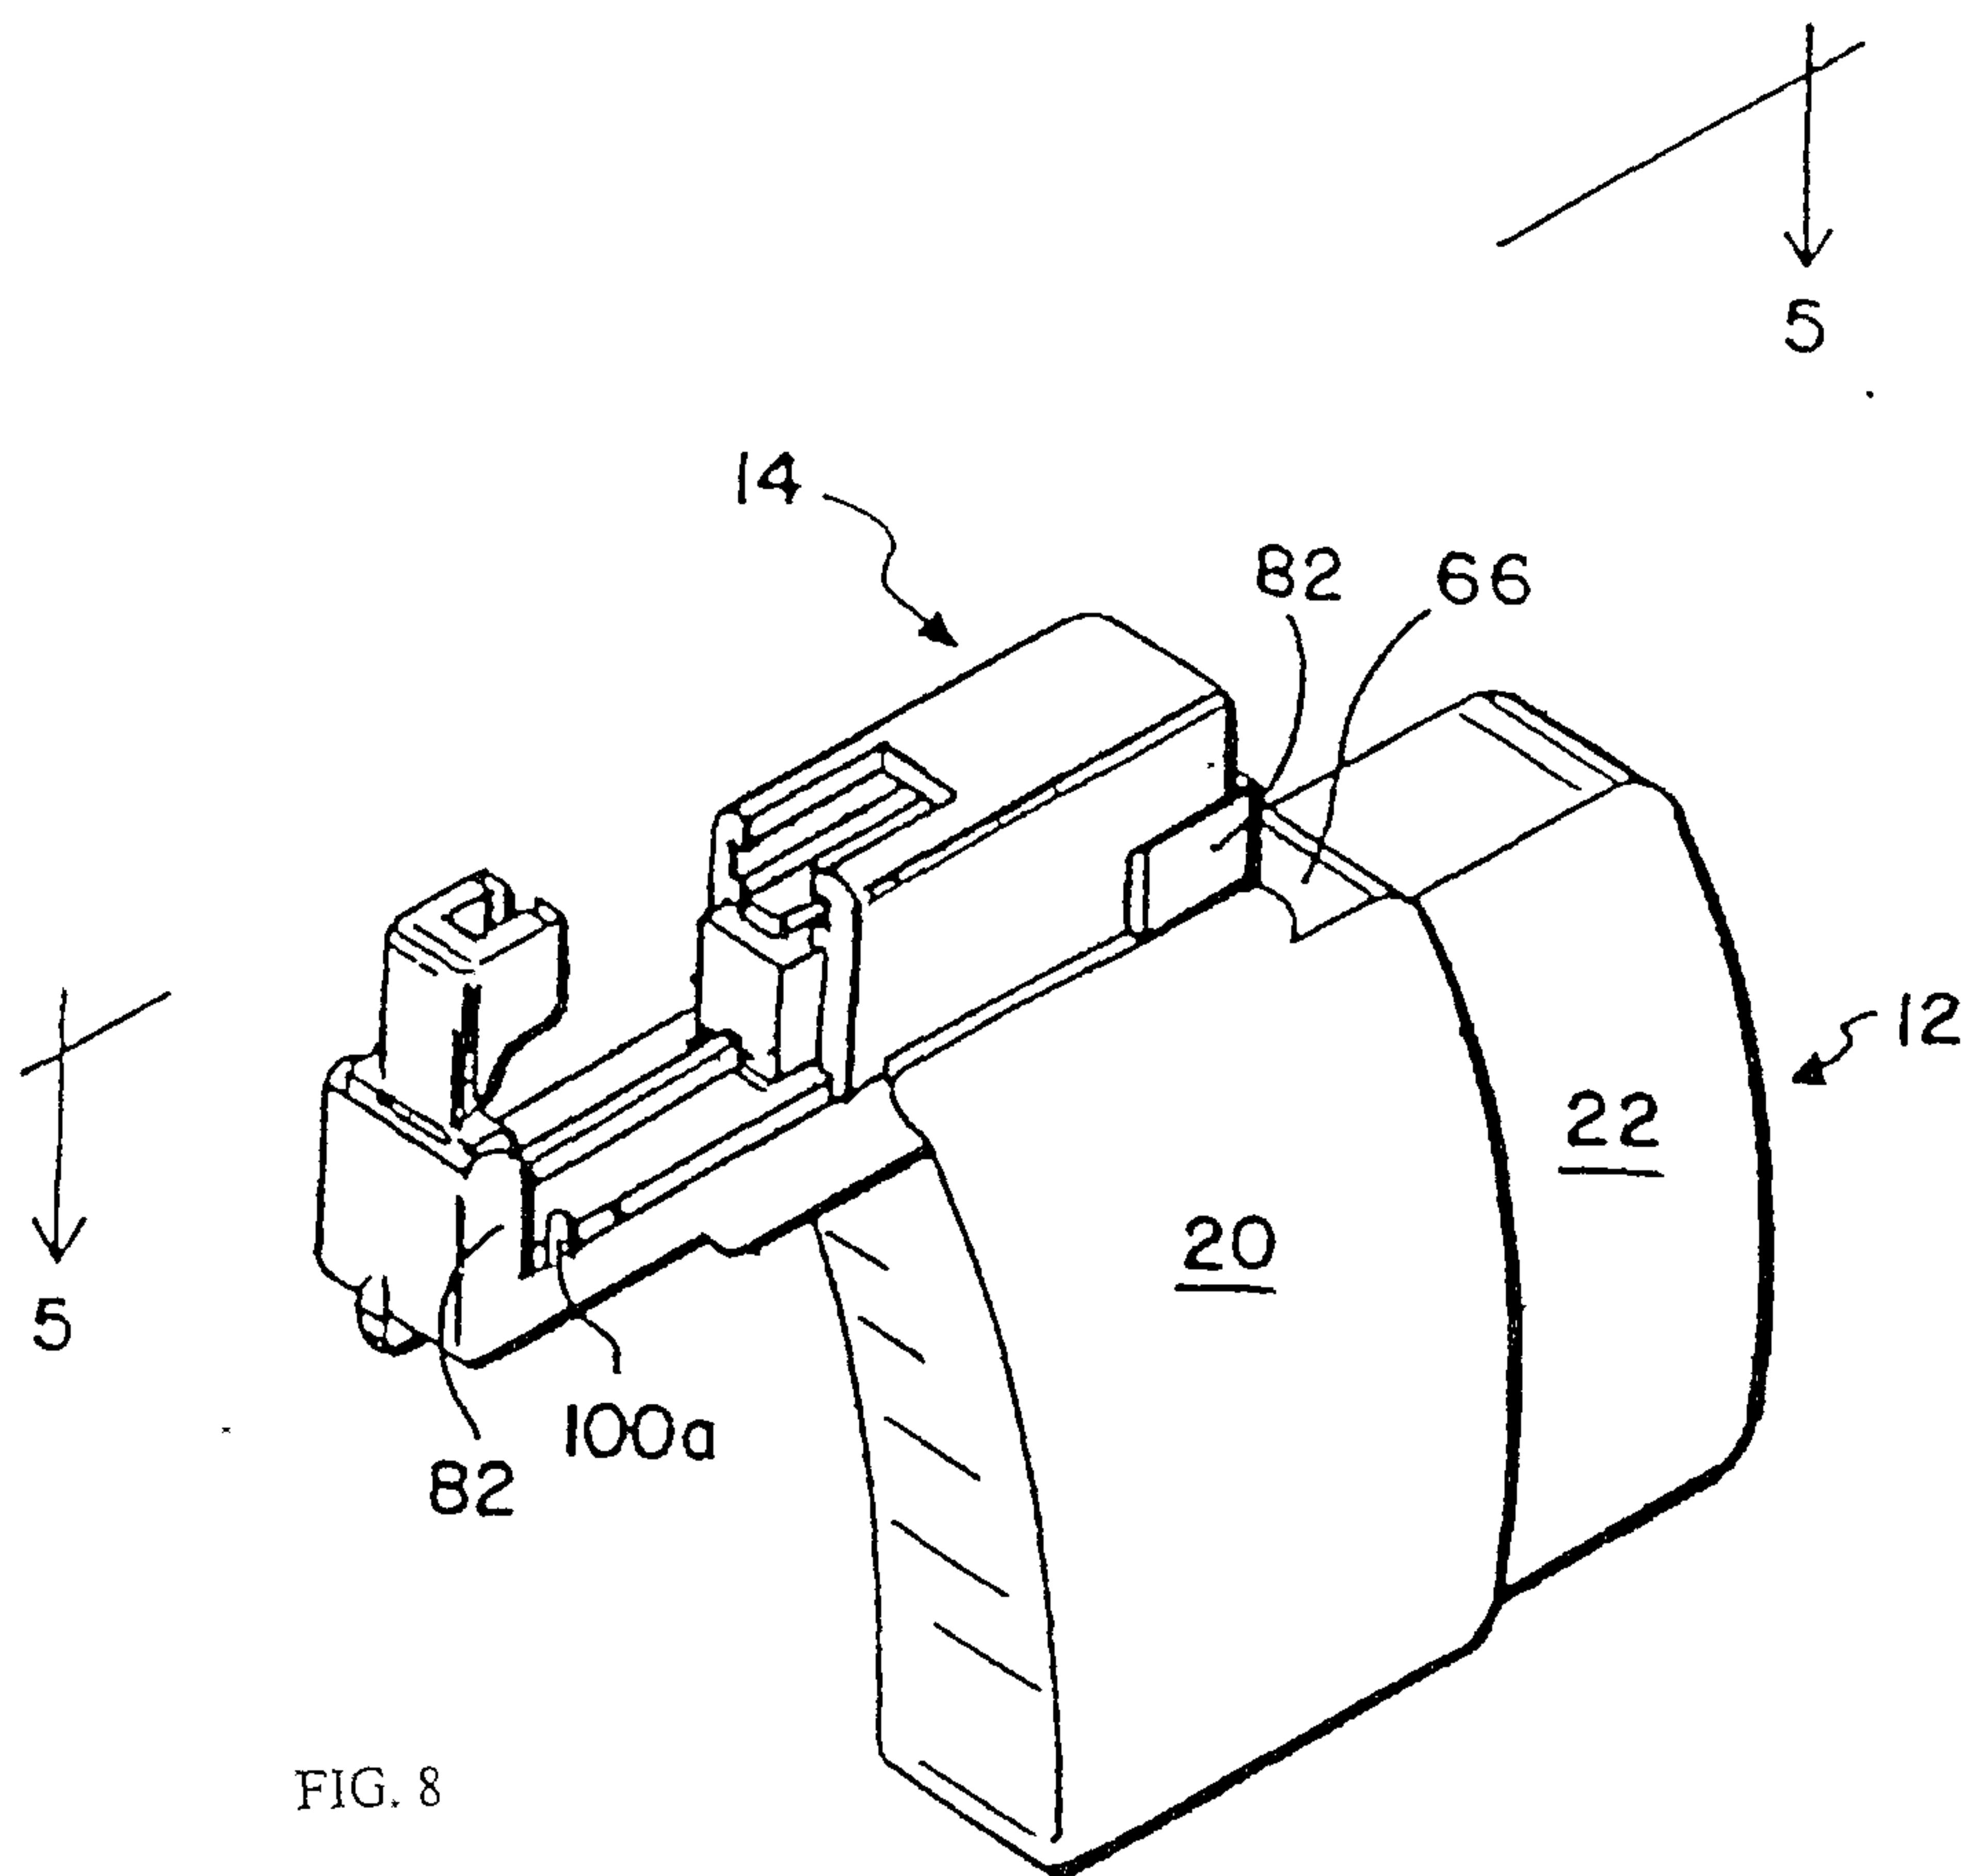
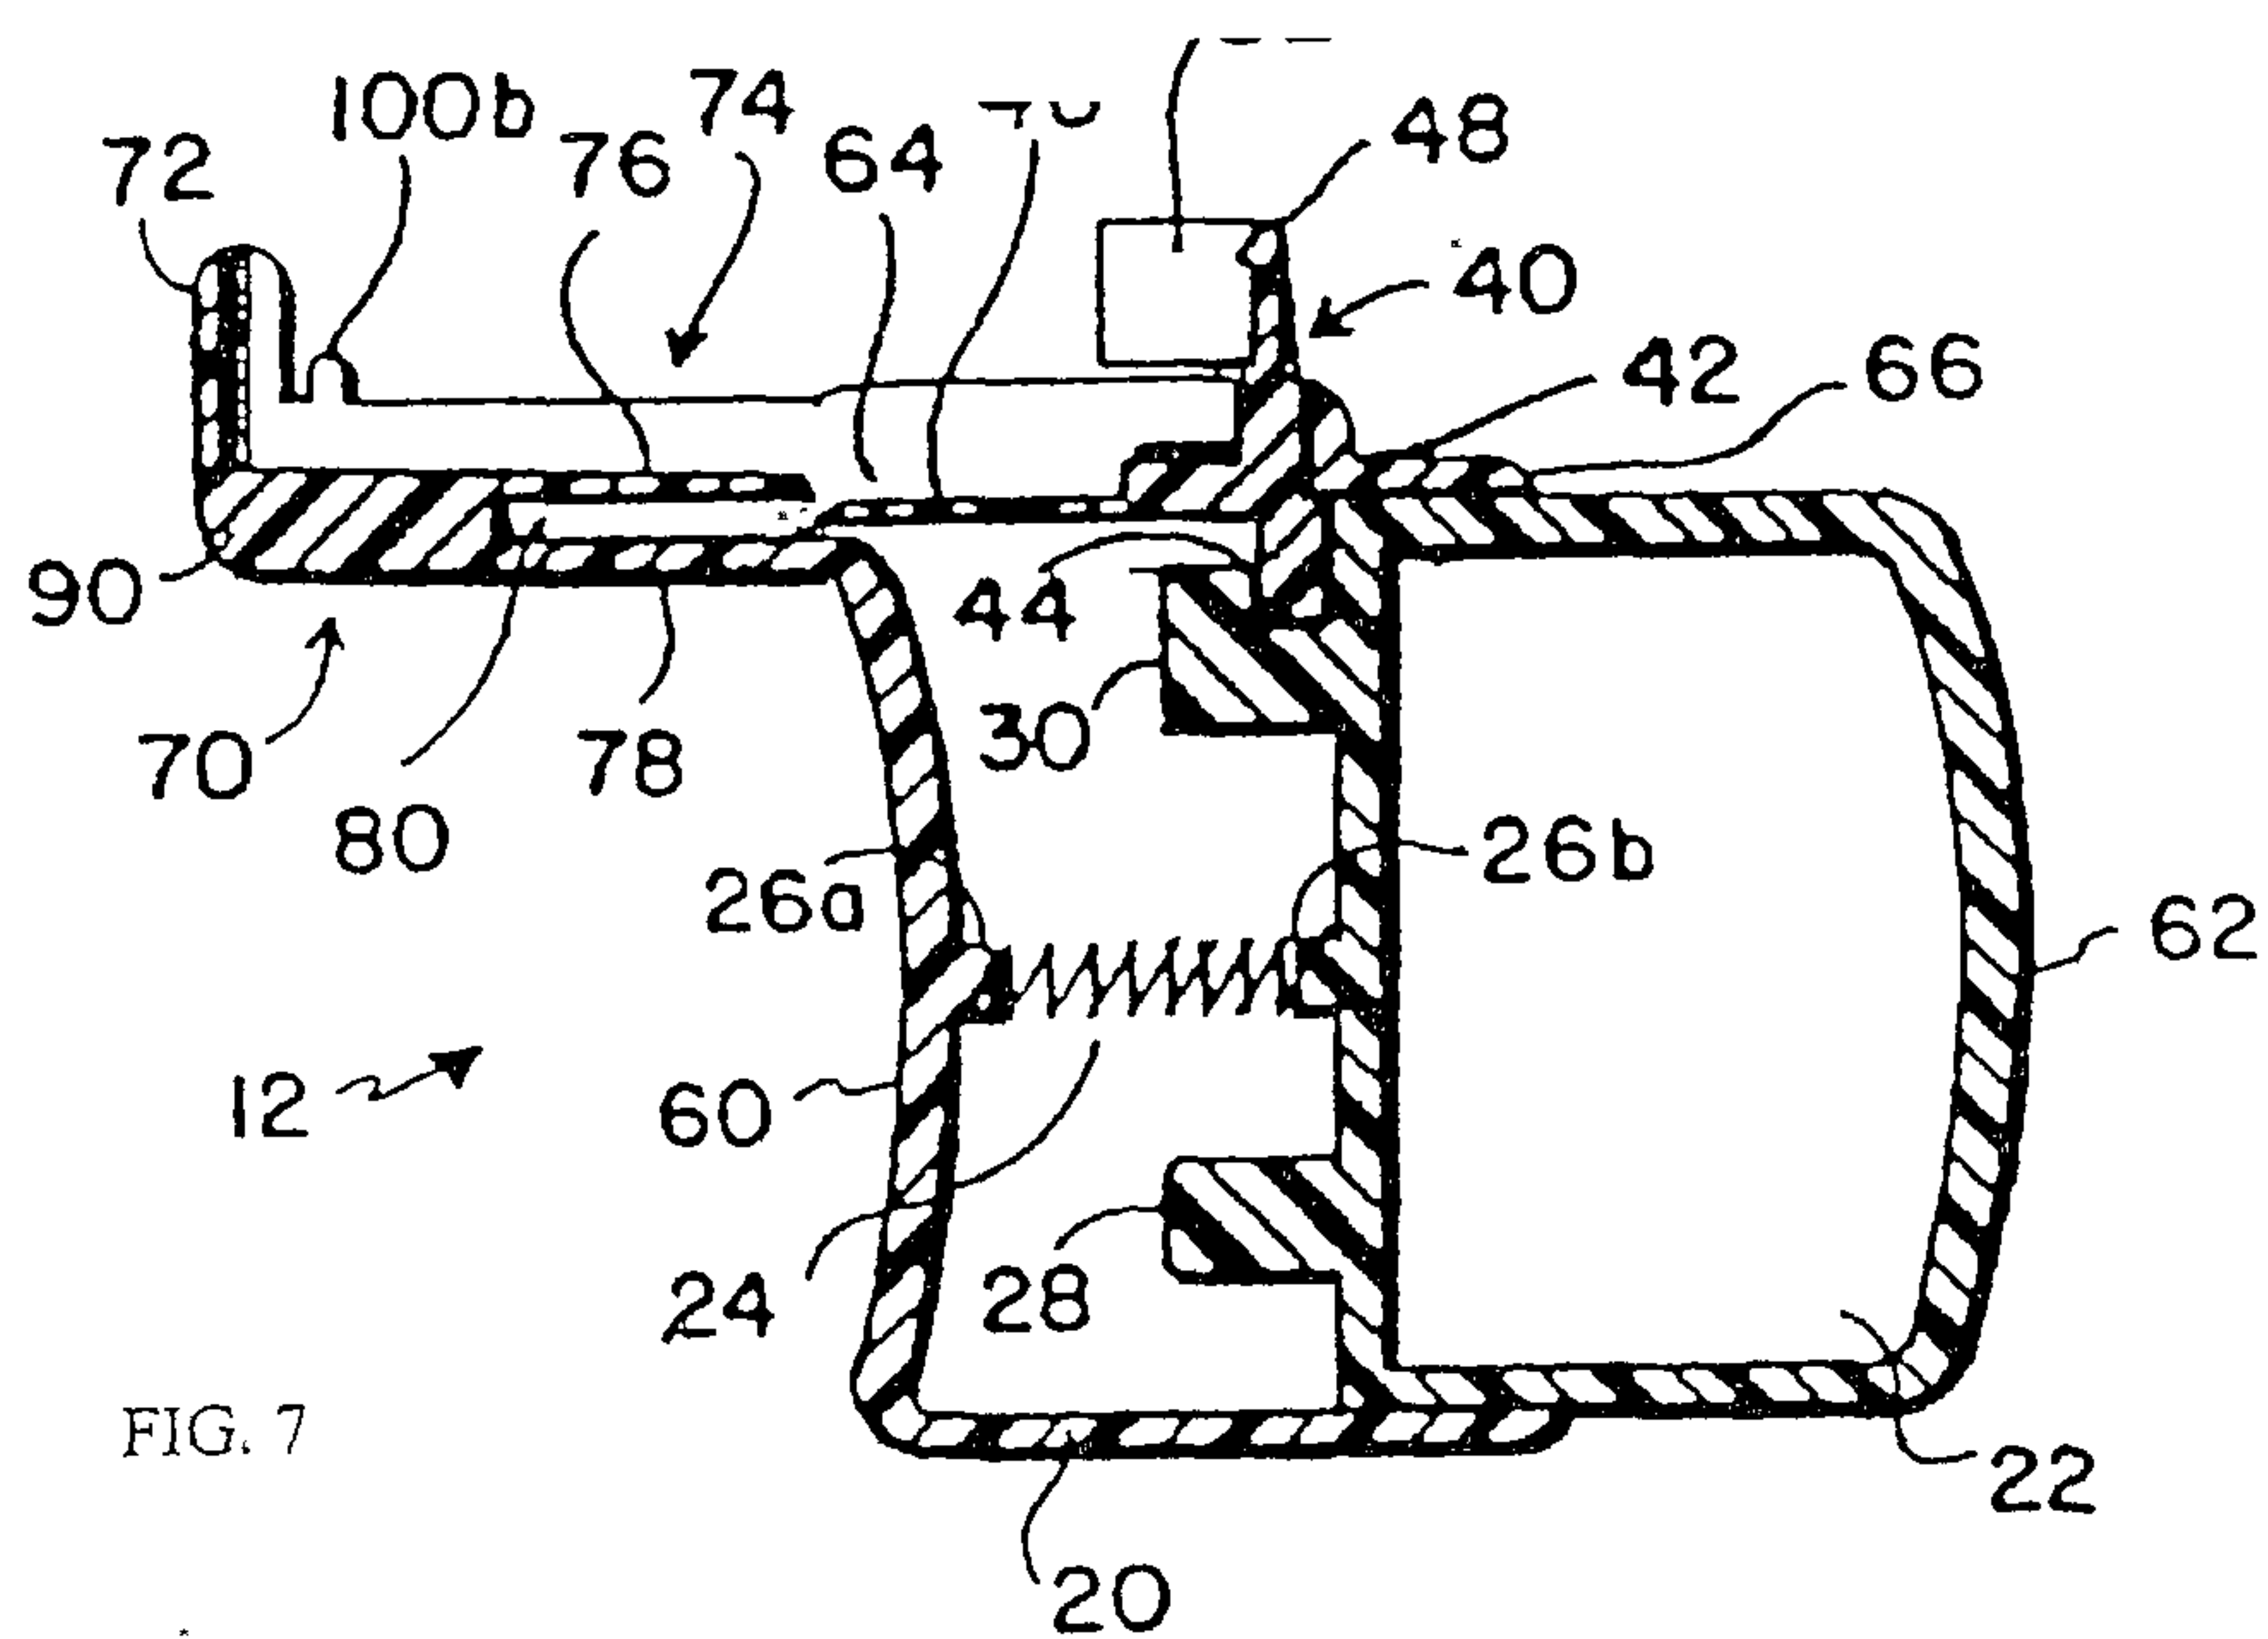


FIG. 10A

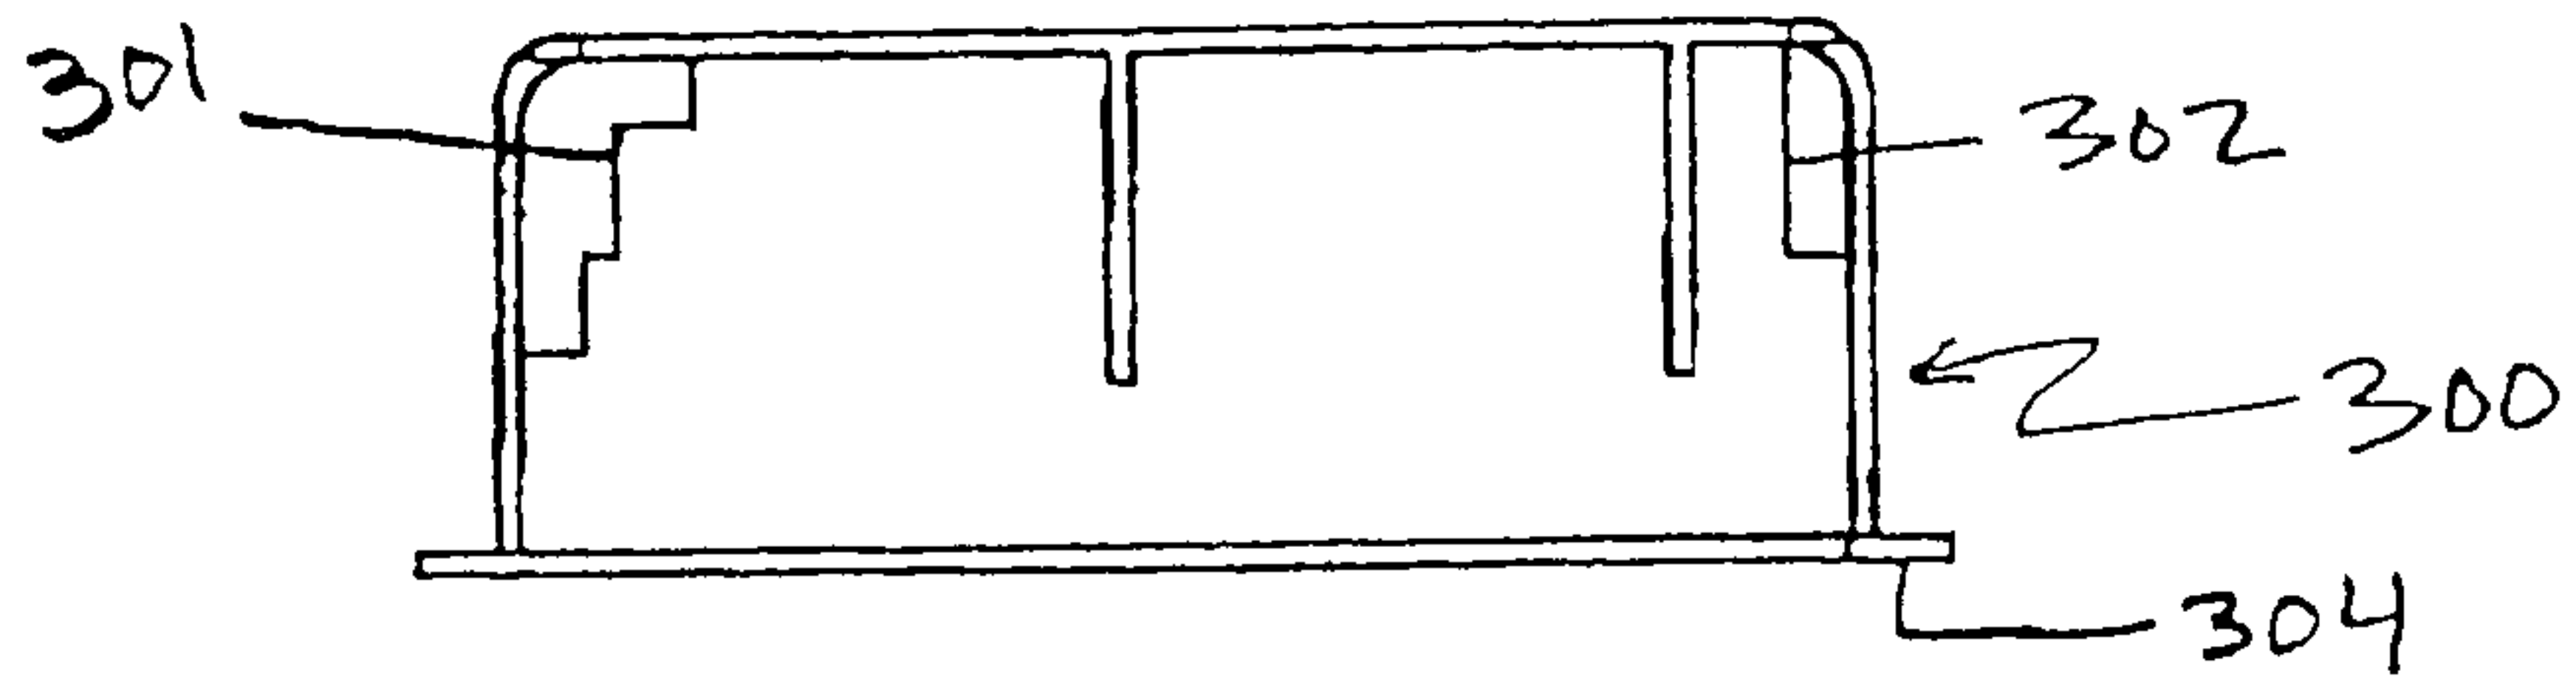


FIG. 10B

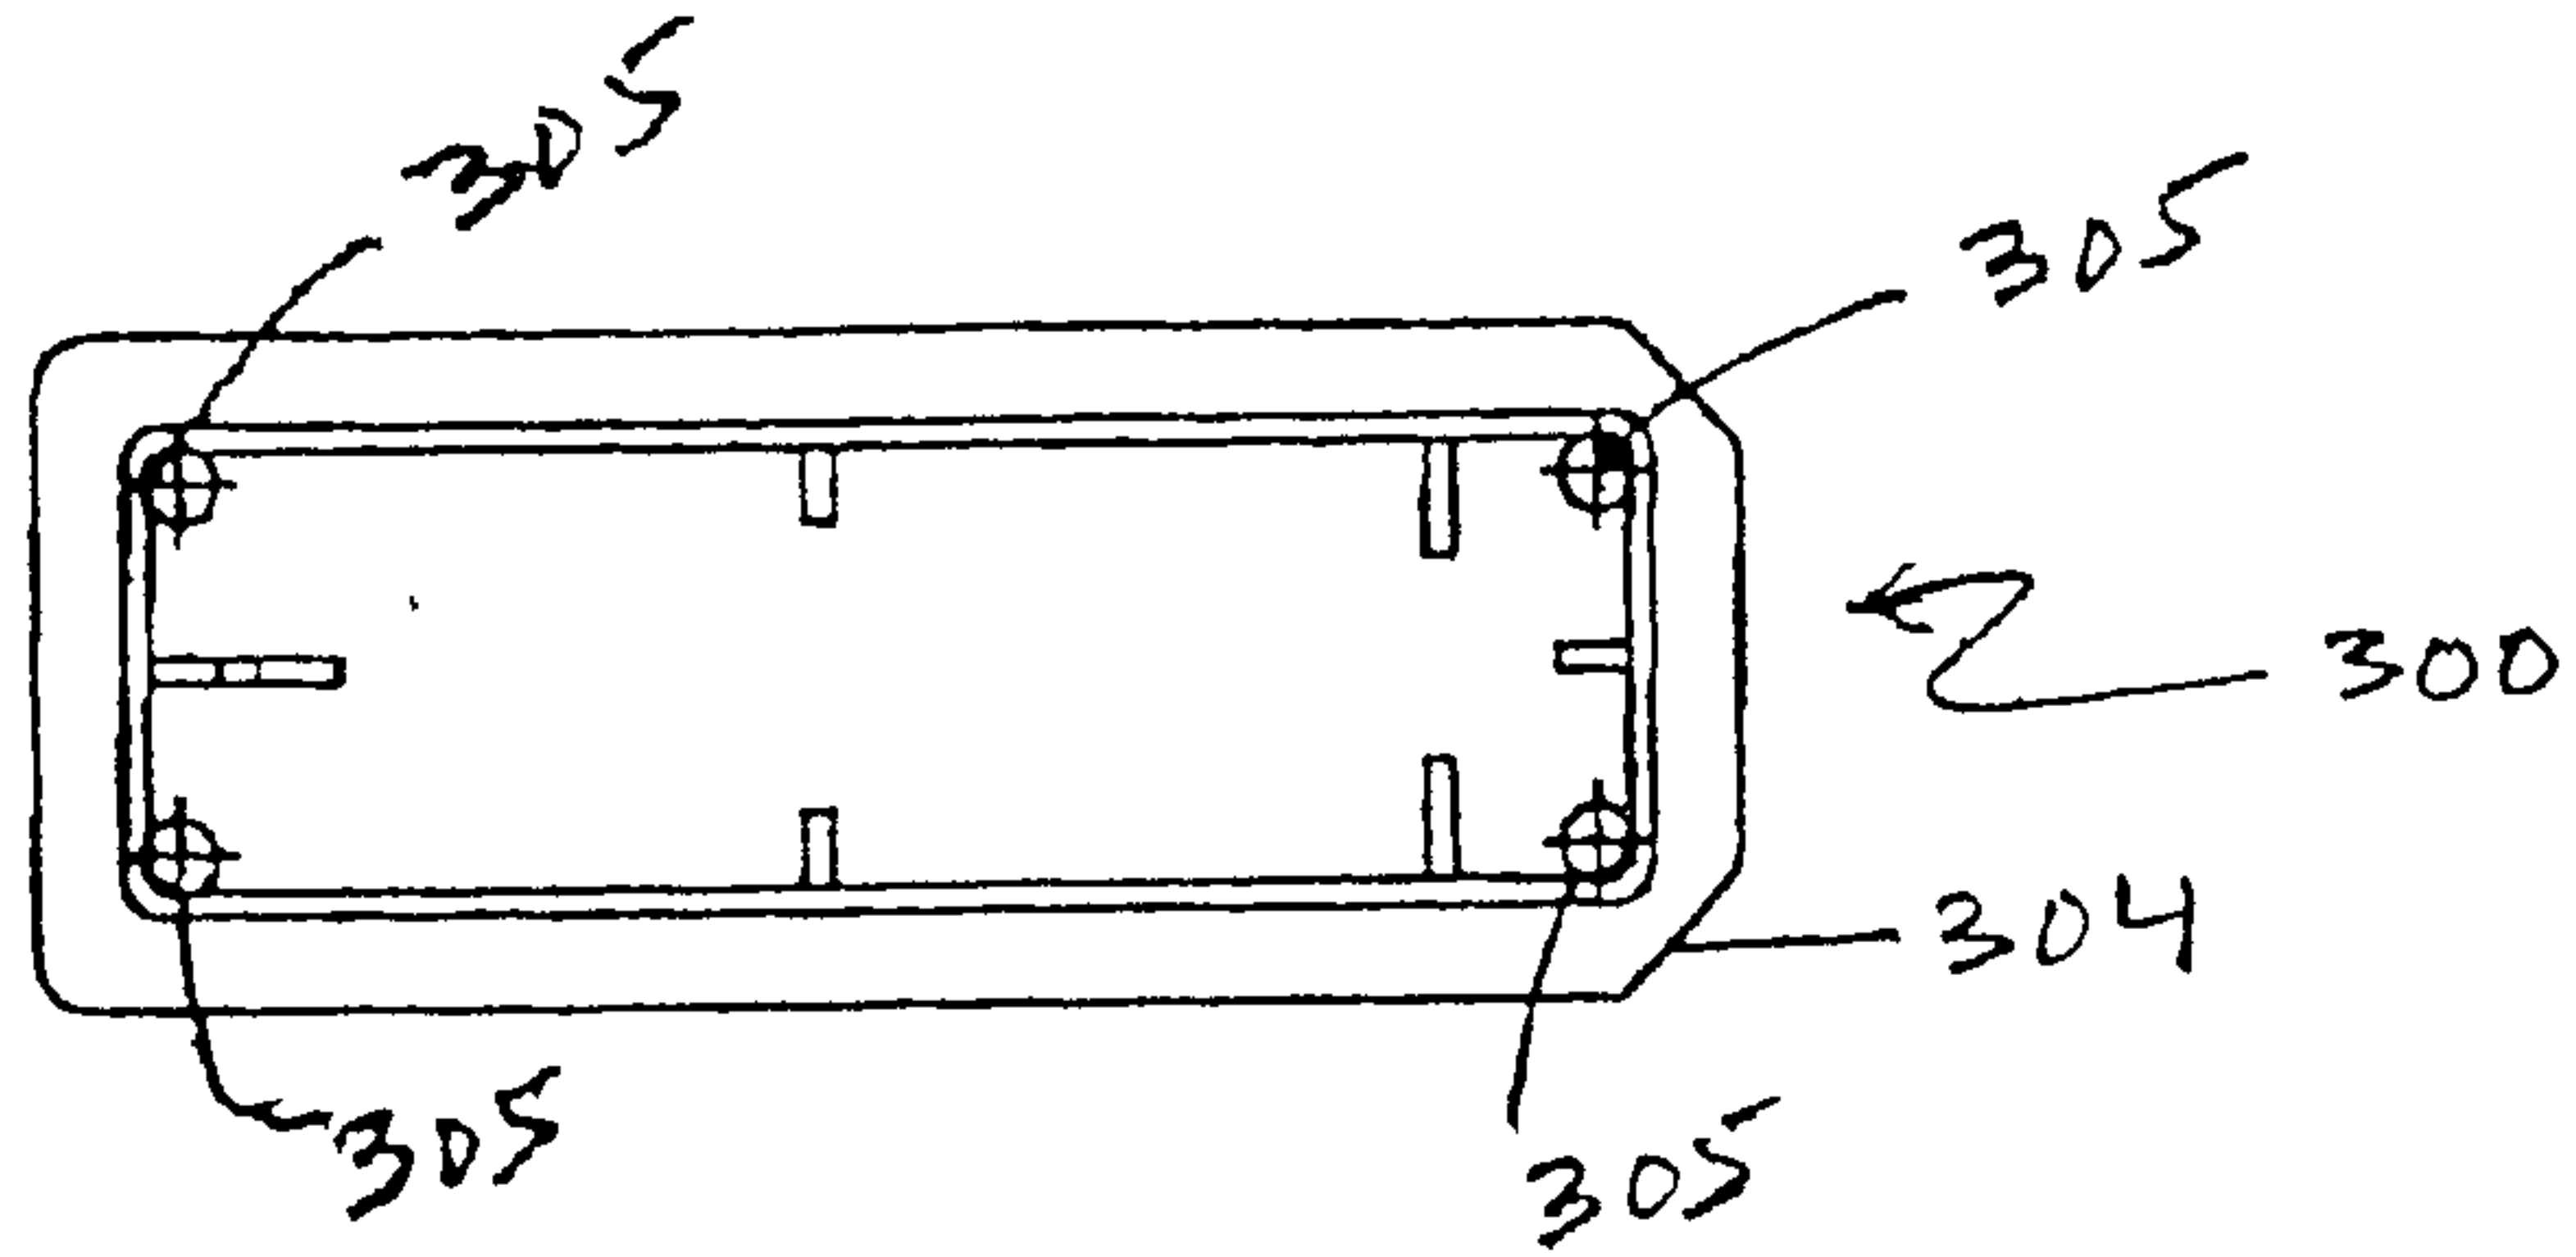


FIG. 11A

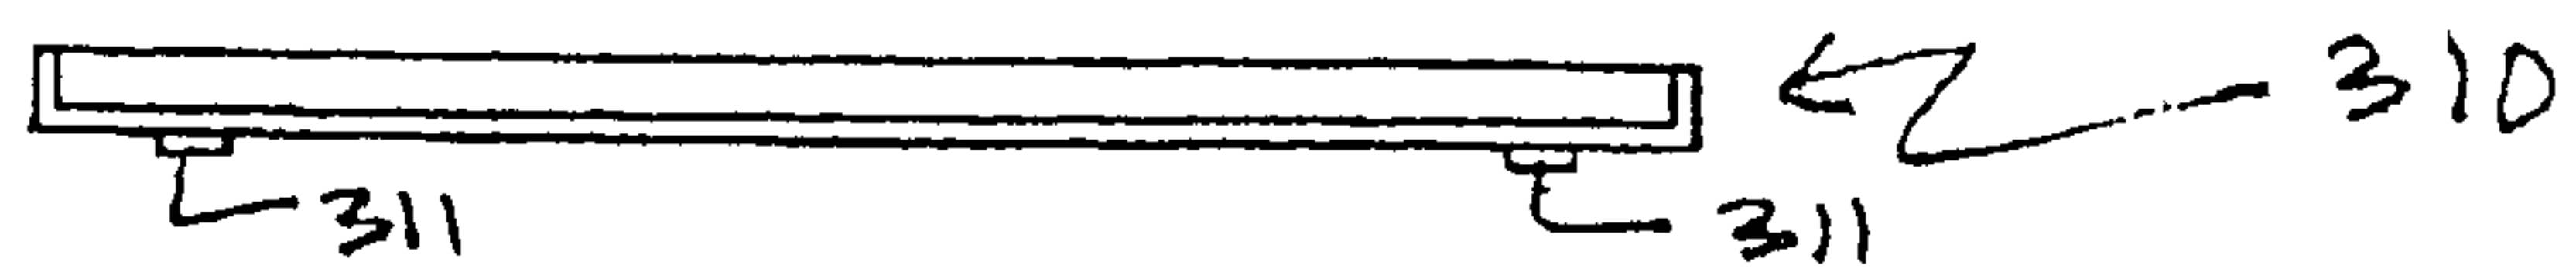
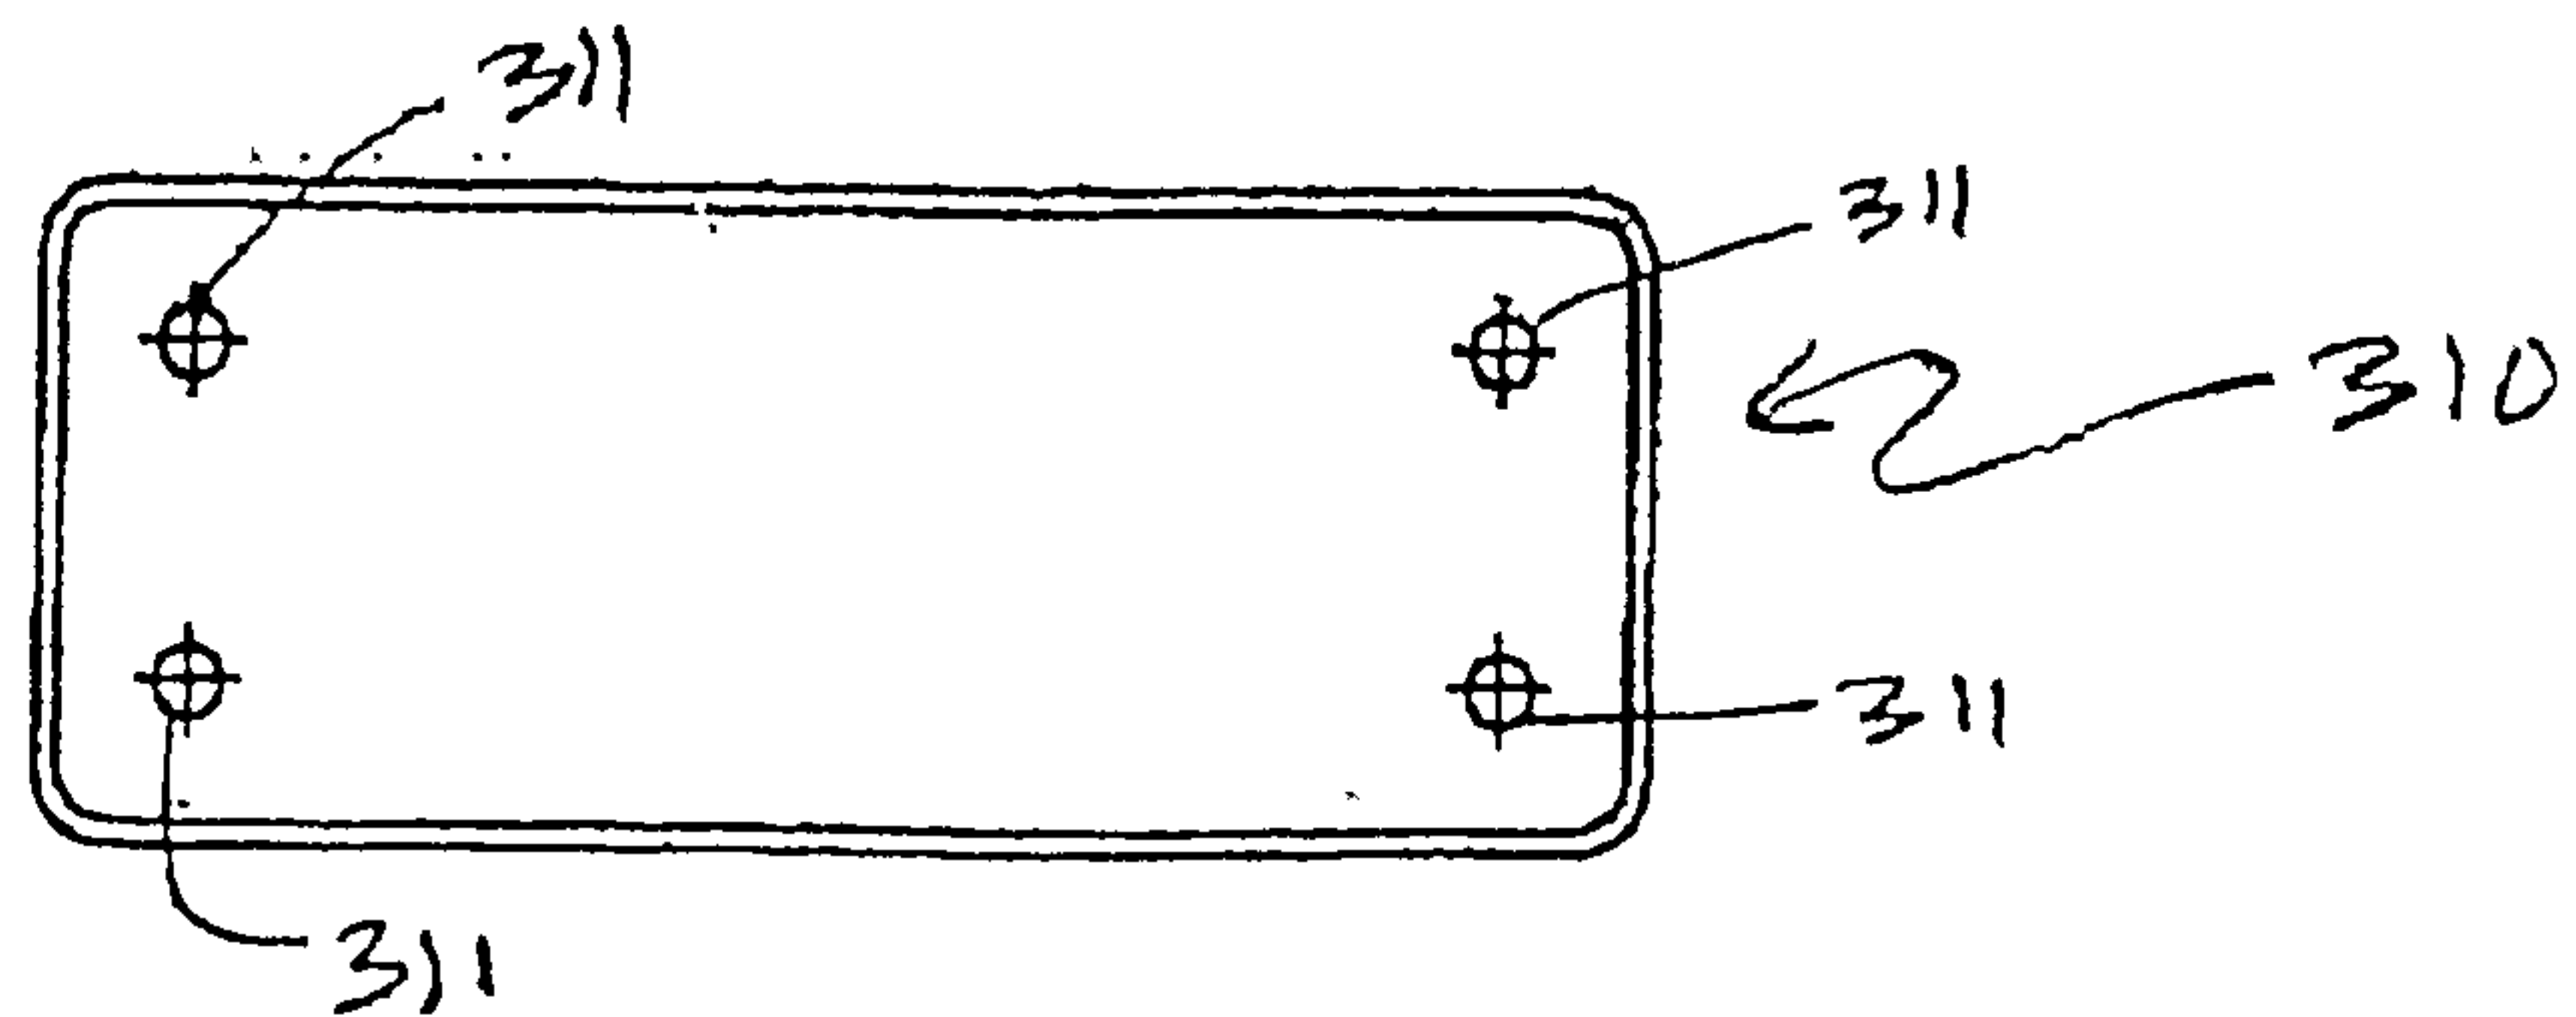


FIG. 11B



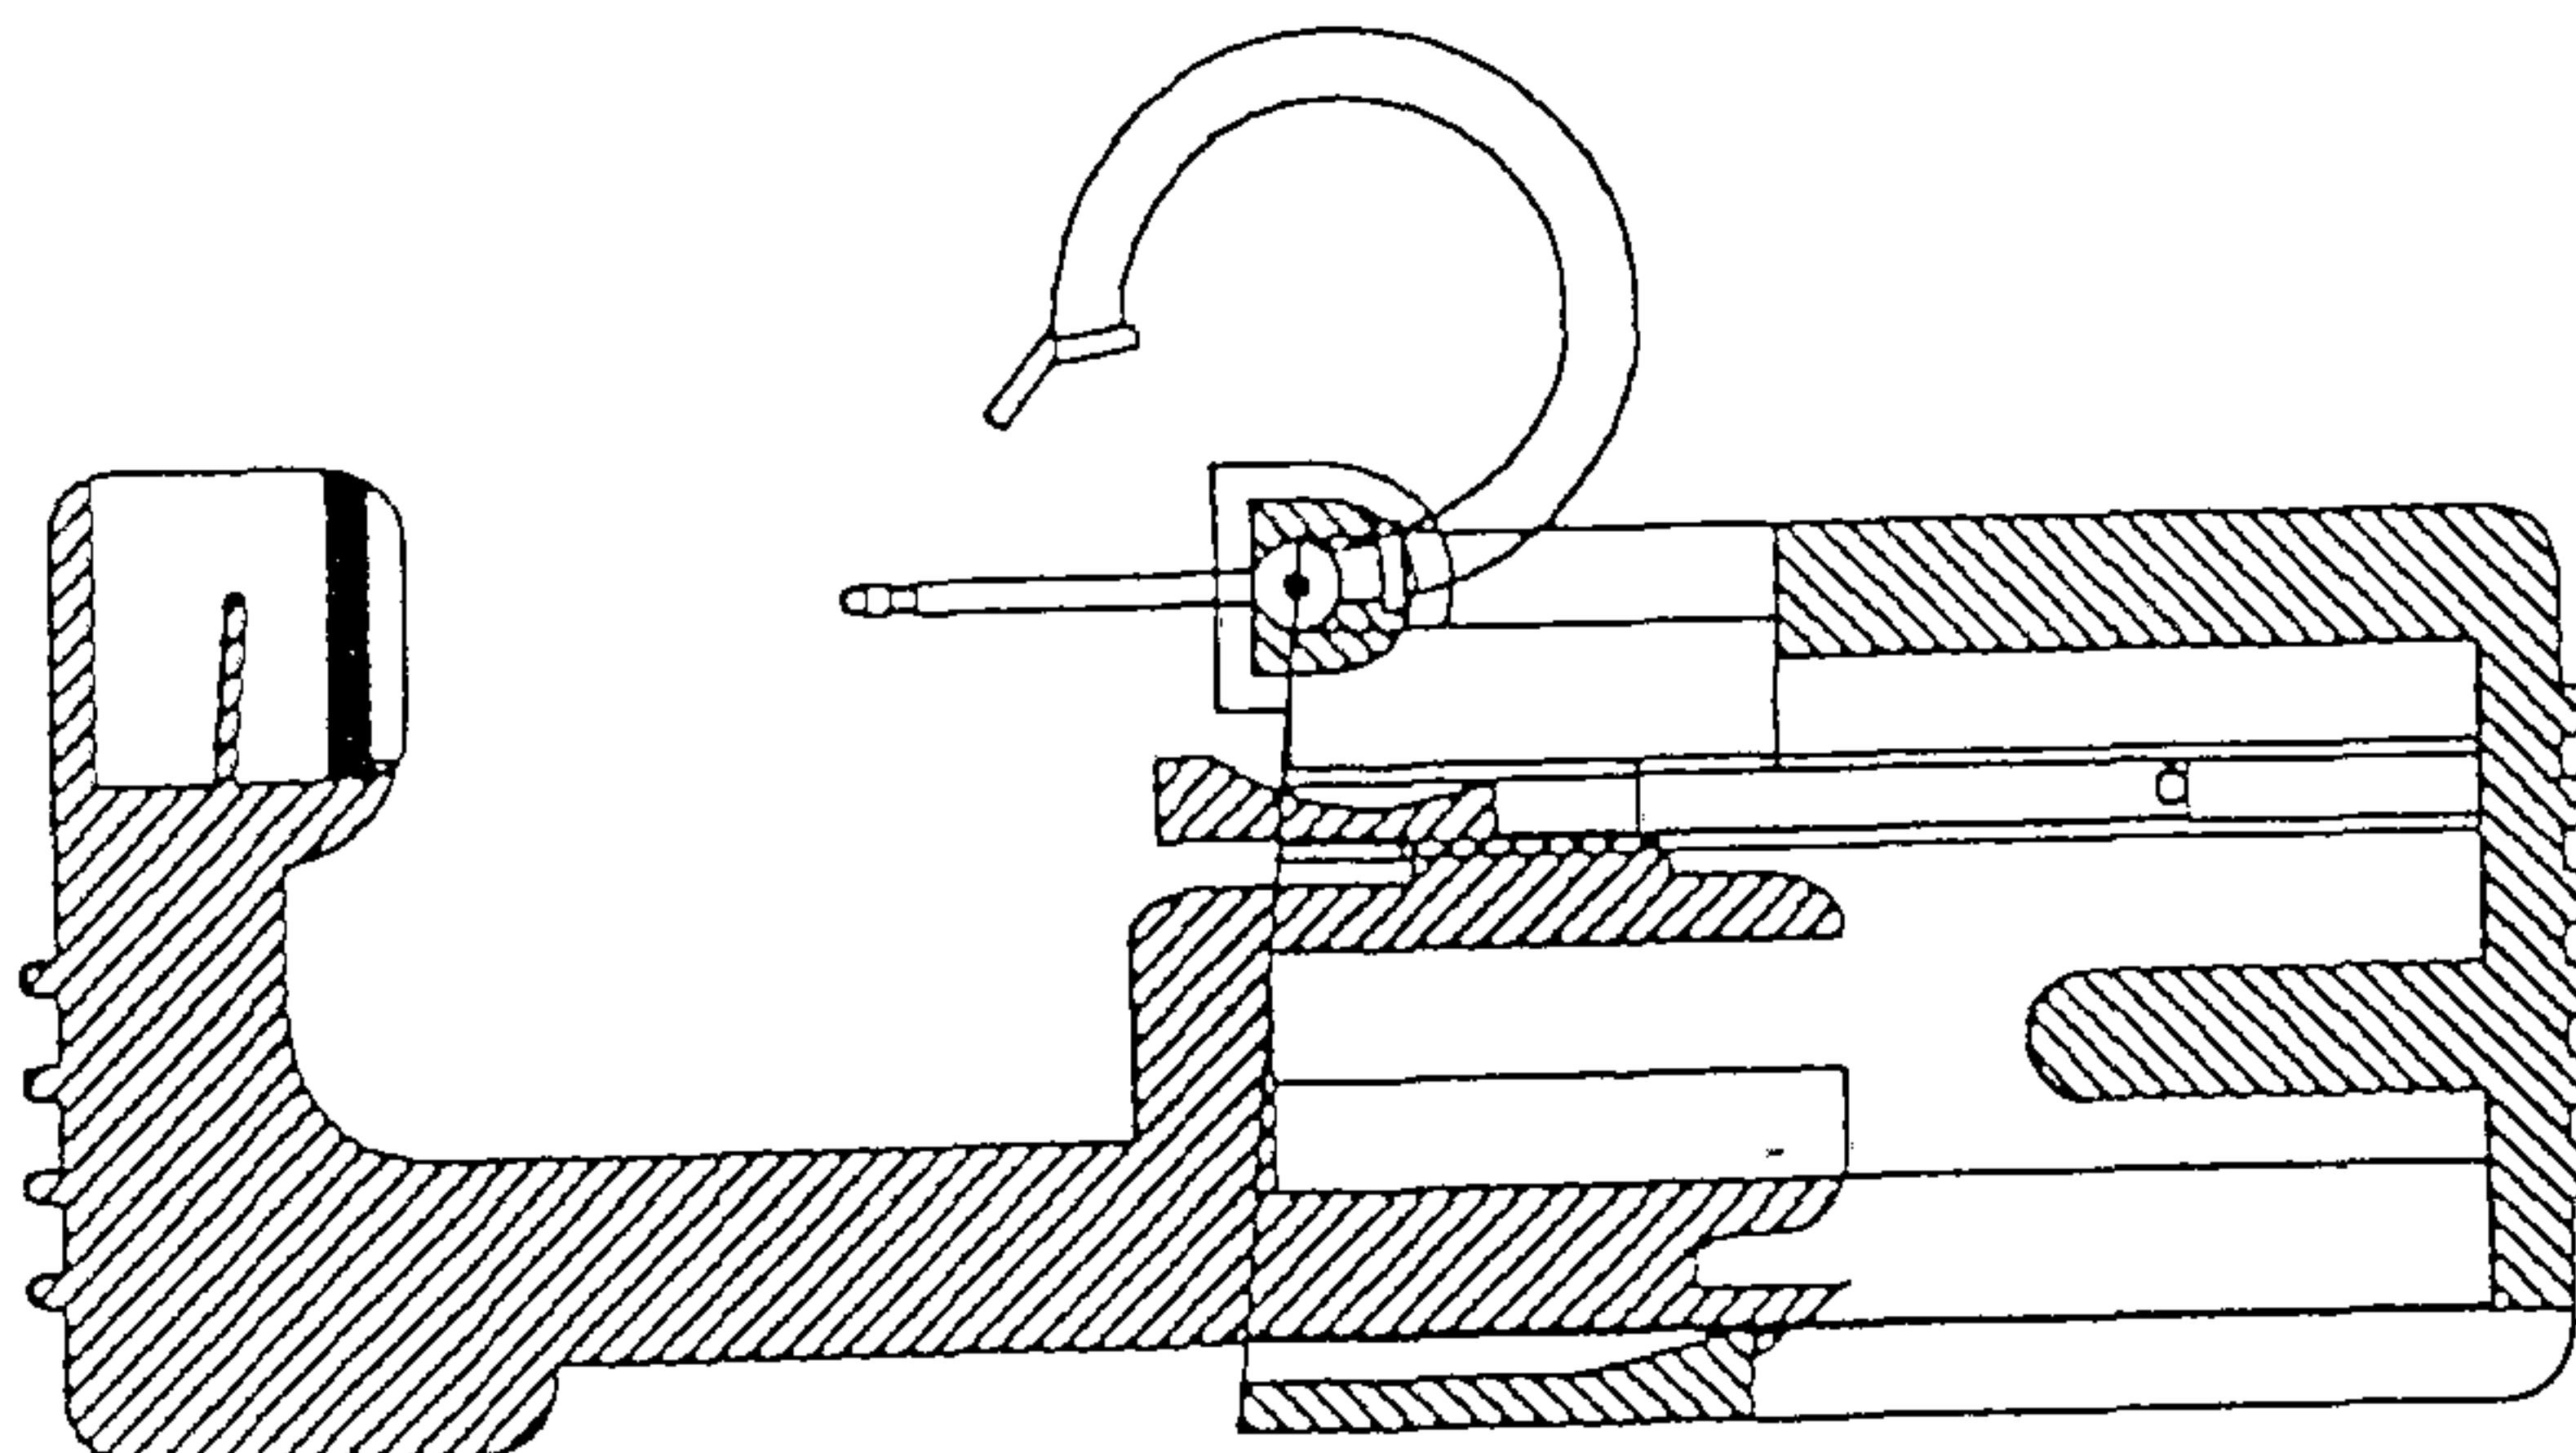


FIG. 12A

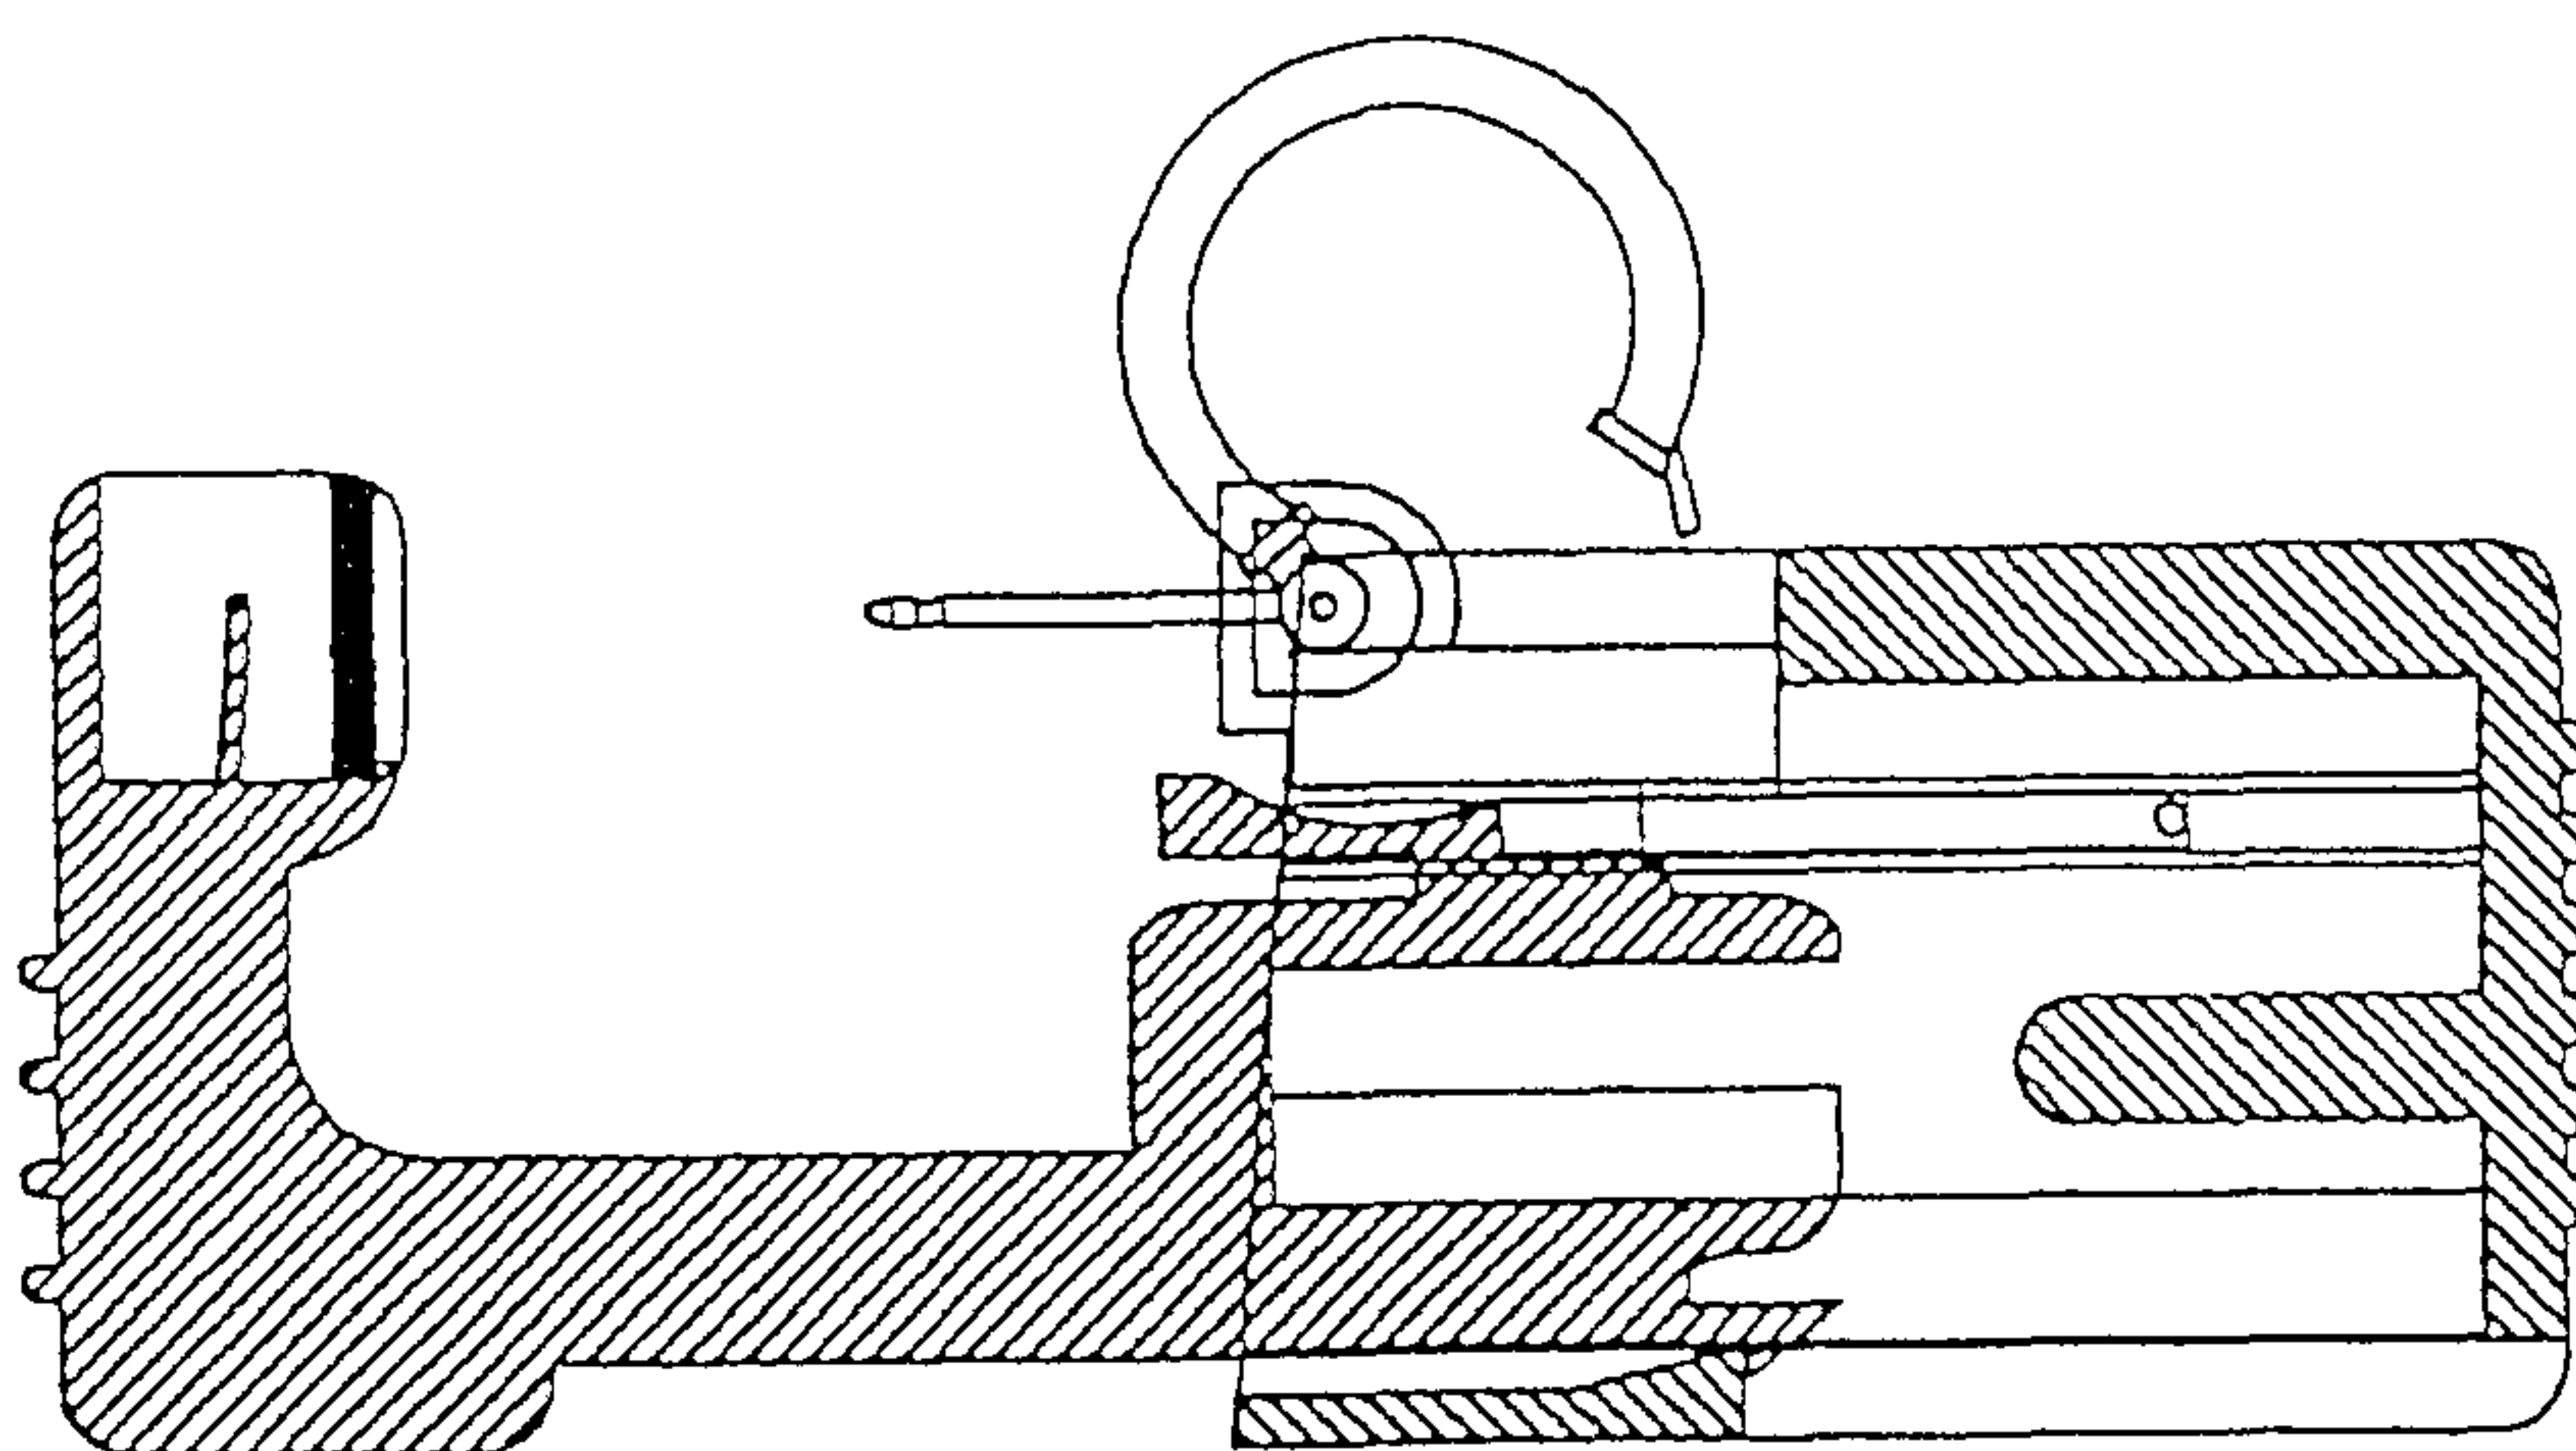


FIG. 12B

