



(51) International Patent Classification:
A47L 11/293 (2006.01) A47L 11/162 (2006.01)

(21) International Application Number:
PCT/SE2011/050159

(22) International Filing Date:
14 February 2011 (14.02.2011)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
1050151-8 17 February 2010 (17.02.2010) SE

(71) Applicant (for all designated States except US):
QLEENO AB [SE/SE]; Gamlestadvägen 2-4, SE-415
02 Göteborg (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BRUNNSTRÖM,
Ludvig [SE/SE]; Underåsgatan 14, SE-412 51 Göteborg
(SE). ANDREASSON, Patrik [SE/SE]; Övre Olskroks-
gatan 14, SE-416 67 Göteborg (SE).

(74) Agent: CEGUMARK AB; P.O.Box 53047, SE-400 14
Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CIRCULAR LIQUID WIPER DEVICE FOR A FLOOR CLEANING MACHINE

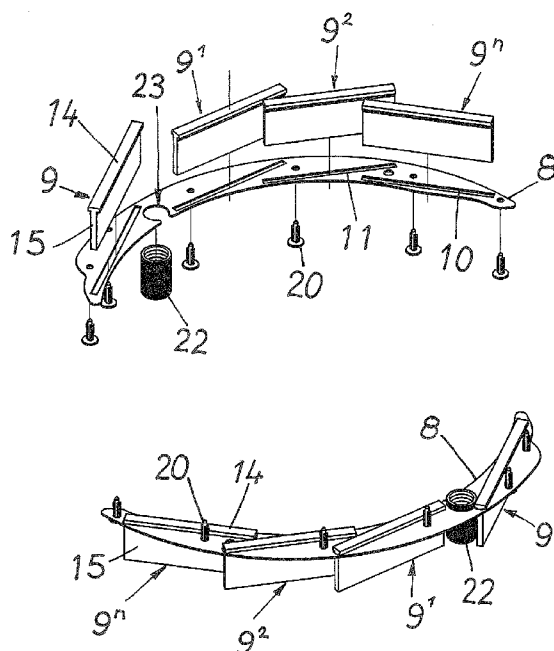


FIG. 2

(57) Abstract: The invention relates to a liquid wiper de-
vice formed of a circular obstacle and intended for a floor
cleaning machine that operates with liquid and has a
scrubbing-brush that is rotatably driven around a vertical
shaft by a motor and arranged and intended for the scrub-
bing of floors and similar surfaces. According to the in-
vention, the device is formed of ring pieces that are inter-
connectable into a ring shape and have wiper strips car-
ried thereby. The wiper strips have a thickened upper fas-
tening end portion while the remaining part of the wiper
strips has essentially a plate shape. The wiper strips have
essentially a T-shaped cross-sectional profile, said ring
pieces having a number of recesses distributed along the
length extension thereof, and the wiper strips are received
in and retained by the same.

WO 2011/102786 A1



Published:

— *with international search report (Art. 21(3))*

Circular liquid wiper device for a floor cleaning machine

5 The present invention relates to a device for a suction protection formed of a circular obstacle and intended for a floor clean machine that operates with liquid and has a scrubbing-brush that is rotatably driven around a vertical shaft by a motor and arranged and intended for the scrubbing of
10 floors and similar surfaces.

 There are problems in floor clean machines in that suction protections are worn and have to be changed and replaced with new ones. If only some part of the known suction protections formed in ring shape is worn, still the entire ring
15 with the suction protection has to be discarded and replaced with a new ring.

 The attachment and retention of said suction protection in the machine are also desirable to be effectable in a simple but still efficient way. By, for instance,
20 SE 529 307 C2, examples are shown of a known ring-shaped suction protection in a handheld floor clean machine.

 US 5,706,549 A concerns a floor clean machine with an appurtenant suction protection for liquid. The suction protection is formed of a plurality of wiper blades (128) that
25 comprise a respective stiff base plate (130) by the upwardly projecting fastening studs (140, 142) of which the wiper blades (128) are snapped on in a circular ring (88). Between said wiper blades (128), nozzles (154) are also possible to snap on to said ring (88). Also said nozzles (154) have a similar shape
30 and function as the adjacent wiper blades (128).

 When exchanging wiper blades (128), the entire unit that these consist of is discarded, i.e., the integrated flexible material (146) and the firm fastening material (130).

Among other things, the recycling of the different materials is made more difficult, and it also becomes a substantial disadvantage to need to change also the fastening part (130) when only the wiper blade is worn out and need to be changed and replaced with a new one.

The wiper blades (12) according to the applicant's own SE 529 868 C2 have an L-shaped cross-sectional profile. This shape, it has turned out, makes that the blades (12) are pressed radially by the superposed ring part (10a) thereof, since no resisting upper clampable part is on the blade's side opposite its centre axis. The problem with oblique blades is intended to be solved by instead arranging the blade with an even cross-sectional profile, so that the main part is clamped evenly.

Therefore, the main object of the present invention is primarily to solve, among others, the problems mentioned above in an efficient and cost-effective way.

Said object is achieved by means of a device according to the present invention that essentially is characterized in that the suction protection is formed of ring pieces that are interconnectable into a ring shape and have wiper strips carried thereby, that the wiper strips have a thickened upper fastening end portion while the remaining part of the wiper strips has essentially a plate shape, that the wiper strips have essentially a T-shaped cross-sectional profile, said ring pieces having a number of recesses distributed along the length extension thereof, and that the wiper strips are received in and retained by the same.

The invention is described below in the form of a preferred embodiment example, reference being made to the accompanying drawings, in which:

Fig. 1 shows in perspective obliquely from above a suction protection formed according to the present

invention in an assembled state and in a mounted position on a floor clean machine,

Fig. 1A shows the suction protection and the machine in perspective obliquely from the side,

5 Fig. 2 shows the invention as individual parts as seen obliquely from above,

Fig. 2A shows a wiper strip from the side, in profile as well as the upper part of the same,

10 Fig. 3 shows the invention as seen obliquely from above and from outside,

Fig. 4 shows an exploded view of the invention in a mounting stage,

Fig. 5 shows the invention straight from below, and

15 Fig. 6 shows a side view of a floor clean machine provided with a suction protection.

A device 1 according to the present invention, which is intended to be applied to a suction protection 2 formed of a circular obstacle and intended for a floor clean machine 4 that operates with liquid 3, for instance of the type that is manoeuvred by hand, and has a scrubbing-brush 6 that is rotatably driven around a vertical shaft 5 by a motor and intended for the scrubbing of floors 7 and similar surfaces, as well as provided with a suction device for the suction of dirty scrub liquid 3, is formed of a partible suction protection 2. More precisely, said suction protection 2 is formed of a plurality of ring pieces 8, 8¹, 8² that are interconnectable into a ring shape and have wiper strips 9, 9¹, 9², 9ⁿ carried thereby. Said wiper strips consist of rubber, plastic or another suitable preferably flexible material that does not risk damaging the subjacent floor 7 in the cleaning stage of the machine 4.

20

25

30

Said ring pieces 8, 8¹, 8², which in the shown embodiment example are three in number but the number of which of may vary both downward and upward, have a suitable number of recesses 10-13 distributed along the length extension L thereof. According to the invention, the respective wiper strips 9-9ⁿ are received in the same and retained therein, namely with a strip 9-9ⁿ in each recess 10-13.

Retention of the strips 9-9ⁿ is provided by the same having a thickened upper fastening end portion 14 each, while the remaining part 15 of the wiper strips has essentially a plate shape that preferably is straight.

The wiper strips 9-9ⁿ have laterally extending projections 50, preferably in the form of barbs at a distance from the upper end 9A of the wiper strips, so that said barbs are arranged to, at least, obstruct pulling up of the wiper strips 9-9ⁿ in the active fastening position in the ring pieces 8-8².

The wiper strips 9-9ⁿ, which have essentially a T-shaped cross-sectional profile, are, with the respective part 15, essentially congruent with the circumferential shape of the recesses 10-13 and have all the same length A or different lengths A and B, respectively. Said wiper strips 9-9ⁿ are arranged inclined to the circumferential shape of the ring by the recesses 10-13 in the ring pieces 8-8² being arranged to, for instance, extend tangentially in relation to the length extension L of the ring pieces and preferably overlapping each other with the respective inner portion 16 thereof arranged at a common circular arc 17 and with the respective outer portion 30 thereof arranged in an outwardly angled position at a common outer circular arc 19.

Said separate ring pieces 8-8² have in turn fastening means 20 in order to thereby be detachably anchorable to a said floor clean machine 4, preferably projecting rivets

or bolts 20 or other stud-shaped fastening members that are arranged to be projected from the ring pieces 8-8² or that are detachably arranged to be received in openings 21 situated in the ring pieces 8-8², distributed at mutual distances X along the same.

In addition, a sleeve-shaped hose part 22 is arranged connectable with the respective ring piece 8-8² via a mating congruent recess 23, and that is attachable in the recess 23 for the connection to a suction hose 24, end-to-end with this suction hose 24. Upon suction, the hose ends are pressed against each other. By the negative pressure formed, they keep it tight in the joints.

A said floor clean machine 4 has a ring-shaped reception part 25 having a number of fastening studs 26 distributed along the circumference of said part. By means of said reception part 25, the ring pieces 8-8² are arranged to be detachably attachable to the machine 4 by the fact that thereat, in the fastening position I, the intermediate and upper thickened portion 14, respectively, of the wiper strips 9-9ⁿ are received in the appurtenant recesses 10-13 in the ring pieces 8-8² and thereby be clampable between the appurtenant wiper strip 9-9ⁿ and said compressed reception ring 25. The barbs 50 are arranged to, at least, obstruct pulling up of the wiper strips 9-9ⁿ in the active fastening position in the ring pieces 8-8².

A suction device of a type previously known *per se* may be arranged on the machine 4 to suck up scrub liquid that is accumulated efficiently inside said wiper strips 9-9ⁿ that work as suction protection strips and, as wipers, collect the liquid and retain the liquid inside the suction protection 2 until the machine has sucked it up and transported it, via the lines 22, 24, to the intended reception place, e.g., a tank intended for the receipt of dirty cleaning liquid.

The function of the invention is described in more detail and principally as follows.

The machine 4 shown in Figs. 1 and 1A, on which the brush for the scrubbing is not mounted and shown, has the suction protection 2 mounted and ready. Said wiper strips 9-9ⁿ are intended to all the time make sure that the water used for scrubbing does not get outside the periphery of the formed ring but is wiped together and sucked up with a suction pump (not shown). On the machine 4, there is shown the three suction places where the water 3 is sucked up from the substratum by the pump via the downwardly projecting hose parts 22 and further up through connecting suction hoses 24 of, e.g., dental kind, and further out through a hollow central shaft 51 that also works for driving the suction ring 2 and the brush 6.

In the drawing, there is shown how the three angle hoses 24 converge into the hollow rotatable shaft 51 in a spindle housing 52, which also works as support for the brush 7, which is to be mounted inside the mounted ring. On the spindle housing 52, there is a belt wheel 53 for driving the shaft assembly and the suction ring as well as a bearing mounting 54 for the shaft assembly as well as for fixation to the chassis of the cleaning machine.

The fastening studs 26 form spacer pins between mounted suction protections working as a suction ring 2 and interconnectable leaf springs 55 starting from the centre of the machine. The function of the bolted leaf springs 55 is to hold the suction ring 2 in place as well as to allow transferring the rotating motion of the shaft to the suction ring 2.

It is also shown how the upper ring 25 forms support for the divided ring pieces 8-8² and the spacers 26 for the leaf springs 55.

Finally, it should be mentioned that said ring 25 and ring pieces 8-8² are assembled by means of shown rivets 20 of plastic or by means of other suitable fastening members.

The function and nature of the invention are
5 clearly seen from the above mentioned, but the invention is naturally not limited to the embodiments described above and shown in the accompanying drawings. Modifications are feasible, particularly as for the nature of the different parts, or by using an equivalent technique, without departing from the
10 protection area of the invention, such as it is defined in the claims.

S248 P4PCT LG/KOE

C l a i m s

5 1. Device (1) for a suction protection (2) formed of a circular obstacle and intended for a floor clean machine (4) that operates with liquid (3) and has a scrubbing-brush (6) that is rotatably driven around a vertical shaft (5) by a motor and arranged and intended for the scrubbing of floors (7) and
10 similar surfaces, **characterized in** that the suction protection (2) is formed of ring pieces (8, 8¹, 8²) that are interconnectable into a ring shape and have wiper strips (9, 9¹, 9², 9ⁿ) carried thereby, that the wiper strips (9-9ⁿ) have a thickened upper fastening end portion (14) while the
15 remaining part (15) of the wiper strips (9-9ⁿ) has essentially a plate shape, that the wiper strips (9-9ⁿ) have essentially a T-shaped cross-sectional profile, said ring pieces (8, 8¹, 8²) having a number of recesses (10-13) distributed along the length extension (2) thereof, and that the wiper strips (9, 9ⁿ)
20 are received in and retained by the same.

2. Device according to claim 1, **characterized in** that the cross-sectional shape of said wiper strips (9-9ⁿ) and the circumferential shape of the recesses (10-13) are
25 essentially congruent to each other.

3. Device according to any one of the preceding claims 1-2, **characterized in** that the recesses (10-13) in the ring pieces (8-8²) are arranged to extend tangentially in
30 relation to the length extension (L) of the ring pieces.

4. Device according to claim 3, **characterized in** that most of the recesses are arranged to extend overlapping

each other with the inner portion (16) thereof arranged at a common circular arc (17), and with the respective outer portion (30) thereof in an outwardly angled position arranged at a common outer circular arc (19).

5

5. Device according to any one of the preceding claims 1-4, **characterized in** that ring pieces (8-8²) have fastening means (20) to be detachably anchored to a said floor clean machine (4).

10

6. Device according to claim 5, **characterized in** that projecting rivets, bolts (20) or other stud-shaped fastening members are arranged to project from the ring pieces (8-8²) or be detachably received in openings (21) in the ring pieces (8-8²).

15

7. Device according to any one of claims 5-6, **characterized in** that the machine (4) has a ring-shaped reception part (25) for detachable attachment of said ring pieces (8-8²) with the intermediate upper thickened portion (14) of the suction protection strips (9-9ⁿ) received in the appurtenant recesses (10-13) and clampable between the appurtenant suction protection strip (9-9ⁿ) and said reception ring (25).



25

8. Device according to any one of the preceding claims, **characterized in** that the ring pieces (8-8²) in question have a recess for detachable retention of a sleeve-shaped hose part (22) for the connection to a suction hose (24).

30

9. Device according to any one of claims 1-8, **characterized in** that the wiper strips (9-9ⁿ) have laterally

extending projections (50), preferably in the form of barbs at a distance from the upper end (9A) of the wiper strips, so that said barbs are arranged to, at least, obstruct pulling up of the wiper strips (9-9ⁿ) in the active fastening position in the
5 ring pieces (8-8²).

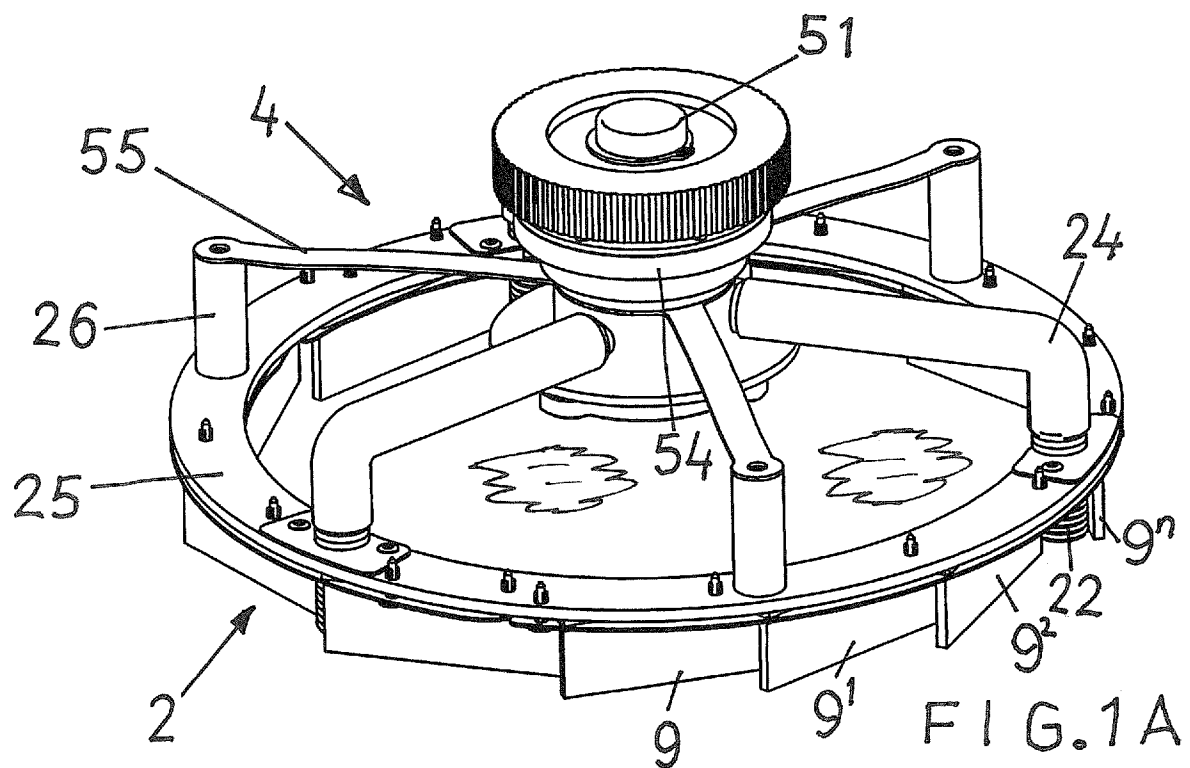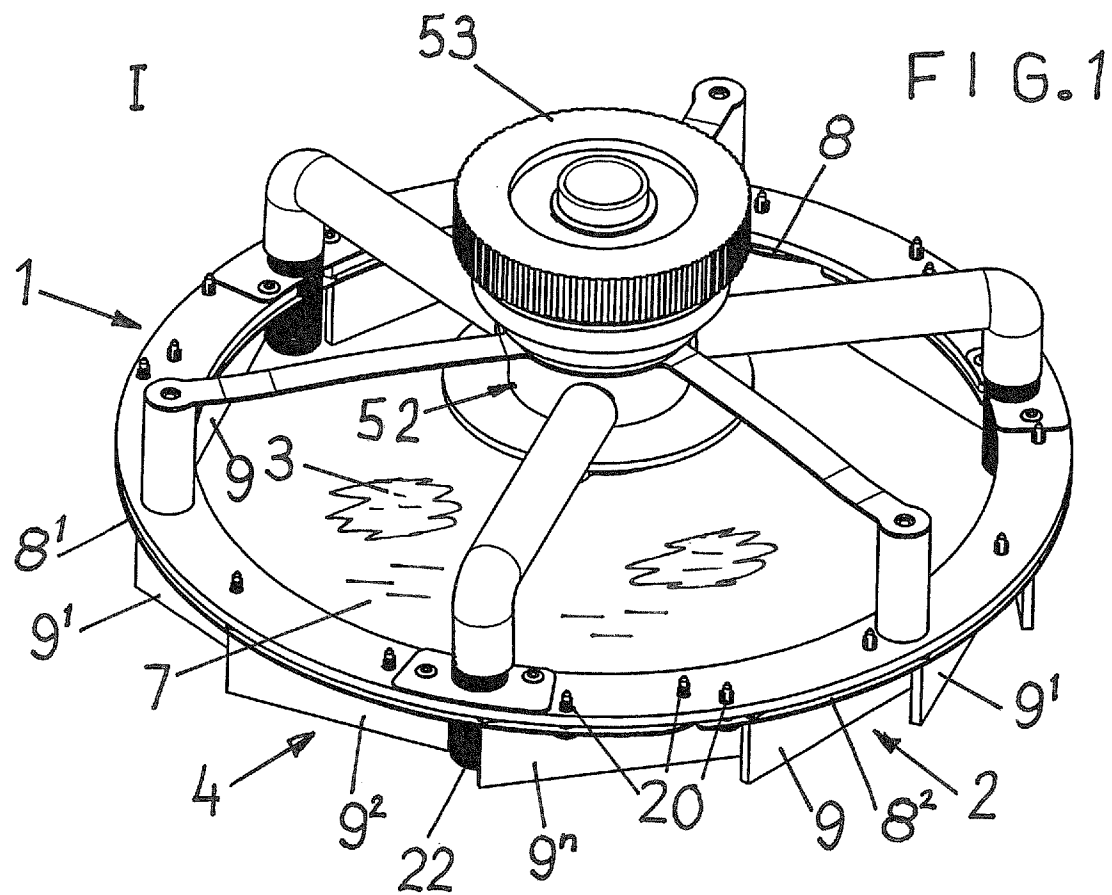

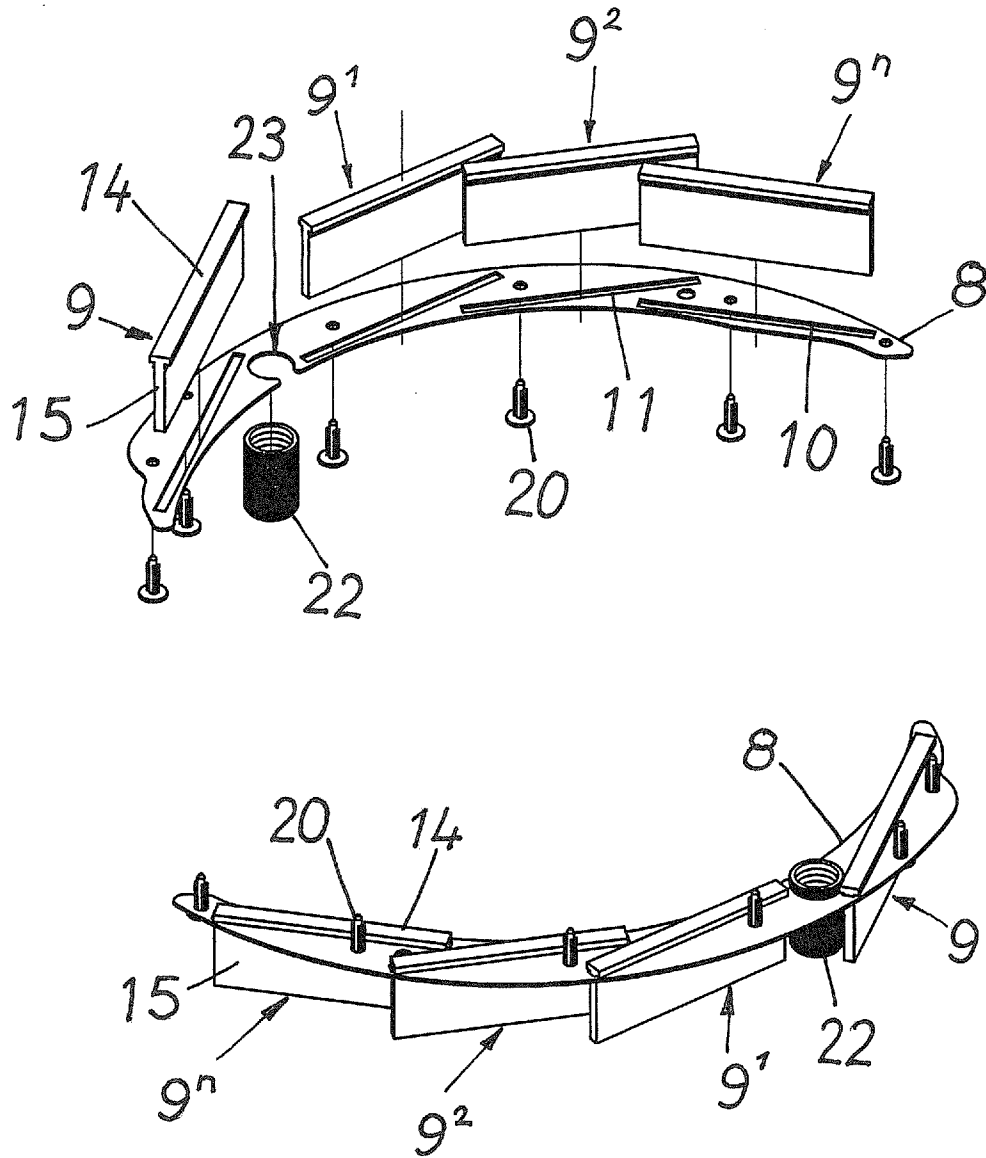


FIG. 2

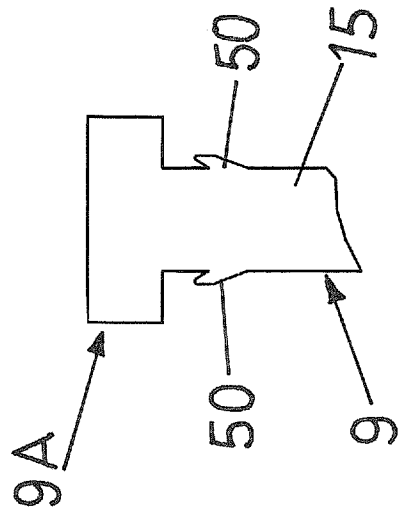
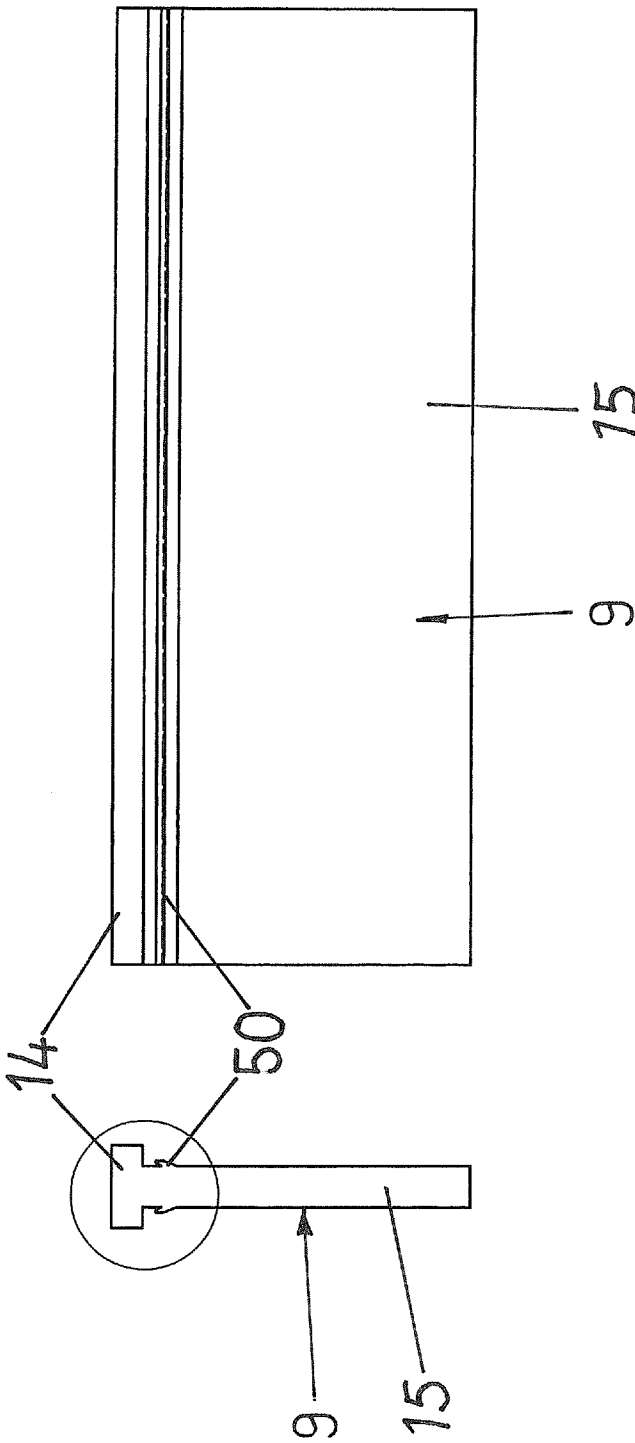


FIG. 2A

FIG.3

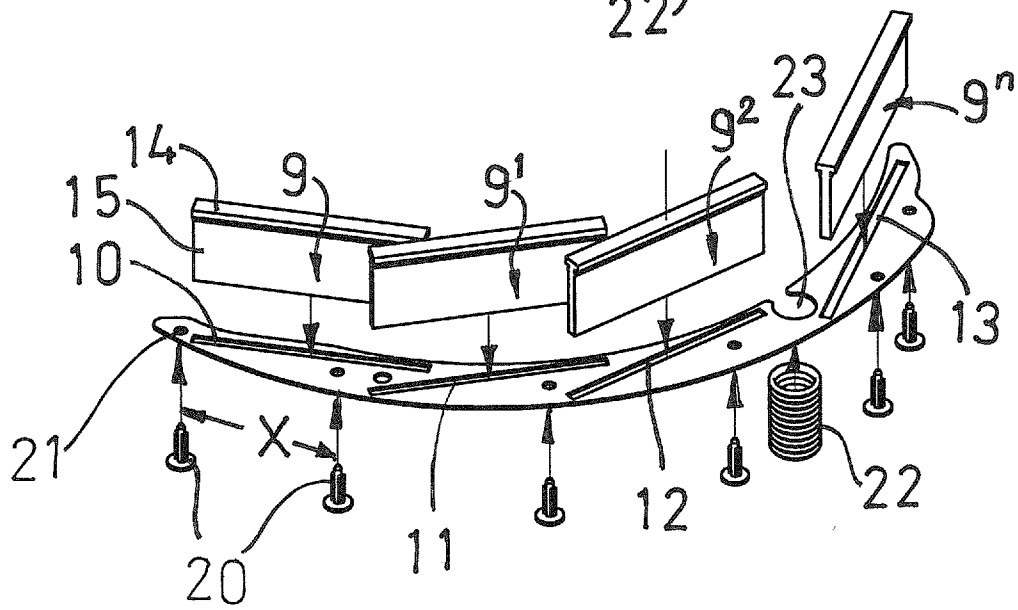
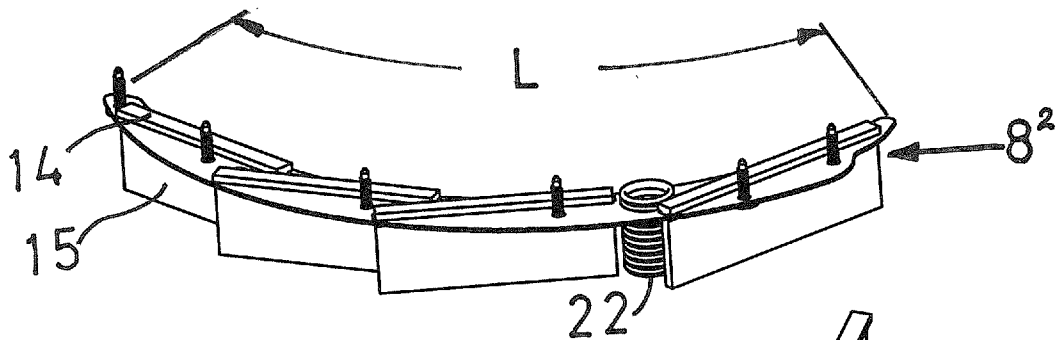


FIG.4

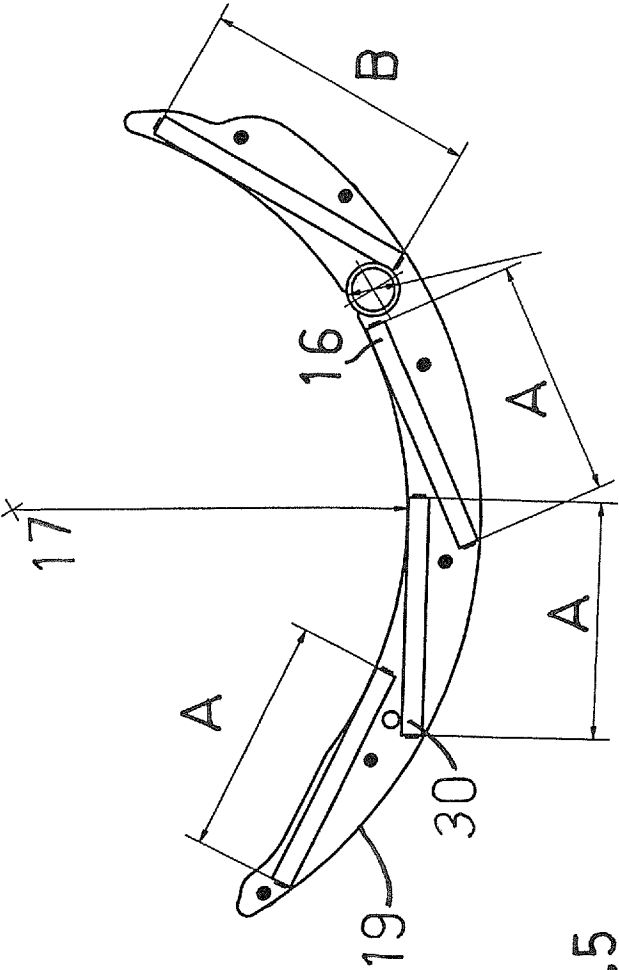


FIG. 5

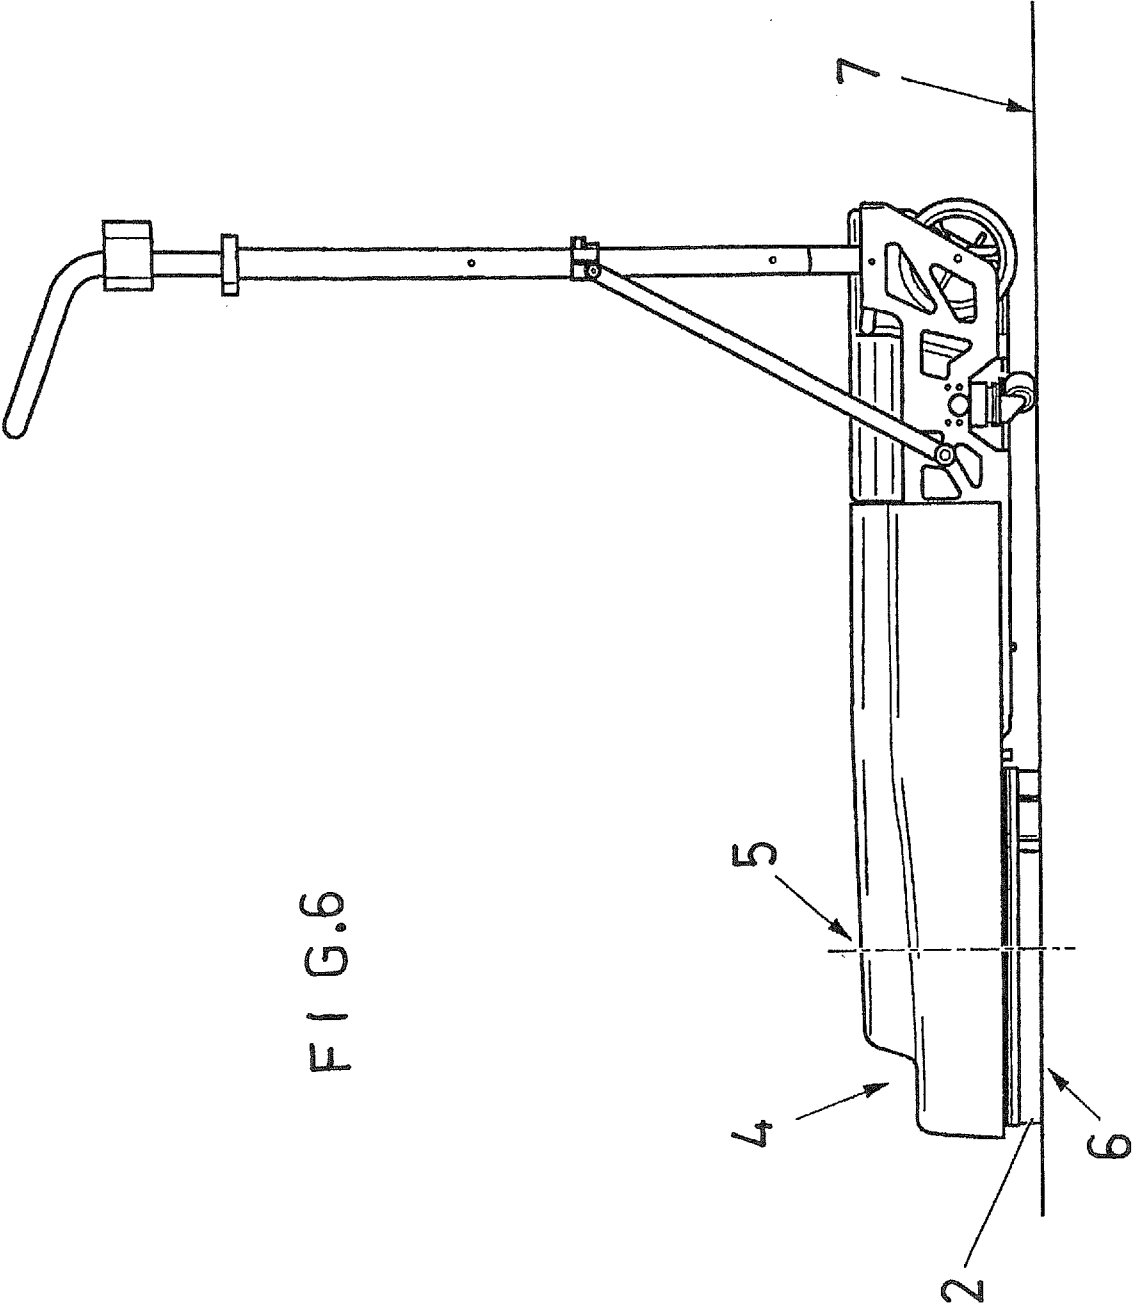


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2011/050159

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A47L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5706549 A (LEGATT DONALD J ET AL), 13 January 1998 (1998-01-13); abstract; figures --	1-9
A	WO 2007129973 A1 (SUPERCLEAN SCANDINAVIA AKTIEBO ET AL), 15 November 2007 (2007-11-15); abstract; figures --	1-9
A	GB 2459086 A (RENEWICK RICHARD WILLIAM ET AL), 14 October 2009 (2009-10-14); abstract; figure 3 -- -----	1-9



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

10-05-2011

Date of mailing of the international search report

11-05-2011

Name and mailing address of the ISA/SE

Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer

Fredrik Timoteusson

Telephone No. + 46 8 782 25 00

Continuation of: second sheet

International Patent Classification (IPC)

A47L 11/293 (2006.01)

A47L 11/162 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se (English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se (Swedish version)

Use the application number as username. The password is **TUPBJEGOKJ**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SE2011/050159

US	5706549 A	13/01/1998	NONE		
WO	2007129973 A1	15/11/2007	SE	529868 C2	18/12/2007
GB	2459086 A	14/10/2009	NONE		