

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 2425496 T3**

(12) **Oversættelse af
europæisk patentskrift**

-
- (51) Int.Cl.: **H 01 R 13/627 (2006.01)** **H 01 R 13/625 (2006.01)** **H 01 R 13/635 (2006.01)**
H 01 R 13/646 (2011.01) **H 01 R 24/50 (2011.01)** **H 01 R 103/00 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2016-11-14**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2016-07-27**
- (86) Europæisk ansøgning nr.: **10716719.9**
- (86) Europæisk indleveringsdag: **2010-04-29**
- (87) Den europæiske ansøgnings publiceringsdag: **2012-03-07**
- (86) International ansøgning nr.: **US2010032888**
- (87) Internationalt publikationsnr.: **WO2010127065**
- (30) Prioritet: **2009-04-30 US 433302**
- (84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**
- (73) Patenthaver: **Corning Gilbert Inc., 5310 Camelback Road, Glendale, AZ 85301, USA**
- (72) Opfinder: **PAULUS, Eric J, 4050 E. Weaver Road, Phoenix, Arizona 85050, USA**
- (74) Fuldmægtig i Danmark: **RWS Group, Europa House, Chiltern Park, Chiltern Hill, Chalfont St Peter, Bucks SL9 9FG, Storbritannien**
- (54) Benævnelse: **KONNEKTOR MED LAV MODSTAND TIL TRYKT KREDSLØBSPLADE**
- (56) Fremdragne publikationer:
EP-A2- 0 971 456
US-A- 4 211 461
US-A- 4 368 940
US-A- 4 743 205
US-A- 6 164 977

DESCRIPTION

BACKGROUND OF THE INVENTION

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Nonprovisional Patent Application No. 12/433,302 filed on April 30, 2009 entitled, "Low Resistance Connector For Printed Circuit Board".

FIELD OF THE INVENTION

[0002] The present invention relates generally to low resistance connectors for printed circuit boards, and particularly to connectors that require lower resistance to unmate the connector from printed circuit boards and only when the unmating of the connector from the printed circuit board is desired.

TECHNICAL BACKGROUND

[0003] Coaxial connectors are used to connect with electrical connectors on printed circuit boards (PCBs). The electrical connectors on the PCBs are soldered to metallic traces on the PCBs, which in turn are laminated to the board material. Typical electrical connections between the PCB connector and coaxial connectors are of the push-pull type. These connections are known to cause a delamination of the soldered connections and the metallic traces on the PCBs themselves when the connectors are unmated due to the typically higher resistance required to unmate them.

[0004] Prior coaxial connectors used on PCBs have attempted to solve this problem by making the connection between the coaxial cable and the electrical connector easier to unmate (easier to pull), but that allowed the coaxial cable to become unmated when it was not desired, causing an unwanted interruption of the electrical systems.

[0005] It would be desirable therefore to provide an electrical connector that can be used on PCBs that allows for easy unmating of the connector only at desired times EP-A-0971456 discloses a connector according to the preamble of claim 1 and according to the preamble of claim 7.

SUMMARY OF THE INVENTION

[0006] Disclosed herein is an electrical connector: according to claim 1 for a printed circuit board that includes a main body having a forward portion and a rearward portion, a front end and a back end and an opening extending therebetween, the front end disposed on the forward portion and the back end disposed on the rearward portion; the forward portion having a generally circular cross section, the forward portion having at least one inclined surface extending from the front end to a middle portion of the forward portion, and at least one generally straight portion adjacent the inclined surface creating a ledge between the inclined surface and the straight portion.

[0007] In some embodiments, the electrical connector has two inclined surfaces, two generally straight portions and two ledges.

[0008] In some embodiments, there is a transition portion between the generally straight portion and the outer surface of the forward portion.

[0009] In another aspect, an electrical connector according to claim 7 is disclosed for connecting a printed circuit board and a coaxial cable that includes a first connector body having a forward portion and a rearward portion, a front end and a back end and an opening extending therebetween, the front end disposed on the forward portion and the back end disposed on the rearward portion, the forward portion having a generally circular cross section, the forward portion having at least one inclined surface extending from the front end to a middle portion of the forward portion, and at least one generally straight portion adjacent the inclined surface creating a ledge between the inclined surface and the straight portion and a second connector body

having an outer sleeve, the sleeve having a front end and a back end and an opening therebetween, the opening configured to receive at least a portion of the forward portion of the first connector body, the outer sleeve having a least one arm extending between the front end and a middle portion and configured to engage the inclined portion and ledge of the forward portion to prevent axial movement of the first and second connector bodies relative to one another when the first connector body is disposed in the second connector body opening.

[0010] Additional features and advantages of the invention will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from that description or recognized by practicing the invention as described herein, including the detailed description which follows, the claims, as well as the appended drawings.

[0011] It is to be understood that both the foregoing general description and the following detailed description present embodiments of the invention, and are intended to provide an overview or framework for understanding the nature and character of the invention as it is claimed. The accompanying drawings are included to provide a further understanding of the invention, and are incorporated into and constitute a part of this specification. The drawings illustrate various embodiments of the invention, and together with the description serve to explain the principles and operations of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Fig. 1 is a perspective view of one embodiment of an electrical connector according to the present invention in an unmated position;

Fig. 2 is a perspective view of the electrical connector of Fig. 1 in a partially engaged position;

Fig. 3 is a cross sectional view of the electrical connector of Fig. 1 in a fully engaged position;

Fig. 4 is a cross sectional view of the electrical connector of Fig. 1 with the two bodies slightly rotated relative to one another;

Fig. 5 is a cross sectional view of the electrical connector of Fig. 1 with the two bodies rotated relative to one another which allows the bodies to be separated with little force;

Fig. 6 is a cross sectional view of another embodiment of a second connector body of an electrical connector according to the present invention;

Fig. 7 is a cross sectional view of yet another embodiment of a second connector body of an electrical connector according to the present invention; and

Fig. 8 is a schematic of a PCB board that can be used with the electrical connector.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0013] Reference will now be made in detail to the present preferred embodiment(s) of the invention, examples of which are illustrated in the accompanying drawings. Whenever possible, the same reference numerals will be used throughout the drawings to refer to the same or like parts.

[0014] Referring to FIGS. 1 and 2, an electrical connector **10** has a first connector body **12** and a second connector body **14**. The first connector body **12** has a forward portion **16** and a rearward portion **18**. The forward portion **16** has a front end **20** and the rearward portion **18** has a back end **22**, with an opening **24** extending therebetween. The forward portion **16** has a generally circular cross section with at least one inclined surface **26** extending from the front end **20** toward a middle portion **28** of the front portion **16**. The inclined surface **26** inclines toward the outer surface **30** of first connector body **12** from the front end **20**. The inclined surface **26** transitions into the outer surface **30**, where there is a generally straight portion **32** that creates a ledge **34** between the generally straight portion **32** and outer surface **30**, that in turn is adjacent the inclined surface **26**. As illustrated in the figures, there are preferably two inclined surfaces **26**, two generally straight portions **32**, and two ledges **34**. However, only one, or more, may be present and still come within the scope of the invention.

[0015] The generally straight portion **32** transitions into the outer surface **30** of the first connector body **12** at transition portions **36** at either end of the generally straight portion **32**. The transition portions **36** have a radius that is preferably different from the diameter of the outer surface **30** of the first connector body **12**. Preferably, the radius of the transition portion **36** is about 0.025 inches, but could range anywhere from 0.00 inches to 0.050 inches. The radius of the transition portion **36** is important for the operation of the electrical connector **10**, as described in more detail below. It should also be noted that the radius and range of the radius can vary with size of the connector.

[0016] The rearward portion **18** of first connector body **12** also has a generally circular cross section and has a diameter that is generally smaller than that of the forward portion **16**. However the diameter of rearward portion **18** may also be the same as or larger than the radius of the forward portion **16**. As is best illustrated in Fig. 3, the first connector body **12** may also have a center contact **40** and a dielectric member **42** to hold and center the center contact **40**. The back end **22** of rearward portion **18** of the first connector body **12** and the center contact **40** are soldered to the PCB as is known in the art. For example as illustrated in Fig. 8, a PCB **90** is illustrated. The PCB **90** has an opening **92** into which the center contact **40** is soldered so that it makes contact with the signal metallization **94** and the back end **22** is soldered to the ground metallization **96**. The metallizations **94,96** are then electrically connected to metal traces.

[0017] The electrical connector **10** also includes the second connector body **14**. Second connector body **14** has an outer sleeve **60** with a front end **62** and a back end **64** and an opening **66** extending therebetween. The outer sleeve **60** may be knurled or grooved to assist in gripping the second connector body **14**. The second connector body **14** has a middle portion **68**, where two cantilevered arms **70** extend toward the front end **62**. The arms **70** are essentially a portion of the outer sleeve, as the arms **70** have the same outer diameter as the remainder of the outer sleeve **60** and are defined by two slots **72** extending from the front end **62** to the middle portion **68**. The opening **66** preferably has two portions, a front inner portion **74** and a rear inner portion **76**. See Fig. 3. The front inner portion **74** has a first diameter that is larger than the second diameter of the rear inner portion **76**, thereby creating a forward facing surface **78** in the middle portion **68**. The rear inner portion **76** is configured to receive a cable adapter, center contact and dielectric **80**. The cable adapter, center contact and dielectric **80** are standard parts, known to those of skill in the art. The second connector body **14** is attached to a cable (not shown) and the cable adapter in a standard way.

[0018] The arms **70** are, by their nature, flexible and are able to flex outward (away from the opening **66**). The arms **70** preferably have at the front end **82** a downward extending projections **84** (and, in particular, rearward facing surfaces **88**) that engage the ledge **34** of the first connector body **12**. Preferably, the arms **70** also have a chamfered portion **86** on the front end **82** to assist in guiding the arms **70** onto the at least one inclined surface **26**. As the forward portion **16** of first connector body portion **12** is inserted into the opening **66** of the second connector body **14**, the arms **70** engage the inclined surface **26** (see Fig. 2) and are flexed outwardly. As the two connector bodies are moved relative to one another, the arms **70** are flexed further outward until the downward extending projections **84** go over the ledge **34** and make contact with the generally straight portion **32**. The engagement of the downward extending projections **84** with the ledge **34** prevents the second connector body **14** from being pulled axially away from the first connector body **12**.

[0019] With the ledge **34** and the rearward facing surfaces **88** of downward extending projections **84** engaging one another, the two connector bodies **12,14** cannot be pulled apart and the force required to connect them to one another is very low. To unmate the first and second connector bodies **12,14**, the user must merely rotate the connector bodies **12,14** relative to one another. As illustrated in Fig. 3, the two connector bodies **12,14** are fully engaged. Fig. 4 illustrates that the two connector bodies **12,14** have begun to be rotated relative to one another. As the arms **70** rotate and move along the generally straight portion **32**, the arms **70** begin to flex outward. As the arms **70** approach the transition portions **36**, the arms **70** flex outwardly even more. The larger the radius of the transition portions **36**, the easier the arms **70** move from the generally straight portion **32** to the outer surface **30**. When the arms **70** make contact with the outer surface **30** that has a constant radius (see Fig. 5), the second connector body **14** can be moved axially relative to the first connector body **12** and unmated with little force (generally limited to the friction of the downward extending projections **84** on the first connector body **12**).

[0020] An alternative embodiment of a second connector body **114** is illustrated in Fig. 6. The second connector body **114** is similar to the second connector body **14** discussed above, but has an elastomeric gasket **120** that engages the forward facing surface **178** in the middle portion **168**. The elastomeric gasket **120** is preferably impregnated with metallic particles to assist in preventing leakage of the electrical signal from the connector. The elastomeric gasket **120** allows the connector to be sealed against the elements when the first connector body is inserted into the opening **166** and the front end of the first connector body engages the elastomeric gasket **120** and compresses it against the forward facing surface **178**.

[0021] As illustrated in FIGS. 3-5 above, the ledge **34** and the rearward facing surfaces **88** of downward extending projections **84** of connector **10** are illustrated as being perpendicular to its axial axis. However, it is possible that the ledge **34** and the rearward facing surfaces **88** of downward extending projections **84** are slanted in a rearward direction to allow for easier engagement of the

ledge **34** by the rearward facing surfaces of downward extending projections **84**. For example, as illustrated in Fig. 6, rearward facing surfaces **188** of downward extending projections **184** have an angle other than 90 degrees with the front inner portion **174** (the ledge **34** would have a corresponding angle, but is not illustrated). Such a configuration compensates for any variations in the tolerances of the first and second connector bodies.

[0022] Another alternative embodiment of a second connector body **214** is illustrated in Fig. 7. The second connector body **214** has a wave spring washer **220** also disposed against the forward facing surface **278** in the middle portion **268**, where it further limits the axial movement of the connector bodies relative to one another.

[0023] It will be apparent to those skilled in the art that various modifications and variations can be made to the present invention without departing from the scope of the invention. Thus it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [US43330209A \[0001\]](#)
- [EP0971456A \[0005\]](#)

Patentkrav

1. Konnektor (10) til en trykt kredsløbsplade (90), som omfatter:

5 et hovedlegeme (12), der har en forreste del (16) med en ydre overflade (30) og en bageste del (18), en forende (20) og en bagende (22) og en åbning (24), som udstrækker sig derimellem, idet forenden (20) er anbragt på den forreste del (16), og bagenden (22) er anbragt på den bageste del (16); idet den
10 forreste del (16) har et i almindelighed cirkulært tværsnit; idet den forreste del (16) har i det mindste én hældende overflade (26), der udstrækker sig fra forenden (20) til en midterste del (28) af den forreste del (16), kendetegnet ved, at
15 den i det mindste ene, hældende overflade (26) hælder hen imod og går over i den ydre overflade (30) imellem forenden (20) og den midterste del (28) af den forreste del (16); og ved, at i det mindste én, i almindelighed ret del (32), der er hosliggende til dér, hvor den hældende overflade (26) går over
20 i den ydre overflade (30), skaber en afsats (34) imellem dér, hvor den hældende overflade (26) går over i den ydre overflade (30) og den rette del (32), og hvori den rette del (32) går over i den ydre overflade (30) på den forreste del (16) af hovedlegemet (12) ved overgangsdele (36).

25

2. Konnektor ifølge krav 1, hvori den forreste del (16) har en ydre overflade, der har en første, ydre diameter, og den bageste del (18) har en ydre overflade, der har en anden diameter, idet den første diameter er forskellig fra den anden
30 diameter.

3. Konnektor ifølge krav 1, hvori den i almindelighed rette del (32) og afsatsen (34) har en vinkel på andet end 90 grader.

35

4. Konnektor ifølge krav 1, hvori overgangsdelen (36) har en forud bestemt radius.

5. Konnektor ifølge krav 1, hvori den bageste del (18) kan forbindes elektrisk med forbindelsespunkter til printbaner på en trykt kredsløbsplade.

5 6. Konnektor ifølge krav 1, hvori åbningen (24) er konfigureret til at modtage en hunkabelkonnektor.

7. Elektrisk konnektor (10) til at forbinde en trykt kredsløbsplade (90) og et koaksialkabel, som omfatter:

10 et første konnektorlegeme (12), der har en forreste del (16) og en bageste del (18), en forende (20) og en bagende (22) og en åbning (24), som udstrækker sig derimellem, idet forenden (20) er anbragt på den forreste del (16), og bagenden (22) er anbragt på den bageste del (18), idet den forreste del (16) har et i almindelighed cirkulært tværsnit, idet den forreste del (16) har i det mindste én hældende overflade (26), der udstrækker sig fra forenden (20) til en midterste del (28) af den forreste del, og i det mindste én, i almindelighed ret del (32), der er hosliggende til den hældende overflade (26), skaber en afsats (34) imellem den hældende overflade (26) og den rette del (32); og

15 et andet konnektorlegeme (14, 114, 214);

kendetegnet ved, at

25 det andet konnektorlegeme (14, 114, 214) har en ydre manchete (60), idet manchette (60) har en forende (62) og en bagende (64) og en åbning (66) derimellem, idet åbningen (66) er konfigureret til at modtage i det mindste en del af den forreste del (16) af det første konnektorlegeme (12), idet den ydre manchete (60) har i det mindste én arm (70), der udstrækker sig imellem forenden (62) og en midterste del (68) og er konfigureret til at gribe ind med den hældende del (26) og afsatsen (34) fra den forreste del (16) for at forhindre aksial bevægelse af det første og det andet konnektorlegeme i forhold til hinanden, når det første konnektorlegeme (12) er anbragt i åbningen (66) i det andet konnektorlegeme.

8. Elektrisk konnektor ifølge krav 7, hvori det at rotere det andet konnektorlegeme (14, 114, 214) i forhold til det

første konnektorlegeme (12) bevæger den i det mindste ene arm (70) fra den i det mindste ene, i almindelighed rette del (32) og afsats (34), hvorved det første og det andet konnektorlegeme kan blive bevæget i en aksial retning væk fra hinanden.

9. Elektrisk konnektor ifølge krav 7, hvori det andet konnektorlegeme (14, 114, 214) har en fremadvendt overflade (78), der udstrækker sig i det mindste delvis omkring åbningen (55) og er anbragt imellem forenden (62) og bagenden (64) og griber ind med forenden (20) af det første konnektorlegeme (12), når det første konnektorlegeme (12) er fuldstændigt indsat ind i det andet konnektorlegeme (14, 114, 214).

10. Elektrisk konnektor ifølge krav 7, hvori det første konnektorlegeme (12) indbefatter en forsænket del, der er omgivende omkring forenden (20), og et elastisk element, der er anbragt deri.

11. Elektrisk konnektor ifølge krav 7, hvori det elastiske element indbefatter metalliske partikler for at forhindre lækage af signaler.

12. Elektrisk konnektor ifølge krav 7, hvori armen (70) indbefatter en nedad udstrakt del (4) til at gribe ind med afsatsen (34).

13. Elektrisk konnektor ifølge krav 7, der yderligere omfatter en fjederbølgeskive (220), som er anbragt imellem det første konnektorlegeme og det andet konnektorlegeme.

DRAWINGS

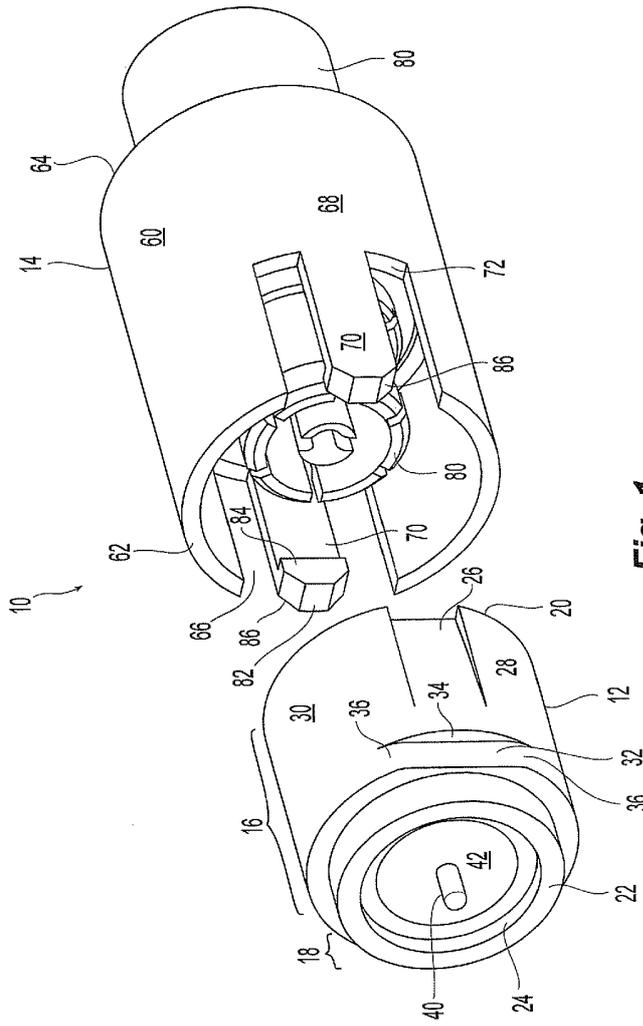


Fig. 1

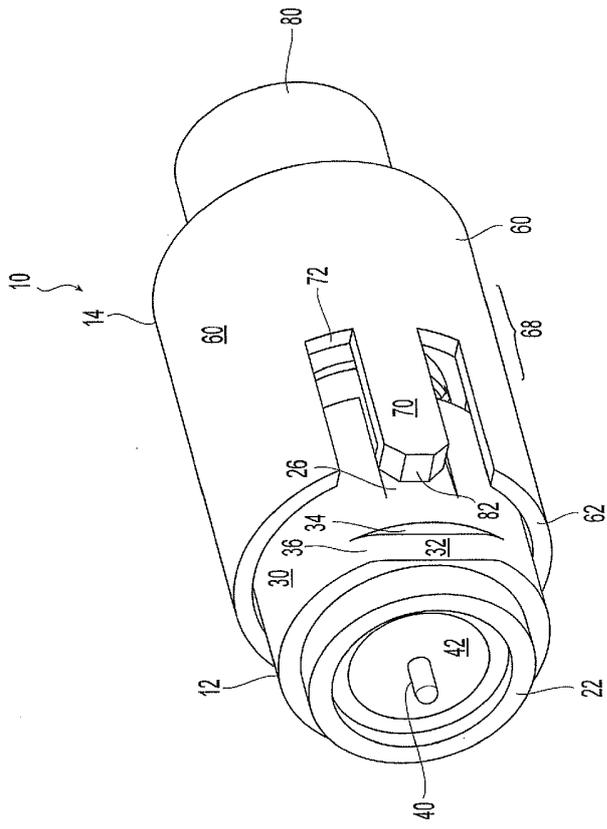


Fig. 2

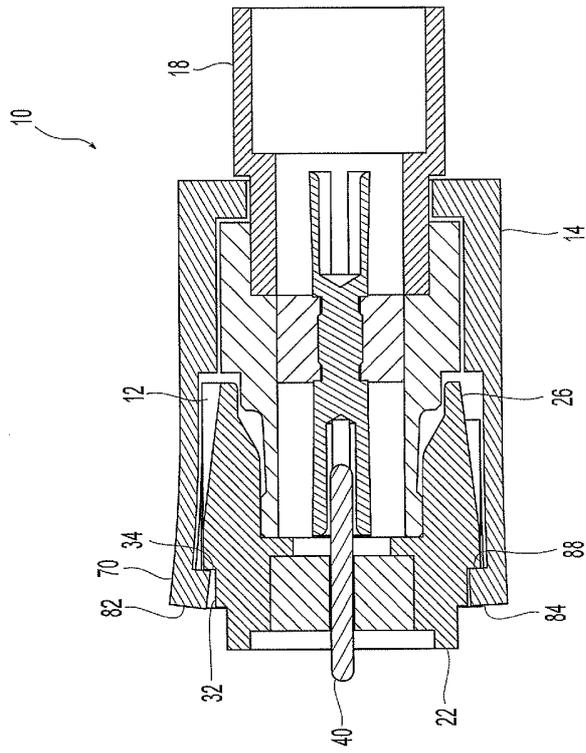


Fig. 4

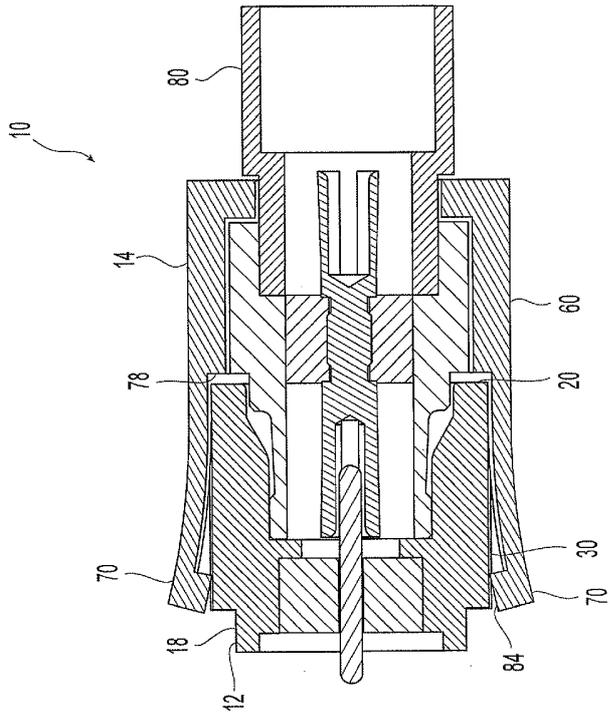


Fig. 5

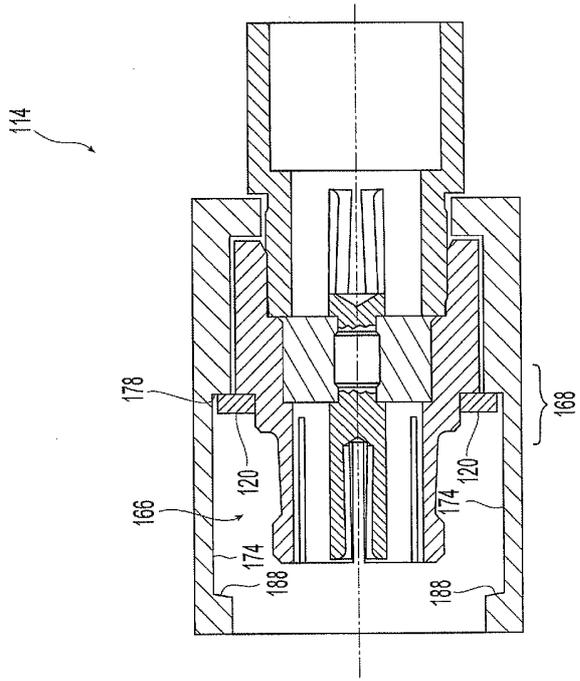


Fig. 6

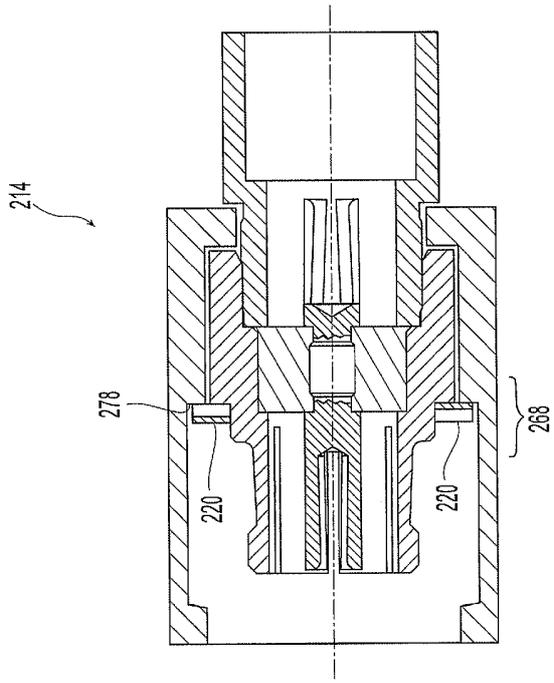


Fig. 7

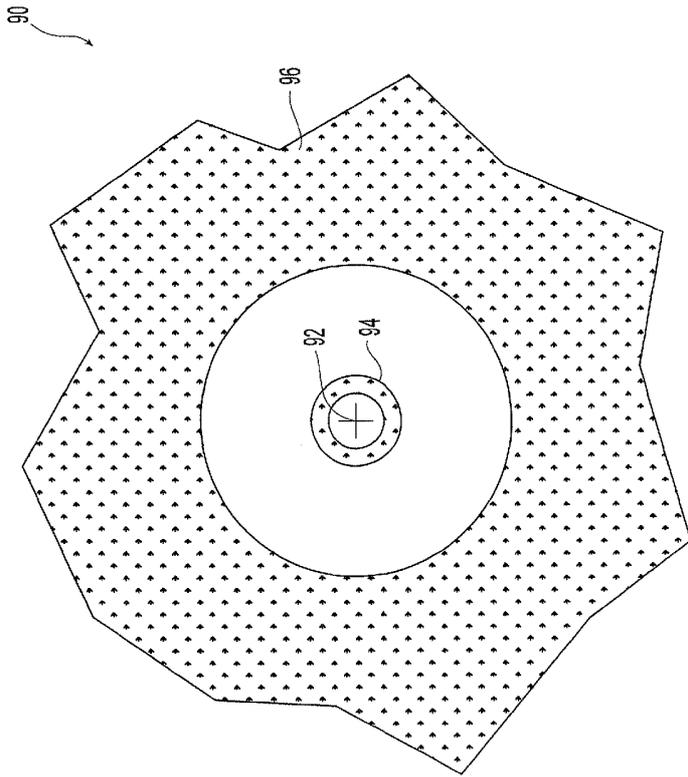


Fig. 8