(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 June 2015 (18.06.2015)

WIPO | PCT

(10) International Publication Number
WO 2015/089374 A1

(51) International Patent Classification:
E21B 33/12 (2006.01) *E21B 34/06* (2006.01)

(21) International Application Number:
PCT/US2014/069965

(22) International Filing Date:
12 December 2014 (12.12.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/106,467 13 December 2013 (13.12.2013) US

(71) Applicant *(for CA only)*: **SCHLUMBERGER CANADA LIMITED** [CA/CA]; 125 - 9 Avenue SE, Calgary, Alberta T2G 0P6 (CA).

(71) Applicant *(for FR only)*: **SERVICES PETROLIERS SCHLUMBERGER** [FR/FR]; 42 rue Saint Dominique, F-75007 Paris (FR).

(71) Applicant *(for GB, JP, NL only)*: **SCHLUMBERGER HOLDINGS LIMITED** [GB/GB]; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola 1110 (VG).

(71) Applicant *(for all designated States except AE, AO, BH, CA, CN, FR, GB, GH, IN, JP, LY, MA, MZ, NA, NG, NL, PH, SD, SY, US, VN)*: **SCHLUMBERGER TECHNOLOGY B.V.** [NL/NL]; Parkstraat 83-89, NL-2514 JG The Hague (NL).

(71) Applicant *(for AE, AO, BF, BH, BJ, CF, CG, CI, CM, CN, GA, GH, GN, GQ, GW, IN, KM, LY, MA, ML, MR, MZ, NA, NE, NG, PH, SD, SN, SY, TD, TG, VN only)*: **PRAD RESEARCH AND DEVELOPMENT LIMITED** [GB/GB]; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola 1110 (VG).

(71) Applicant *(for US only)*: **SCHLUMBERGER TECHNOLOGY CORPORATION** [US/US]; 300 Schlumberger Drive, Sugar Land, Texas 77478 (US).

(72) Inventors: **MILH, Patrice**; Maison n°20, 11 rte de Doullens, F-80100 Abbeville (FR). **CORRE, Pierre-Yves**; 1 Impasse Henry Dunant, F-76260 Eu (FR).

(74) Agents: **KINCAID, Kenneth L.** et al.; 10001 Richmond Avenue, IP Administration Center of Excellence, Room 4720, Houston, Texas 77042 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(54) Title: ANTI-CREEP RINGS AND CONFIGURATIONS FOR SINGLE PACKERS

FIG. 1

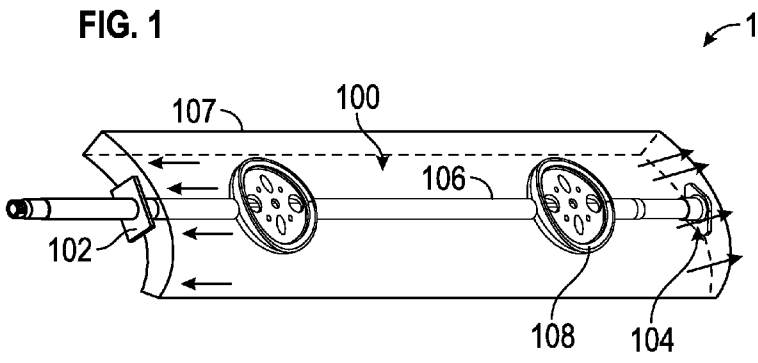

(57) Abstract: In one example a tool is provided, having a body configured to expand from a first diameter to a second diameter, an outer covering for the body, the outer surface having at least one inlet to accept fluid through the outer covering into the body, the outer covering to outer proximate ends and at least two anti-creep rings abutting the outer covering at each of the outer proximate ends, wherein the anti-creep rings constrain the outer covering from movement.

WO 2015/089374 A1

ANTI-CREEP RINGS AND CONFIGURATIONS FOR SINGLE PACKERS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Non-Provisional Patent Application Serial Number 14/106467 filed on December 13, 2013, the contents of which are incorporated herein for all purposes.

FIELD OF THE INVENTION

[0002] Aspects relate to downhole drilling apparatus and methods. More specifically, aspects relate to apparatus to prevent creep of materials in single packers used in downhole drilling and single packers that incorporate apparatus to limit movement of outer coverings for the single packers.

BACKGROUND INFORMATION

[0003] Testing formation fluids in downhole conditions can be a challenging endeavor that presents many problems for engineers, drillers and scientists. To aid in the testing of such formation fluids, different apparatus may be used to accomplish the testing, including probes and single packer apparatus. Single packer apparatus have many advantages compared to standard testing devices. Single packer apparatus may be used to separate different segments of the wellbore so testing may be performed at a variety of pressures, for example.

[0004] In order to separate the different segments of a wellbore, the single packer device is positioned downhole at a desired elevation. The single packer, during placement, is generally in a minimum diameter configuration to allow the single packer to be fit and moved within the wellbore. Once the single packer is at the desired elevation, the single packer is expanded such that the outer diameter of the single

packer contacts the inner diameter of the wellbore. The expansion may occur, for example, through actuation of an internal mandrel.

[0005] Expansion of the single packer can lead to significant problems, due to many issues. Environmental issues can cause stresses on different sections of the single packer system and thus, it would be desirable to eliminate such stresses.

[0006] The increase in diameter of the single packer system can cause the outer covering of the single packer to undergo significant stresses. A potential failure of the outer covering can compromise not only sampling efficiency, but also safety of the single packer as the outer covering is used as a bearing surface.

[0007] Currently, there is no protection from potential failure of the outer covering of a single packer, especially at the anterior ends of the single packer. Such ends are prone to over expansion as the single packer system ends have stress concentrations at the ends of the configurations.

SUMMARY

[0008] The following summary is but an example and should not be considered to limit the aspects described and claimed. In one example embodiment, a tool is provided having a body configured to expand from a first diameter to a second diameter, an outer covering for the body, the outer surface having at least one inlet to accept fluid through the outer covering into the body, the outer covering at outer proximate ends and at least two anti-creep rings abutting the outer covering at each of the outer proximate ends, wherein the anti-creep rings constrain the outer covering from movement.

[0009] In another example embodiment, a method is provided. In the method for sampling a fluid, aspects provide for placing a tool in a wellbore, lowering the tool in the wellbore to a desired elevation and expanding a diameter of the tool to an expanded diameter such that at the expanded diameter, the tool abuts a formation surface,

wherein during the expanding of the diameter of the tool, an outer covering is retained in a position by at least two anti-creep rings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a perspective view of an inner section of a single packer with anti-creep rings installed.

[0011] FIG. 2 is a first example embodiment of an anti-creep ring for a single packer.

[0012] FIG. 3 is a second example embodiment of an anti-creep ring for a single packer.

[0013] FIG. 4 is a third example embodiment of an anti-creep ring for a single packer.

[0014] FIG. 5 is an overall assembly drawing of an assembled single packer system with anti-creep rings removed for ease of illustration.

DETAILED DESCRIPTION

[0015] Referring to FIG. 1, a perspective view of an exterior section **100** of a single packer **101** is provided. Some sections of the exterior section **100** as well as interior components have been eliminated for ease of illustration. The exterior section **100** is configured with a first anti-creep ring **102** and a second anti-creep ring **104**. The exterior section **100** is retained on respective ends by the first anti-creep ring **102** and the second anti-creep ring **104**. While the rubber bladder **106** has an opening for two sample inlets **108**, other configurations may be used, including guard inlets and combinations of sample and guard inlets.

[0016] The first anti-creep ring **102** and the second anti-creep ring **104** are positioned on respective ends of the exterior section **100** of the single packer **101**. A flow line **106**

is provided throughout the exterior section **100**. The flow line **106** accepts flow from either a guard flow inlet or a sample flow inlet **108**, multiple guard flow inlets, multiple sample flow inlets and/or combinations of such inlets. The flow line **106** may be segmented into different sections where guard flow is separated from sample flow.

[0017] As provided by the arrows, during expansion, the materials provided for use in the exterior section **100** expand. Without any retaining capability, the section **100** will continue to expand and eventually rupture. To prevent excessive expansion, the first anti-creep ring **102** and the second anti-creep ring **104** retain the section into a predefined limit.

[0018] The exterior section **100**, in the illustrated embodiment, is made of a rubber material to allow for expansion and contraction. Expansion and contraction of the single packer **101** may be accomplished, for example, by a mandrel. Due to the expected service conditions of single packer systems, high pressure and temperature conditions, the rubber used for the exterior section **100** of the single packer **101** creeps. This behavior decreases the number of cycles that the packer **101** can achieve. In order to increase the packer service time capability, the first anti-creep ring **102** and the second anti-creep ring **104** are designed and welded at the end of the flow line **106**. Due to the first anti-creep ring **102** and the second anti-creep ring **104** creeping behavior is stopped along the flowlines. The resulting anti-creep system ensures that the bonding interface between tubes and rubber are protected and packer resistance to wear is increased. Different anti-creep ring shapes may be used. In alternative configurations, the anti-creep rings may be mechanically connected and provided with a capability to slide over a predefined distance. Different anti-creep shapes are provided in FIGS. 2, 3 and 4. The drains **108** and the flow line **106** may be placed along an axis that is parallel to an outside edge **107** of the single packer **101**.

[0019] Referring to FIG. 2, a round shape of an anti-creep ring is illustrated. Referring to FIG. 3, a rounded diamond shape anti-creep ring is illustrated. Referring to FIG. 4, a

rectangular shape anti-creep ring is illustrated. Each of the types of anti-creep rings provided in FIG. 2, FIG. 3 or FIG. 4 may be used in a single packer system **101**. The different shapes may be interchanged to provide different retention capabilities. Although the designs described are noted as "rings", the shapes that may be used may be varied. Ovals, boxes or other more complex shapes may be used.

[0020] The anti-creep rings provided in FIG. 2, FIG. 3 and FIG. 4 may be chosen to be made from various materials. In the illustrated embodiment, the materials are metallic to allow for a weld to the flow line **106** to occur.

[0021] Referring to FIG. 5, a perspective view of the single packer system **101** is illustrated. The single packer system **101** is placed downhole at a desired elevation in order to isolate a wellbore section or to sample fluid materials. The packer is transported through a conveyance to the desired downhole elevation. The conveyance may be a tractor, as a non-limiting embodiment. A mandrel is actuated such that the single packer system **101** is expanded from a first unexpanded diameter to a second expanded diameter. At the second expanded diameter, the drains **510** provided through the rubber layer/exterior section **100** are exposed to the surface of the formation. The drains **510** in FIG. 5 are placed over the inner section of the drains **108** of FIG. 1. Fluid may then be drawn into the single packer system **101**. In another example embodiment, expansion may be performed through accepting well fluid inside the packer through the use of a pump.

[0022] When the single packer **101** is inflated at high temperatures, the outer rubber layer **101** is squeezed between the borehole and the inner packer structure, which may be an expandable body. The outer rubber layer **101** tends to creep towards the packer extremities. Due to this creep, a sheer stress occurs between the internal flowline and rubber at the bonding interface. Leaks may occur at this junction, compromising overall packer integrity.

[0023] During expansion of the single packer, rotating tubes allow for the movement of flow lines **506** resulting from the different diameters. The rotating tubes **502** are connected to end caps **504** that contain passages that allow for fluid transmitted to and from the single packer.

[0024] In one example embodiment, a tool is disclosed having a body configured to expand from a first diameter to a second diameter, an outer covering for the body, the outer surface having at least one inlet to accept fluid through the outer covering into the body, the outer covering to outer proximate ends, and at least two anti-creep rings abutting the outer covering at each of the outer proximate ends, wherein the at least two anti-creep rings constrain the outer covering from movement.

[0025] In another example embodiment, the tool may further comprise at least one flow line connected to the at least one inlet.

[0026] In another example embodiment, the tool may be provided wherein the at least two anti-creep rings are placed in on a same axis as an axis for the at least one flow line.

[0027] In another example embodiment, the tool may provide a construction wherein the at least two anti-creep rings are welded to the at least one flow line.

[0028] In another example embodiment, the tool may be constructed wherein the at least two anti creep rings are at least one of circular, square, triangular, oval, diamond and rectangular in shape.

[0029] In a still further example embodiment the tool may further comprise at least mechanical ends, each of the mechanical ends configured to abut one end of the body, wherein each of the at least mechanical ends is configured connect to a downhole component.

[0030] In another example embodiment, the tool may be constructed wherein the at least one flow line is connected to at least one of the mechanical ends.

[0031] In another example embodiment, the tool may be constructed wherein the connection between the at least one flow is connected to the at least one of the mechanical ends through a swivel connection.

[0032] In a still further configuration, the tool may be constructed wherein the at least two anti-creep rings are made of a metal material.

[0033] In another example embodiment, a method for operating a tool is disclosed wherein the method comprises placing a tool in a wellbore, lowering the tool in the wellbore to a desired elevation, and expanding a diameter of the tool to an expanded diameter such that at the expanded diameter, the tool abuts a formation surface, wherein during the expanding of the diameter of the tool, an outer covering is retained in a position by at least two anti-creep rings.

[0034] The method may also further comprise sampling a fluid from the formation surface.

[0035] In another example embodiment, the method may further comprise transporting the fluid from the tool to a sample bottle.

[0036] In another example embodiment, the method may further comprise decreasing the diameter of the tool.

[0037] In another example embodiment, the method may further comprise removing the tool from the wellbore.

[0038] In another example embodiment, the tool may be constructed wherein the at least one inlet to accept fluid through the outer covering into the body is at least one

sample inlet and at least one guard inlet, wherein flow from the at least one sample inlet is separate from the one at least one sample inlet.

[0039] While the aspects have been described with respect to a limited number of embodiments, those skilled in the art, having benefit of the disclosure, will appreciate that other embodiments can be devised which do not depart from the scope of the disclosure herein.

WHAT IS CLAIMED IS:

1. A tool, comprising:

a body configured to expand from a first diameter to a second diameter;

an outer covering for the body, the outer surface having at least one inlet to accept fluid through the outer covering into the body, the outer covering to outer proximate ends; and

at least two anti-creep rings abutting the outer covering at each of the outer proximate ends, wherein the at least two anti-creep rings constrain the outer covering from movement.

2. The tool according to claim 1, further comprising:

at least one flow line connected to the at least one inlet.

3. The tool according to claim 2, wherein the at least two anti-creep rings are placed in on a same axis as an axis for the at least one flow line.

4. The tool according to claim 3, wherein the at least two anti-creep rings are welded to the at least one flow line.

5. The tool according to claim 3, wherein the at least two anti creep rings are at least one of circular, diamond, square, triangular and rectangular in shape for a portion of a body.

6. The tool according to claim 1, further comprising:

at least two mechanical ends, each of the mechanical ends configured to abut one end of the body, wherein each of the at least two mechanical ends is configured connect to a downhole component.

7. The tool according to claim 6, wherein the at least one flow line is connected to at least one of the mechanical ends.

8. The tool according to claim 7, wherein the connection between the at least one flow is connected to the at least one of the mechanical ends through a swivel connection.

9. The tool according to claim 1, wherein the at least two anti-creep rings are made of a metal material.

10. A method for operating a tool, comprising:
placing a tool in a wellbore;
lowering the tool in the wellbore to a desired elevation; and
expanding a diameter of the tool to an expanded diameter such that at the expanded diameter, the tool abuts a formation surface, wherein during the expanding of the diameter of the tool, an outer covering is retained in a position by at least two anti-creep rings.

11. The method according to claim 10, further comprising:
sampling a fluid from the formation surface.

12. The method according to claim 10, further comprising:
transporting the fluid from the tool to a sample bottle.

13. The method according to claim 12, further comprising:
decreasing the diameter of the tool.

14. The method according to claim 13, further comprising:
removing the tool from the wellbore.

15. The tool according to claim 1, wherein the at least one inlet to accept fluid through the outer covering into the body is at least one sample inlet and at least one guard inlet, wherein flow from the at least one sample inlet is separate from the one at least one sample inlet.

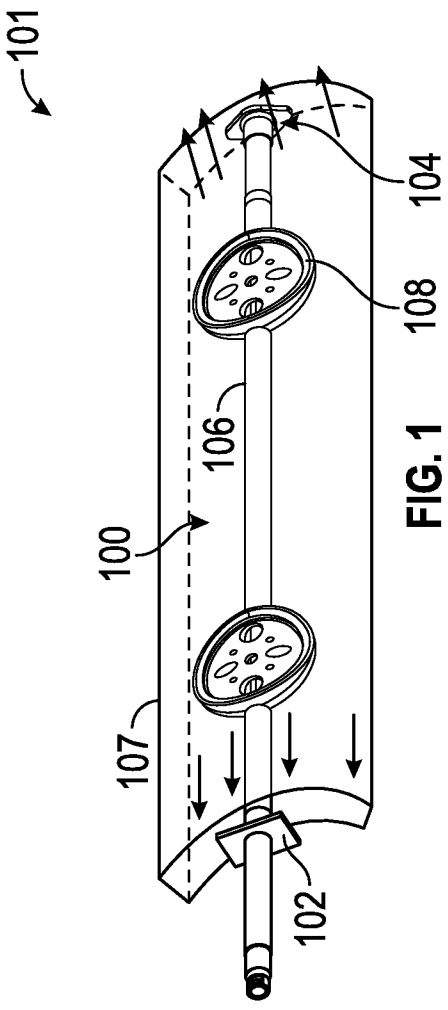


FIG. 1

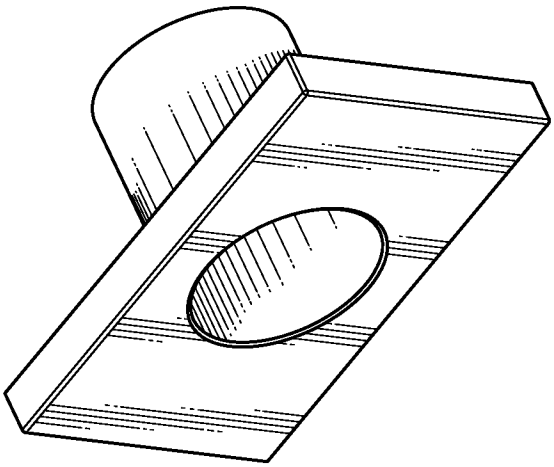


FIG. 4

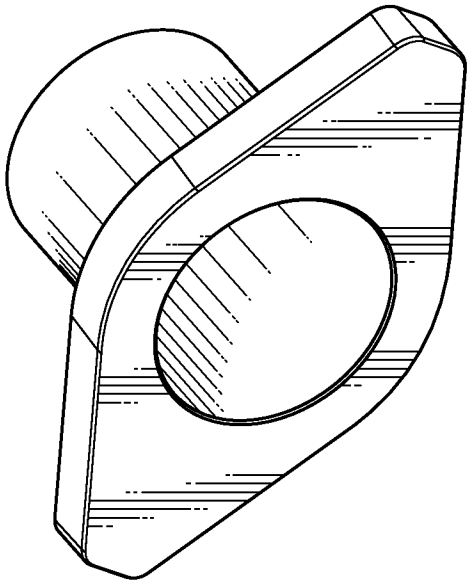


FIG. 3

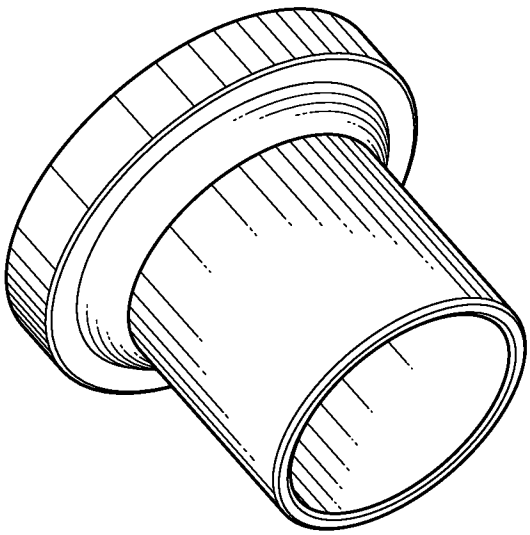


FIG. 2

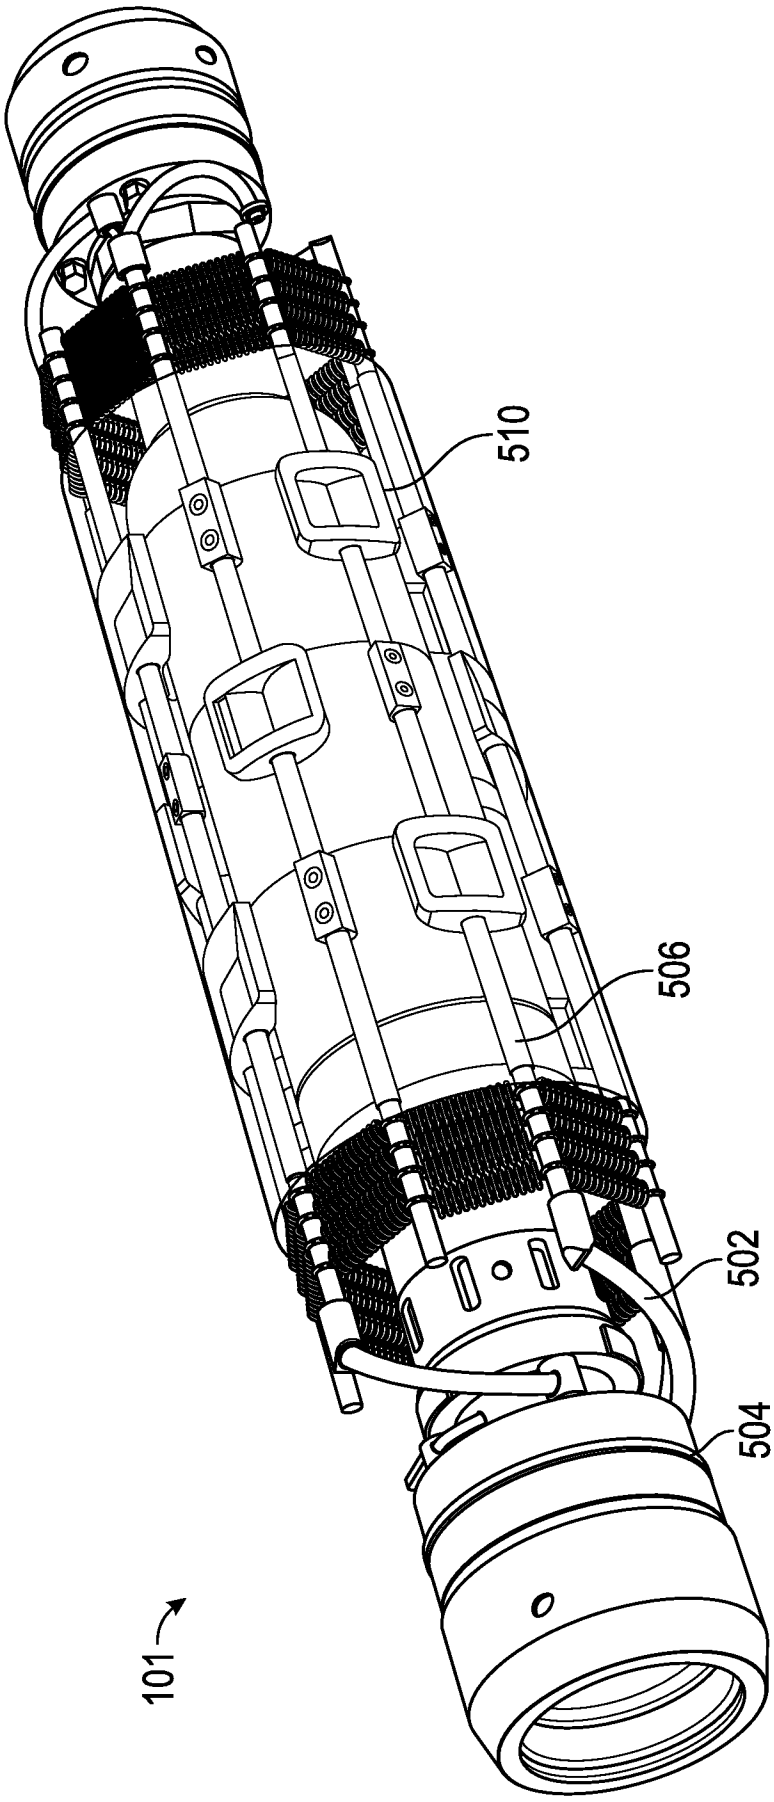


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/069965

A. CLASSIFICATION OF SUBJECT MATTER

E21B 33/12(2006.01)i, E21B 34/06(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
E21B 33/12; E21B 33/127; E21B 49/10; E21B 37/00; E21B 49/08; E21B 34/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: single packer, inlet, outer covering, anti-creep ring, restriction, movement and sampling

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2013-0306309 A1 (CORRE et al.) 21 November 2013 See paragraphs [0025]-[0032]; and figures 2-5.	1-15
Y	US 8413717 B2 (CORRE et al.) 09 April 2013 See column 6, lines 2-29 and figures 10-11.	1-15
A	US 7699124 B2 (CORRE et al.) 20 April 2010 See column 2, line 46-column 6, line 64 and figures 1-19.	1-15
A	EP 2307664 B1 (SERVICES PTROLIERS SCHLUMBERGER et al.) 22 May 2013 See claim 1.	1-15
A	US 7874356 B2 (CORRE et al.) 25 January 2011 See column 2, line 45-column 5, line 60 and figures 1-9.	1-15

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents,such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
03 April 2015 (03.04.2015)	**03 April 2015 (03.04.2015)**

Name and mailing address of the ISA/KR
International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea
Facsimile No. ++82 42 472 7140

Authorized officer
PARK, Tae Wook
Telephone No. +82-42-481-3405

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2014/069965

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013-0306309 A1	21/11/2013	AU 2009-294332 A1	25/03/2010
		AU 2009-294332 B2	19/09/2013
		CA 2736516 A1	25/03/2010
		EP 2329104 A1	08/06/2011
		RU 2011115213 A	27/10/2012
		RU 2503794 C2	10/01/2014
		US 2010-071898 A1	25/03/2010
		US 8490694 B2	23/07/2013
		WO 2010-032152 A1	25/03/2010
US 8413717 B2	09/04/2013	CA 2762035 A1	18/11/2010
		EP 2430286 A2	21/03/2012
		EP 2430286 A4	30/04/2014
		US 2010-0288511 A1	18/11/2010
		US 2013-228279 A1	05/09/2013
		WO 2010-131119 A2	18/11/2010
		WO 2010-131119 A3	20/01/2011
US 7699124 B2	20/04/2010	AU 2009-254877 A1	10/12/2009
		AU 2009-254877 B2	12/09/2013
		CA 2727137 A1	10/12/2009
		EP 2307664 A1	13/04/2011
		EP 2307664 B1	22/05/2013
		GB 2461157 A	30/12/2009
		RU 2010153700 A	20/07/2012
		RU 2471961 C2	10/01/2013
		US 2009-0301635 A1	10/12/2009
		US 2009-0301715 A1	10/12/2009
		US 8028756 B2	04/10/2011
		WO 2009-147564 A1	10/12/2009
EP 2307664 B1	22/05/2013	AU 2009-254877 A1	10/12/2009
		AU 2009-254877 B2	12/09/2013
		CA 2727137 A1	10/12/2009
		EP 2307664 A1	13/04/2011
		GB 2461157 A	30/12/2009
		RU 2010153700 A	20/07/2012
		RU 2471961 C2	10/01/2013
		US 2009-0301635 A1	10/12/2009
		US 2009-0301715 A1	10/12/2009
		US 7699124 B2	20/04/2010
		US 8028756 B2	04/10/2011
		WO 2009-147564 A1	10/12/2009
US 7874356 B2	25/01/2011	FR 2932528 A1	18/12/2009
		US 2009-0308604 A1	17/12/2009