

(51) International Patent Classification:

E21B 33/12 (2006.01) E21B 23/06 (2006.01)

(21) International Application Number:

PCT/US2023/031053

(22) International Filing Date:

24 August 2023 (24.08.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

18/228,135 31 July 2023 (31.07.2023) US

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032-3219 (US).

(72) Inventors: **SHUKLA, Shashwat**; 11 Tuas South Avenue 12, Singapore 637131 (SG). **SINGH, Arpana**; 11 Tuas South Avenue 12, Singapore 637131 (SG).

(74) Agent: **COREY S. TUMEY**; P.O. Box 890226, Houston, Texas 77062-9998 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: BULK METALLIC GLASS (BMG) SEALS FOR DOWNHOLE APPLICATIONS

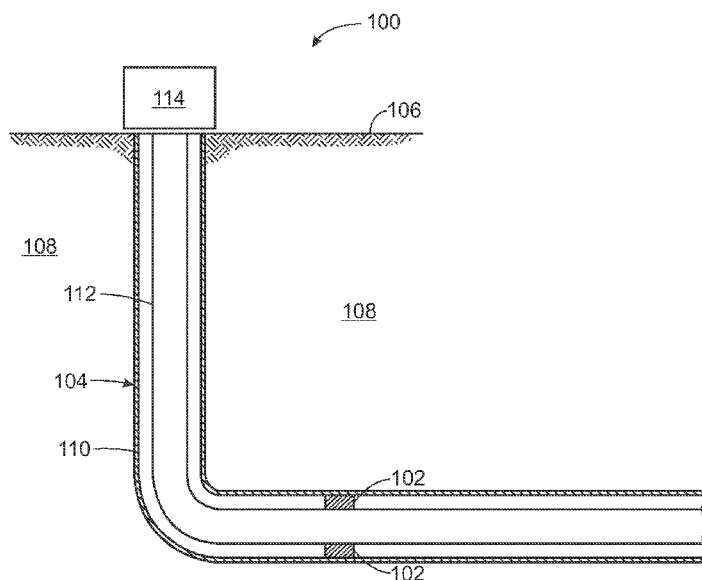


FIG. 1

(57) Abstract: A variety of methods and apparatus are disclosed, including, in one embodiment, a downhole tool for use in a borehole, comprising: a mandrel; and a sealing element disposed about the mandrel, wherein the sealing element comprises bulk metallic glass (BMG).

Published:

— *with international search report (Art. 21(3))*

Bulk Metallic Glass (BMG) Seals for Downhole Applications

BACKGROUND

[0001] Boreholes may be drilled into subterranean formations to recover valuable hydrocarbons, among other functions. Operations may be performed before, during, and after the borehole has been drilled to produce and continue the flow of the hydrocarbon fluids to the surface. A borehole may be labeled as a wellbore.

[0002] A typical operation concerning downhole applications may be to apply a seal within a borehole. A seal may isolate and contain produced hydrocarbons and pressures within the borehole. There may be a variety of different tools and equipment used to create seals between the outside of a production tubing string and the inside of a casing string, liner, or the wall of a wellbore. Substantial pressure differentials across a seal may induce failure of the seal and may result in substantial loss of time, money, and equipment, and may even result in harm to individuals. Additionally, expanding a wellbore seal may induce substantial deformation and internal stress on a sealing element, which may increase the chance of failure (e.g., due to breaking or tearing). The design and manufacture of wellbore seals may be limited in structure and material choice in order to reduce the chance of failure. It may be suitable to explore alternative manufacturing techniques to produce improved sealing elements.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] These drawings illustrate certain aspects of some of the embodiments of the present disclosure and should not be used to limit or define the disclosure.

[0004] FIG. 1 is a diagram of a well site that includes a packer in a wellbore.

[0005] FIG. 2 is a diagram of a downhole tool (e.g., packer) having a sealing element including bulk metallic glass (BMG).

[0006] FIG. 3 is a diagram of sealing element that can include or be BMG.

[0007] FIG. 4 is a diagram of an O-ring that can include or be BMG.

DETAILED DESCRIPTION

[0008] Disclosed herein are sealing elements that include bulk metallic glass (BMG) that are solid non-crystalline metallic alloys having strength, hardness, and elasticity. The sealing elements (seals) having the BMG may be for downhole tools, such as packers. Embodiments

include the BMG having zirconium as the major element in that the BMG has at least 40 atomic percent (at%) of zirconium. Implementations herein of BMG for sealing elements include BMG having an amorphous structure with no nanocrystalline phases.

[0009] BMGs, also known as metallic glass, amorphous metal, amorphous alloy, or glassy metal, are metal alloys having a disordered atomic-scale structure (glass-like) that is amorphous (non-crystalline) and exhibits electrical conductivity and metallic luster. BMG can be produced, for example, by rapid cooling, physical vapor deposition, solid-state reaction, ion irradiation, and mechanical alloying. BMG may be considered true glasses in that BMG softens and flows upon heating, facilitating processing, such as by injection molding, similar to thermoplastic polymers. BMGs are tougher and less brittle than oxide glasses and ceramics.

[0010] BMGs can be a metal alloy, for example, of three or more of the following: zirconium (Zr), copper (Cu), silver (Ag), aluminum (Al), titanium (Ti), nickel (Ni), niobium (Nb), chromium (Cr), tantalum (Ta), beryllium (Be), magnesium (Mg), lanthanides (general symbol Ln), palladium (Pd), calcium (Ca), platinum (Pt), gold (Au), iron (Fe), cobalt (Co), yttrium (Y), and hafnium (Hf). For a metal present in the BMG (alloy) at least 40 atomic percent (at%), the BMG may be labeled as based on that metal. For instance, a BMG having Mg at least 40 at% can be called an Mg-based BMG. Likewise, a BMG having Zr at least 40 at% can be called a Zr-based BMG.

[0011] In implementations herein, the BMG is a Zr-based BMG. Thus, the major element (greater than 40 at%) in the BMG is Zr. In addition to Zr, the BMG has at least two minor elements in the alloy that can include Cu, Ag, Al, Ti, Ni, Nb, Cr, Ta, or Be. In examples, this Zr-based BMG is an amorphous structure without nanocrystalline phases.

[0012] Seals may have a range of combinations of mechanical and chemical properties to satisfy functional demands. These demands may become more stringent in certain applications, such as high pressure-high temperature (HPHT), hydrogen storage, CCUS (carbon capture, utilization and storage), and the like. HPHT conditions may cause rapid decline in the modulus (e.g., Young's modulus), strength (ability to withstand an applied load without failure or plastic deformation), and elongation (elongation at break) of seals. Decrease in modulus and strength may cause the seal to extrude through the clearance when pressure differentials are relatively large. Reduction in elongation may cause the seal to fracture. Absorption of gases, such as hydrogen sulfide (H₂S), H₂, and CO₂, and supercritical CO₂ may lead to rapid gas decompression

(RGD), which can fracture elastomeric seals. In some applications, exposure to gases is also accompanied with a relatively high service temperature, e.g., -80°C in CCUS or greater than 175°C in HPHT, accelerating the failure.

[0013] Conventional seals (elastomeric seals) generally tend to swell when they interact with water or oil. Swelling results in changes in volume, thickness, density, hardness and other mechanical properties, leading to reduced performance with time. Elastomeric seals can be sensitive to (attacked and degraded by) chemicals and generally cannot withstand abrasive or erosive media. Examples of elastomers or elastomer material utilized as elastomer seals (sealing elements) include natural rubbers, styrene-butadiene block copolymers, polyisoprene, polybutadiene, ethylene propylene rubber, ethylene propylene diene rubber, silicone elastomers, fluoroelastomers, polyurethane elastomers, and nitrile rubbers. Examples of non-elastomeric material utilized for downhole seals or back-up rings include polyphenylene sulfide (PPS), polyether ether ketone (PEEK), and polytetrafluoroethylene (PTFE).

[0014] A challenge can be to design seals that [1] do not measurably absorb gases, water, or oil, [2] have relatively high resistance to abrasion and erosion, [3] are generally not sensitive (or relatively low sensitivity) to chemicals, and [4] maintain a specified (beneficial) modulus, strength, and elongation over a wide range of pressures and temperatures likely in downhole service conditions. In response, embodiments herein include seals made of BMG that address these functional and property issues.

[0015] BMG as a structural alloy has high strength and high modulus – generally superior to conventional structural alloys. This is combined with BMG having high-temperature elongation that supersedes even the room temperature elongation of most elastomers. Additionally, BMG is generally chemically inert (when exposed to most chemicals and having a relatively low corrosion rate when exposed to strong acids), and being metallic in nature, generally does not absorb gases or fluids. With respect to chemical sensitivity, BMG corrode when exposed to strong acids. However, their chemical resistance is superior to elastomers and even most corrosion resistance alloys. For instance, for immersion corrosion in 6 molar (M) hydrochloric acid (HCl), an example of a nickel-chromium based BMG corrodes at 0.03 millimeter per year (mm/year), which is about 1-2 orders of magnitude less than stainless steel 316L that corrodes at about 1 mm/year. Because of this combination of characteristics, BMGs are a beneficial material to expand the performance envelope of seals. Embodiments include seals having BMG for

downhole applications. The BMG – its chemistry and microstructure – may give extrusion resistance, thermal resistance, RGD resistance, chemical resistance, and resistance to swelling, abrasion and erosion.

[0016] Techniques for producing the BMG seal may be based on, for example, rapid solidification that can be performed by melt-spinning, splat-quenching, micro-injection molding, suction casting, rapid discharge forming, superplastic forming, or any other similar technique that can solidify and shape the molten BMG without its crystallization. Technique for setting the BMG seal can involve its deformation at or above the glass transition point, so the BMG flows superplastically to fill and conform to the geometry of the annulus. With time, the BMG will generally set the seal and in implementations, may crystallize.

[0017] The seal may be BMG with or without filler material in the BMG. The BMG may incorporate filler material, such as nanofillers including, for example, carbon nanotubes (CNT) or nanocrystalline metals (nanometal). CNT-BMG and nanometal-BMG composites may be implemented in those examples. On the other hand, the seal may be elastomer material having BMG as filler. Implementations include incorporation of BMG fillers in an elastomer to make composite seals with improved performance.

[0018] Implementations of the BMG seals (e.g., Zr-based BMG) as disclosed herein have [1] high yield strength, such as about 2000 megapascals (MPa) or in the range of 1500 MPa to 2500 MPa, and [2] high modulus of elasticity (Young's modulus), such as about 100 gigapascals (GPa) or in the range of 50 GPa to 150 GPa, combined with [3] high fracture toughness, such as about $100 \text{ MPa} \cdot \text{meter}^{1/2}$ ($\text{MPa} \cdot \text{m}^{1/2}$) or in the range of $50 \text{ MPa} \cdot \text{m}^{1/2}$ to $150 \text{ MPa} \cdot \text{m}^{1/2}$. These values are two orders of magnitude greater compared to typical elastomeric seals, which have strength and modulus in the range of 10-30 MPa, and fracture toughness only around $1 \text{ MPa} \cdot \text{m}^{1/2}$. As a result of improved crack resistance and load bearing capability, once the BMG seal is set and installed downhole, the BMG seal may withstand relatively large pressure differentials without extruding through the clearance. Additionally, after the seal is set, exposure to high temperature (e.g., greater than 300°C , or in the range of 300°C to 500°C) or low temperature (e.g., less than -190°C , or in the range of -300°C to -190°C) generally does not cause the seal (BMG) to crack in implementations herein. Conversely, conventional elastomeric seals fracture at such temperatures. Further, seals made of BMGs generally not absorb water, oil, or gases and will experience little or no RGD damage. Elastomeric seals typically cannot offer a

comparable fluid resistance. BMG seals can resist damage due to formation fluids and offer orders of magnitude higher resistance to abrasion and erosion, compared to conventional seals.

[0019] Table 1 is a comparison of properties of Zr-based BMG with properties of typical elastomers utilized for seals in downhole applications. Functional issues are noted. The comments and property numerical values in Table 1 are given as examples and not intended to limit the present techniques. For BMGs, values of strength, hardness, elongation, fracture toughness, critical casting diameter, and glass transition temperatures are discussed herein for embodiments BMGs. In other embodiments, where service conditions permit, alternative BMGs with lower values can also be used.

Table 1. Function comparison of a Zr-based BMG and typical elastomers for seals

Function	Corresponding Material Property	BMG	Elastomer
Extrusion resistance	Yield Strength (MPa)	2000	10-30
	Modulus (GPa)	100	0.01-0.03
High-temp compatibility	% Elongation (>300°C)	>1500	<20
Low-temp compatibility		-196°C or colder	-65°C to -1°C (glass transition)
RGD resistance	Gas absorption	Not susceptible	Highly susceptible
Swelling resistance	Water/oil absorption	Not susceptible	Highly susceptible
Abrasion/erosion resistance	Hardness (MPa)	>6500	<100
Crack growth resistance	Fracture toughness (MPa*m ^{1/2})	100	<1
Chemical compatibility		Excellent	Weak to moderate
Processability	Thermoplastic-like processing/forming	Straightforward	Difficult

[0020] For BMGs (e.g., Zr-based BMGs), their strength beneficially combines with their elastic modulus that considerably exceeds the modulus of elastomers. Additionally, at certain elevated temperatures, BMGs can flow like a viscous fluid making the BMGs processable, similar to thermoplastics. Elastomers do not offer a comparable formability unless a thermoplastic filler is added to the elastomeric matrix. Another implication of the non-crystalline BMG superplastic-like behavior is giving significant high-temperature elongation. This behavior

of BMGs can be harnessed to deform the seal and make the seal conform to the desired geometry during setting.

[0021] The BMG seal can be set when it is in a supercooled state between its glass transition and crystallization temperature. After setting, it can be used at any service temperature that falls below its glass transition temperature (e.g., at least 300°C) down to the cryogenic range (e.g., -150°C).

[0022] FIG. 1 is a well site 100 that includes a packer 102 in a wellbore 104. The packer 102 has a seal (sealing element) that is or includes BMG. In implementations herein, the BMG has or is an amorphous structure without nanocrystalline phases. As indicated, the major element (at least 40 at%, such as in the range of 40 at% to 80 at%) in the BMG is Zr in examples. In addition to Zr, the BMG has at least two minor elements (each less than 40 at%), in the alloy that can include Cu, Ag, Al, Ti, Ni, Nb, Cr, Ta, or Be. The composition of the BMG is configured such that the BMG glass transition temperature is, for example, at least 300°C or in the range of 300°C to 500°C. The composition of the BMG may be configured to have a high glass formability, manifested by a critical casting diameter of at least 20 millimeters (mm). In embodiments, this high glass formability permits the BMG to maintain an amorphous structure up to a seal thickness of 20 mm without forming a nanocrystalline phase(s). The absence of nanocrystals can be confirmed by transmission electron microscopy (TEM).

[0023] In implementations, the composition and amorphous structure of the BMG for the downhole seal are configured such that the BMG has a high strength (e.g., at least 1000 MPa) and a high modulus (e.g., at least 70 GPa), facilitating the seal to resist extrusion when subjected to relatively large pressure differentials, e.g., a pressure differential of 2000 pounds per square inch (psi) with a 0.01 inch total diametral clearance. The BMG may have a hardness for the seal to withstand abrasive and erosive service conditions. For example, the hardness may be greater than 500 Vickers hardness number (HV), or in the range of 500 HV to 1000 HV. The BMG can have a high fracture toughness ($>50 \text{ MPa}\cdot\text{m}^{1/2}$) between -150°C to 300°C, preventing or reducing potential crack growth when the BMG subjected to extreme service temperatures. The superplastic-like behavior for the non-crystalline BMG can give elongation of at least 400%. While the BMG is generally not a crystalline structure, the BMG can act as a superplastic (in a state of superplasticity). The superplastic-like flow of the BMG facilitates setting of the BMG seal in a temperature range that falls at or above its glass transition point, which can vary

between 300°C to 500°C, depending on the BMG composition. After setting, the seal can be utilized between -150°C and the glass transition temperature of the BMG. The superplastic-like flow imparts processability and facilitates the fabrication of BMG seal by thermoplastic-like forming, similar to the molding of thermoplastics. The BMG seal generally does not swell in water/oil and is resistant to gas absorption/RGD damage.

[0024] The wellbore 104 is formed through the Earth surface 106 into a subterranean formation 108 in the Earth crust. In the illustrated implementation, the wellbore 104 has a casing 110 and is therefore a cased wellbore. Cement (not shown) may be disposed between the casing 110 and the formation 108 face. The formation 108 face can be considered a wall of the wellbore 104.

[0025] Perforations may be formed through the casing 110 (and cement) for entry of fluid (e.g., hydrocarbon, water, etc.) from the subterranean formation 108 into the wellbore 104 to be produced (routed) as produced fluid through production tubing 112 to the surface 106. The surface equipment 114 may include a wellhead for receipt of the produced fluid. In other implementations, the wellbore 104 can be utilized for injection of fluid from the surface 106 through the wellbore 104 and the perforations in the casing 110 (and cement) into the subterranean formation 106.

[0026] The surface equipment 114 can include a hoisting apparatus (e.g., for raising and lowering pipe strings) and a derrick. The surface equipment 114 and equipment deployed in the wellbore 104 can include equipment, such as a wireline, slickline, coiled tubing, tubing string, pipe, drill pipe, drill string, and the like, that facilitates mechanical conveyance for deploying downhole tools (e.g., packer 102 and other tools). The deploying of the downhole tool (e.g., packer 102) may include lowering the downhole tool into the wellbore 104 from the surface 106 and setting (e.g., via mechanical slips) the downhole tool in the wellbore 104. In some implementations for the downhole tool as a packer 102, the equipment (e.g., wireline) may provide electrical connectivity, for example, to actuate the packer 102 to seal off a portion of the wellbore 104.

[0027] Again, the casing 110 may be secured within wellbore 104 by cement (not shown). The casing 110 may be, for example, metal, plastic, composites, and the like, and may be expanded or unexpanded as part of an installation procedure. Additionally, in implementations, the casing 110 is not cemented into the wellbore 104. The production tubing 112 may be a tubing

string utilized in the production of hydrocarbons. The packer 102 may be disposed on or near production tubing 112.

[0028] Depending on the type of packer 102, the packer 102 may be permanently set or retrievable, mechanically set, hydraulically set, and/or combinations thereof. As will be discussed in more detail below, packer 102 may include one or more sealing elements (e.g., expandable seal elements 206, 208, 210 of FIG. 2). The packer 102 may be set downhole to seal off a portion of wellbore 104. When set, packer 102 may isolate zones of the annulus between casing 110 and the production tubing 112 (e.g., a tubing string) by providing a seal (fluid seal) between the production tubing 112 and the casing 110. In examples, the packer 102 may be disposed on the production tubing 112.

[0029] It should be understood by those skilled in the art that present examples are equally well suited for use in wellbores having other directional configurations including vertical wellbore, horizontal wellbores, deviated wellbores, multilateral wells and the like. Accordingly, it should be understood by those skilled in the art that the use of directional terms such as above, below, upper, lower, upward, downward, uphole, downhole and the like are used in relation to the illustrative embodiments as they are depicted in the figures, the upward direction being toward the top of the corresponding figure and the downward direction being toward the bottom of the corresponding figure, the uphole direction being toward the surface of the well and the downhole direction being toward the toe of the well. Also, even though FIG. 1 depicts an onshore operation, it should be understood by those skilled in the art that the packer and its sealing elements of the present techniques is equally well suited for use in offshore operations. In addition, while FIG. 1 depicts use of the packer 102 in a cased portion of wellbore 104, it should be understood that a packer 102 may also be used in uncased portions (e.g., openhole portions) of wellbore 104.

[0030] FIG. 2 is a downhole tool 200 (e.g., packer) to be disposed in a borehole (e.g., wellbore 104 of FIG. 1). The downhole tool 200 (e.g., packer analogous to the packer 102 of FIG. 1) as installed in the wellbore may be permanently set or retrievable, mechanically set, hydraulically set, and/or combinations thereof. A retrievable packer may be a type of packer that is run and retrieved on a running string or production string, unlike a permanent production packer that is set in the casing or liner before the production string is run.

[0031] A packer may be device that can be run into a wellbore with a smaller initial outside diameter that then expands externally to seal the wellbore. Packers may employ flexible, elastomeric elements that expand. A packer may be a production packer, test packer, isolation packer, etc. A production packer may isolate the annulus (e.g., between the production tubing and the casing or wellbore wall) and anchor or secure the bottom of the production tubing string. A typical packer assembly incorporates a means of securing the packer against the casing or liner wall, such as a slip arrangement, and a means (e.g., sealing elements) of creating a reliable hydraulic seal to isolate the annulus, typically by means of an expandable elastomeric element. Packers are typically classified by application, setting method and possible retrievability.

[0032] The downhole tool 200 (e.g., packer) may include a mandrel 202 (tool mandrel) and a seal stack 204 disposed about the mandrel 202. The seal stack 204 may be an assembly of individual sealing elements 206, 208, 210 utilized to seal off a portion of the wellbore. One or more of the sealing elements 206, 208, 210 may be or include BMG. The material selection for the sealing elements may be to tailor properties of the sealing elements 206, 208, 210, such as hardness, elasticity, gas resistance, chemical resistance, temperature resistance, and high temperature strength, among others. As in the illustrated implementation, the individual sealing elements 206, 208, 210, within seal stack 204 may be of differing size, height, and/or shape. A shape may include, for example, cross-sectional shapes that are circular, elliptical, triangular, rectangular, square, hexagonal, irregular, and/or combinations thereof.

[0033] The seal stack 204 may provide for a fluid seal between the downhole tool 200 and the wellbore wall or casing (or liner), such that in the borehole or wellbore annulus, uphole of the downhole tool is fluidically sealed from downhole of the downhole tool. The downhole tool 200 may engage via the seal stack 204 an adjacent surface (e.g., wellbore wall, an inside surface of a casing, an inside surface of a liner, etc.) to form a seal (fluid seal) between the seal stack 204 and the adjacent surface. The seal stack 204 includes the top seal 206 for uphole position, the middle-positioned seal 208, and the bottom seal 210 on downhole side. The seals 206, 208, 210 may provide resilience, sealing efficiency, and extrusion resistance. A seal stack can have multiple seals with different respective materials to give different properties. As mentioned, in application, the seal stack 204 provides for a fluid seal in the wellbore between the seal stack 204 and the wellbore wall (e.g., formation face, casing, etc.), thereby isolating (e.g., the annulus) downhole of the downhole tool 200 from uphole of the downhole tool 200.

[0034] Again, the seal stack 202 includes the seals 206, 208, 210 (e.g., rings) that may be sealing elements that provide for a fluid seal in the wellbore between the seals 206, 208, 210 and the wellbore wall (e.g., casing). In implementations, the top seal 208 is an anti-extrusion backup ring to resist extrusion. To resist extrusion, the top seal 206 may have a higher temperature resistance than the seal 208 (e.g., an elastomer) and/or a higher Young's modulus than the seal 208. The top seal 206 can be, for example, a thermoplastic (e.g., PEEK) or BMG.

[0035] A problem with downhole packers can be extrusion (migration) of packer sealing elements into an annular gap between the packer body and the wellbore casing. The amount of extrusion can be a function of the differential pressure, working temperature, and size of the annular gap to the casing inside diameter. A back-up ring (e.g., top seal 206 in implementations) can reduce extrusion and therefore promote holding a seal stack to the outlined shape of the seal stack.

[0036] Embodiments include seal stacks having a sealing element (seal) that includes BMG, an O-ring or O-ring backup that includes BMG, a packer element (packer sealing element) or packer element backup that includes BMG, and other similar applications. Implementations include BMG as a seal material for downhole tools to give a downhole seal and/or downhole seal backup solution. The sealing element (seal or backup) may be or include Zr-based BMG.

[0037] FIG. 3 is a seal or sealing element 300 that can include or be BMG. The sealing element 300 is for a downhole tool, such as a packer. As depicted, the sealing element 300 may have a generally annular body 302 (e.g., ring-shaped, comprising a ring shape to be situated around a tool mandrel). In some embodiments, the annular body 302 may be circular and/or hollow. In examples, the sealing element 300 may be configured with cross-sectional shapes. For instance, the sealing element 300 may have a cross-section similar in shape to V-shape 304, D-shape 306, square 308, an irregular shape, and/or combinations thereof.

[0038] FIG. 4 is an O-ring 400. The O-ring 400 can be disposed on a mandrel (tool mandrel) of a downhole tool, such as a packer, to be disposed in a wellbore. The O-ring 400 can be or include BMG.

[0039] Applications of BMG may include seals, seal stacks, O-rings, anti-extrusion ring or backup (e.g., packer element backup), and so on, for downhole tools, such as packers. In implementations, the BMG can have filler material. In other implementations, the BMG can be

filler material in a seal, such as in an elastomer seal. In examples, the sealing element may be a composite seal having BMG plus elastomer or other material.

[0040] In embodiments, BMG particles are utilized as fillers in an elastomeric seal to improve extrusion resistance, thermal resistance, and fluid resistance of the elastomer-based seal. In implementations, the amorphous BMG is designed such that the temperature at which it superplastically flows is comparable to the shaping temperature of the elastomer. In examples, the mixing and/or shaping of the elastomer and BMG particles can be performed with a coupling agent, where the coupling agent enhances the interfacial wetting of BMG particles on the elastomeric matrix. In examples, BMG particles are produced by mechanical milling of rapidly solidified BMG rods or BMG ribbons, or thermoplastically formed BMG ingots.

[0041] In embodiments, alternative materials, such as a thermoplastic elastomer/plastomer, or two-phase materials containing a plastic and a rubber component, can be used as a matrix with the BMG. In these cases, the matrix can be formed with BMG included in or as part of the matrix. In implementations, the matrix material can contain nanofillers, such as carbon nanotubes and/or clay nanopowders, to tailor the properties of the elastomer/BMG composite.

[0042] In another embodiment, BMG can be utilized as an overlay on the elastomer to improve a specific functionality, such as, the resistance to fluid absorption and RGD.

[0043] As mentioned, structure of BMGs is amorphous devoid of any nanocrystals in embodiments. In other embodiments, BMGs with nanocrystals in the range of 1 weight percent (wt%) to 10 wt% can be utilized to make the seal or the fillers for elastomeric seals.

[0044] BMG compositions can include one or more metalloids, e.g., boron (B), silicon (Si), carbon (C), phosphorus (P), etc. BMG compositions (alloying compositions) may include, for example, AuCuSi, PdCuSi, TiZrNiCu, PdCuNiP, MgZnCa, MgCuGd, CaMgCu, LaAlCoCuNi, FeCoCrMoCBY, PtNiCuP or MgNiMn, as well as their variants arising from different alloying additions can be utilized to make the seal or the fillers.

[0045] In embodiments, the BMG seal can be manufactured by additive methods, such as, fused deposition modelling or other rapid solidification techniques, such as blow molding.

[0046] Accordingly, the present disclosure may provide sealing elements that include bulk metallic glass. The methods, systems, and tools may include any of the various features disclosed herein, including one or more of the following statements.

[0047] Statement 1. A downhole tool for use in a borehole, comprising: a mandrel; a sealing element disposed about the mandrel, wherein the sealing element comprises bulk metallic glass (BMG).

[0048] Statement 2. The downhole tool of statement 1, wherein the sealing element is configured to interface with the borehole to form a fluid seal in the borehole.

[0049] Statement 3. The downhole tool of statement 1 or statement 2, wherein the downhole tool comprises a seal stack disposed about the mandrel, wherein the seal stack comprises the sealing element and a second sealing element that comprises an elastomer.

[0050] Statement 4. The downhole tool of any preceding statement, wherein the sealing element comprises an annular body.

[0051] Statement 5. The downhole tool of any preceding statement, wherein the BMG is an amorphous structure without nanocrystalline phases.

[0052] Statement 6. The downhole tool of any preceding statement, wherein the BMG comprises at least 40 atomic percent (at%) of zirconium (Zr).

[0053] Statement 7. The downhole tool of statement 6, wherein the BMG is a Zr-based BMG.

[0054] Statement 8. The downhole tool of statement 6, wherein the BMG comprises copper (Cu), silver (Ag), aluminum (Al), titanium (Ti), nickel (Ni), niobium (Nb), chromium (Cr), tantalum (Ta), or beryllium (Be), or any combinations thereof.

[0055] Statement 9. The downhole tool of any preceding statement, wherein the sealing element comprises an elastomer seal having the BMG as filler material.

[0056] Statement 10. The downhole tool of any preceding statement, wherein the downhole tool is a packer.

[0057] Statement 11. The downhole tool of any preceding statement, comprising an O-ring comprising BMG.

[0058] Statement 12. A method of sealing a borehole, comprising: moving a tool mandrel of a downhole tool to a selected position in the borehole, wherein a sealing element is disposed about the tool mandrel, wherein the sealing element comprises bulk metallic glass (BMG); and positioning the sealing element in the borehole to form a seal between the sealing element and an adjacent surface.

[0059] Statement 13. The method of statement 12, wherein the adjacent surface comprises a liner or casing in the borehole.

[0060] Statement 14. The method of statement 12 or statement 13, wherein the downhole tool comprises a seal stack disposed about the tool mandrel, wherein the seal stack comprises the sealing element and a second sealing element that comprises an elastomer.

[0061] Statement 15. The method of any one of statements 12-14, wherein the sealing element comprises an annular body.

[0062] Statement 16. The method of any one of statements 12-15, wherein the BMG is an amorphous structure without nanocrystalline phases.

[0063] Statement 17. The method of any one of statements 12-16, wherein the BMG comprises at least 40 atomic percent (at%) of zirconium (Zr).

[0064] Statement 18. The method of statement 17, wherein the BMG comprises copper (Cu), silver (Ag), aluminum (Al), titanium (Ti), nickel (Ni), niobium (Nb), chromium (Cr), tantalum (Ta), or beryllium (Be), or any combinations thereof.

[0065] Statement 19. The method of any one of statements 12-18, wherein the sealing element comprises an elastomer seal having the BMG as filler material.

[0066] Statement 20. The method of any one of statements 12-19, wherein the downhole tool is a packer.

[0067] For the sake of brevity, only certain ranges are explicitly disclosed herein. However, ranges from any lower limit may be combined with any upper limit to recite a range not explicitly recited, as well as, ranges from any lower limit may be combined with any other lower limit to recite a range not explicitly recited, in the same way, ranges from any upper limit may be combined with any other upper limit to recite a range not explicitly recited. Additionally, whenever a numerical range with a lower limit and an upper limit is disclosed, any number and any included range falling within the range are specifically disclosed. In particular, every range of values (of the form, "from about a to about b," or, equivalently, "from approximately a to b," or, equivalently, "from approximately a-b") disclosed herein is to be understood to set forth every number and range encompassed within the broader range of values even if not explicitly recited. Thus, every point or individual value may serve as its own lower or upper limit combined with any other point or individual value or any other lower or upper limit, to recite a range not explicitly recited.

[0068] Therefore, the present embodiments are well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed above

are illustrative only, as the present embodiments may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Although individual embodiments are discussed, all combinations of each embodiment are contemplated and covered by the disclosure. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. Also, the terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee. It is therefore evident that the particular illustrative embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the present disclosure.

What is claimed is:

1. A downhole tool for use in a borehole, comprising:
a mandrel; and
a sealing element disposed about the mandrel, wherein the sealing element comprises bulk metallic glass (BMG).
2. The downhole tool of claim 1, wherein the sealing element is configured to interface with the borehole to form a fluid seal in the borehole.
3. The downhole tool of claim 1, wherein the downhole tool comprises a seal stack disposed about the mandrel, wherein the seal stack comprises the sealing element and a second sealing element that comprises an elastomer.
4. The downhole tool of claim 1, wherein the sealing element comprises an annular body.
5. The downhole tool of claim 1, wherein the BMG is an amorphous structure without nanocrystalline phases.
6. The downhole tool of claim 1, wherein the BMG comprises at least 40 atomic percent (at%) of zirconium (Zr).
7. The downhole tool of claim 6, wherein the BMG is a Zr-based BMG.
8. The downhole tool of claim 6, wherein the BMG comprises copper (Cu), silver (Ag), aluminum (Al), titanium (Ti), nickel (Ni), niobium (Nb), chromium (Cr), tantalum (Ta), or beryllium (Be), or any combinations thereof.
9. The downhole tool of claim 1, wherein the sealing element comprises an elastomer seal having the BMG as filler material.

10. The downhole tool of claim 1, wherein the downhole tool is a packer.
11. The downhole tool of claim 1, comprising an O-ring comprising BMG.
12. A method of sealing a borehole, comprising:
moving a tool mandrel of a downhole tool to a selected position in the borehole, wherein a sealing element is disposed about the tool mandrel, wherein the sealing element comprises bulk metallic glass (BMG); and
positioning the sealing element in the borehole to form a seal between the sealing element and an adjacent surface.
13. The method of claim 12, wherein the adjacent surface comprises a liner or casing in the borehole.
14. The method of claim 12, wherein the downhole tool comprises a seal stack disposed about the tool mandrel, wherein the seal stack comprises the sealing element and a second sealing element that comprises an elastomer.
15. The method of claim 12, wherein the sealing element comprises an annular body.
16. The method of claim 12, wherein the BMG is an amorphous structure without nanocrystalline phases.
17. The method of claim 12, wherein the BMG comprises at least 40 atomic percent (at%) of zirconium (Zr).
18. The method of claim 17, wherein the BMG comprises copper (Cu), silver (Ag), aluminum (Al), titanium (Ti), nickel (Ni), niobium (Nb), chromium (Cr), tantalum (Ta), or beryllium (Be), or any combinations thereof.

19. The method of claim 12, wherein the sealing element comprises an elastomer seal having the BMG as filler material.
20. The method of claim 12, wherein the downhole tool is a packer.

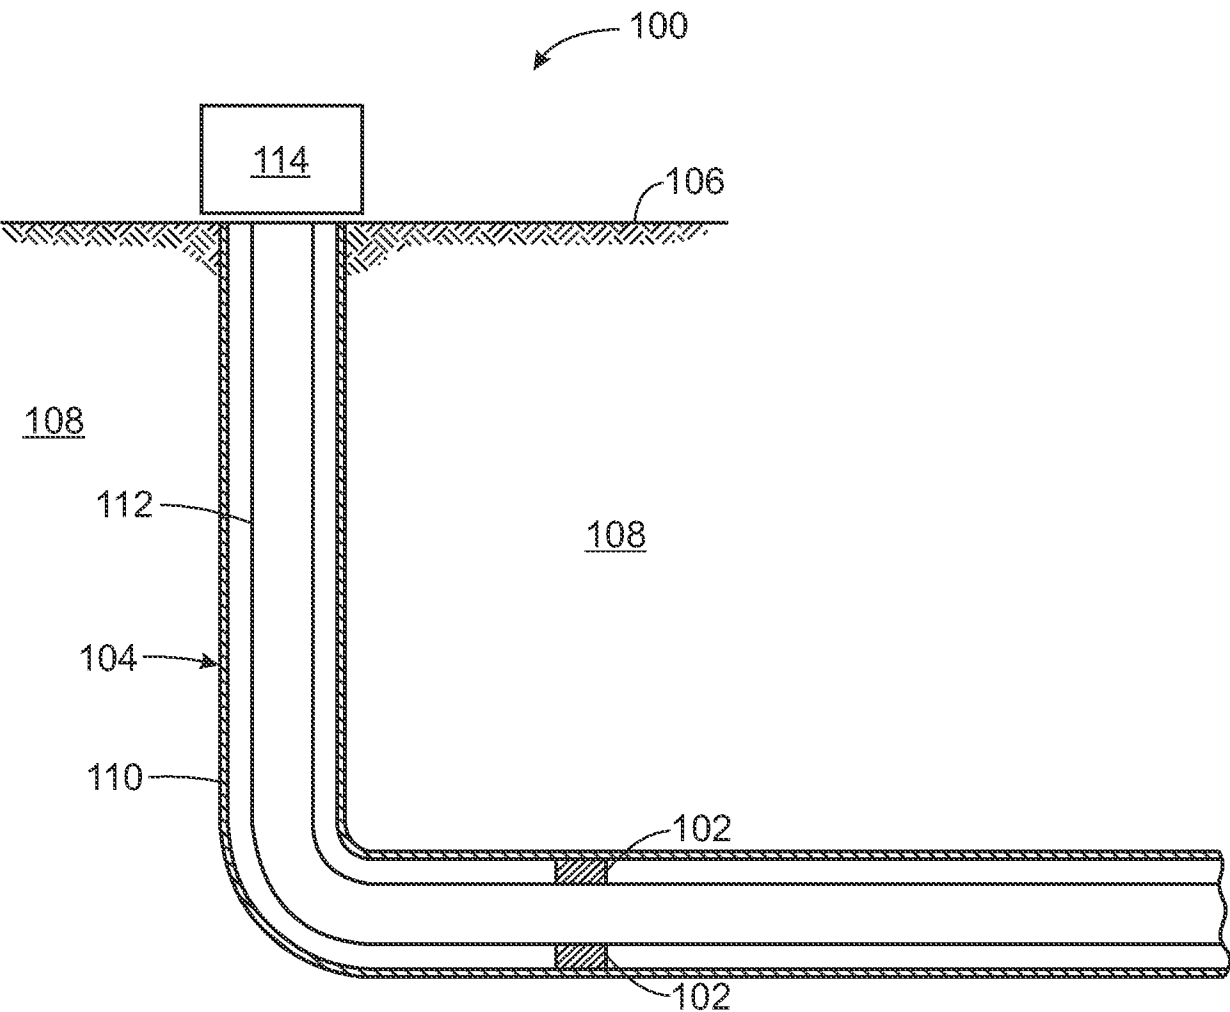


FIG. 1

2/3

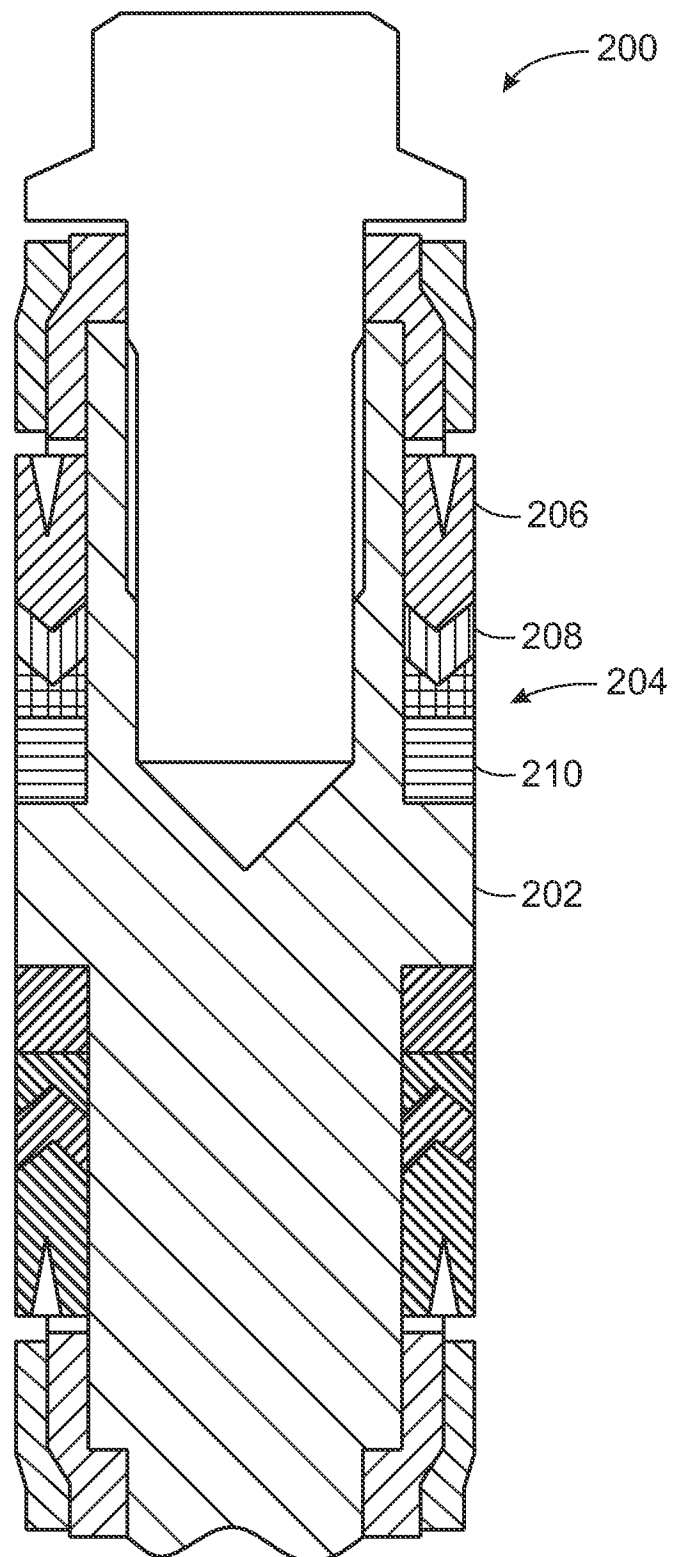


FIG. 2

3/3

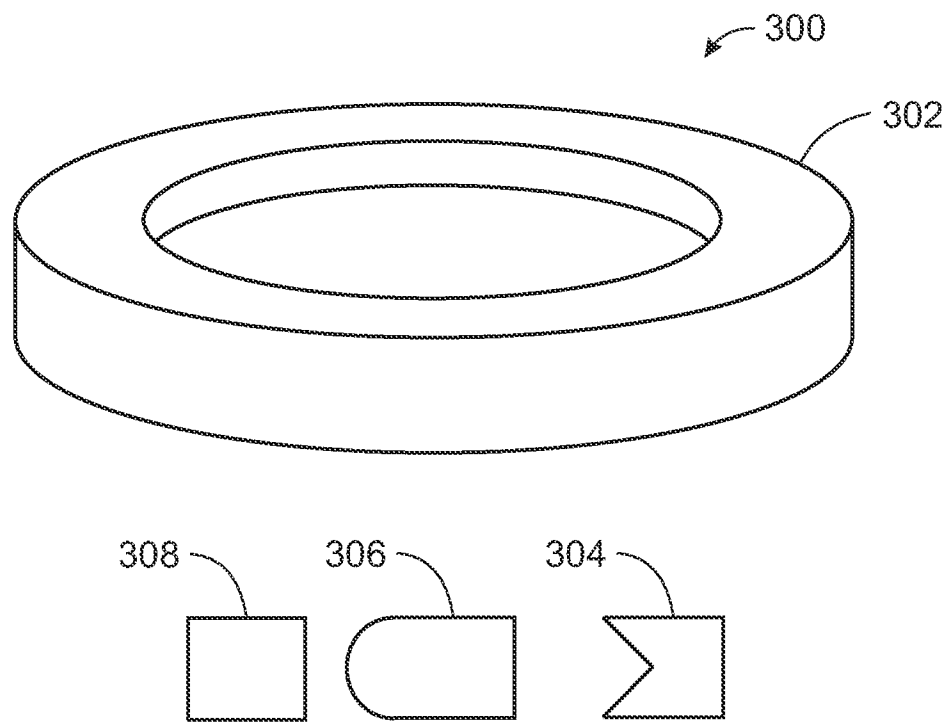


FIG. 3

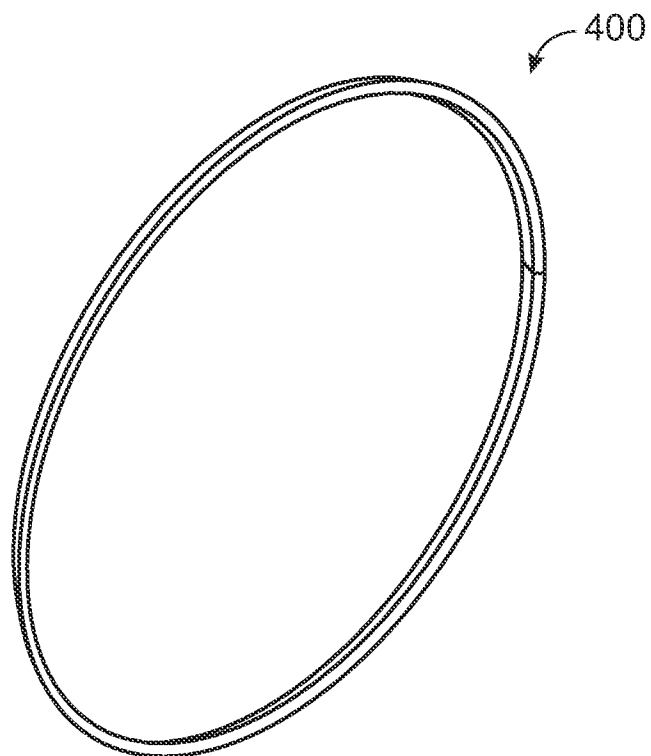


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2023/031053

A. CLASSIFICATION OF SUBJECT MATTER E21B 33/12(2006.01)i; E21B 23/06(2006.01)i According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) E21B 33/12(2006.01); C08J 9/32(2006.01); C08K 3/04(2006.01); E21B 23/01(2006.01); E21B 29/02(2006.01); E21B 33/129(2006.01) Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: sealing element, packer, bulk metallic glass (BMG), wellbore, mandrel		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 9840887 B2 (ZHAO et al.) 12 December 2017 (2017-12-12) column 4, line 66 - column 5, line 3, column 7, lines 1-39, claims 1, 18, and figures 1-5	1-20
Y	US 2015-0337615 A1 (EPSTEIN et al.) 26 November 2015 (2015-11-26) paragraph [0031]	1-20
Y	US 2018-0245422 A1 (HALLIBURTON ENERGY SERVICES, INC.) 30 August 2018 (2018-08-30) paragraph [0084] and figure 2	3,14
Y	US 2023-0167263 A1 (HALLIBURTON ENERGY SERVICES, INC.) 01 June 2023 (2023-06-01) paragraphs [0001], [0019], claims 1, 4, 8, and figures 1-2	6-9,17-19
A	US 2018-0135369 A1 (PAREKH et al.) 17 May 2018 (2018-05-17) claim 1 and figure 6	1-20
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “D” document cited by the applicant in the international application “E” earlier application or patent but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family		
Date of the actual completion of the international search 24 April 2024		Date of mailing of the international search report 24 April 2024
Name and mailing address of the ISA/KR Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon 35208, Republic of Korea Facsimile No. +82-42-481-8578		Authorized officer PARK, Tae Wook Telephone No. +82-42-481-3405

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2023/031053

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	9840887	B2	12 December 2017	CA	2985335	A1	17 November 2016
				CA	2985335	C	19 September 2023
				GB	2556221	A	23 May 2018
				GB	2556221	B	21 November 2018
				NO	20171871	A1	23 November 2017
				US	2016-0333657	A1	17 November 2016
				WO	2016-182661	A1	17 November 2016
US	2015-0337615	A1	26 November 2015	US	2015-0184486	A1	02 July 2015
				US	2015-0275616	A1	01 October 2015
				US	9708884	B2	18 July 2017
US	2018-0245422	A1	30 August 2018	AR	105907	A1	22 November 2017
				AU	2015-414102	A1	12 April 2018
				AU	2015-414102	B2	22 April 2021
				AU	2021-204185	A1	15 July 2021
				AU	2021-204185	B2	28 July 2022
				CA	3000642	A1	18 May 2017
				CA	3000642	C	16 March 2021
				GB	2558813	A	18 July 2018
				GB	2558813	B	14 April 2021
				GB	2589042	A	19 May 2021
				GB	2589042	B	03 November 2021
				MX	2018004119	A	17 May 2018
				MY	196645	A	27 April 2023
				NO	20180415	A1	23 March 2018
				PL	425177	A1	19 November 2018
				RO	132818	A2	28 September 2018
				US	10626695	B2	21 April 2020
				WO	2017-082865	A1	18 May 2017
US	2023-0167263	A1	01 June 2023	WO	2023-101655	A1	08 June 2023
US	2018-0135369	A1	17 May 2018	US	10683718	B2	16 June 2020
				WO	2018-093491	A1	24 May 2018