



(22) Date de dépôt/Filing Date: 2017/06/23

(41) Mise à la disp. pub./Open to Public Insp.: 2017/12/23

(30) Priorité/Priority: 2016/06/23 (US62/353,869)

(51) Cl.Int./Int.Cl. *A61G 5/02* (2006.01),
A61G 5/10 (2006.01), *B62B 5/00* (2006.01)


(71) Demandeur/Applicant:
VERMIJ WORKS INC., CA

(72) Inventeurs/Inventors:
VERMY, HANS, US;
VERMIJ, MAXIMILIAAN, CA;
MACLATCHIE, MITCHEL J., CA...

(74) Agent: ANDREWS ROBICHAUD


(54) Titre : VEHICULE A ROUE PROPULSE A LA MAIN

(54) Title: HAND PROPELLED WHEELED VEHICLE

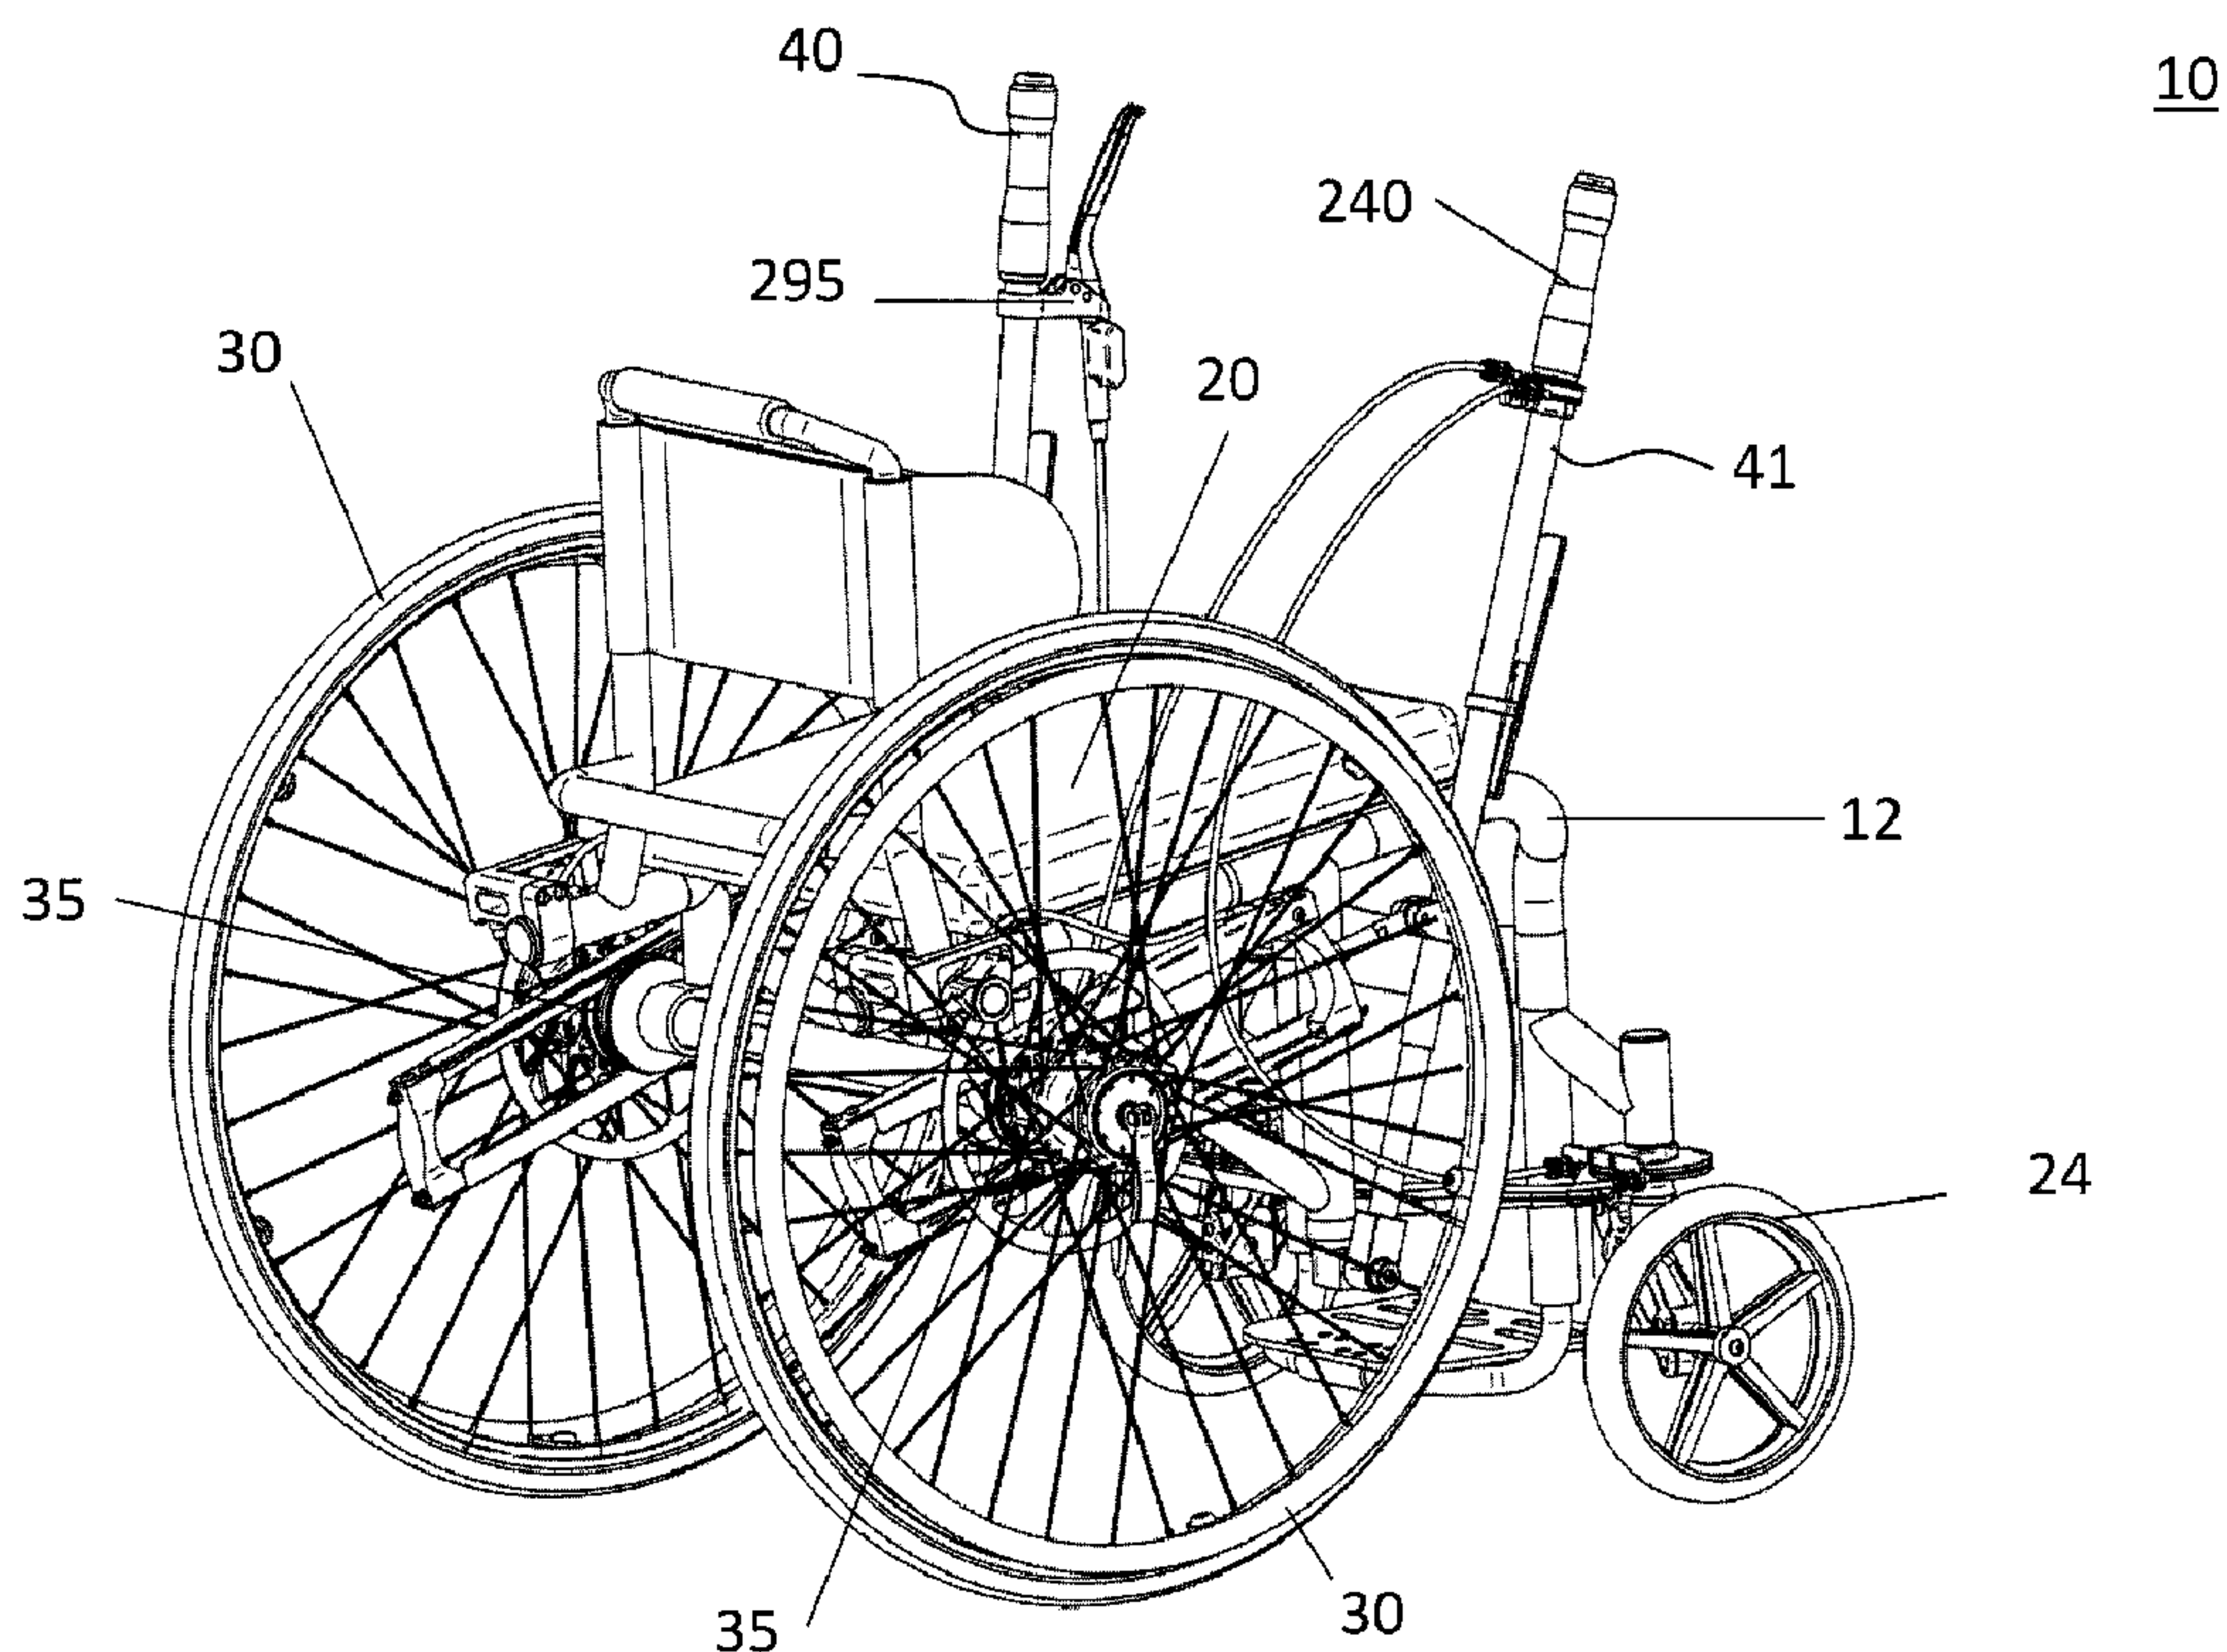

(57) Abrégé/Abstract:

A hand propelled wheeled vehicle, specifically a wheelchair, containing a pair of hand actuated, lever driven mechanisms to rotate the main wheels. The levers pivot around attachment points on the left and right sides of the vehicle chassis. The left lever actuates

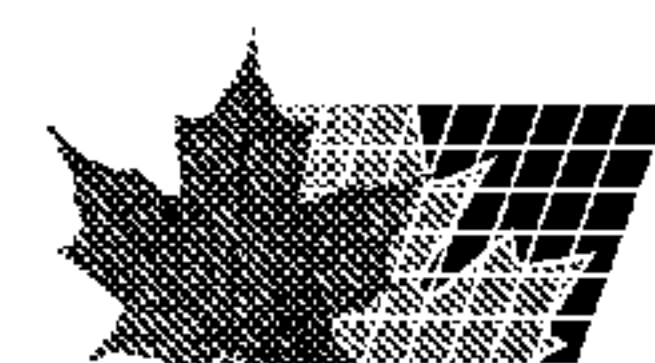

(57) **Abrégé(suite)/Abstract(continued):**

a frame responsible for contra-rotating two integral one-way clutches arranged on a drive shaft coupled to the left main wheel, with the right lever operating the right side mechanism in an identical fashion. The arrangements of the clutches utilize both the forward (pushing) and backward (pulling) stroke of the lever to rotate the main wheels forward. Steering and braking control is afforded through attachments integral to the hand grips of the right and left hand levers, respectively.

Abstract

A hand propelled wheeled vehicle, specifically a wheelchair, containing a pair of hand actuated, lever driven mechanisms to rotate the main wheels. The levers pivot around attachment points on the left and right sides of the vehicle chassis. The left lever actuates a frame responsible for
5 contra-rotating two integral one-way clutches arranged on a drive shaft coupled to the left main wheel, with the right lever operating the right side mechanism in an identical fashion. The arrangements of the clutches utilize both the forward (pushing) and backward (pulling) stroke of the lever to rotate the main wheels forward. Steering and braking control is afforded through attachments integral to the hand grips of the right and left hand levers, respectively.

10

15

20

Hand Propelled Wheeled Vehicle

Field of the invention

The present invention relates generally to a wheeled device and more specifically to a hand
5 propelled device for wheeled vehicles.

Background

Hand propelled devices provide not only a means of mobility and independence for people who
have difficulty walking, but can also provide a means of efficient travel and a form of exercise
for able bodied people. In addition, Hand propelled devices can provide an alternative means for
10 children to commute short distances and to play with their peers. The main drawback to
hand/arm propelled devices in the industry is that hand propelled devices are inefficient and
require substantial hand and arm strength and stamina to operate for long durations. As such, the
majority of exercise devices and children's toys operate through foot and leg propulsion.

In situations where individuals have difficulty walking, hand/arm propelled devices, such as
15 wheelchairs, are a practical method of human powered travel. The usual means of propelling
wheelchairs is through the use of annular hand rails attached to the two main driving wheels.
This method is not efficient and contorts the rider's body in a potentially unhealthy manner. The
continual unidirectional movement and hunched over riding position may be unhealthy as it
tends to constrict the chest and arms. Additionally, the use of annular hand rails to propel the
20 wheels is an inefficient use of energy, and can be exhausting to use over longer distances and on
rough terrain. Other attempts at designing alternative mechanisms for wheelchair propulsion
suffer similar problems, as they feature a power stroke in one direction only, which is strenuous
on the upper body.

Additionally, most hand propelled devices, such as wheelchairs, are difficult to steer. The
25 mechanism of steering generally involves altering the speed of one wheel independent of the
other wheel. Other mechanisms involve the use of a steering mechanism that alters the direction

of the front wheel(s) of the propelled device, but requires removal of at least one hand from the drive wheel.

Inventions such as US Patent 8,186,699 (Green), US Patent 5,007,655 (Hanna), US Patent Publication US2013/0015632 (Winter), and US Patent 6,158,757A (Tidcomb) have been devised
5 in order to provide hand propelled wheeled vehicles.

Green discloses a manual propulsion mechanism for wheelchairs. The mechanism utilizes a lever pivotally mounted to the hub of each drive wheel such that the wheelchair operator can propel the chair with push/pull movements of the lever. Forward and reverse propulsion is accomplished by a system of two one-way, opposing clutches contained within wheel hubs that
10 are controlled by shifting of the lever handgrips. Only one of the strokes of the lever is converted into rotary motion of the wheel at any given time. The return stroke is only engaged when the reverse direction is selected by the operator through movement of the hand grip, which as a result propels the wheelchair backwards. Green is an inefficient use of the lever system as it uses only one of the stroke directions to propel the wheelchair forward, and can only feasibly
15 rotate the wheel less than one quarter of a full rotation (360 °) for one stroke.

Hanna discloses a lever propelled wheelchair wherein only the forward stroke propels the wheels as the return stroke does not affect the rotation of the wheel as the clutch disconnects the lever from the wheel drivetrain. Hanna employs a rack that connects the lever to the wheel drivetrain. The rack converts the linear motion of the lever into rotational force of the drivetrain by linearly
20 running over the drivetrain gear, causing the gear and the wheel, to rotate. Hanna, like Green is a less efficient system, as only one of the two strokes is employed to propel the wheelchair forward. Additionally, the unidirectional effort can cause physiological strain.

Winter discloses a manually powered wheelchair propelled through the use of a left and right lever. The drivetrain is comprised of driven and driving sprockets which convert the linear
25 motion to rotational motion. The diametric ratio between the driven and driving sprocket is either 4:1 or 3:1 and gives mechanical advantage. Hand position along the tall levers can be modified to change the amount of torque applied. As with Green and Hanna, Winter only uses the forward stroke to propel the wheels, the return stroke ratchets and resets the gear train for the next power stroke. This style of ratcheting lever only allows a fraction of a full rotation (360°).

Tidcomb discloses an operator-propelled vehicle driven by a hand lever system, where a flexible cable member is connected to the drive lever, and wrapped around a wheel drum. The state of tension on the wrapped cable is selected by the operator by closing a grip lever to assume a tensioned state driving the chair, or releasing the grip lever assuming a slackened state allowing for freewheeling. As such, when the lever is moved through a push or pull stroke, and depending on the grip lever position, the wheel will rotate with the movement of the lever under a tensioned cable, and the wheel will not be acted on by a slackened cable. The operator can only use one stroke direction to propel the wheel forward, and the mechanism necessitates learning a coordinated technique to tension and slacken the cables at the appropriate times during power and return strokes to effectively use the vehicle at speed.

Other inventions have attempted to harness forward and backward linear strokes to provide rotary motion. US Patent 4,282,442 (Massinger) discloses a device for converting linear reciprocal motion to continuous rotary motion whereby both forward and backward strokes of the reciprocal motion contribute to the power output of the device. Massinger employs two one-way clutches, wherein during the forward stroke, the first clutch engages and the second clutch slips, while during the backward stroke, the first clutch slips and the second clutch engages. Massinger discloses a complicated system with numerous gears and a large number of moving parts, intended for use in industries such as power generation and heavy machinery. The design is not specifically tailored to vehicle locomotion.

As such, there is a need in the industry for a hand propelled wheeled device that is efficient at converting the linear force applied by the operator into rotational force at the main wheels. The efficiency stems from converting both the forward and return strokes to forward rotation of the wheels, thus propelling the wheeled device forward. In addition, a single stroke of the lever should equate to a full rotation of the mechanism, thus, the operator is not expending energy with multiple strokes for just one wheel rotation. None of the prior art provides for a full wheel rotation with just one power stroke. Furthermore, the steering mechanism of the prior art is inefficient, if present at all. With traditional wheelchair steering mechanisms, the operator steers by manipulating the speed of the main wheels and not through a dedicated steering mechanism, as the operator's hands are occupied with propulsion of the chair. This is an inefficient method of steering, as the operator uses friction to slow down one wheel in order to turn in one direction.

None of the prior art provides for a mechanism of steering the wheeled vehicle outside varying the speed of the rear wheels, except Tidcomb. Although a steering mechanism is present in Tidcomb's design, the steering wheels are not controlled to follow the proper arc for a given turning radius. The steering wheels are fixed to both rotate at the same angle relative to a straight forward path leading to frictional losses and wheel slippage, which could negatively impact running speed turning performance.

Further, the propulsion mechanism disclosed herein can be adapted to perform tasks other than that of propelling the hand powered wheeled vehicle. It can be used in any case where the need arises for a mechanism requiring reciprocal, linear input to be converted into unidirectional rotational output, such as pumps, electricity generators, or any other applicable industrial scenario.

Summary

The Hand Propelled Wheeled Vehicle is primarily comprised of a frame that accommodates the rider and at least one drive wheel that is connected to a propulsion mechanism. To propel the Hand Propelled Wheeled Vehicle, the rider applies linear force to the propulsion mechanism
5 which converts forward and backward linear force into forward rotational force that subsequently rotates the at least one drive wheel mounted to the frame and propels the Hand Propelled Wheeled Vehicle forward. A single stroke through the functional range of the propulsion mechanism, either forward or backwards, is converted into forward rotational force that provides one full rotation of the at least one drive wheel. In addition, the Hand Propelled Wheeled
10 Vehicle contains an efficient means of providing directional control and braking.

15

20

Table of Described Drive Mechanisms

	Fixed Cable/Pulley Harp Mechanism	A
	Wraparound Tensioned Cable/Pulley Harp Mechanism	B
	Rack and Pinion Gear Harp Mechanism	C
5	Sprocket and Pin Rack Harp Mechanism	D
	Floating Sprocket and Chain Mechanism	E
	Fixed Sprocket and Chain Mechanism	F
	Ballscrew/Differential Gear Mechanism	G

10

15

20

Parts Labelled in the Drawings

	10	Hand Propelled Wheeled Vehicle		130	Belleville Spring Stack
	12	Chassis	50	135	Hirth Coupling Assembly
	15	Frame		140	Pin Rack
5	20	Seat		141	Harp Pin
	22	Backrest		145	Driven Hirth Coupling Member
	24	Right Steering Wheel		150	Drive Block
	25	Left Steering Wheel	55	154	Inner Idler Sprocket
	30	Left/Right Drive Wheel		155	Outer Idler Sprocket
10	31	Wheel Hub		165	Inner Drive Chain
	32	Drive Shaft		170	Outer Drive Chain
	33	Axle Mounting Adaptor		175	Floating Support Rail
	34	Fixed Axle	60	181	Chain Drive Handle
	35	Harp Drive Mechanism		185	Fixed Support Rail
15	40	Left Drive Lever Assembly		195	Ball Nut Drive Sleeve
	41	Right Drive Lever Assembly		210	Ball Nut
	45	Axle Tube		211	Ball Bearings
	50	Steering Wheel Mount	65	215	Ball screw
	55	Foot Rest		220	Ball screw Bearing
20	60	Propulsion Mechanism		225	Driving Bevel Gear
	64	Inner Clutch Driver		230	Mechanism Housing
	65	Outer Clutch Driver		235	Steering System
	70	Harp Attachment Knuckle	70	240	Steering Controller
	71	Lever Shaft		245	Right Steering Cable
25	72	Lever Pivot Block		250	Left Steering Cable
	75	Drive Ratio Handle		255	Right Steering Assembly
	80	Harp Frame		256	Left Steering Assembly
	81	Upper Harp Beam	75	260	Right Steering Column
	82	Lower Harp Beam		261	Right Suspension Fork
30	83	Front Harp Pillar		265	Steering Tie Rod
	84	Rear Harp Pillar		270	Left Steering Column
	86	Inner Idling Cable		271	Left Suspension Fork
	87	Inner Driving Cable	80	285	Steering Drive Disc
	88	Outer Driving Cable		290	Braking Mechanism
35	89	Outer Idling Cable		295	Brake Lever
	90	Drive Shaft Assembly		300	Brake Caliper
	91	Brake Disc		310	Brake Line
	95	Inner One-Way Clutch	85	315	Brake Caliper Mount
	100	Outer One-Way Clutch			
40	105	Coupling Lever Assembly			
	110	Drive Shaft Bearings			
	115	Upper Linear Gear Rack			
	116	Lower Linear Gear Rack			
	120	Locking/Unlocking Lever			
45	125	Driving Hirth Coupling Member			
	127	Drive Transfer Pins			

Brief Description of the Drawings

It will now be convenient to describe the invention with particular reference to one embodiment of the present invention. It will be appreciated that the drawings relate to one embodiment of the present invention only and are not to be taken as limiting the invention.

5 Figures **1** and **2** are perspective views of a complete hand propelled wheelchair according to one embodiment of the present invention;

Figure **3** is a perspective view of a hand propelled wheelchair chassis according to one embodiment of the present invention;

10 Figure **4** is an inner view of the propulsion mechanism in association with the wheel in a fixed cable/pulley harp mechanism **A**, according to one embodiment of the present invention;

Figure **5** is an inner perspective view of the propulsion mechanism and harp drive with the wheel hub representing the drive wheel, according to one embodiment of the present invention;

15 Figure **6** is a perspective inner view of the propulsion mechanism with the upper plate of the harp frame removed and the wheel hub representing the drive wheel, according to one embodiment of the present invention;

Figure **7a** is an illustrative image of the harp drive mechanism operating on the forward (push) stroke, according to one embodiment of the present invention;

Figure **7b** is an illustrative image of the harp drive mechanism operating on the return (pull) stroke, according to one embodiment of the present invention;

20 Figure **8** is a cross-sectional view of the propulsion mechanism, according to one embodiment of the present invention;

Figure **9** is a cross-sectional view outlining the interaction between the spoked wheel hub **31** and the drive shaft **32**, according to one embodiment of the present invention;

Figure **10a** is a cross-sectional view of the drive coupling lever in the unlocked (freewheeling) position, according to one embodiment of the present invention;

Figure **10b** is a cross-sectional view of the drive coupling lever in the locked (forward drive) position, according to one embodiment of the present invention;

- 5 Figure **10c** is a magnified cross-sectional view of the hirth coupling in the unlocked (freewheeling) position, according to one embodiment of the present invention;

Figure **11** is an outer perspective view of a wraparound tensioned cable/pulley harp drive mechanism **B**, according to another embodiment of the present invention;

- 10 Figure **12a** is an outer perspective view of the rack and pinion harp drive mechanism **C**, according to another embodiment of the present invention;

Figure **12b** is a lower inner perspective view of a rack and pinion harp drive mechanism **C**, according to another embodiment of the present invention;

Figure **13** is a perspective view of a sprocket and pin rack harp drive mechanism **D**, according to another embodiment of the present invention;

- 15 Figure **14** is an outer perspective view of the floating rail sprocket and chain mechanism **F**, according to another embodiment of the present invention;

Figure **15** is an outer perspective view of the fixed rail sprocket and chain mechanism **G**, according to another embodiment of the present invention;

- 20 Figure **16** is a perspective view of the ballscrew/differential gear drive mechanism **E** with the differential housing and outer sleeve housing cut away, according to another embodiment of the present invention;

Figure **17** is a cross-sectional diagram of the ball nut assembly of the ballscrew/differential gear drive mechanism **E**, according to another embodiment of the present invention;

- 25 Figure **18** is a perspective view of the cable driven steering mechanism, according to one embodiment of the present invention;

Figure **19a** is a cross sectional view of the cable driven steering controller, according to one embodiment of the present invention;

Figure **19b** is a cross sectional view of the cable controlled steering column, according to one embodiment of the present invention;

5 Figure **20a** is a top view schematic of the steering mechanism at maximum left turn input, according to one embodiment of the present invention;

Figure **20b** is a top view schematic of the steering mechanism at maximum right turn input, according to one embodiment of the present invention;

Figure **20c** is a top view schematic of the steering mechanism at straight forward input,
10 according to one embodiment of the present invention; and,

Figure **21** is the brake mechanism, according to one embodiment of the present invention.

15

20

Detailed Description

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred and other embodiments of the invention are shown. This application refers to seven possible embodiments of the invention, having the designations
5 A through G as per the table of contents. No embodiment described below limits any claimed invention, and any claimed invention may cover processes or apparatuses that are not described below. The claimed inventions are not limited to apparatuses or processes having all the features of any one apparatus or process described below or to features common to multiple or all of the apparatuses described below. It is possible that an apparatus or process described below is not an
10 embodiment of any claimed invention. The applicants, inventors or owners reserve all rights that they may have in any invention claimed in this document, for example the right to claim such an invention in a continuing application and do not intend to abandon, disclaim or dedicate to the public any such invention by its disclosure in this document.

With reference to Figures 1 and 2, and according to one embodiment of the present invention, a
15 hand propelled wheeled vehicle is described in greater detail. The hand propelled wheeled vehicle 10 is primarily comprised of: a chair frame 15; seat 20; right and left steering wheels, 24 and 25, respectively; drive wheels 30; harp drive mechanism 35; left drive lever assembly 40; and right drive lever assembly 41. The hand propelled wheeled vehicle converts the operator's linear arm force to rotation that acts on the drive wheels 30 to propel the hand propelled wheeled
20 vehicle. For clarity, the left drive lever 40 will be referred to for the purposes of outlining the drive mechanism function, as the right drive lever assembly 41 produces the identical motion on the opposite side of the vehicle. A single stroke through the functional range of the drive lever assembly 40, either forward or backwards, is converted into forward rotational force that provides one full rotation of the drive wheel 30. The operator exerts forward and backward
25 linear motion on the drive lever assembly 40 to produce a stroke, which pushes or pulls the harp drive mechanism 35. The linear movement of the harp drive mechanism 35 frame rotates clutch drivers (not shown), which in turn rotate the drive wheels 30. The embodiment of the hand propelled wheeled vehicle described within the patent application relates to a wheelchair. A worker skilled in the relevant art would appreciate that a hand propelled wheeled vehicle can be
30 embodied as a number of different vehicles, such as, but not limited to: a bicycle; tricycle; go

cart; rower; and any other wheeled land vehicle that requires the operators force to propel the vehicle. In addition, and in another embodiment of the present invention, the hand propelled wheeled vehicle can be a hand propelled water device such as, but not limited to: a boat, canoe, wheeled rower, or any other human powered watercraft; and can be used in any small boat as the means of propulsion. The water craft application would require peripheral design modifications to the drive output, such as the addition of fins or propellers, to adapt the vehicle to water. A worker skilled in the relevant art would appreciate the various ways that the propulsion mechanism described herein can be modified to propel the craft through water.

With reference to Figure 3 and according to one embodiment of the present invention, the chair chassis 12, comprised of: the frame 15 and the seat 20, is described in more detail. The chair frame 15 is comprised of a tubular structure formed to accommodate the operator in a sitting position. The material used for the tubular structure can be comprised of a number of different metals or composites that are light weight and have sufficient rigidity. A worker skilled in the relevant art would appreciate the various structures that can maximize rigidity and form the shape of the chair frame 15. The chair frame 15 contains an axle tube 45 and steering wheel mounts 50. The axle tube 45 connects the drive wheel (not shown) to the chair frame 15. A drive wheel assembly (not shown) is set within the axle tube 45 which connects the drive wheel (not shown) to the chair frame 15. In a similar manner, the steering wheel mount 50 connects the chair frame 15 to the steering wheels (not shown). The location for the steering wheel mount 50 allows for the connection of the steering system. The seat 20 is set on top of the chair frame 15 at the location where the operator would sit. The seat 20 provides support and comfort to the operator while seated in the hand propelled wheeled device (not shown). The seat 20 is comprised of soft material which is comfortable but also provides support to the operator. The backrest 22 is an addition to the seat 20 and provides lumbar support and lateral stability for the operator. A worker skilled in the relevant art would appreciate the various ways of forming and configuring the seat 20 and backrest 22. The chair frame 15 contains a footrest 55, which allows the operator's feet to be secured into the chair frame 15.

With reference to Figure 4 and according to the preferred embodiment of the present invention the fixed cable/pulley harp mechanism A, the propulsion mechanism 60 is described in greater detail. The propulsion mechanism 60 is primarily comprised of: drive wheels 30; harp drive

mechanism **35**; and drive lever assembly **40** or **41**. The harp drive mechanism **35** is further comprised of: harp frame **80**; and, clutch drivers **65**. The drive lever assembly is comprised of: a lever shaft **71**; steering controller **240** or brake lever **295**; a drive ratio handle **75**. The preferred embodiment, shown in Figure 4, employs the fixed cable/pulley mechanism **A** as the drive
5 mechanism **35**. As shown in Figures 1 and 2, the propulsion mechanism **60** works in unison, on either side of the hand propelled wheeled vehicle, in a left and right-handed configuration where the left drive lever **40** contains a braking lever **295**, and the right drive lever **41** contains a steering controller **240**. The harp frame **80** is floating, as it is only attached to the hand propelled wheeled vehicle through the inner and outer clutch drivers, **64** and (not shown), respectively, and
10 the attachment knuckle **70**. In one embodiment of the present invention, the drive lever assembly **40** is fixed to the wheelchair frame (not shown) at the drive pivot block **72**. As a result of the pivot block **72** the stroke motion applied by the operator is translated into linear motion of the harp drive mechanism, relative to the harp frame, through the use of harp attachment knuckle **70**. As the harp frame **80** linearly traverses between the clutch drivers, **64** and **65** (not shown)
15 through a stroke of the drive lever assembly **40**, the clutch driver **64**, which is affixed to the center of the drive wheel **30**, rotates as the harp frame **80** runs across it. The connection point of the harp frame **80** to the drive lever **40** can be modified at the knuckle **70** and is accomplished through the axial movement of the drive ratio handle **75** along the drive lever **40**. The adjustment up or down of the connection point alters the range of travel for the harp frame **80**,
20 and this variation in effective range acts as a gear change mechanism. A shorter stroke equates to decreased force required to complete the full stroke, along with increased power to the drive wheel **30**, and is beneficial for starting off and low speeds. The longer stroke equates to increased range of movement for the harp frame **80**, and a better ability to catch up to freewheeling, and apply power to the drive wheel **30** at higher speeds. A single stroke through the functional range
25 of the drive lever assembly **40**, translates into a full turn of the driver, which equates to more than one full revolution of the drive wheel **30** at standstill. The rotation of the clutch driver **64** is accomplished through a direct interaction of the harp frame **80** with the clutch driver **64**. In one embodiment the direct interaction is accomplished through the use of the fixed cable/pulley mechanism **A**. The interaction can also be accomplished through: a wraparound tensioned
30 cable/pulley harp mechanism **B**; rack and pinion harp mechanism **C**; sprocket and pin rack harp mechanism **D**; pivoting sprocket and chain mechanism **E**; linear sprocket and chain mechanism

F; and, differential gear mechanism **G**. These seven designs have a number of key features in common: the drive lever **40**, pair of one way clutches, and the drive shaft assembly **90** upon which the clutches engage and disengage. A worker skilled in the relevant art would appreciate the various means of linking the harp **80**, or similar linear motion, with the clutch driver **64**.

5 With reference to Figures **5**, and **6**, and according to one embodiment of the present invention, the fixed cable/pulley mechanism **A** propulsion mechanism **60** is described in greater detail. Once the function of this embodiment of the invention is described, other embodiments of the mechanism will become more clearly understood. In both Figure **5** and **6** the drive wheel (not shown) is removed for illustrative purposes only, the wheel hub **31** and brake disc **91** are shown
10 in order to outline the drive wheel location. The harp drive mechanism **35** is comprised of: inner and outer clutch drivers, **64** and **65**, respectively; a harp frame **80**; inner and outer driving cables, **87** and **88**, respectively; and drive shaft assembly **90**. The clutch drivers **64** and **65** are embodied in this mechanism as pulleys. The inner and outer driving cables, **87** and **88**, couple the harp frame **80** onto the inner and outer clutch drivers, **64** and **65**. The coupling translates the linear
15 motion of the harp frame **80** into rotational motion of the inner and outer clutch drivers **64** and **65**, which is transferred onto the drive shaft assembly **90**. The harp **80** is a free floating unit that moves linearly across the inner and outer clutch drivers **64** and **65**. Forward and backward linear movement of the harp **80** is driven by the drive lever **40**. The operator pushes and pulls the drive lever **40** which moves the harp frame **80** forward and backwards, respectively. In the present
20 embodiment, the drive lever **40** is attached to the chair (not shown) at the pivot block **72**, and as a result, a harp attachment knuckle **70** is required to ensure that the linear force provided by the operator is translated to linear motion onto the harp **80**. A worker skilled in the relevant art would appreciate the various means of connecting the drive lever assembly **40** to the harp frame **80**. With specific reference to Figure **6**, the propulsion mechanism **60** is shown with the upper
25 beam of the harp frame **80** removed. In this configuration, the inner and outer driving cables **87** and **88**, respectively, are shown coupled to the inner and outer clutch drivers **64** and **65**, respectively, and fixed onto the harp frame **80**. The front end of the inner driving cable **87** and the rear end of the outer driving cable **88** are attached to the inner edges of the harp frame **80**. The inner and outer drive cables **87** and **88** then wrap around, and are affixed to, the inner and
30 outer clutch drivers, **64** and **65**, respectively. In the fixed cable/pulley mechanism embodiment, the inner and outer cables, **87** and **88** are complemented by two inner and outer idling cables, **86**

and **89**, respectively. The inner idling cable **86** is attached at the rear of the harp frame **80**, opposite to the inner driving cable **87**, and at its other end is affixed to, and wrapped around the inner clutch driver **64**. The outer idling cable **89** is attached at the front of the harp frame **80**, opposite to the outer driving cable **88**, and at its other end is affixed to, and wrapped around the outer clutch driver **65**. The function of anchoring the driving and idling cables to the clutch drivers in the fixed cable/pulley mechanism is to eliminate the potential of cable slippage around the clutch drivers. The inner and outer drivers, **64** and **65**, respectively, are adjacent and set onto the drive shaft assembly **90**. The harp frame **80** is set between the inner and outer clutch drivers, **64** and **65** with the upper and lower beams, **81** and **82**, respectively, containing integral rails which align with each other and are set between the clutch drivers, **64** and **65**. The beams, **81** and **82**, act as guides, allowing the harp frame **80** to run in alignment with the clutch drivers, **64** and **65**. The front and rear pillars, **83** and **84**, respectively, are formed to align the beams, **81** and **82**. A worker skilled in the relevant art would appreciate the various means of constructing a harp frame **80** wherein the upper and lower beams, **81** and **82**, respectively, contain rails or similar protrusions that align.

With reference to Figure 7, the propulsion mechanism of the harp drive mechanism **35** is shown in greater detail. Figure **7a** describes the action of the harp drive mechanism **35** when the operator is pushing the drive lever **40**. Figure **7b** describes the action of the harp drive mechanism **35** when the operator is pulling the drive lever **40**. As the harp frame **80** moves forward or backward, the inner and outer driving cables, **87** and **88**, respectively, and the inner and outer idling cables, **86** and **89**, respectively, partially wind and unwind around corresponding clutch drivers, causing the drivers to rotate. As described in Figure **7a**, when the operator pushes the drive lever **40**, the harp frame **80** moves forward and passes between the inner and outer clutch drivers, **64** and **65**, respectively. As the harp **80** moves forward, the inner clutch driver **64** is engaged with the drive shaft (not shown) and is driving the wheel hub **31** forward, as the inner clutch driver **64** is rotated forward by unwinding of the inner driving cable **87**. The outer clutch driver **65**, is being rotated backwards by the unwinding of the outer idling cable **89** and is overrunning the drive shaft (not shown), thus transferring no rotation to the wheel hub **31**. As described in Figure **7b**, when the operator pulls the lever assembly **40**, the harp frame **80** moves backward guided by the upper and lower beams, **81** and **82**, respectively. As the harp frame **80** moves backward, the outer clutch driver **65** is engaged with the drive shaft (not shown) and is

driving the drive wheel, partially shown as a wheel hub **31**, forward, as the outer clutch driver **65** is rotated forward by the unwinding of the outer driving cable **88**. The inner clutch driver **64**, is being rotated backwards by the unwinding of the inner idling cable **86** and is overrunning the drive shaft (not shown), thus transferring no rotation to the wheel hub **31**. The alternate
5 directions in which the driving cables **87** and **88**, and idling cables **86** and **89**, are wound around the clutch drivers, **64** and **65**, is responsible for the contra-rotating action.

With reference to Figure **8**, and according to one embodiment of the present invention, a cross-sectional view of the propulsion mechanism **60** is described in greater detail. For clarity, the drive lever is not shown, and the drive wheel (not shown) is represented in the cross-section with
10 the wheel hub **31** and disc brake **91**. The drive shaft assembly **90** is primarily comprised of: the drive shaft **32**, the fixed axle **34**, and axle mounting adaptor **33**. The axle mounting adaptor **33** secures the fixed axle **34** to the chair frame (not shown) as the drive wheel propulsion mechanism **60** rotates about the fixed axle **34**. As such, the left drive wheel (not shown) of the propulsion mechanism **60** is independent from the right drive wheel (not shown). The coupling
15 lever assembly **105** enables the wheel hub **31** to be coupled to the drive shaft **32**, and in its locked position, rotation of the drive shaft **32** around the fixed axle **34** rotates the wheel hub **31** forward. The inner and outer one way drive clutches, **95** and **100**, respectively, are mated to the inner and outer clutch drivers, **64** and **65**, respectively, and mount onto the drive shaft **32**. The inner and the outer one way drive clutches, **95** and **100** are mounted to drive in the same
20 direction (forward). As such when the inner one way drive clutch **95** is driving, the outer one way drive clutch **100** is overrunning (idling), and vice versa, as the harp and cables cause both drivers to run in opposite directions. The inner and outer drive cables, **87** and **88**, respectively, wrap around the inner and outer clutch drivers, **64** and **65**, respectively, causing the inner and outer drivers, **64** and **65**, to contra-rotate as the harp **80** moves. The rotation of the inner and
25 outer clutch drivers, **64** and **65**, respectively, is translated into unidirectional rotation of the drive shaft **32**, through the inner and outer one way drive clutches, **95** and **100**, respectively. The drive shaft **32** rotates around the fixed axle **34**, which is aided by bearings **110**. The harp frame, shown through the upper and lower harp beams **81** and **82**, respectively, is guided between the inner and outer clutch drivers, **64** and **65**, respectively. The upper and lower harp beams, **81** and
30 **82** act as guide rails, allowing the harp frame, to maintain alignment with the inner and outer clutch drivers, **64** and **65**.

When the coupling lever assembly **105** is in the locked position, the wheel hub **31** and the drive shaft **32** are locked together. In this locked configuration, rotation of the drive shaft **32**, translates to the wheel hub **31** and drive wheel (not shown). When the coupling lever assembly **105** is in the unlocked position, the wheel hub **31** and the drive shaft **32** are disconnected, allowing the wheel hub **31** to rotate freely and independently of the drive shaft **32**. As a result, the operator has the ability to maneuver the wheelchair through direct manipulation of the hand rings affixed to the drive wheel **30**.

With reference to Figure **9**, and according to one embodiment of the present invention, a cross-sectional view, outlining the interaction between the wheel hub **31** and the drive shaft **32**, is described in greater detail. For clarity, only the drive shaft assembly **90** is shown, and comprises: the drive shaft **32**, fixed axle **34**, hirth coupling assembly **135**, wheel hub **31**; and clutch drivers **64** and **65**. The fixed axle **34** attaches to the chair frame (not shown) and does not rotate. The forward rotation of the wheel hub **31** is dependent on its connection with the drive shaft **32** through the hirth coupling assembly **135**. In the coupling's locked configuration, rotation of the wheel hub **31** occurs, as the drive shaft **32** is being rotated by the inner and outer clutch drivers, **64** and **65**, respectively when the drive lever (not shown) is manipulated. In the unlocked configuration, the wheel hub **31** is disengaged from the drive shaft **32** at the hirth coupling **135**, and can freely rotate around the drive shaft **32**. In this configuration, the harp drive mechanism (not shown) does not affect the rotation of the wheel hub **31**. Any rotation placed upon the drive shaft **32** by the clutch drivers, **64** and **65**, is not transferred to the wheel as the drive shaft **32** rotates freely inside the hub **31**. In the unlocked configuration, the operator can directly rotate the drive wheels (not shown) forward or backward as in a conventional wheelchair, without affecting the harp drive mechanism. The unlocked configuration would be used by the operator to move backward from an obstruction, or when attempting to maneuver in small spaces.

With reference to Figures **10a**, **10b**, and **10c**, and according to one embodiment of the present invention, a cross-sectional view of the coupling lever assembly **105** is described in greater detail. The coupling lever assembly **105** is primarily comprised of: a locking/unlocking lever **120**; driving hirth coupling member **125**; driven hirth coupling member **145**; Belleville spring stack **130**; and drive transfer pins **127**. With specific reference to Figure **10c**, the hirth coupling

assembly **135** is shown in a magnified image of Figure **10a**. The hirth coupling **135** is comprised of driving and driven hirth coupling members, **125** and **145**, respectively, which lock together. A worker skilled in the relevant art would appreciate the mode of action of a hirth coupling. The driven hirth coupling member **145** is coupled to the wheel hub **31** through drive transfer pins **127**, as such, the driven hirth coupling member **145** functions to engage or disengage the wheel hub **31** from the drive shaft **32**. With specific reference to Figure **10a**, the coupling lever assembly **105** is shown in its unlocked position. In the unlocked position, the Belleville spring stack **130** positively separates the driving and driven hirth coupling members, **125** and **145**, thereby disengaging the drive shaft **32** from the wheel hub **31**. The spring stack **130** is in place to separate the hirth coupling. In the unlocked configuration, the wheel hub **31** is free to rotate around the drive shaft **32**, as the unlocking disconnects the rotation of the drive shaft **32** from the wheel hub **31**. With specific reference to Figure **10b**, the coupling lever assembly **105** is shown in its locked position. In the locked position, the lever **120** forces the driven hirth coupling member **145** onto the driving hirth coupling member **125**, engaging the hirth coupling **135**, thereby locking the driven hirth coupling member **145** to the drive shaft **32**. The drive transfer pins **127** mate the driven hirth coupling member **145** with the wheel hub **31**, thereby transferring the rotation from the drive shaft **32** to the wheel hub **31**. The Belleville spring stack **130** is compressed, and the mechanism is locked in place by the coupling lever **105**, as the spring stack **130** only provides enough force to separate the hirth coupling when the lever **105** is in the unlocked position. This configuration is necessary, as it allows the operator to lock or unlock the coupling lever **105** at any time, regardless of the relative position the wheel hub **31** and drive mechanism **35**. The coupling is designed in this embodiment of the invention to feature a short range of travel that corresponds to the allowable movement of the lever **105**.

With reference to Figure **11**, and according to one embodiment of the present invention, the wraparound tensioned cable mechanism **B** is described in greater detail. The wraparound tensioned cable mechanism is another embodiment of the harp drive mechanism **35** that is used within the propulsion mechanism (not shown) of the hand propelled wheeled vehicle. As stated above, this is another means of converting linear movement of the harp frame **80** into rotational movement of the inner and outer clutch drivers, **64** and **65**, respectively. In this embodiment, the inner and outer drive cables, **87** and **88**, respectively, are comprised of a single cable and the clutch drivers **64** and **65** are embodied as pulleys. For ease of reference, the function of the harp

drive cable mechanism will be described with regards to the inner drive cable **87** wrapping around the inner clutch driver **64**. The same mechanism occurs with the outer drive cable **88** wrapping around the outer clutch driver **65**. One end of the inner drive cable **87** is attached to the harp frame **80**; it is then wound around the inner clutch driver **64** and attached at its other end to the harp frame **80** at sufficiently high tension to eliminate slippage. As the harp frame **80** moves in a linear direction, the inner drive cable **87** partially winds and unwinds around the inner clutch driver **64**, causing the inner clutch driver **64** to rotate, driving or overrunning the drive shaft **32**.

With reference to Figures **12a** and **12b**, and according to one embodiment of the present invention, a rack and pinion harp drive mechanism **C** is described in greater detail. The mechanism **C** is another embodiment of the harp drive mechanism **35** that is used within the propulsion mechanism (not shown) of the hand propelled wheeled vehicle. As stated above, it is another means of converting linear movement of the harp frame **80** into rotation of the inner and outer clutch drivers, **64** and **65**, respectively. In this embodiment the rack and pinion drive mechanism **C** employs a gear system to convert the linear movement of the harp frame **80** into rotational movement of the inner and outer clutch drivers, **64** and **65**, and subsequently, the wheel hub **31**. The inner and outer clutch drivers, **64** and **65**, respectively, are comprised of pinion gears, and are engaged with the upper and lower linear gear racks, **115** and **116**, set within the upper and lower harp beams, **81** and **82**, of the harp frame **80**. As the harp **80** is moved by the drive lever (not shown) it passes around the clutch drivers, **64** and **65**, and the teeth of the upper and lower gear racks, **115** and **116**, engage with the clutch drivers, **64** and **65**, causing one to drive the wheel hub **31** and one to overrun. On the push stroke, the lower gear rack **116** is driving the wheel, and on the pull stroke the upper gear rack **115** is driving the wheel.

With reference to Figure **13**, and according to one embodiment of the present invention, the sprocket and pin rack harp mechanism **D** is described in greater detail. The mechanism **D** is another embodiment of the harp drive mechanism **35** that is used within the propulsion mechanism (not shown) of the hand propelled wheeled vehicle. As stated above, this is another means of converting linear movement of the harp frame **80** into rotational movement of the inner and outer clutch drivers, **64** and **65**, respectively. In this embodiment an integral pin rack system converts the linear movement of the harp frame **80** into rotational movement of the inner and outer clutch drivers, **64** and **65**, respectively, and the wheel hub **31**. The inner and outer drivers,

64 and 65, respectively, are comprised of sprocket gears, which engage with the pin rack 140 set within the upper and lower harp beams, 81 and 82, of the harp frame 80. It is this interaction of the pin rack 140 moving forwards and backwards while the harp pins 141 are engaged with the teeth of the inner and outer clutch drivers, 64 and 65, respectively, that allows the mechanism to rotate the wheel hub 31. Additionally the front and rear harp pillars, 142 and 143, respectively, are formed differently than the pillars of the previous harp frame 80. The pin racks 140 are aligned between the inner and outer clutch drivers, 64 and 65, respectively, necessitating a symmetrical front and rear pillar to maintain alignment of the harp pins 141.

With reference to Figure 14, and according to another embodiment of the present invention, the floating sprocket and chain mechanism F is described in greater detail. The floating sprocket and chain mechanism F is another embodiment of the harp drive mechanism 35 that is used within the propulsion mechanism (not shown) of the hand propelled wheeled vehicle. As stated above, this is another means of converting linear movement into rotational movement of the inner and outer clutch drivers, 64 and 65, respectively. In this case the harp frame 80 is substituted by a series of chains and sprockets containing: a drive block 150, floating support rail 175, inner and outer clutch drivers, 64 and 65, respectively, embodied as sprockets; inner and outer idler sprockets, 165 and 155, respectively, and inner and outer drive chains, 165 and 170, respectively.

The floating support rail 175 is the backbone of mechanism F, as it supports the drive block 150, the inner and outer clutch drivers, 64 and 65, respectively, and the inner and outer idler sprockets, 154 and 155, respectively. A drive block 150 runs along the support rail 175 from the inner and outer idler sprockets, 154 and 155, to the inner and outer clutch drivers, 64 and 65. The inner drive chain 165 is fixed to the top of the chain driver 150, wraps around the inner idler sprocket, 154, and around the inner clutch driver, 64, and terminates the loop by attaching to the top of the drive block 150. The outer drive chain 170 is fixed to the bottom of the drive block 150, wraps around the outer idler sprocket 155 and around the outer clutch driver 65, and terminates the loop by attaching to the bottom of the chain driver 150. The drive lever assembly 40 is connected to the drive block 150. The block 150 moves across the support rail 175 as the operator pushes and pulls the drive lever assembly 40. In this arrangement, the lateral movement of the chain block 150 across the support rail 175 causes the inner and outer chains, 165 and 170,

to move along their respective looped paths causing the inner and outer clutch drivers, **64** and **65**, to rotate along with the inner and outer idler sprockets, **154** and **155**. The rotation of the inner and outer clutch drivers, **64** and **65**, is translated into forward rotation of the wheel hub **31**. The floating support rail **175** and mechanism float freely, as with the harp frame **80**, as the unit pivots
5 about the fixed axle **34**.

With reference to Figure **15**, the fixed sprocket/chain mechanism **G** is described. Mechanism **G** functions in a manner identical to mechanism **F**. In this case the harp frame **80** is substituted by a drive block **150**, a chain drive handle **181**, fixed support rail **185**, the clutch drivers, **64** and **65**, embodied as sprockets, inner and outer idler sprockets, **154** and **155**, respectively; and inner and
10 outer drive chains, **165** and **170**, respectively. Where the chain drive handle **181** moves the drive block **150** along the fixed support rail **185** and actuates the inner and outer drive chains, **165** and **170**, respectively, are engaged with the sprocket series. The difference between the fixed and floating versions of the sprocket and chain assemblies **F** and **G**, lies in the connection point between either the drive lever **40** or the chain drive handle **181**, and in the path followed by the
15 chain guides. In mechanism **G**, the support rail **185** is fixed at multiple points, remaining stationary, and attached to the chair frame (not shown), and the chain drive lever **181** contains a handle and drive block **150** connected directly to the chains. The operator actuates the chain drive lever **181** linearly backwards and forwards, driving the inner and outer clutch drivers, **64** and **65** respectively, via the inner and outer drive chains, **165** and **170**, respectively. In this
20 mechanism, the drive lever **181** is fixed to the drive block **150**, not to the frame, and does not pivot around a fixed point. The relationship between the inner and outer clutch drivers, **64** and **65**, as they drive or overrun the drive shaft (not shown) to rotate the wheel hub **31** forward, is maintained within the framework of the propulsion mechanism, the same as the other variants.

With reference to Figures **16**, and **17**, and according to one embodiment of the present invention,
25 the ballscrew/differential gear mechanism **E** is described in greater detail. The ballscrew/differential mechanism **E** is another embodiment of the harp drive mechanism **35** that is used within the propulsion mechanism (not shown) of the hand propelled wheeled vehicle. As stated above, this is another means of converting linear movement of an assembly similar to the harp frame **80** into rotational movement of the inner and outer clutch drivers, **64** and **65**,
30 respectively. The wheel hub **31** and the fixed axle **34** are shown as reference points to orient the

ballscrew/differential gear mechanism **E** within the propulsion mechanism. In this embodiment, the harp drive mechanism **35** is replaced with a ball screw/differential gear mechanism **E**, comprised of: the ball nut drive sleeve **195**, ball nut **210**, ballscrew **215**, ballscrew bearings **220**, driving bevel gear **225**, mechanism housing **230**, and clutch drivers **64** and **65**. In this mechanism, the clutch drivers, **64** and **65**, are embodied as differential gears. The housing **230** protects the running components of the mechanism from contaminants, while sealing in lubricant. With specific reference to Figure **16**, the ballscrew/differential gear mechanism is shown in greater detail. The ball nut **210** is set within the ball nut drive sleeve **195** and this assembly is moved axially along the ballscrew **215** by interaction with the drive lever (not shown). The ballscrew is fixed at one end through ballscrew bearings **220** to the mechanism housing **230**. The linear movement of the ball nut **210** causes the ballscrew **215** and the attached driving bevel gear **225** to rotate, which subsequently rotates the inner and outer clutch drivers, **64** and **65**, respectively. The drivers, **64** and **65**, are contra-rotating in an identical fashion to the drivers in the variants having a harp frame **80**, as they interact with the drive shaft (not shown) to rotate the wheel hub **31** forward.

With specific reference to Figure **17**, the ball nut **210** and ballscrew **215** is schematically shown. Ball bearings **211** are located within the ball nut **210**, and are positioned within the grooves of the ballscrew **215**, a worker skilled in the relevant art will appreciate the various means of constructing and utilizing a ballscrew assembly. The helix of the grooves causes the ballscrew **215** to rotate as the ball nut **210** moves axially along it. The driving bevel gear **225** is fixed to the ballscrew **215**, and transfers its rotation to the inner and outer clutch drivers, **64** and **65** respectively. As the ball nut **210** moves towards the driving bevel gear **225**, the gear is rotated clockwise, when the ball nut **210** moves away from the driving bevel gear **225**, it rotates counter-clockwise. This contra-rotating action is the key to the push pull of the driving lever (not shown) harnessing the one-way clutches to achieve unidirectional rotation output from a reciprocating linear input.

With reference to Figures **18**, **19**, and **20**, and according to one embodiment of the present invention, a steering mechanism **235** is described in greater detail. The steering mechanism **235** is incorporated into the right drive lever assembly **41**. The operator can control the hand propelled wheeled vehicle's direction of travel by operating the steering controller **240** located

on the handle of the right drive lever assembly **41**. The right and left steering assemblies, **255** and **256**, respectively, are comprised of right and left suspension forks, **261** and **271** respectively, and right and left steering tires, **24** and **25** respectively. Through the rotation of the controller **240** the operator can efficiently control the direction in which the hand propelled wheel vehicle is travelling. Rotation of the controller **240** rotates the right steering column **260**, causing the right steering assembly **255** to rotate and to move the tie rod **265**. The movement of the tie rod **265** causes the left steering assembly **256** to rotate in correspondence with the right steering assembly **255**. The controller **240** and the right steering column **260** are mated through the left and right steering cables, **275** and **280**, respectively. With specific reference to Figure **19a**, controller **240** is shown in greater detail. To further illustrate the mechanism, a cross-sectional view of the controller **240** is shown. The controller **240** rotates around the lever assembly **40**. The rotation of the controller **240**, pushes and pulls the left and right steering cables, **275** and **280**, respectively, which are fixed at the base of the controller **240**. The pushing and pulling of the left and right steering cables, **275** and **280**, respectively, affects the apparent length of the resultant wire at the opposite end of the respective steering cables, which are attached to the steering drive disc (not shown). With specific reference to Figure **19b**, the right steering column **260** is shown in greater detail. To further illustrate the mechanism, a cross-sectional view of the right steering column **260** is shown. The left and right steering cables, **275** and **280**, are fixed to the steering drive disc **285**. The change in apparent length of the left and right steering cables, **275** and **280**, respectively, rotates the steering drive disc **285** and subsequently the right steering column **260**. Rotation of the right steering column **260**, turns the right steering assembly (not shown), which is directly connected to the right steering column **260**, and pulls or pushes the steering tie rod **265**. The pushing and pulling of the tie rod **265** rotates the left steering assembly (not shown) about the left steering column (not shown).

With reference to Figure **20**, the turning mechanism **235** is shown in greater detail. To ensure a smooth turn in the left and right direction, the inside steering assembly for a given turn has a higher turn radius than the outside steering assembly. With specific reference to Figure **20a**, the turning mechanism **235** is shown in a maximum left turn configuration. The inner steering assembly, in this case the left steering assembly **256**, has a higher turning radius than the outer, or right steering assembly **255**, when the controller **240** is rotated left **90** degrees. Similarly, and with specific reference to Figure **20b**, the turning mechanism **235** is shown in a maximum right

turn. The inner steering assembly, in this case the right steering assembly **255**, has a higher turning radius than the outer or left steering assembly **256** when the controller **240** is turned right **90** degrees. The configurations shown in figures **20a** and **20b** demonstrate that a smooth turning arc is achieved, as the steering geometry allows for the inner wheel to move slower than the
5 outer wheel in a turning scenario. With specific reference to Figure **20c**, the turning mechanism **235** is shown with a straight forward input, when the hand propelled wheel vehicle (not shown) is moving in a straight path. When the controller is unturned, the right and left steering assemblies, **255** and **256**, respectively, are parallel and tracking forward.

With reference to Figure **21**, and according to one embodiment of the present invention, a
10 braking mechanism **290** is described in greater detail. The braking mechanism **290** is primarily comprised of: a brake lever **295**; brake discs **91**; brake calipers **300**; and, a brake line **310**. The braking mechanism **290** is incorporated into the left drive lever assembly **40**. As such, the operator can operate the hand propelled wheeled vehicle through manipulation of the left drive lever assembly **40**. The operator can brake by applying pressure on the brake lever **295**. When
15 applying pressure to the brake lever, the brake calipers **300** on the left and right sides of the chair engage with the brake disc **91** thereby slowing down the disc's rotation, in turn slowing the rotation of the wheel hub **31**. The brake system can be actuated hydraulically, or via a cable system. A worker skilled in the relevant art would appreciate the various means that can be used to slow down a wheeled vehicle and the placement/composition of a braking mechanism.
20 Additionally, the braking lever **295** has the ability to lock when activated, acting as a parking brake to keep the hand propelled wheeled vehicle stationary when the operator is entering or egressing the hand propelled wheeled vehicle, and when parked.

The term means of connecting the propulsion mechanism to the drive wheel includes, but is not limited to, the drive shaft assembly or any other means of connecting described in the figures.

25 The term efficient means of providing directional control includes, but is not limited to, a steering system, steering controller, right steering assembly, left steering assembly, right steering column, right suspension fork, steering tie rod, left steering column, left suspension fork and steering drive disc or any other means of providing directional control described in the figures.

The term efficient means of providing braking capabilities includes, but is not limited to, a braking mechanism, brake lever, brake caliper, brake line and brake caliper mount or any other braking capabilities described in the figures.

5

10

15

20

25

CLAIMS

1. A hand propelled wheeled device for a rider comprising:

- a) A frame to support the rider;
- b) At least two wheels mounted to the frame for displacement of the rider;
- 5 c) A propulsion mechanism that converts the rider's applied linear force into rotation force for rotating a drive wheel and propelling the wheeled device;
- d) A means of connecting the propulsion mechanism to the drive wheel; and
- e) An efficient means of providing directional control and braking capabilities of the wheeled device.

10 2. The propulsion mechanism of claim 1 further comprising:

- a) A harp frame linearly traversing around a drive shaft and two contra-rotating clutch drivers for converting the rider's linear force;
- b) Two clutch drivers for rotating the drive shaft through one way drive clutches;
- c) One or more one-way drive clutches converting forward and reverse linear motion of the
- 15 harp into forward rotation of the two wheels mounted on the frame; and
- d) The drive shaft connected to at least one wheel for displacing the wheeled device.

wherein the rider exerts a linear force on the harp that moves the harp linearly across the two clutch drivers causing the drivers to contra-rotate.

3. The drive lever assembly of Claim 1 further comprising:

- 20 a) a drive lever shaft attached to the harp through a knuckle;
- b) the drive lever assembly being attached at a pivot block of the frame of the hand propelled wheeled device;
- c) the efficient means of providing directional control and braking capabilities of the wheeled device, mounted to the drive lever assembly, and in such a way they can each
- 25 be used without the rider removing either hand from the drive lever assembly

wherein the harp connection point at the knuckle is adjustable along the lever shaft, relative to the pivot block, modifying the harp's range of travel as the lever is moved through its functional range, thus enabling variable selection of torque and displacement applied to the driving wheel.

4. The harp drive mechanism of claim 2 wherein the harp's linear motion is converted to contra-rotating motion of two clutch drivers (pulleys) through a fixed cable pulley mechanism.
- 5 5. The harp drive mechanism of claim 2 wherein the harp's linear motion is converted to contra-action of two clutch drivers (pulleys) through a wraparound tensioned cable mechanism.
6. The harp drive mechanism of claim 2 wherein the harp's linear motion is converted to contra-rotating motion of two clutch drivers (pinion gears) through a rack and pinion mechanism.
- 10 7. The harp drive mechanism of claim 2 wherein the harp's linear motion is converted to contra-rotating motion of two clutch drivers (sprockets) through a sprocket and pin rack mechanism.
8. The harp drive mechanism of claim 2 wherein a linear motion is converted to contra-rotating motion of two clutch drivers (sprockets) through a floating rail sprocket and chain mechanism.
9. The harp drive mechanism of claim 2 wherein a linear motion is converted to contra-rotating motion of two clutch drivers (sprockets) through a fixed rail sprocket and chain mechanism.
- 15 10. The harp drive mechanism of claim 2 wherein a ballscrew backdriving is converted to contra-rotating motion of two clutch drivers (differential gears) through a ballscrew/differential gear mechanism.
11. A hand propelled wheeled device for a rider in claim 1 wherein the hand propelled wheeled device is a wheelchair.
- 20 12. A hand propelled wheeled device for a rider in claim 1 wherein the hand propelled wheeled device is a vehicle such as a go cart, bicycle, tricycle or any land vehicle having at least one driving wheel.
13. A hand propelled water device for a rider in claim 1 wherein the hand propelled water device is a wheeled rower, boat, canoe or any other human powered watercraft.
- 25

14. The means through which the harp drive mechanism converts reciprocal linear motion into unidirectional rotation is not limited in use to vehicles or propulsion, and could see use in a variety of other industries where the size and type of input for the mechanism could vary based on the desired use.

5

10

15

20

25

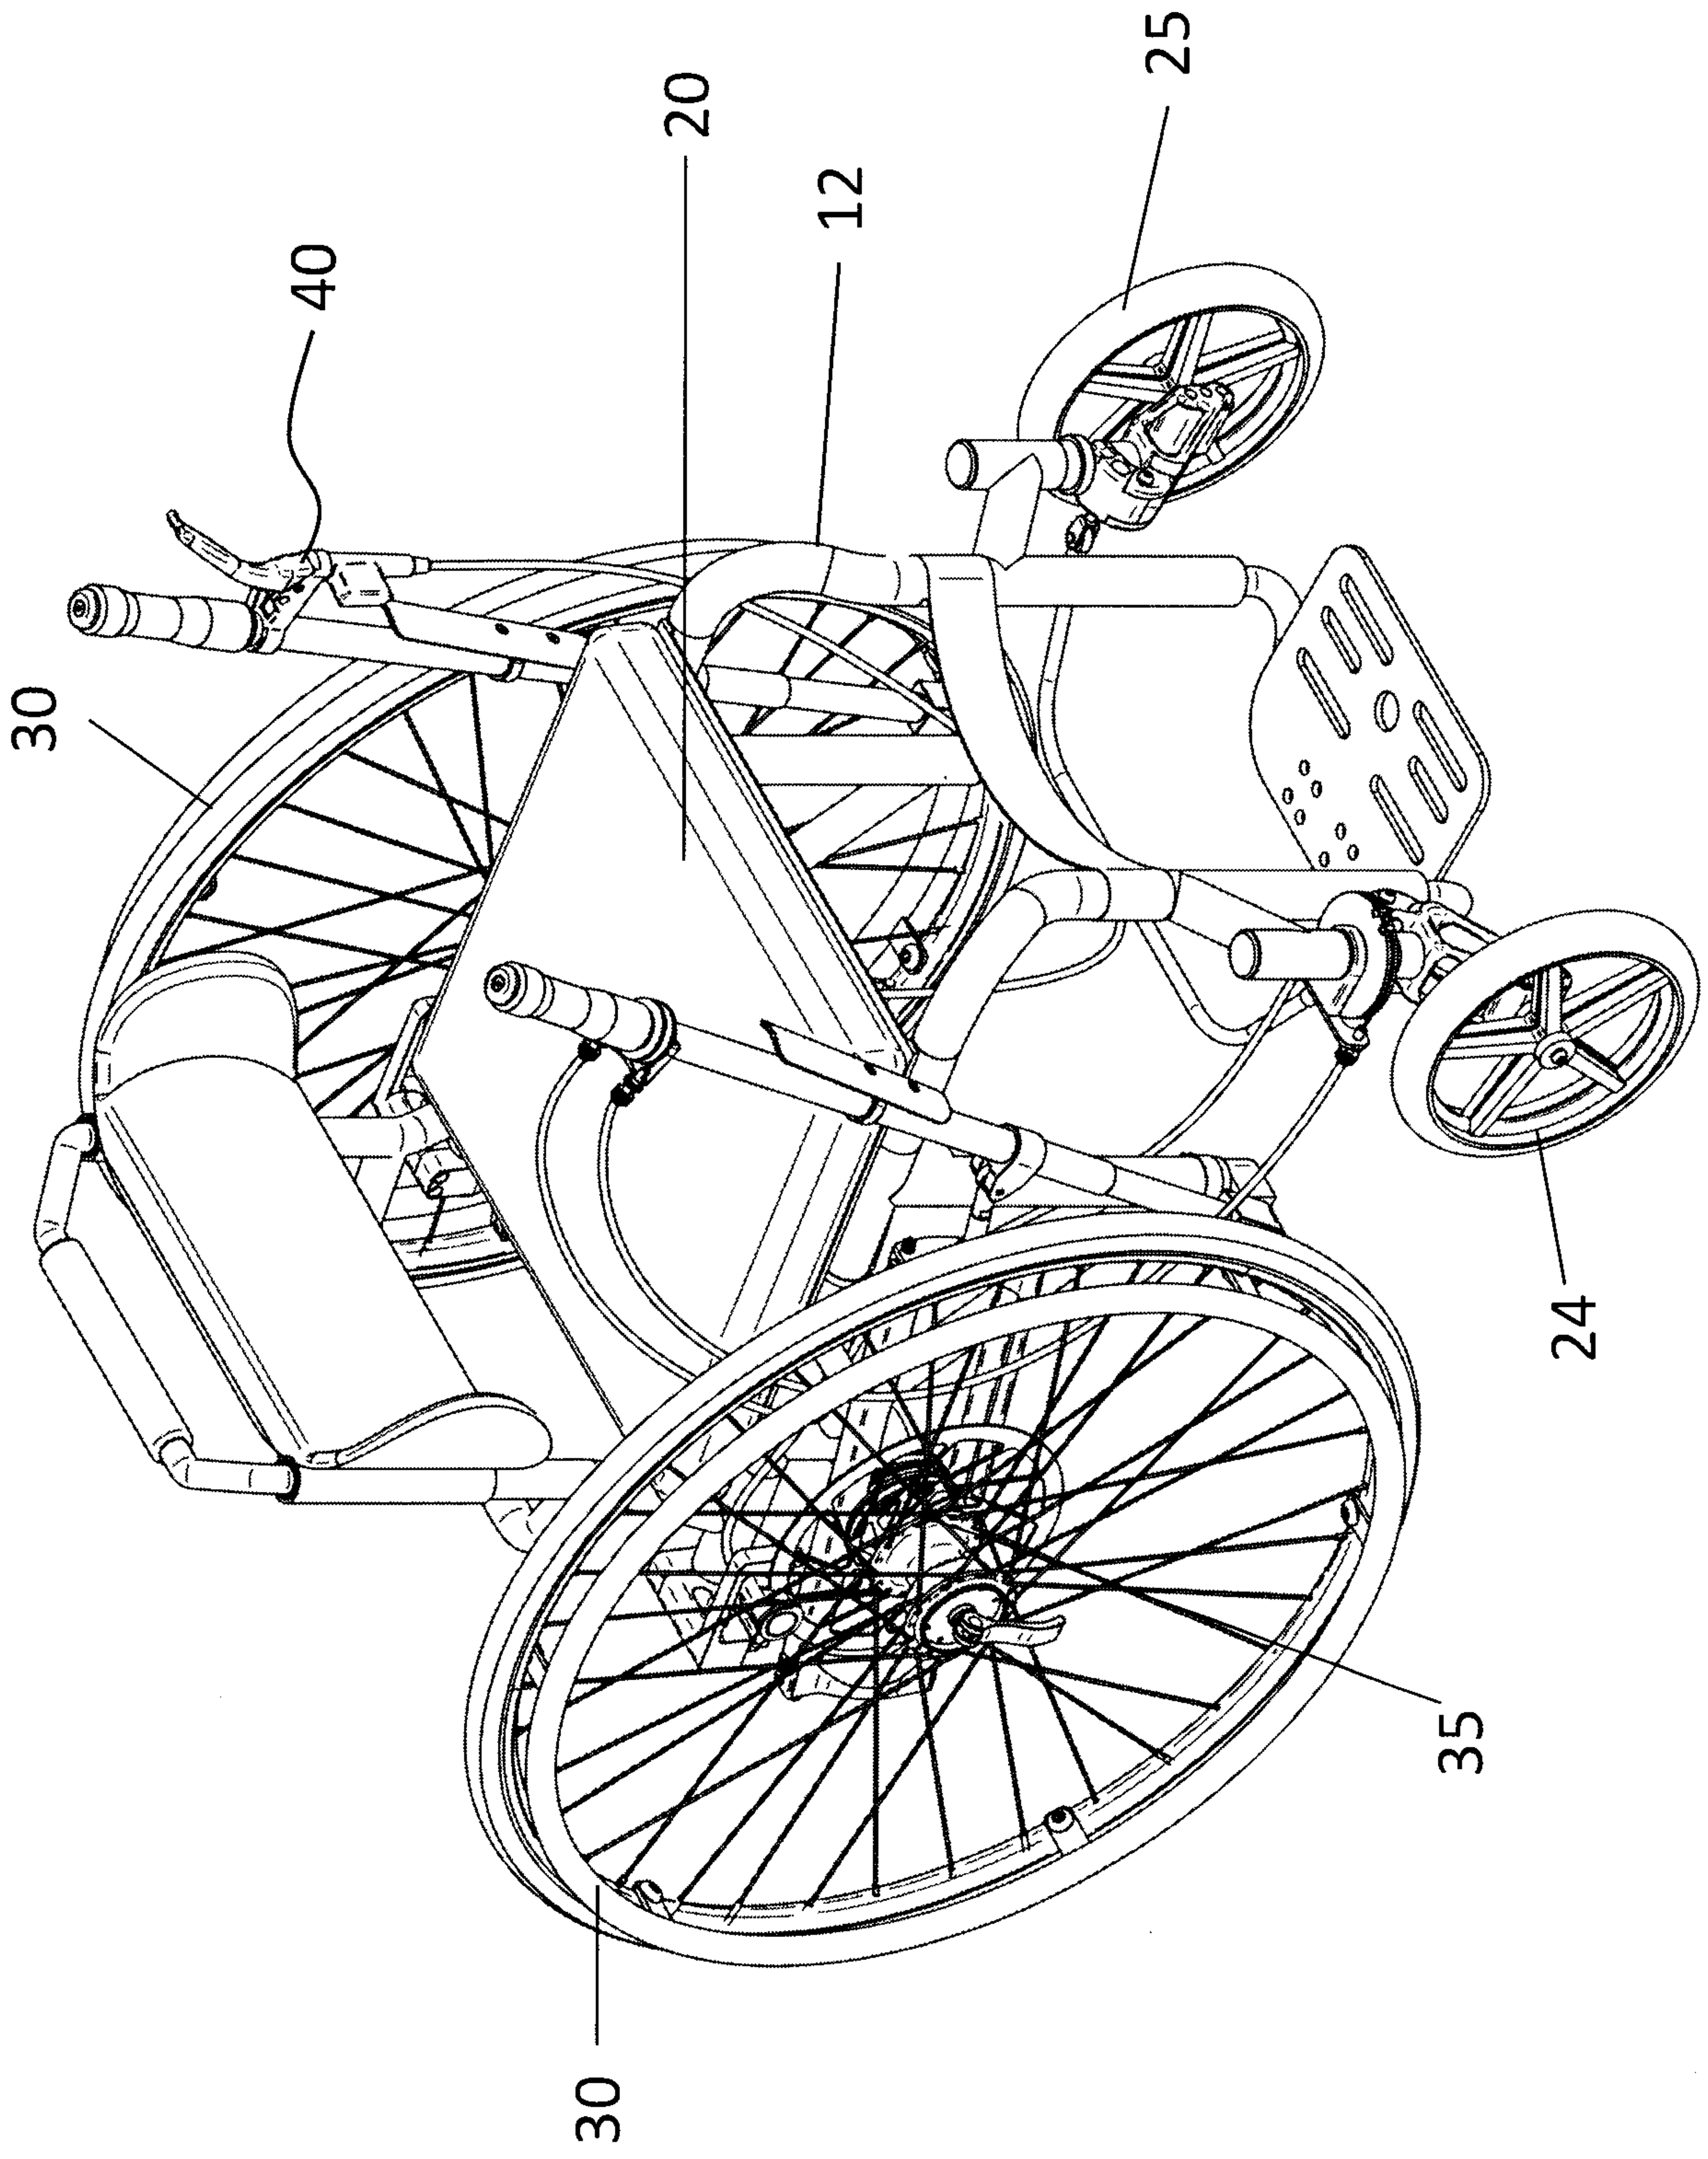


Figure 1.

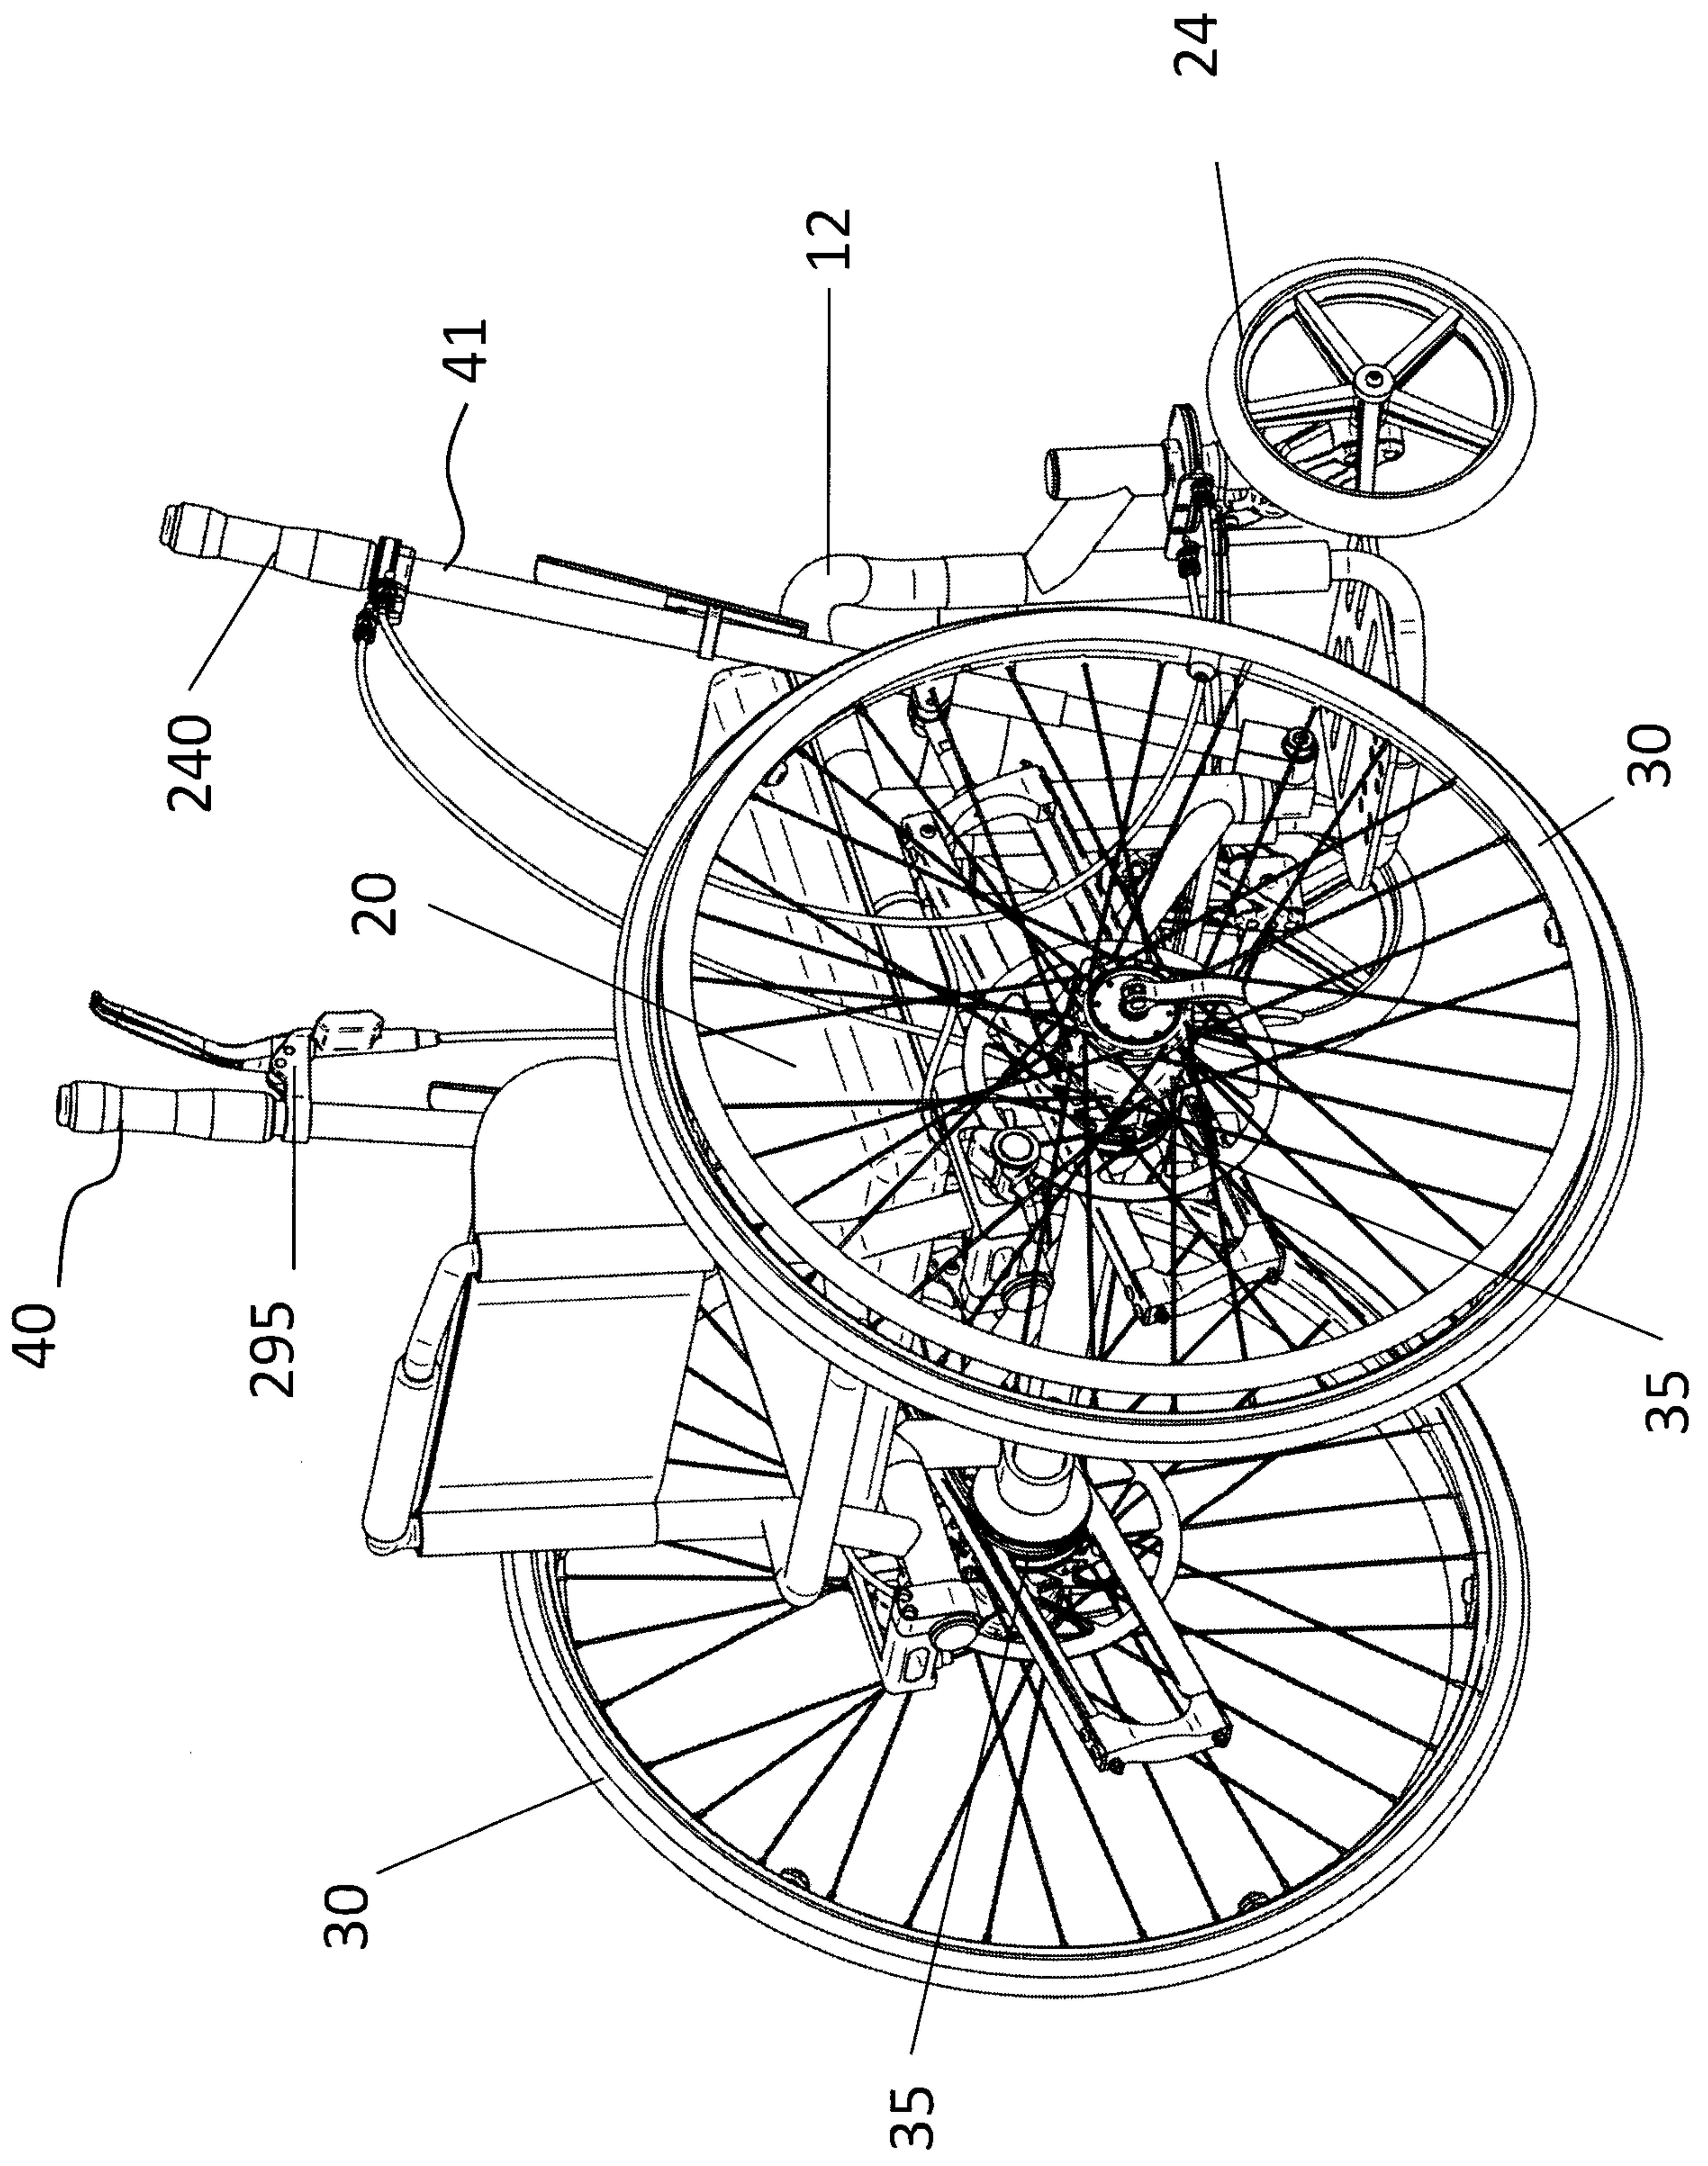


Figure 2.

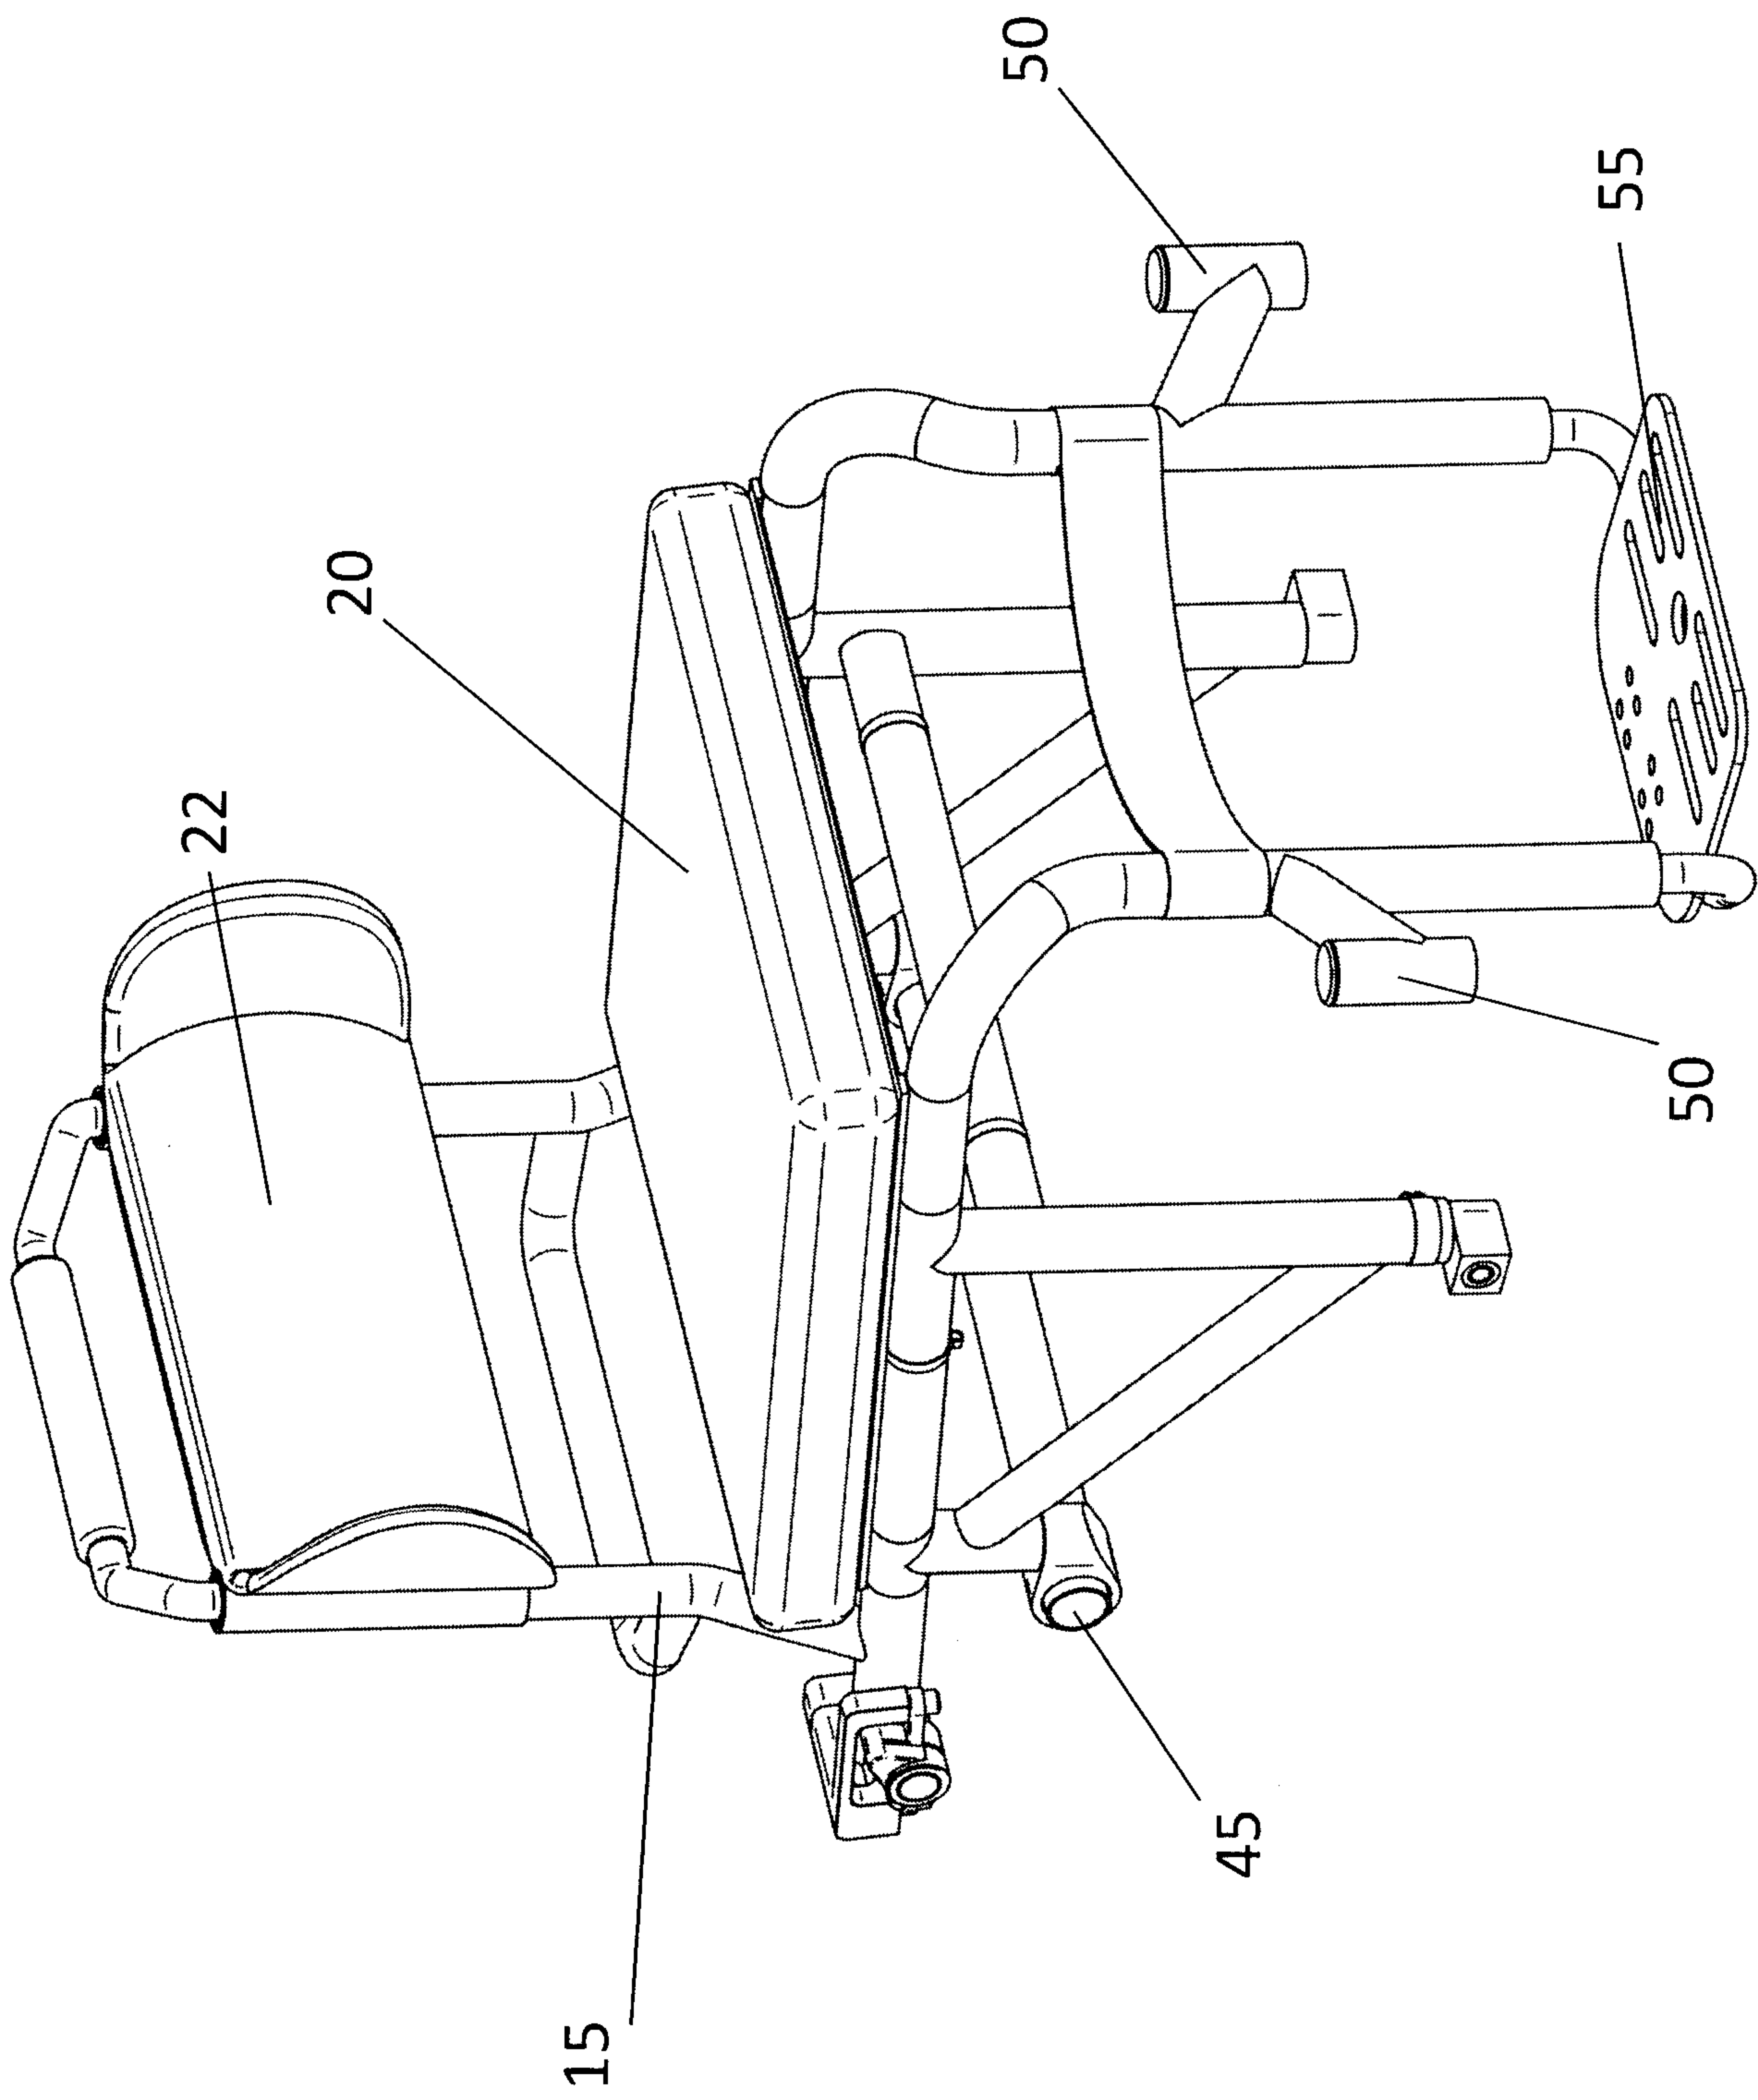


Figure 3.

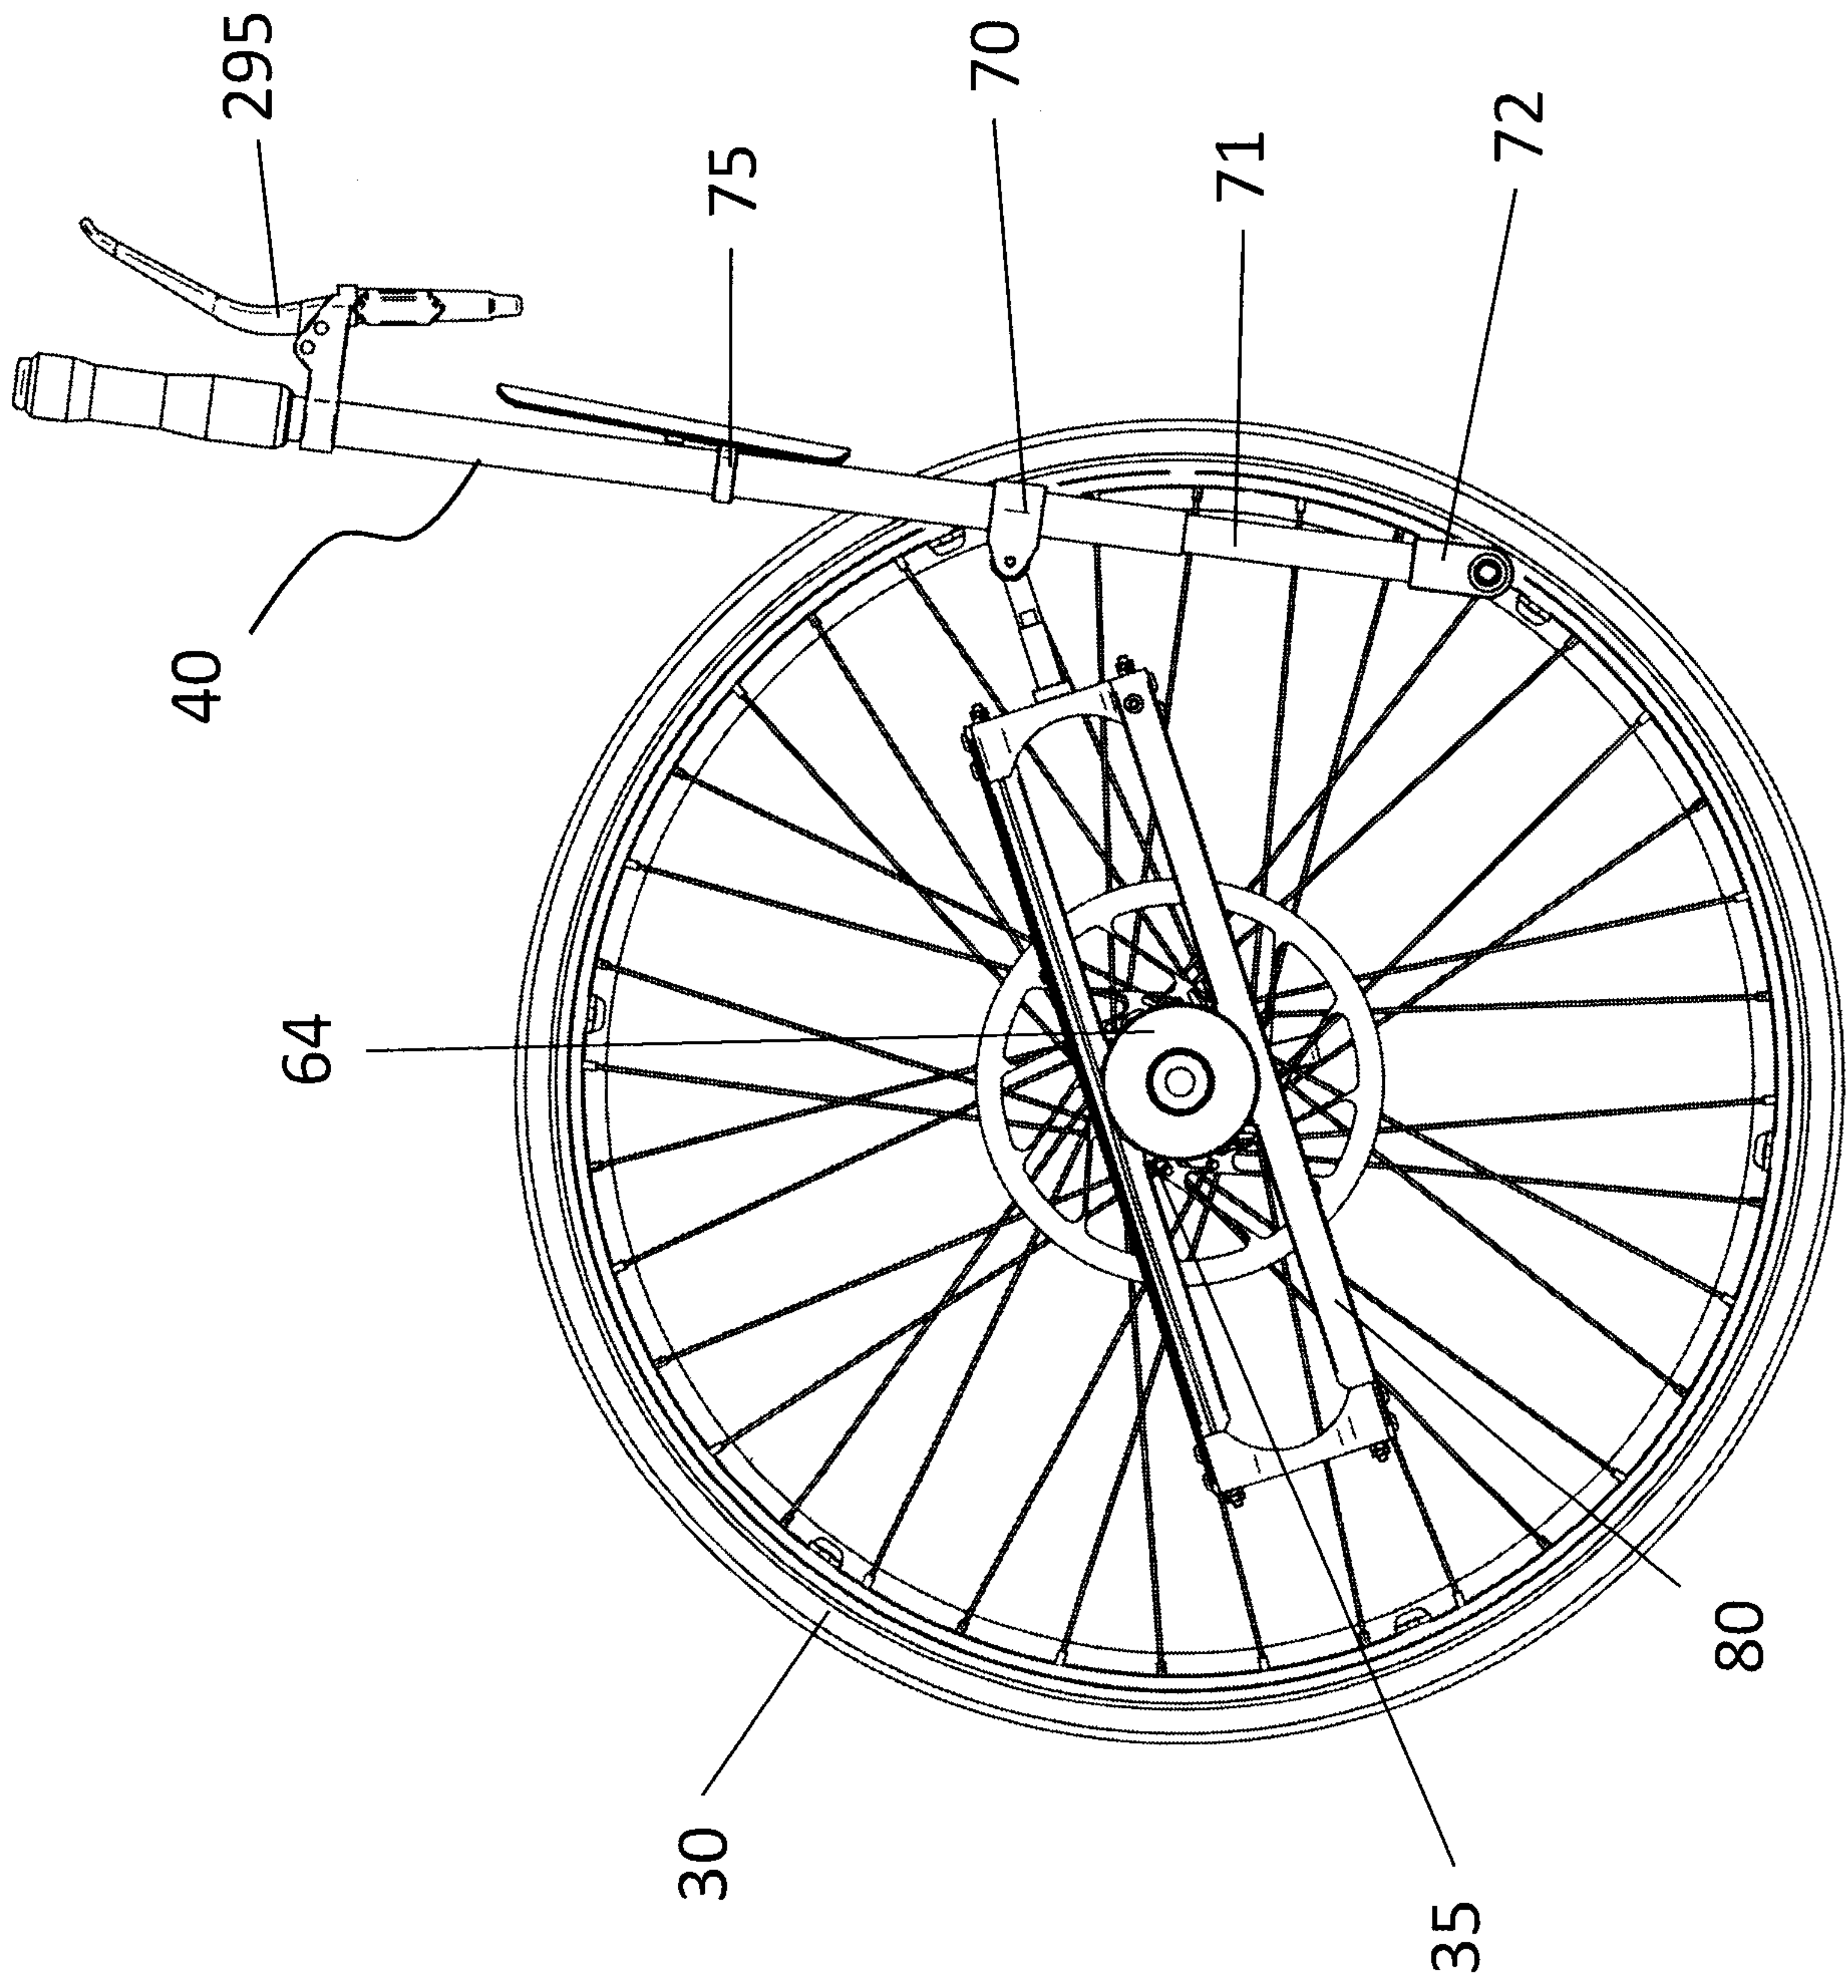


Figure 4.

35

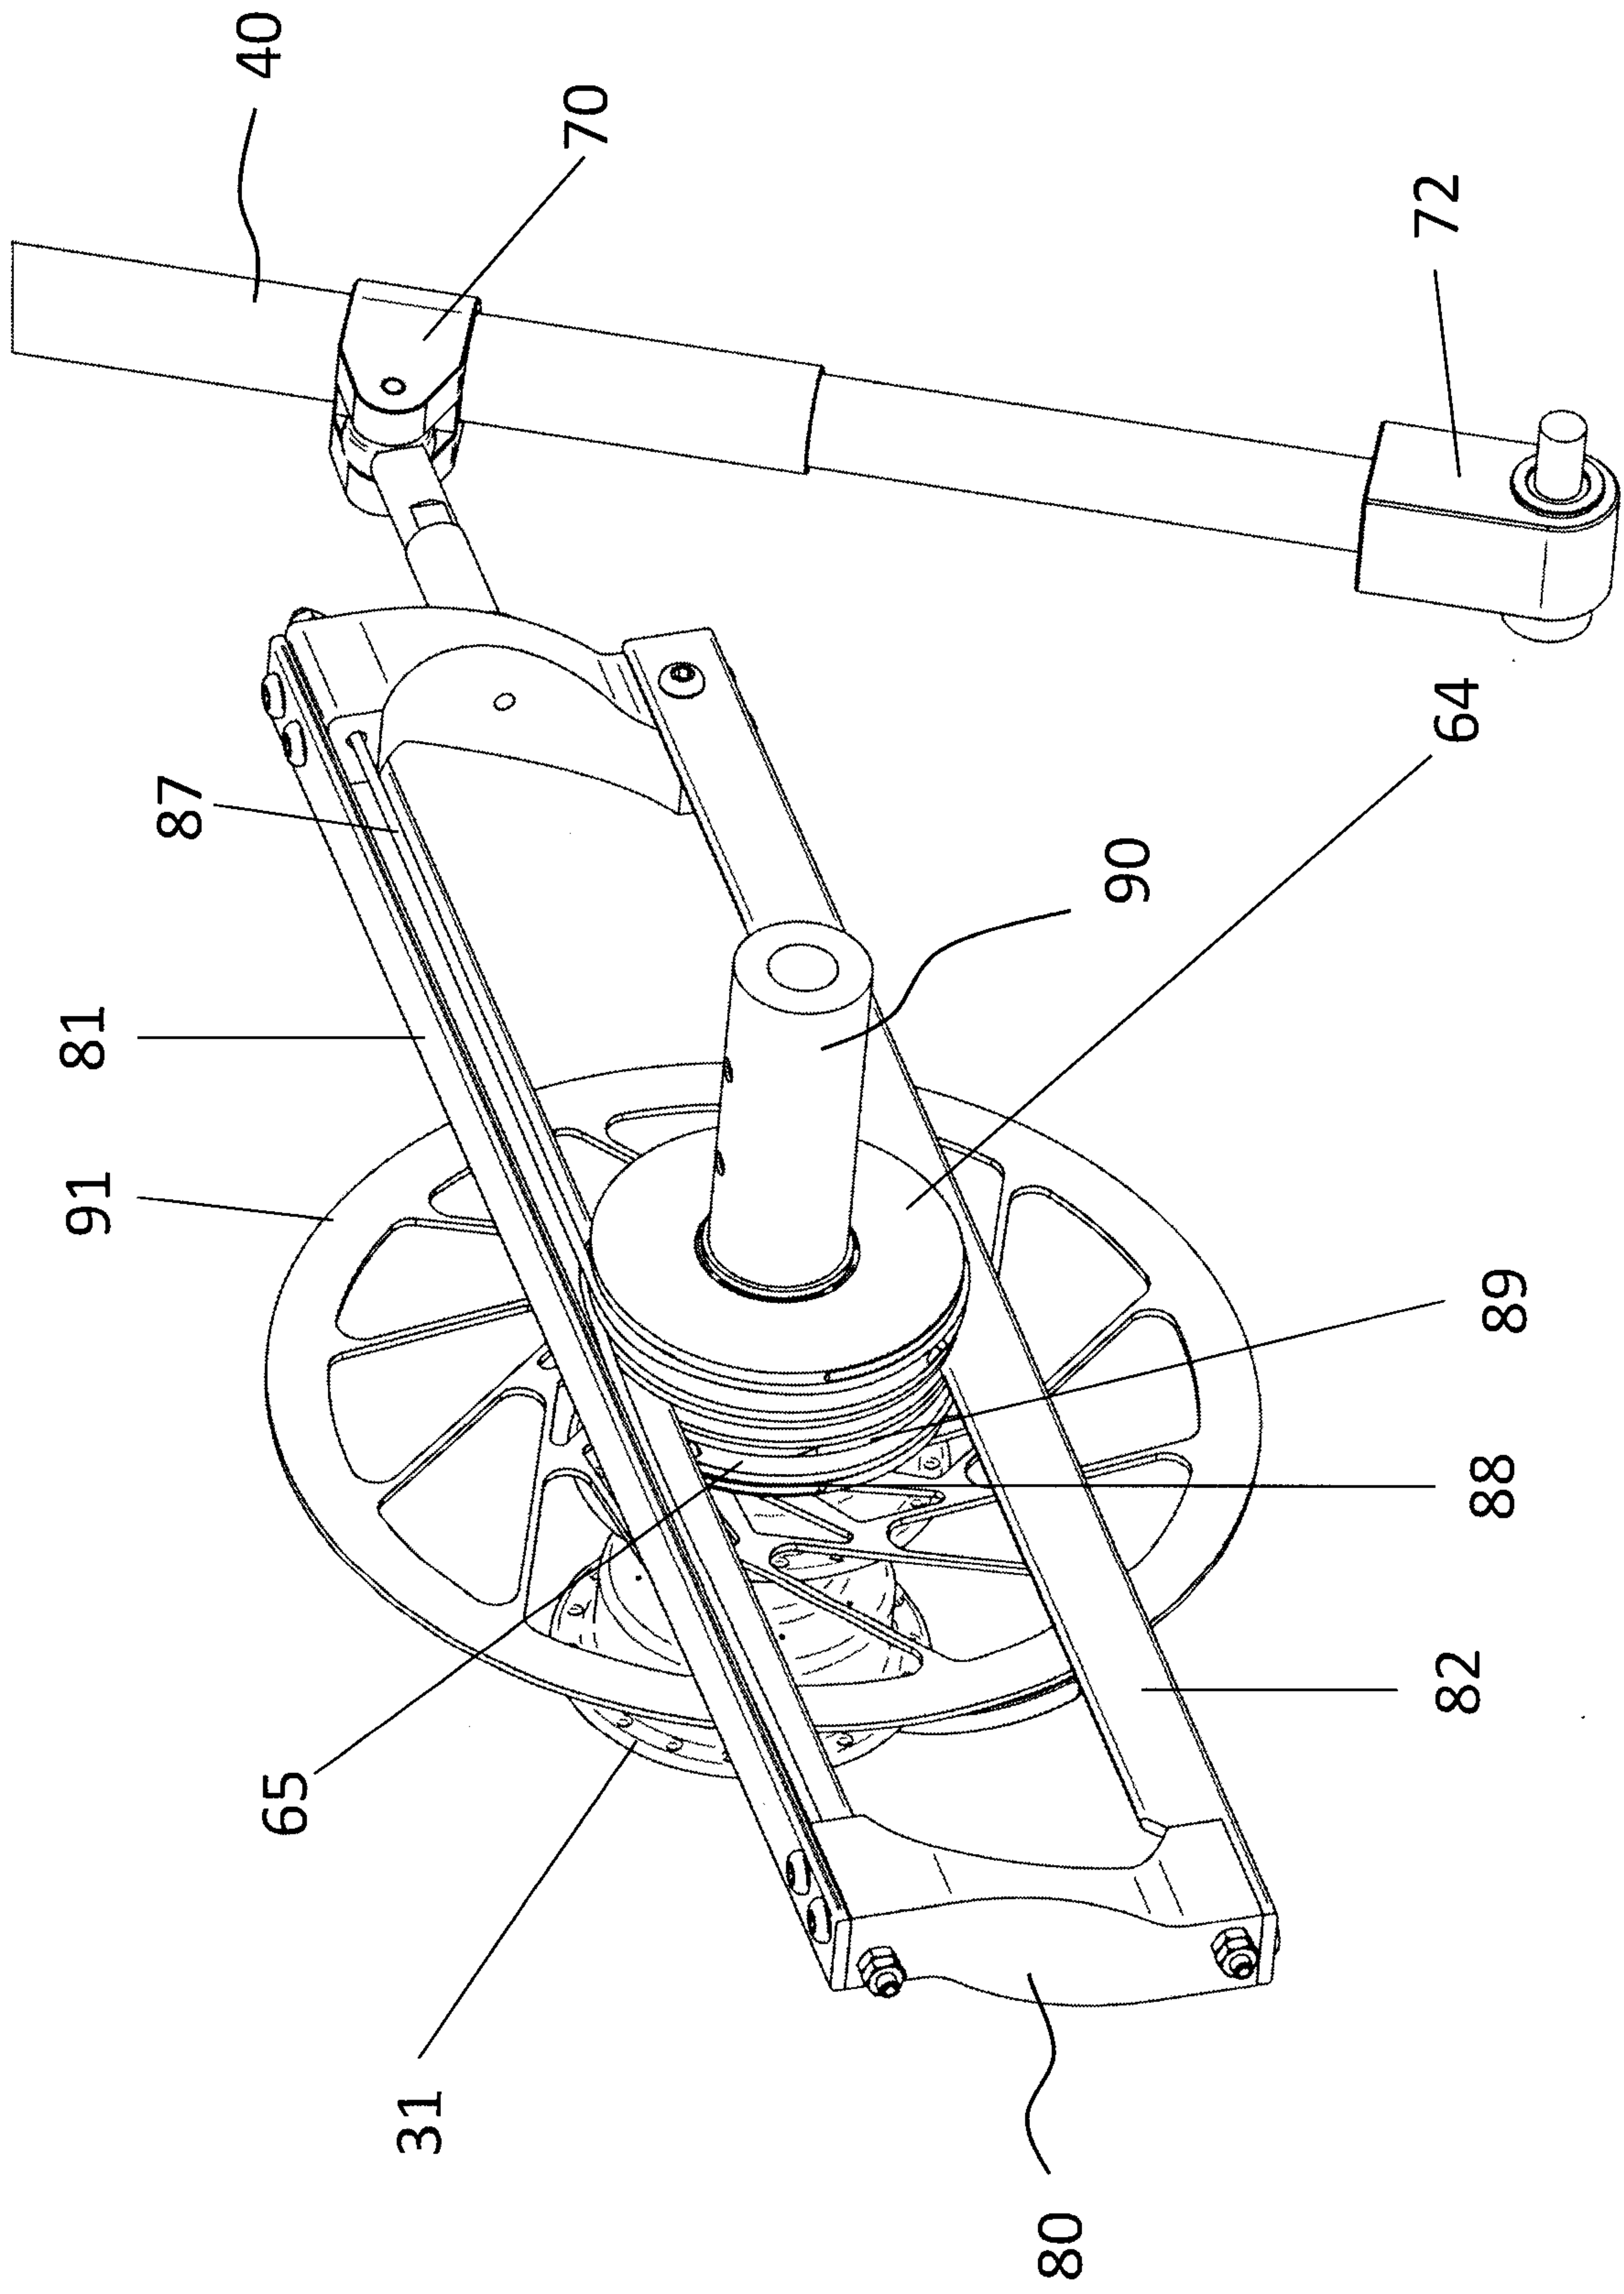


Figure 5.

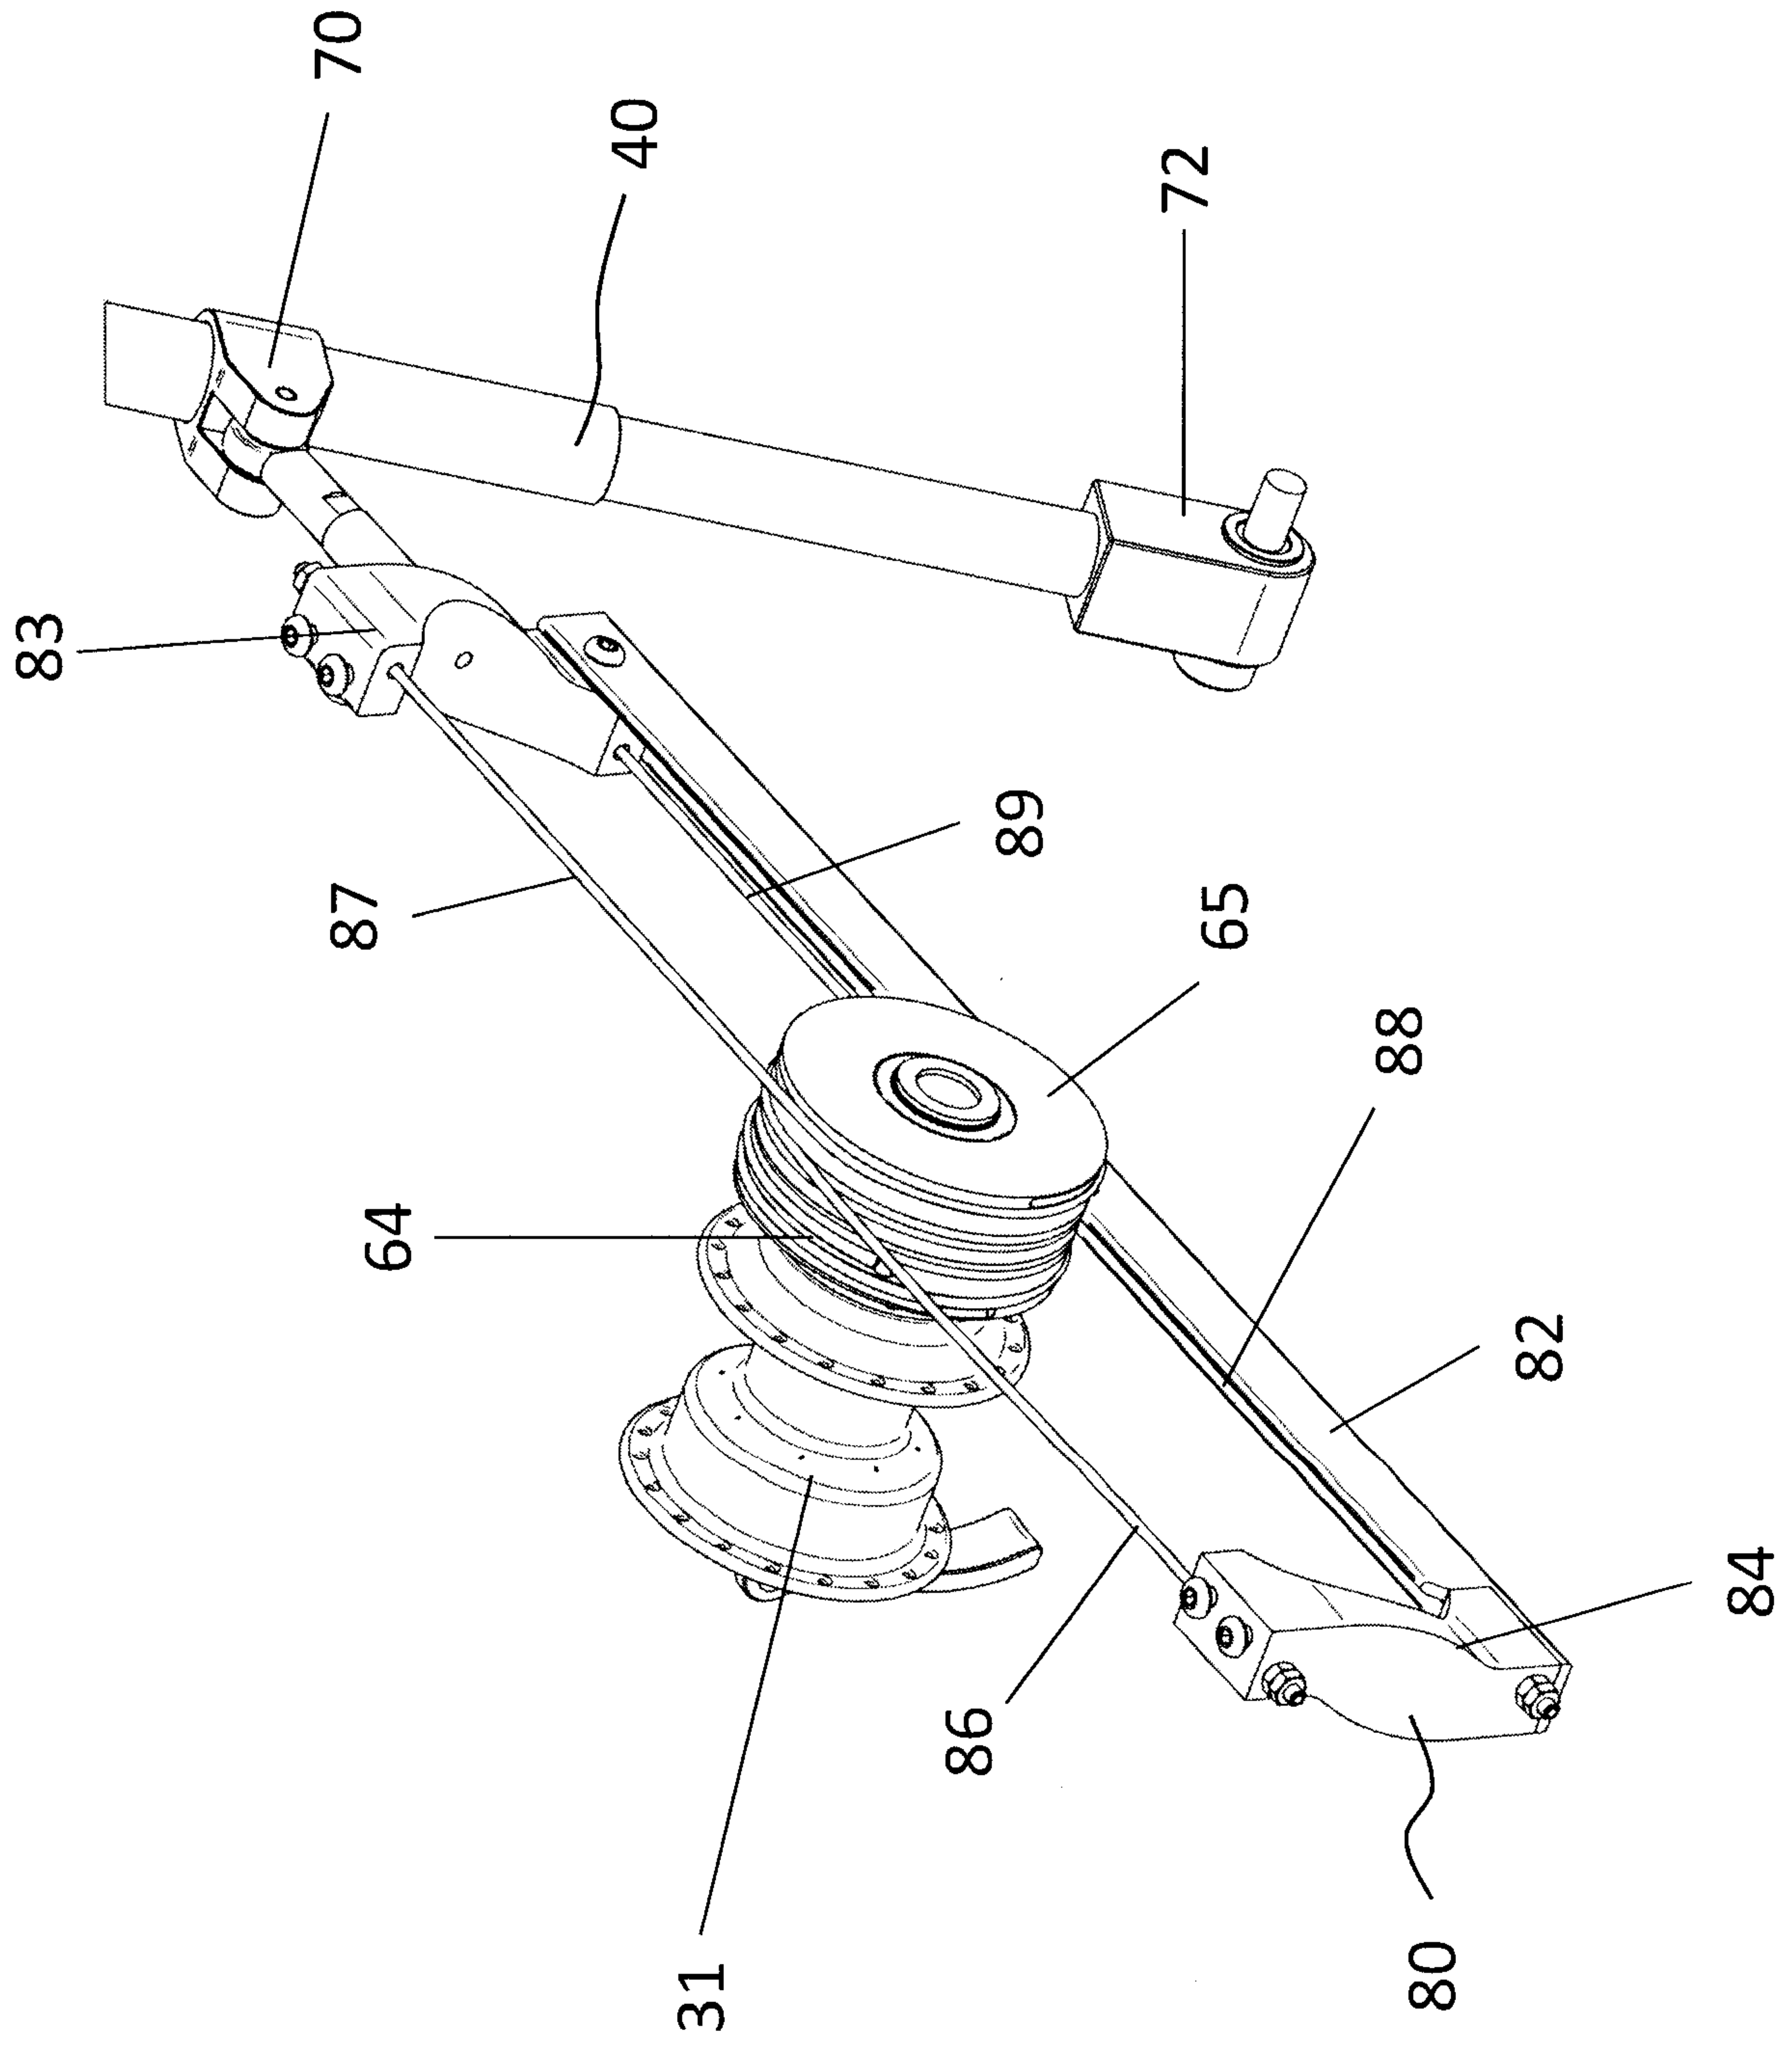


Figure 6.

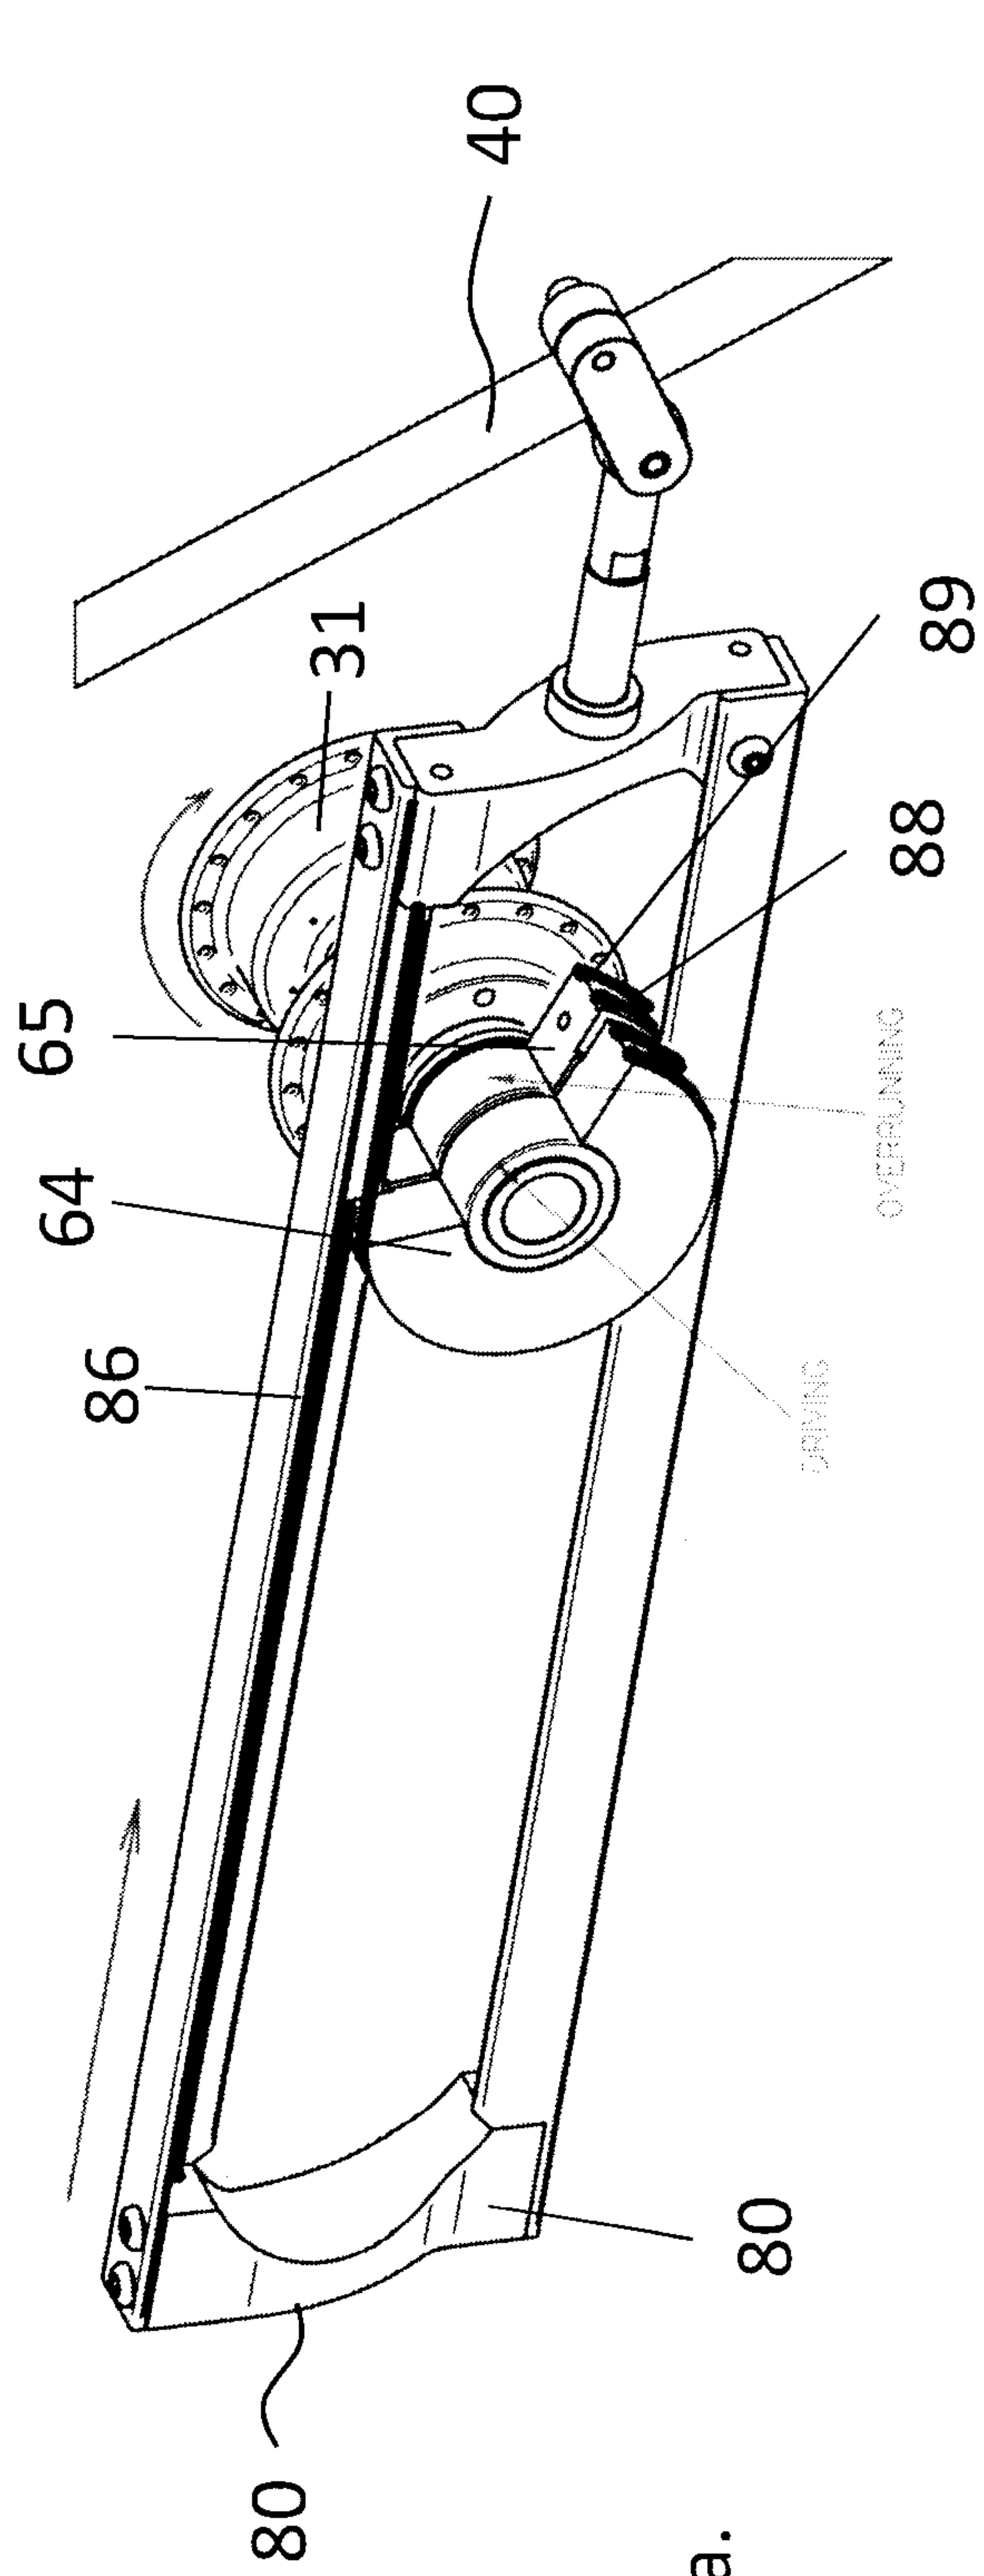


Figure 7a.

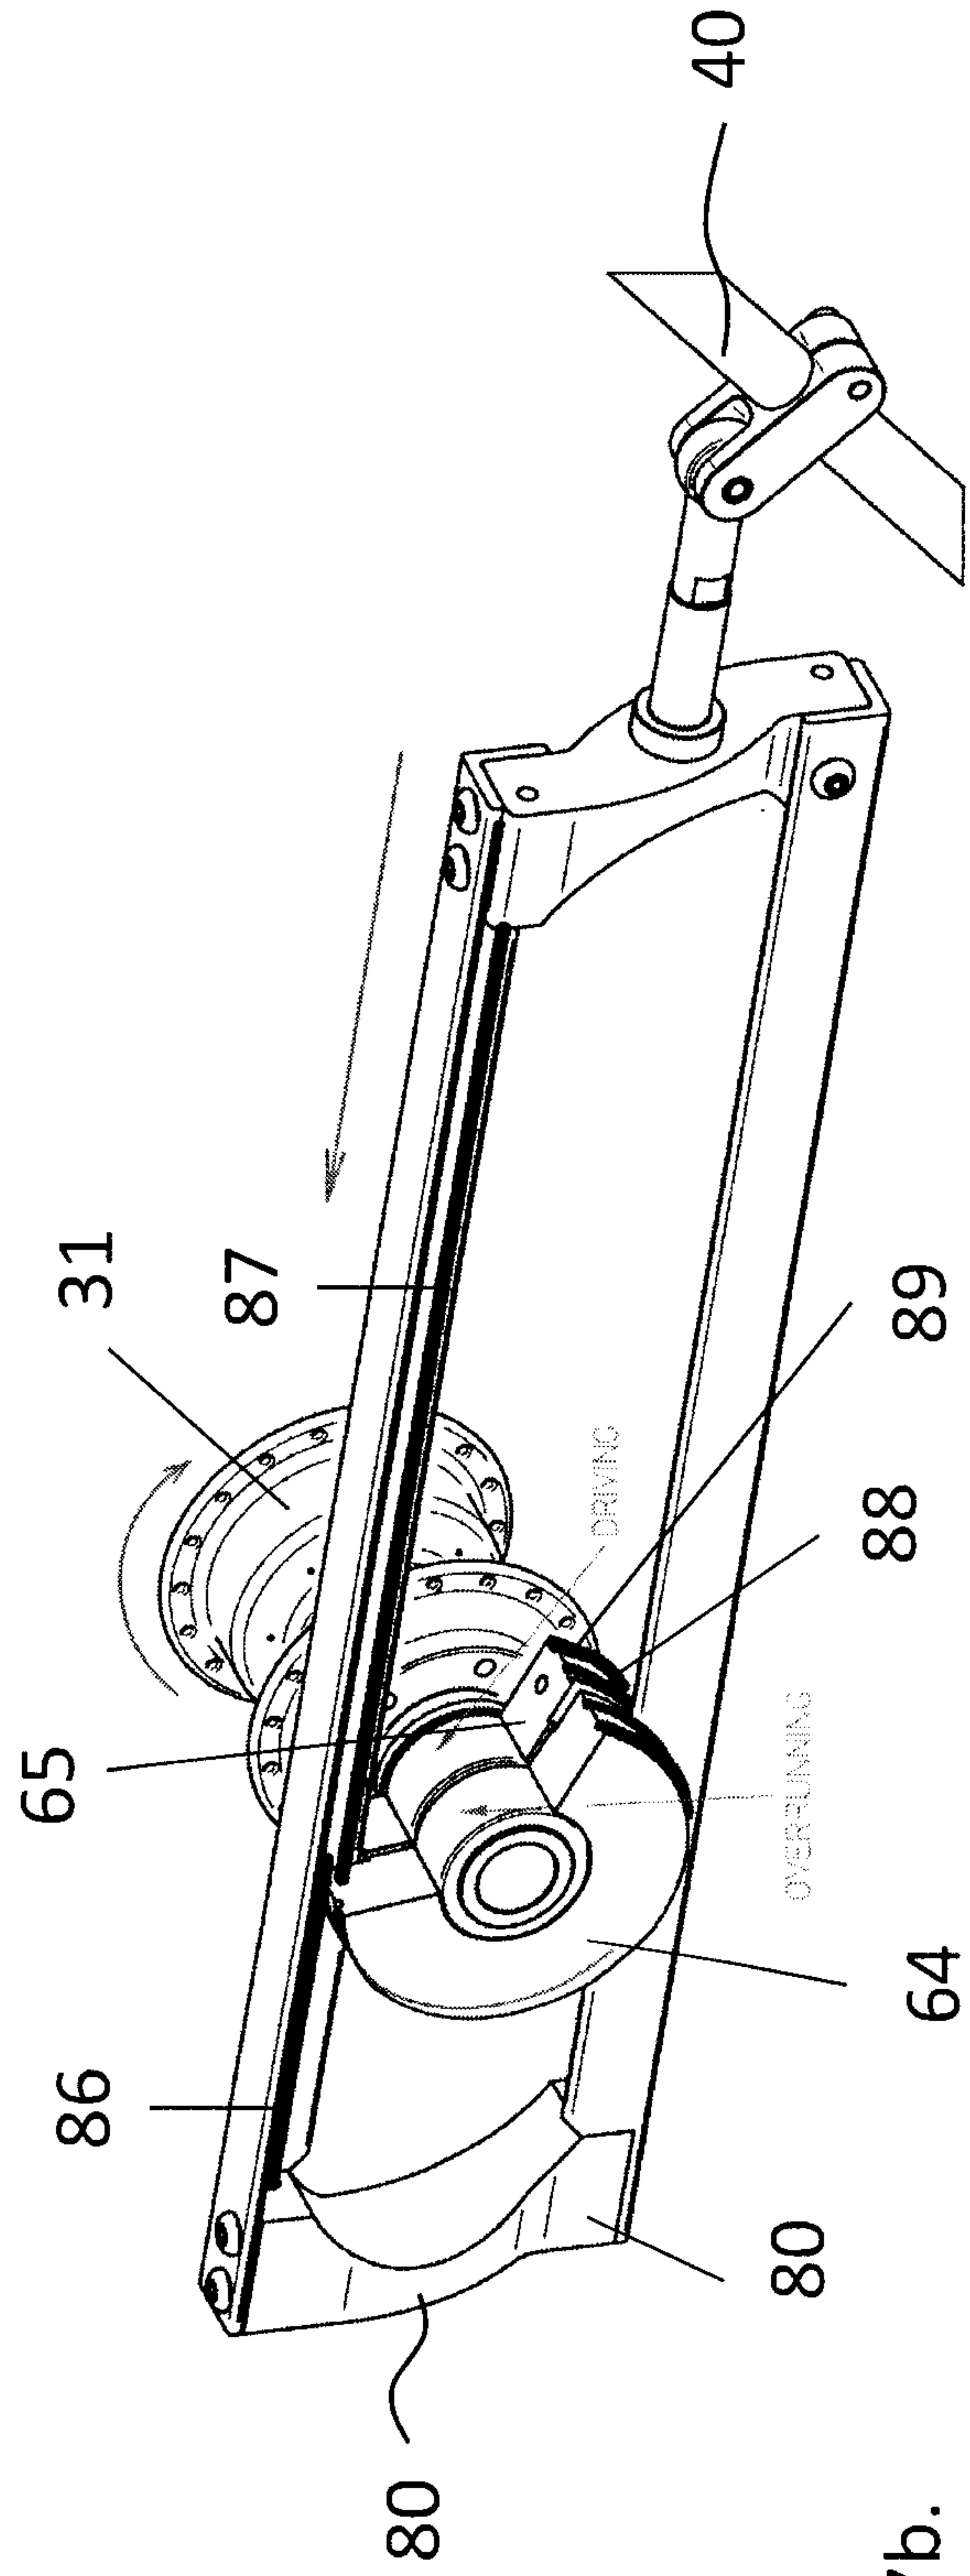


Figure 7b.

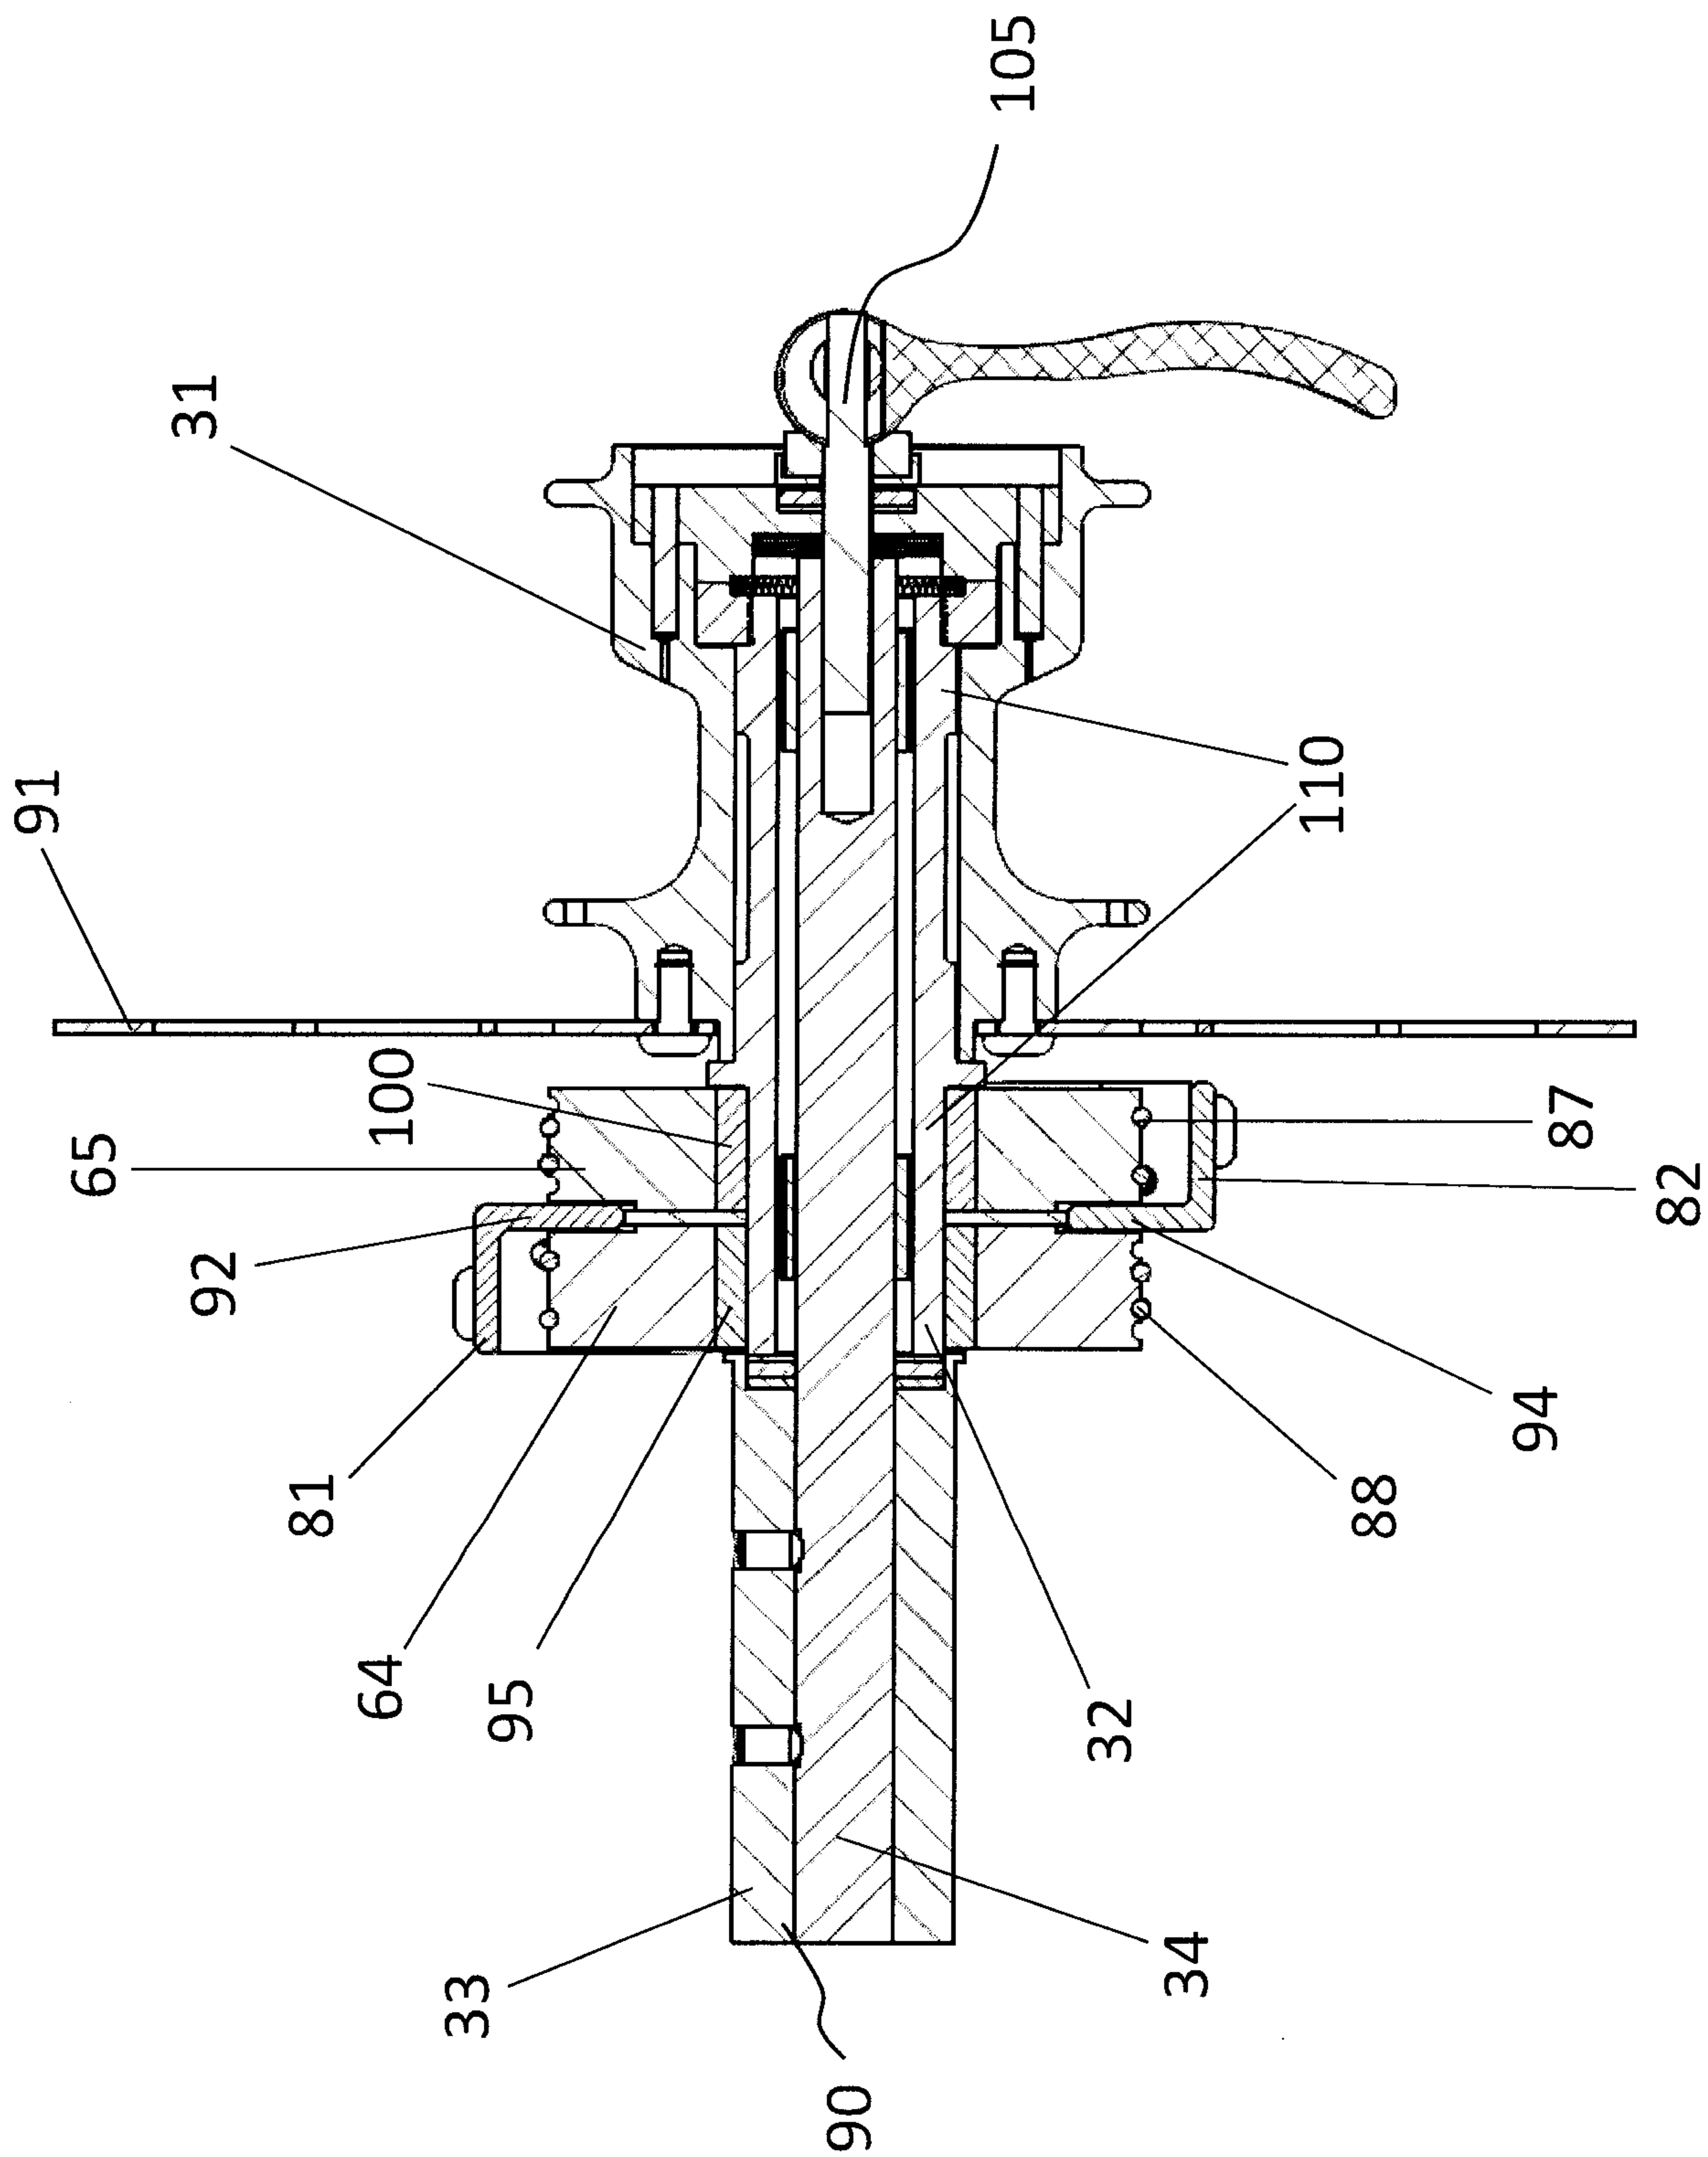


Figure 8.

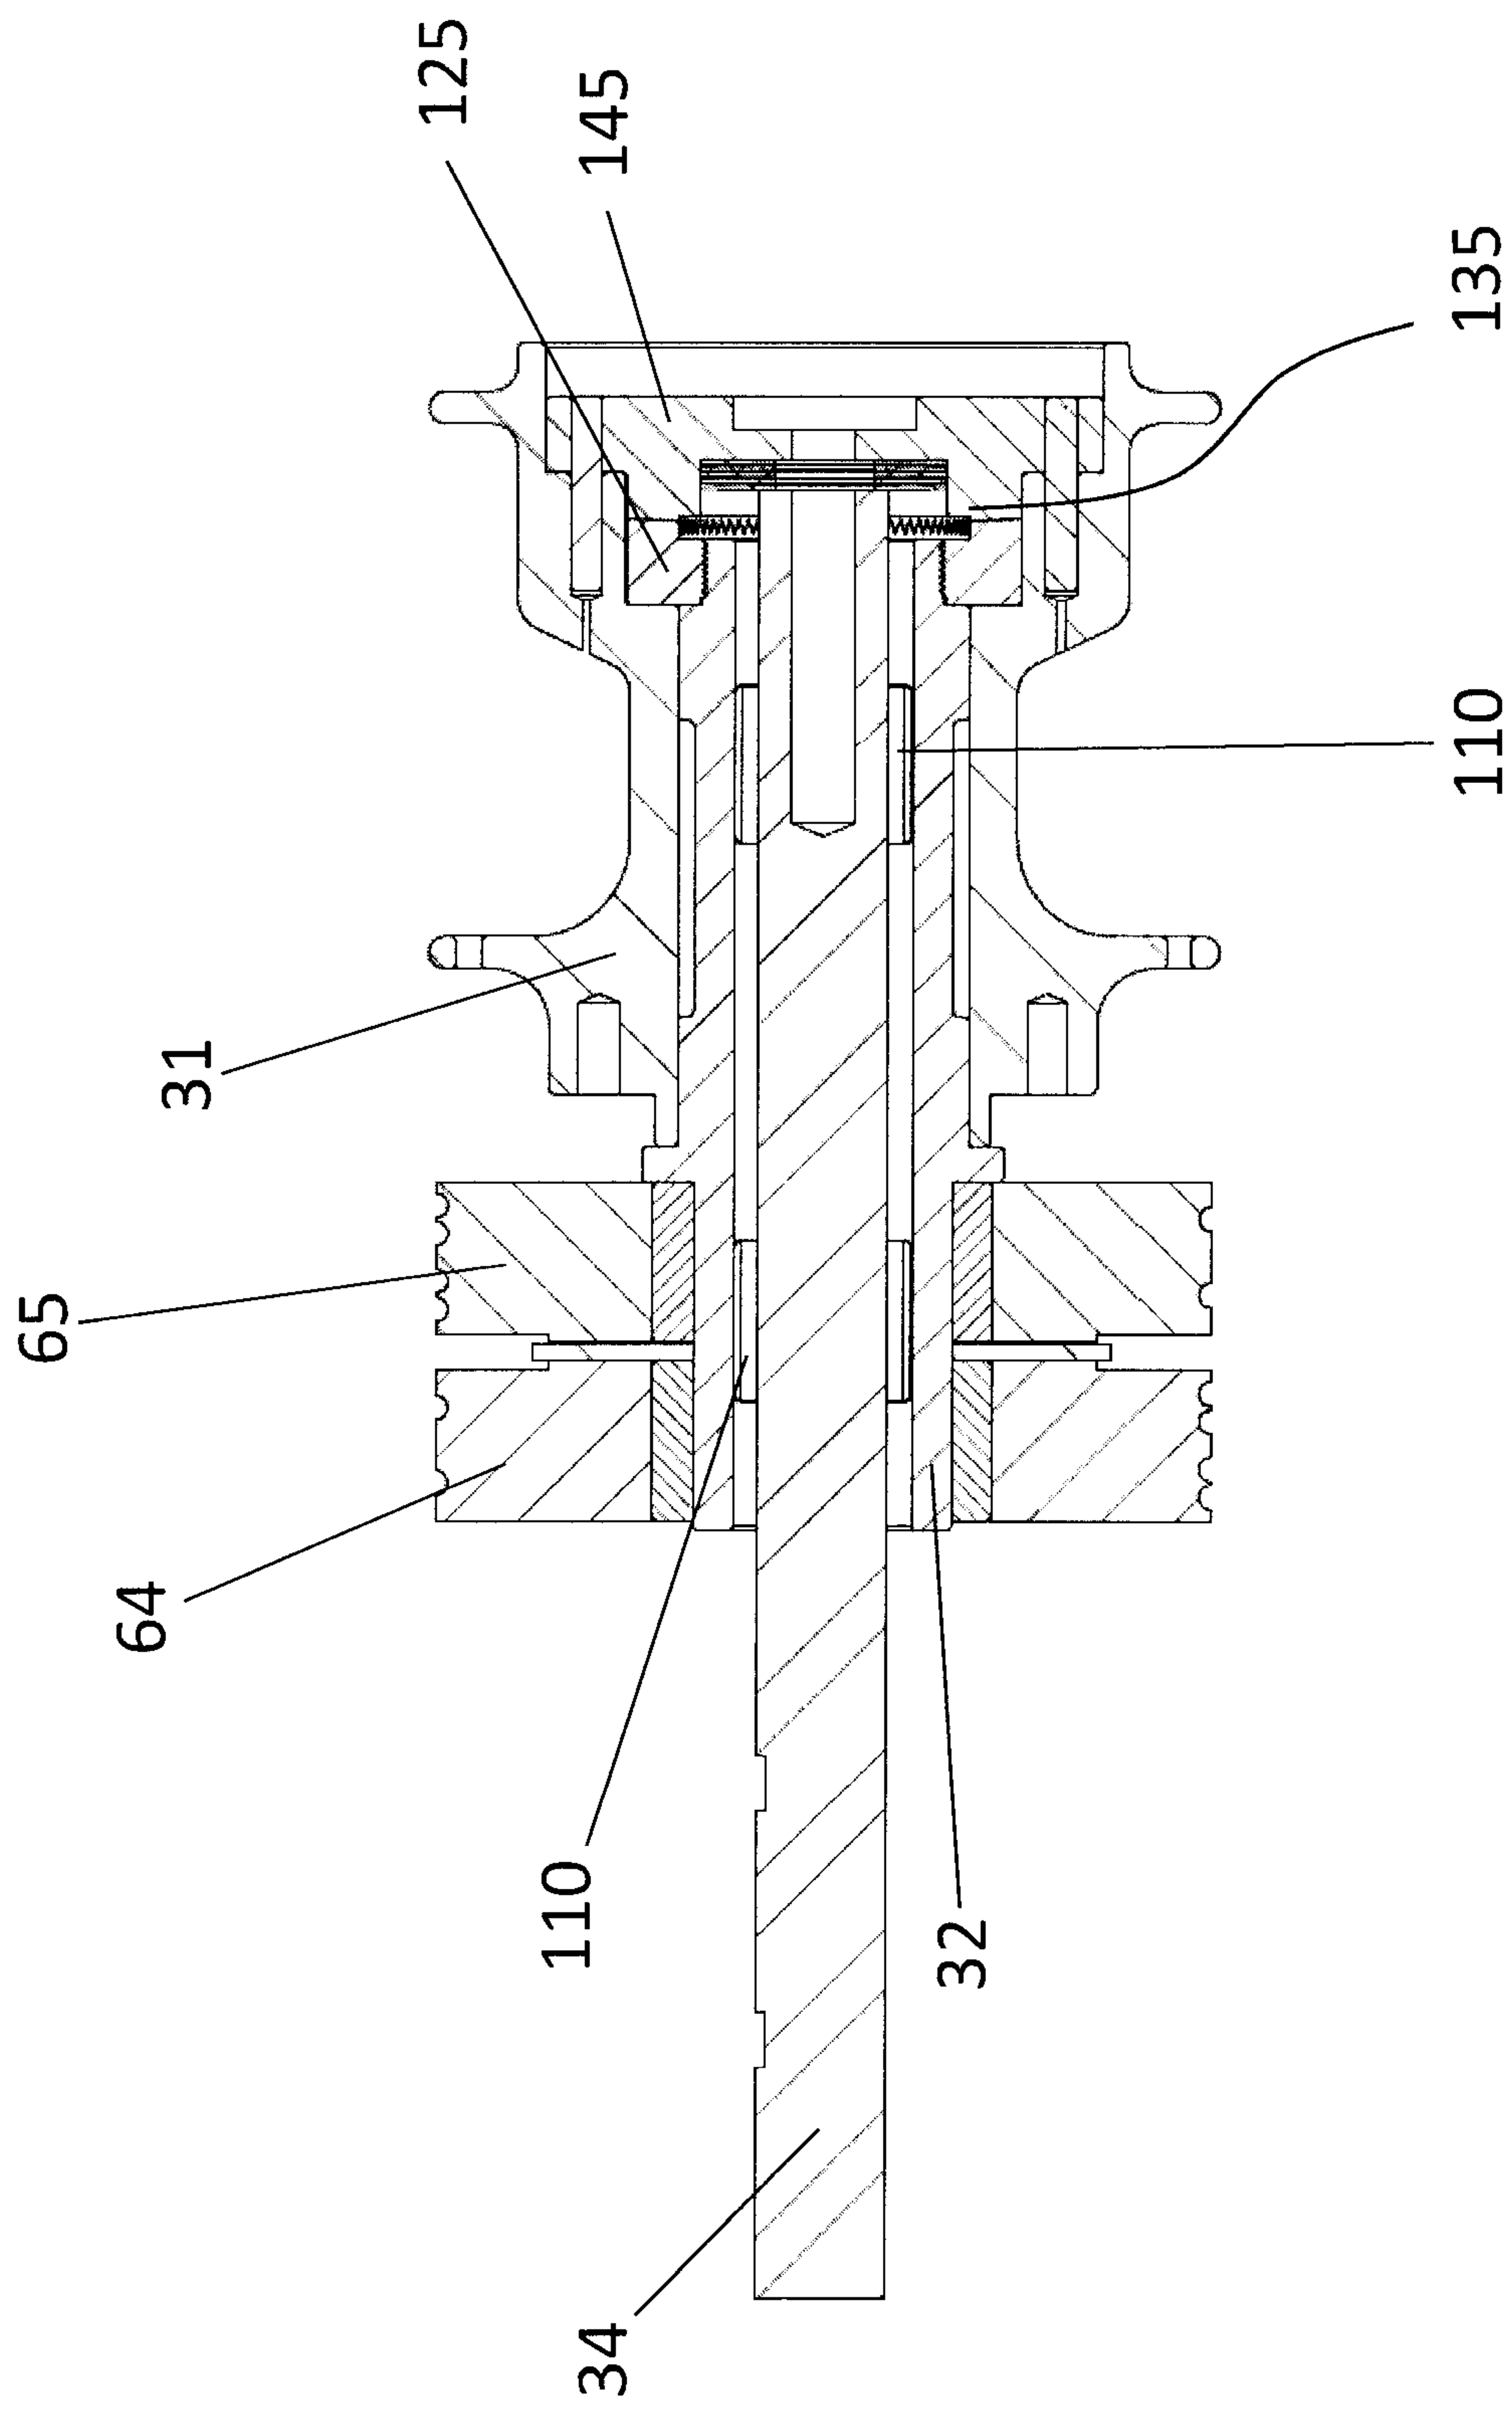


Figure 9.

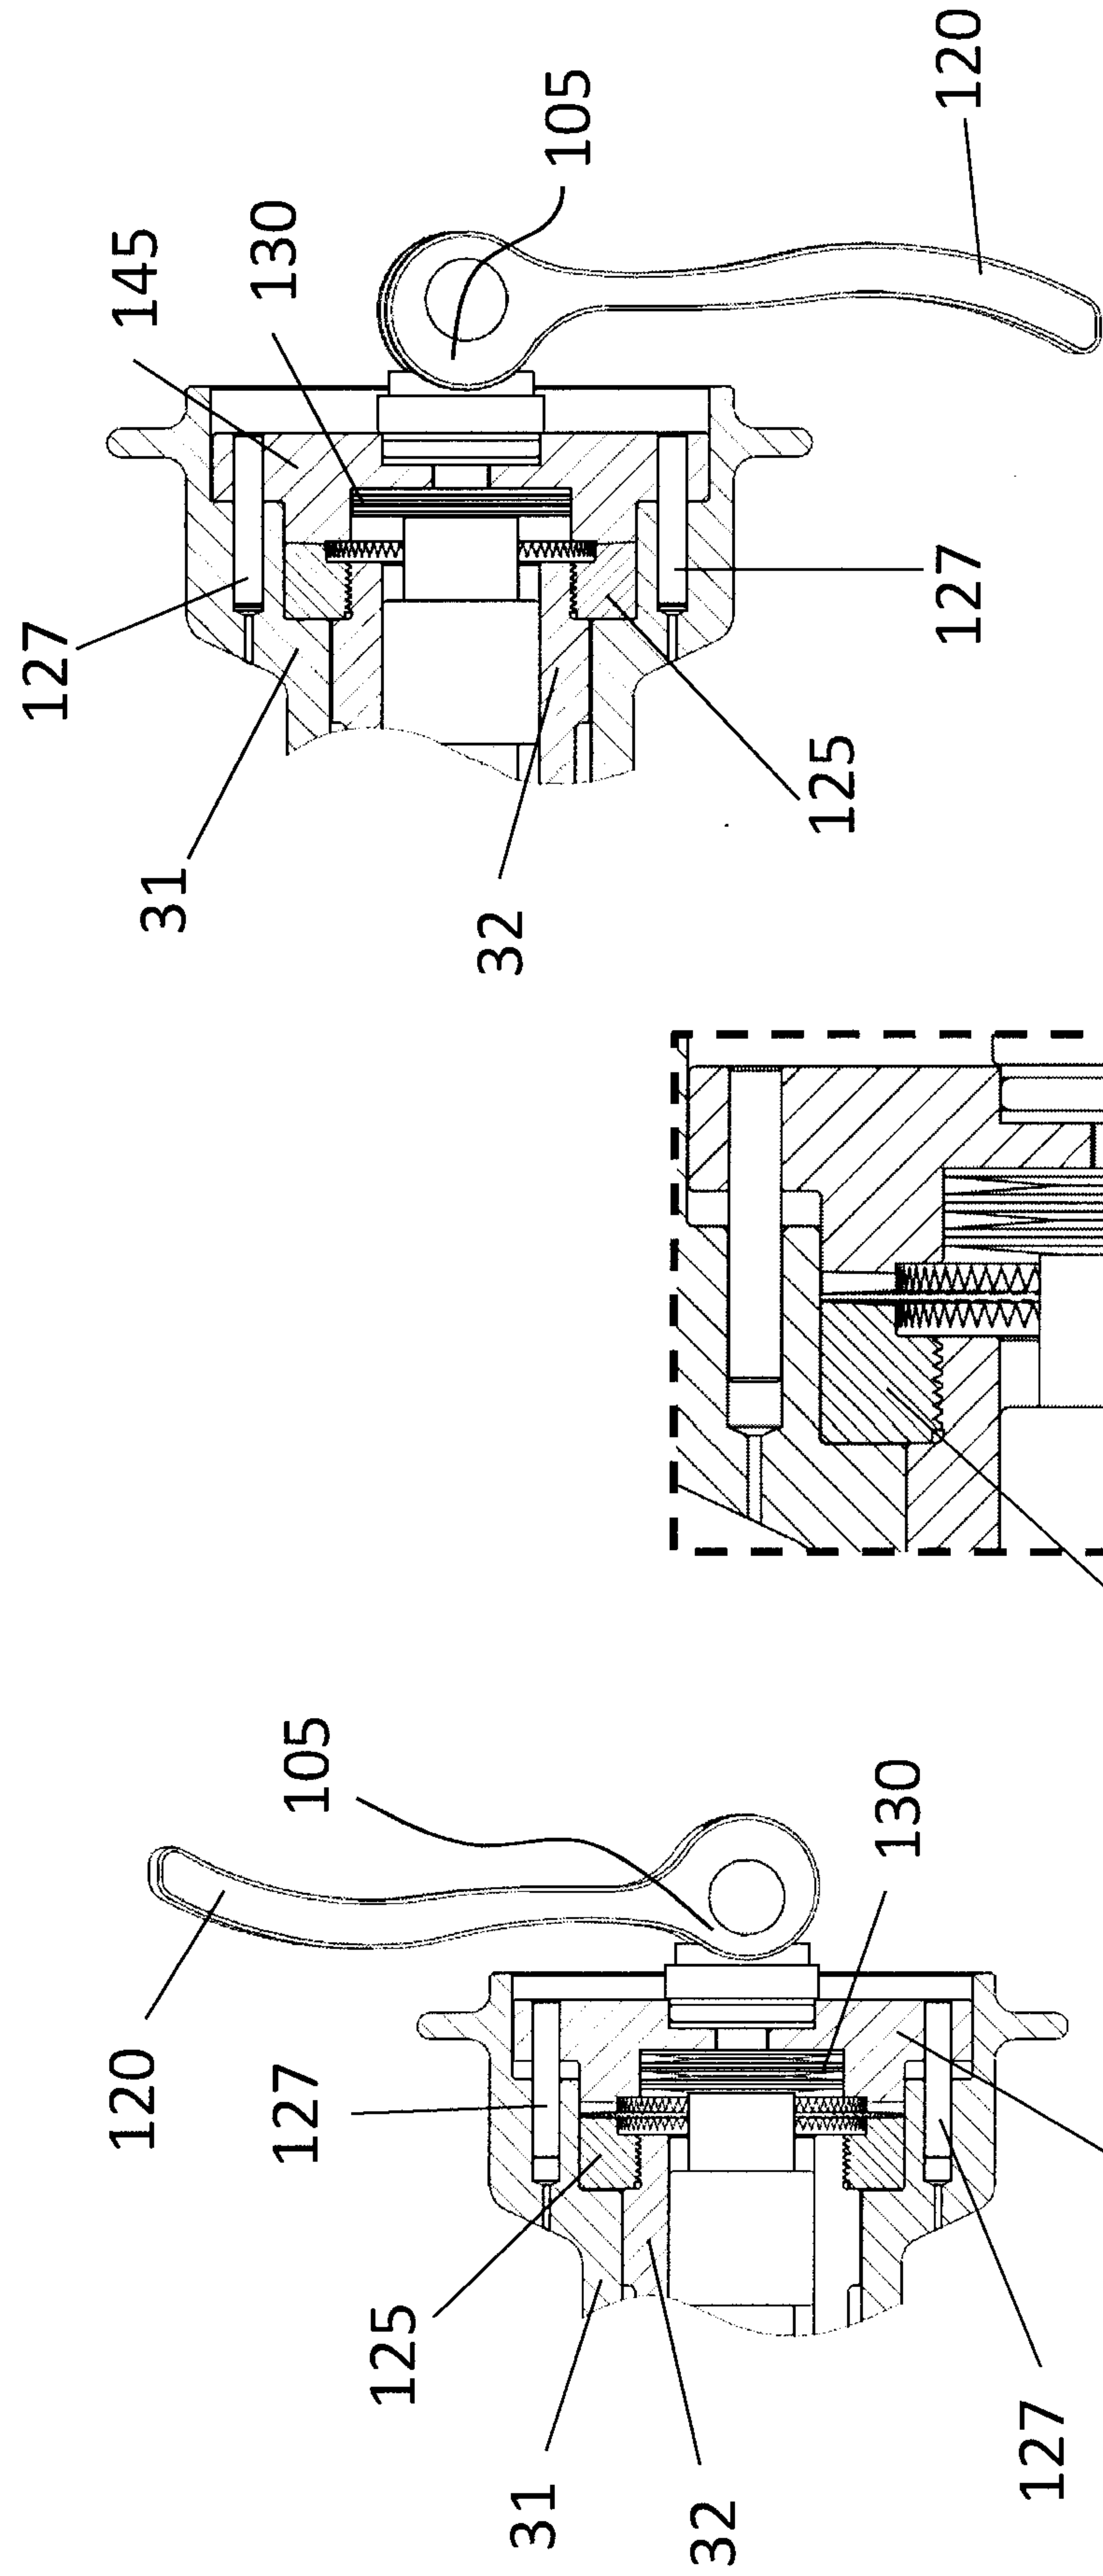


Figure 10a.

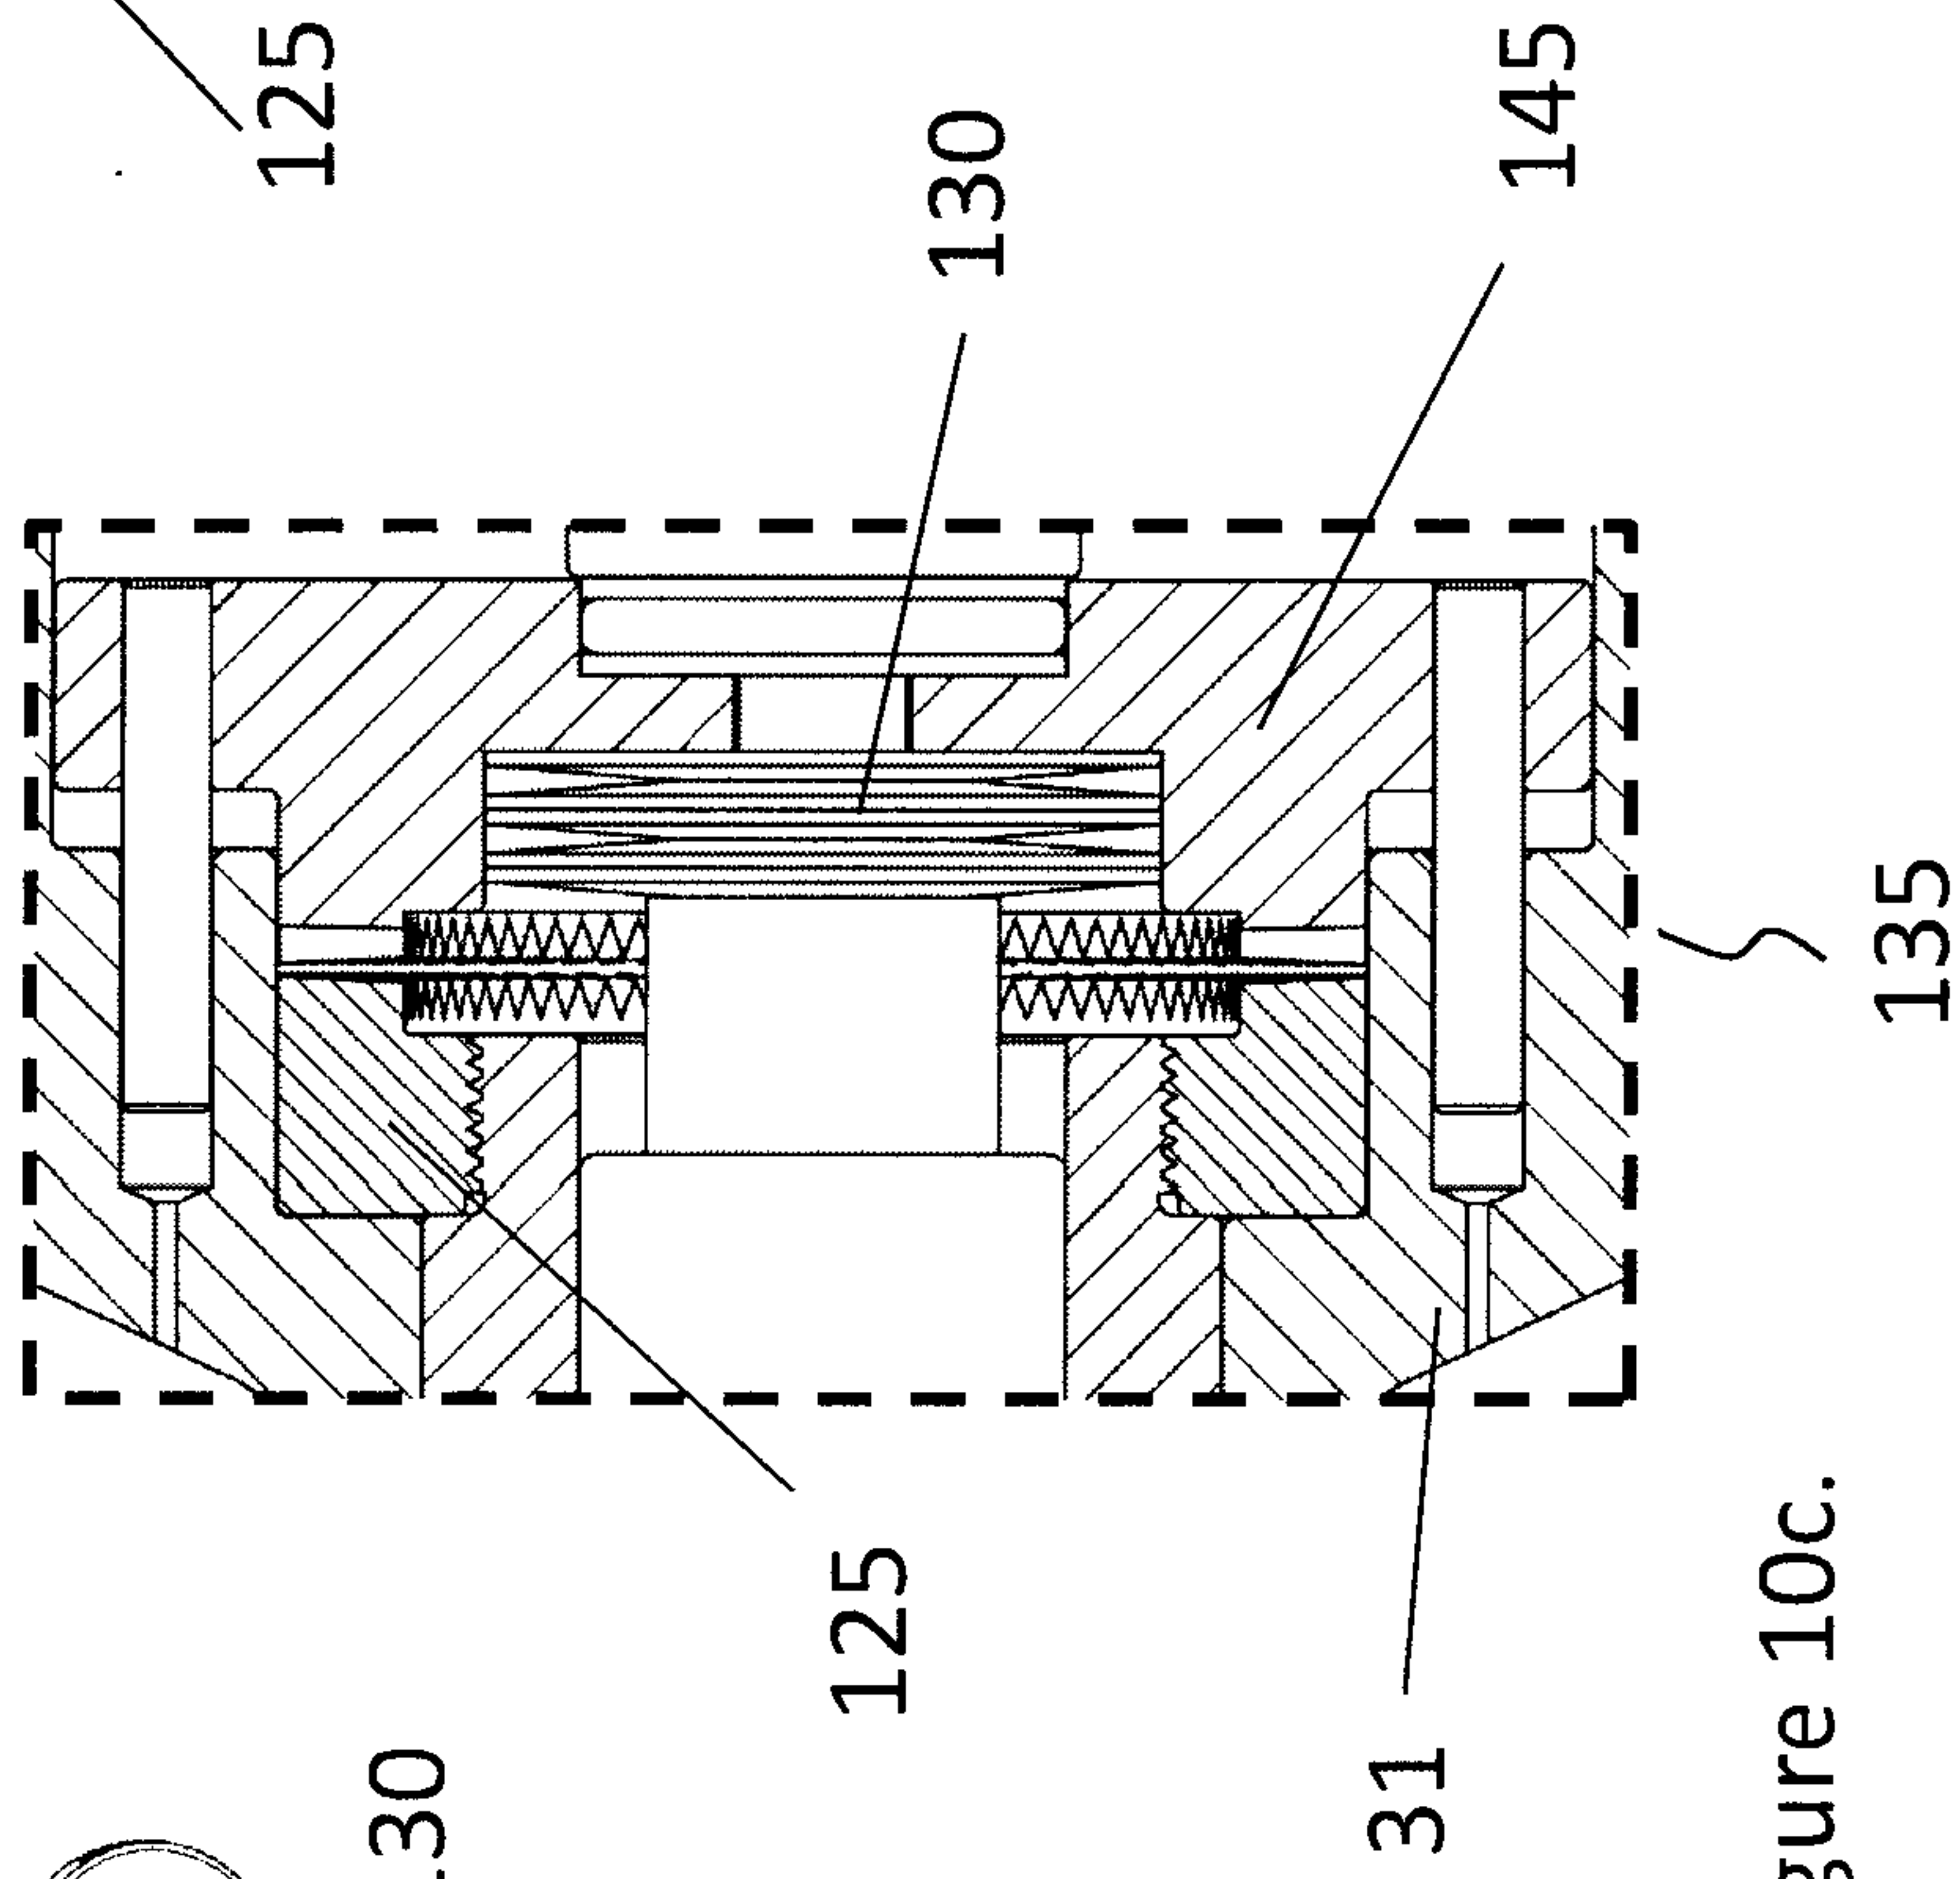


Figure 10b.

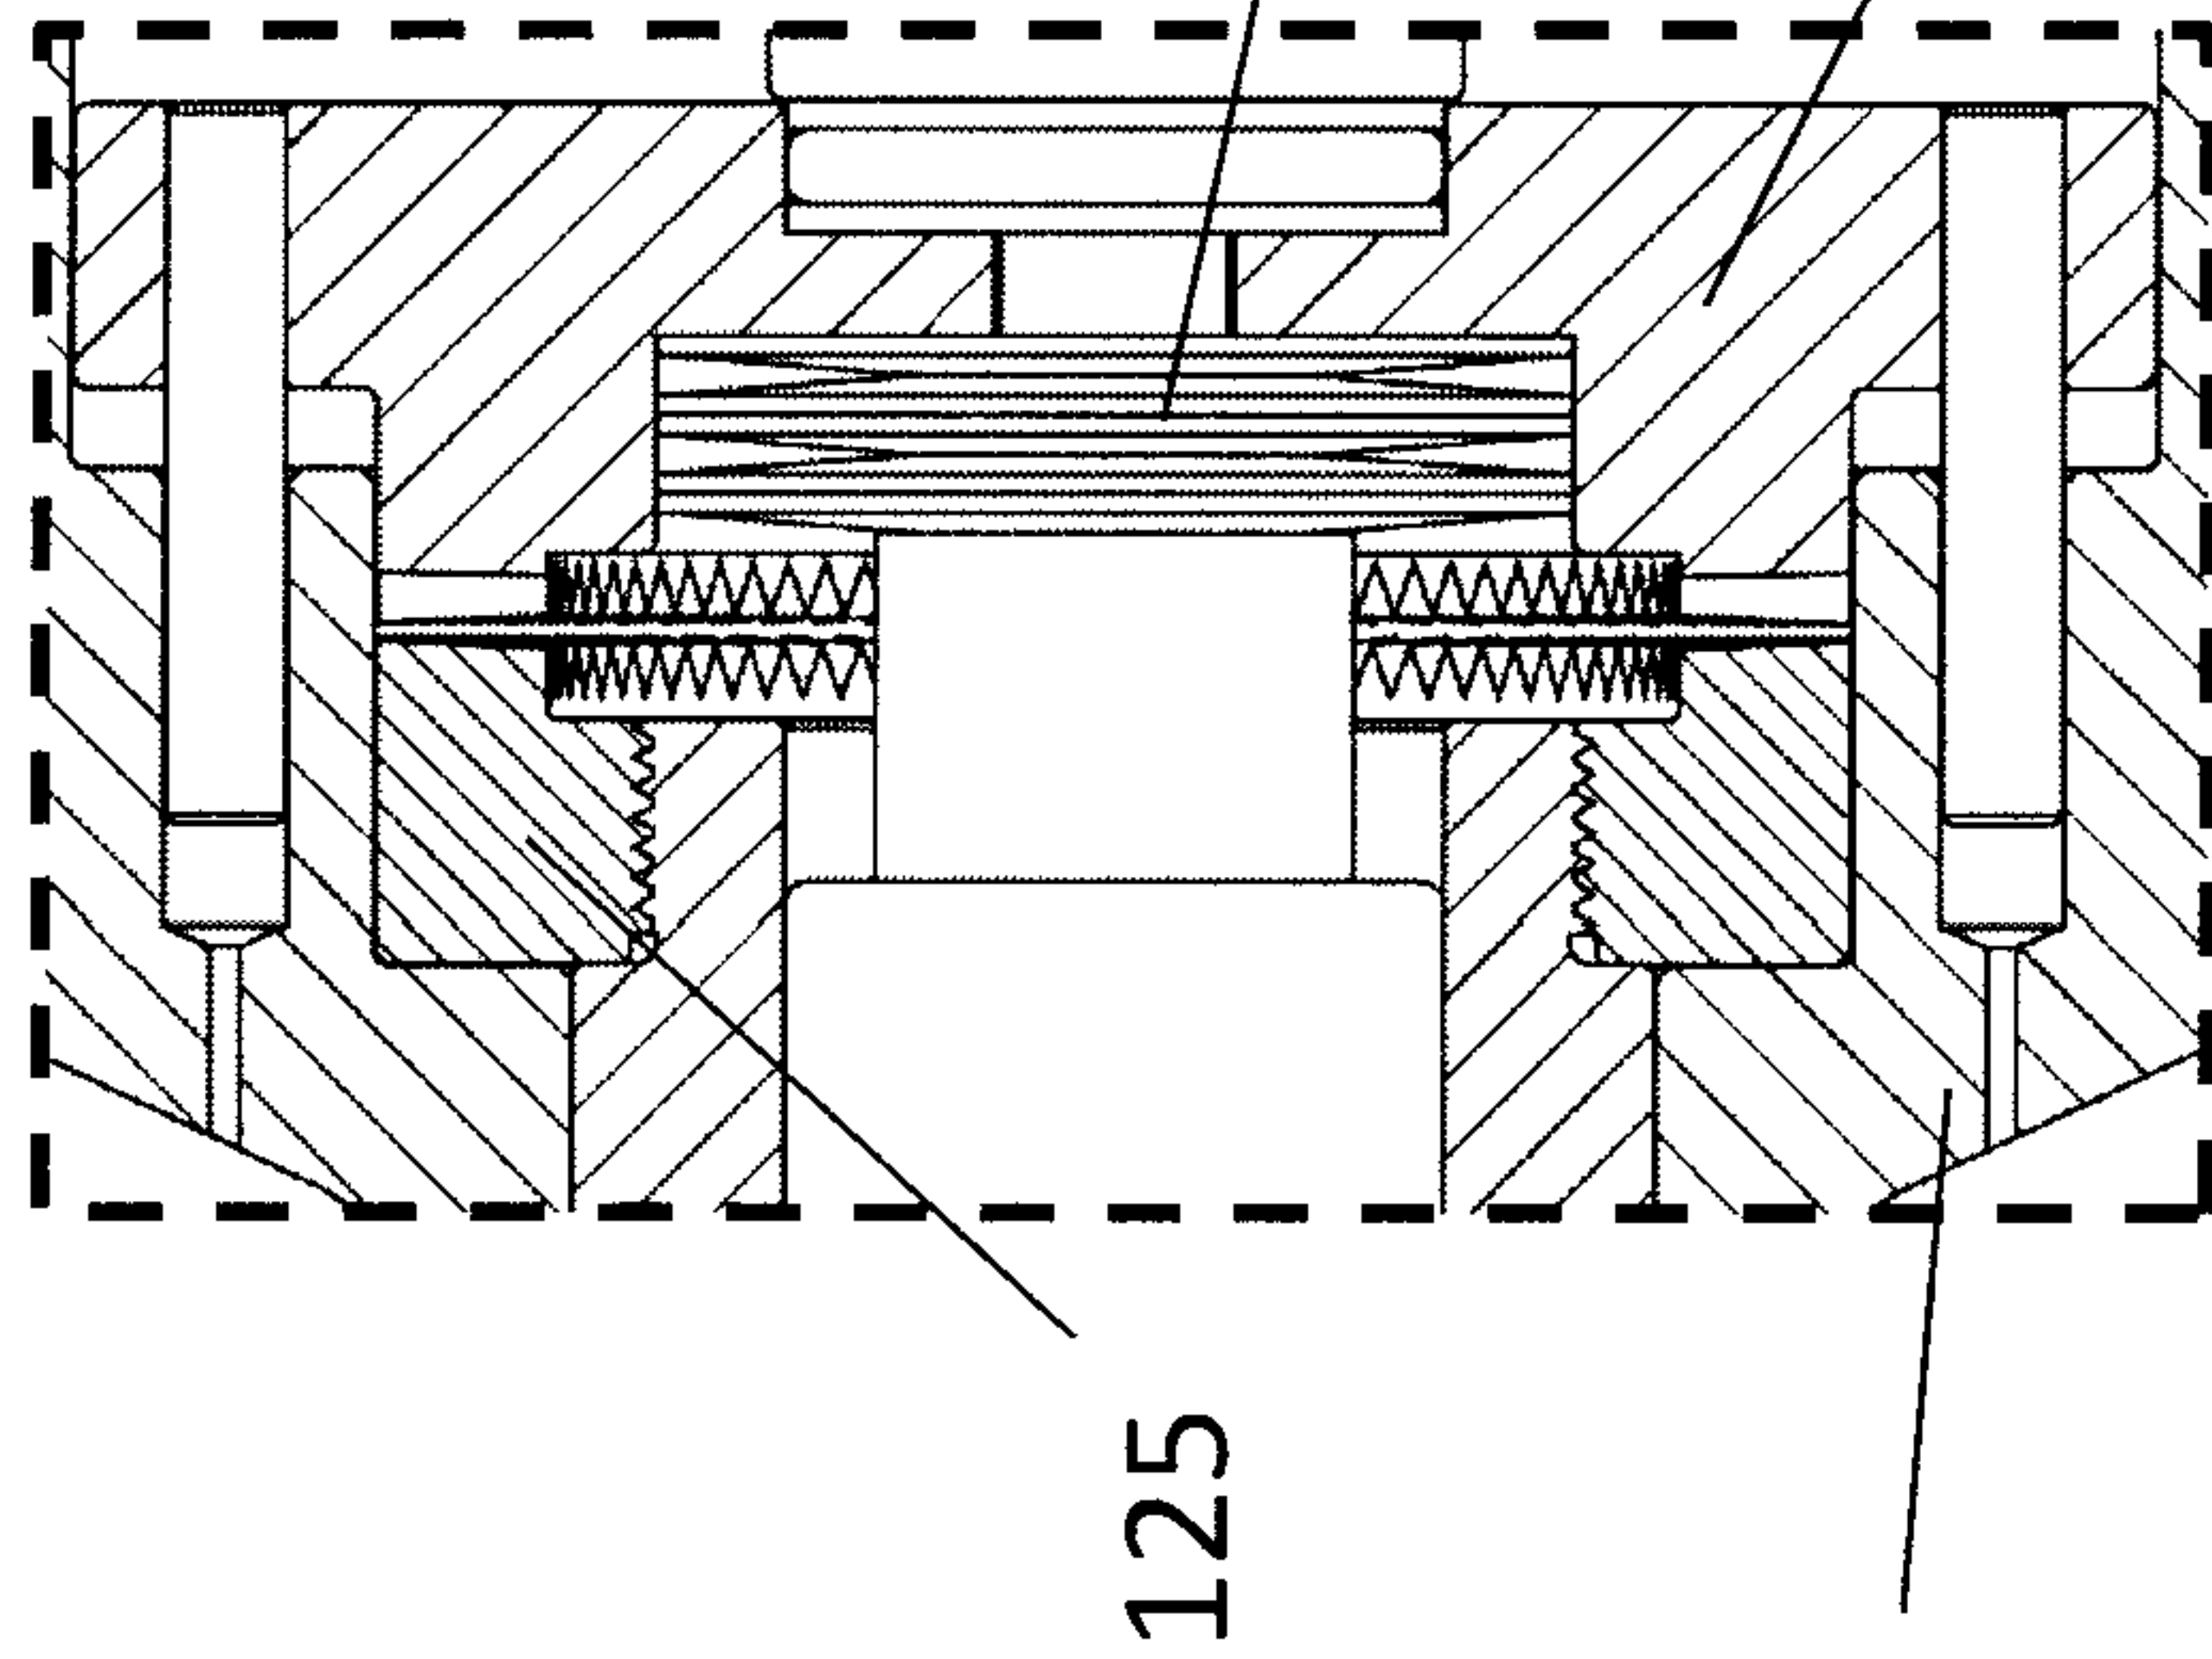


Figure 10c.

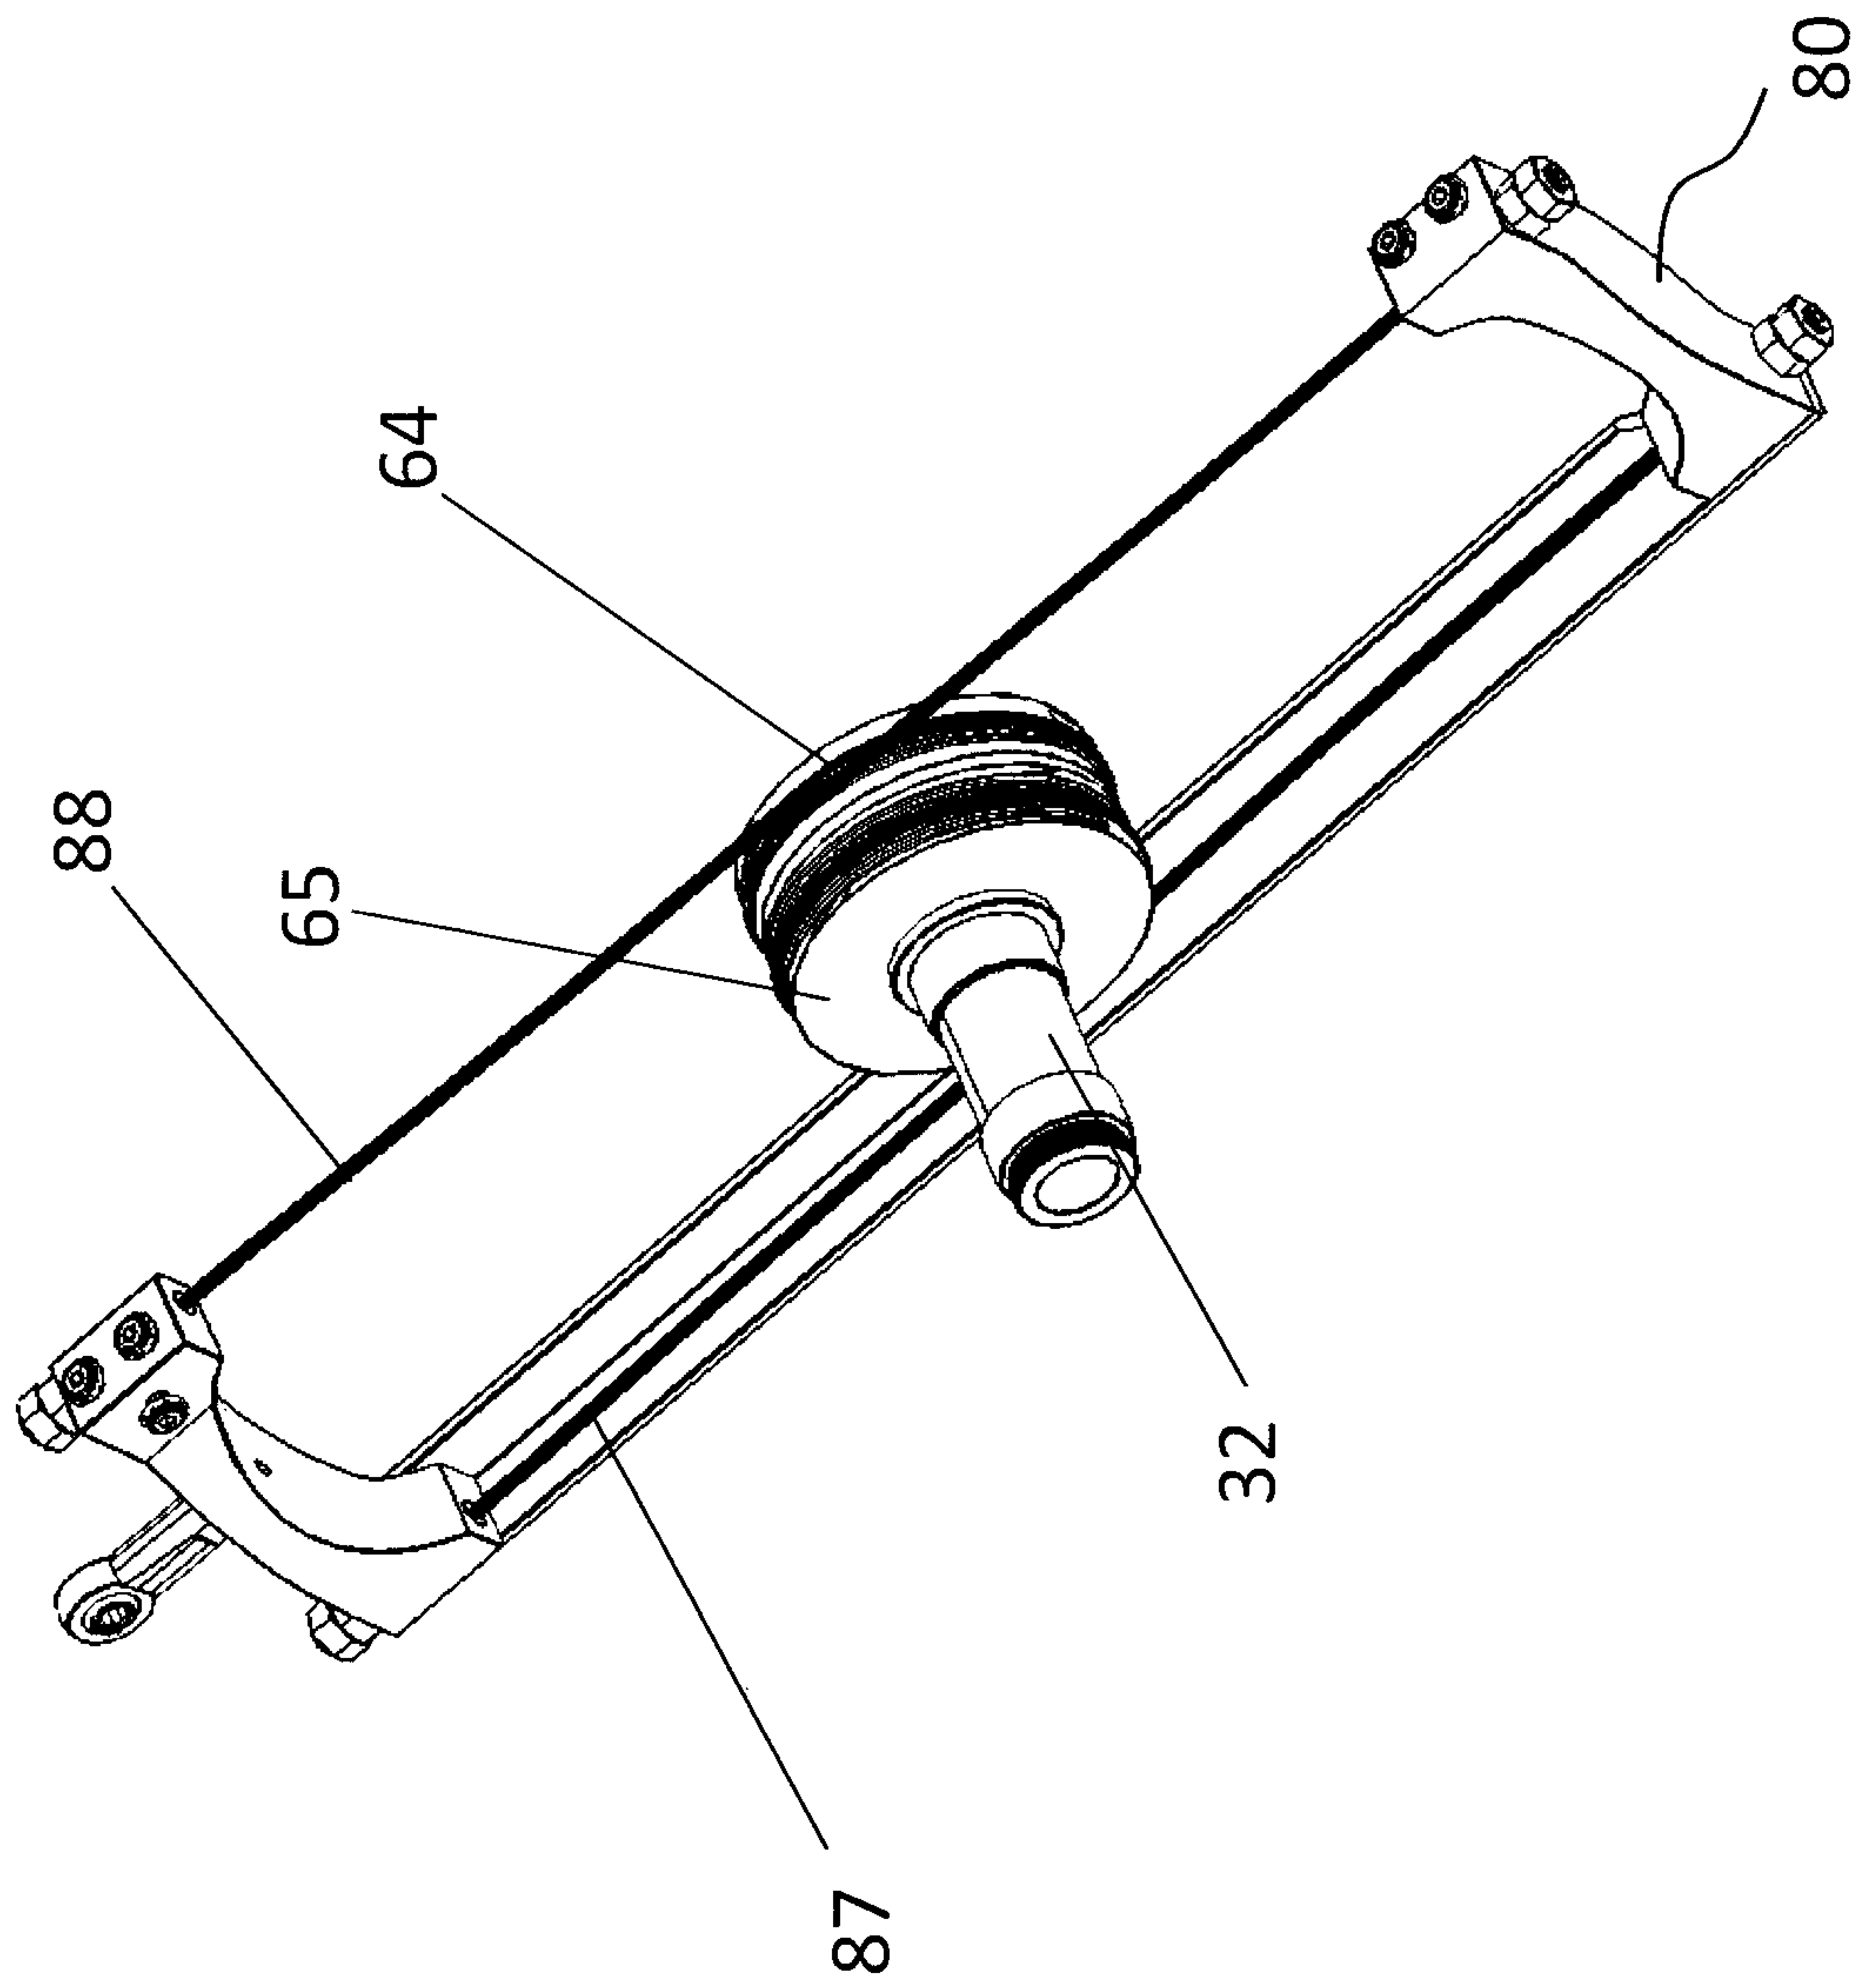


Figure 11.

Figure 12a.

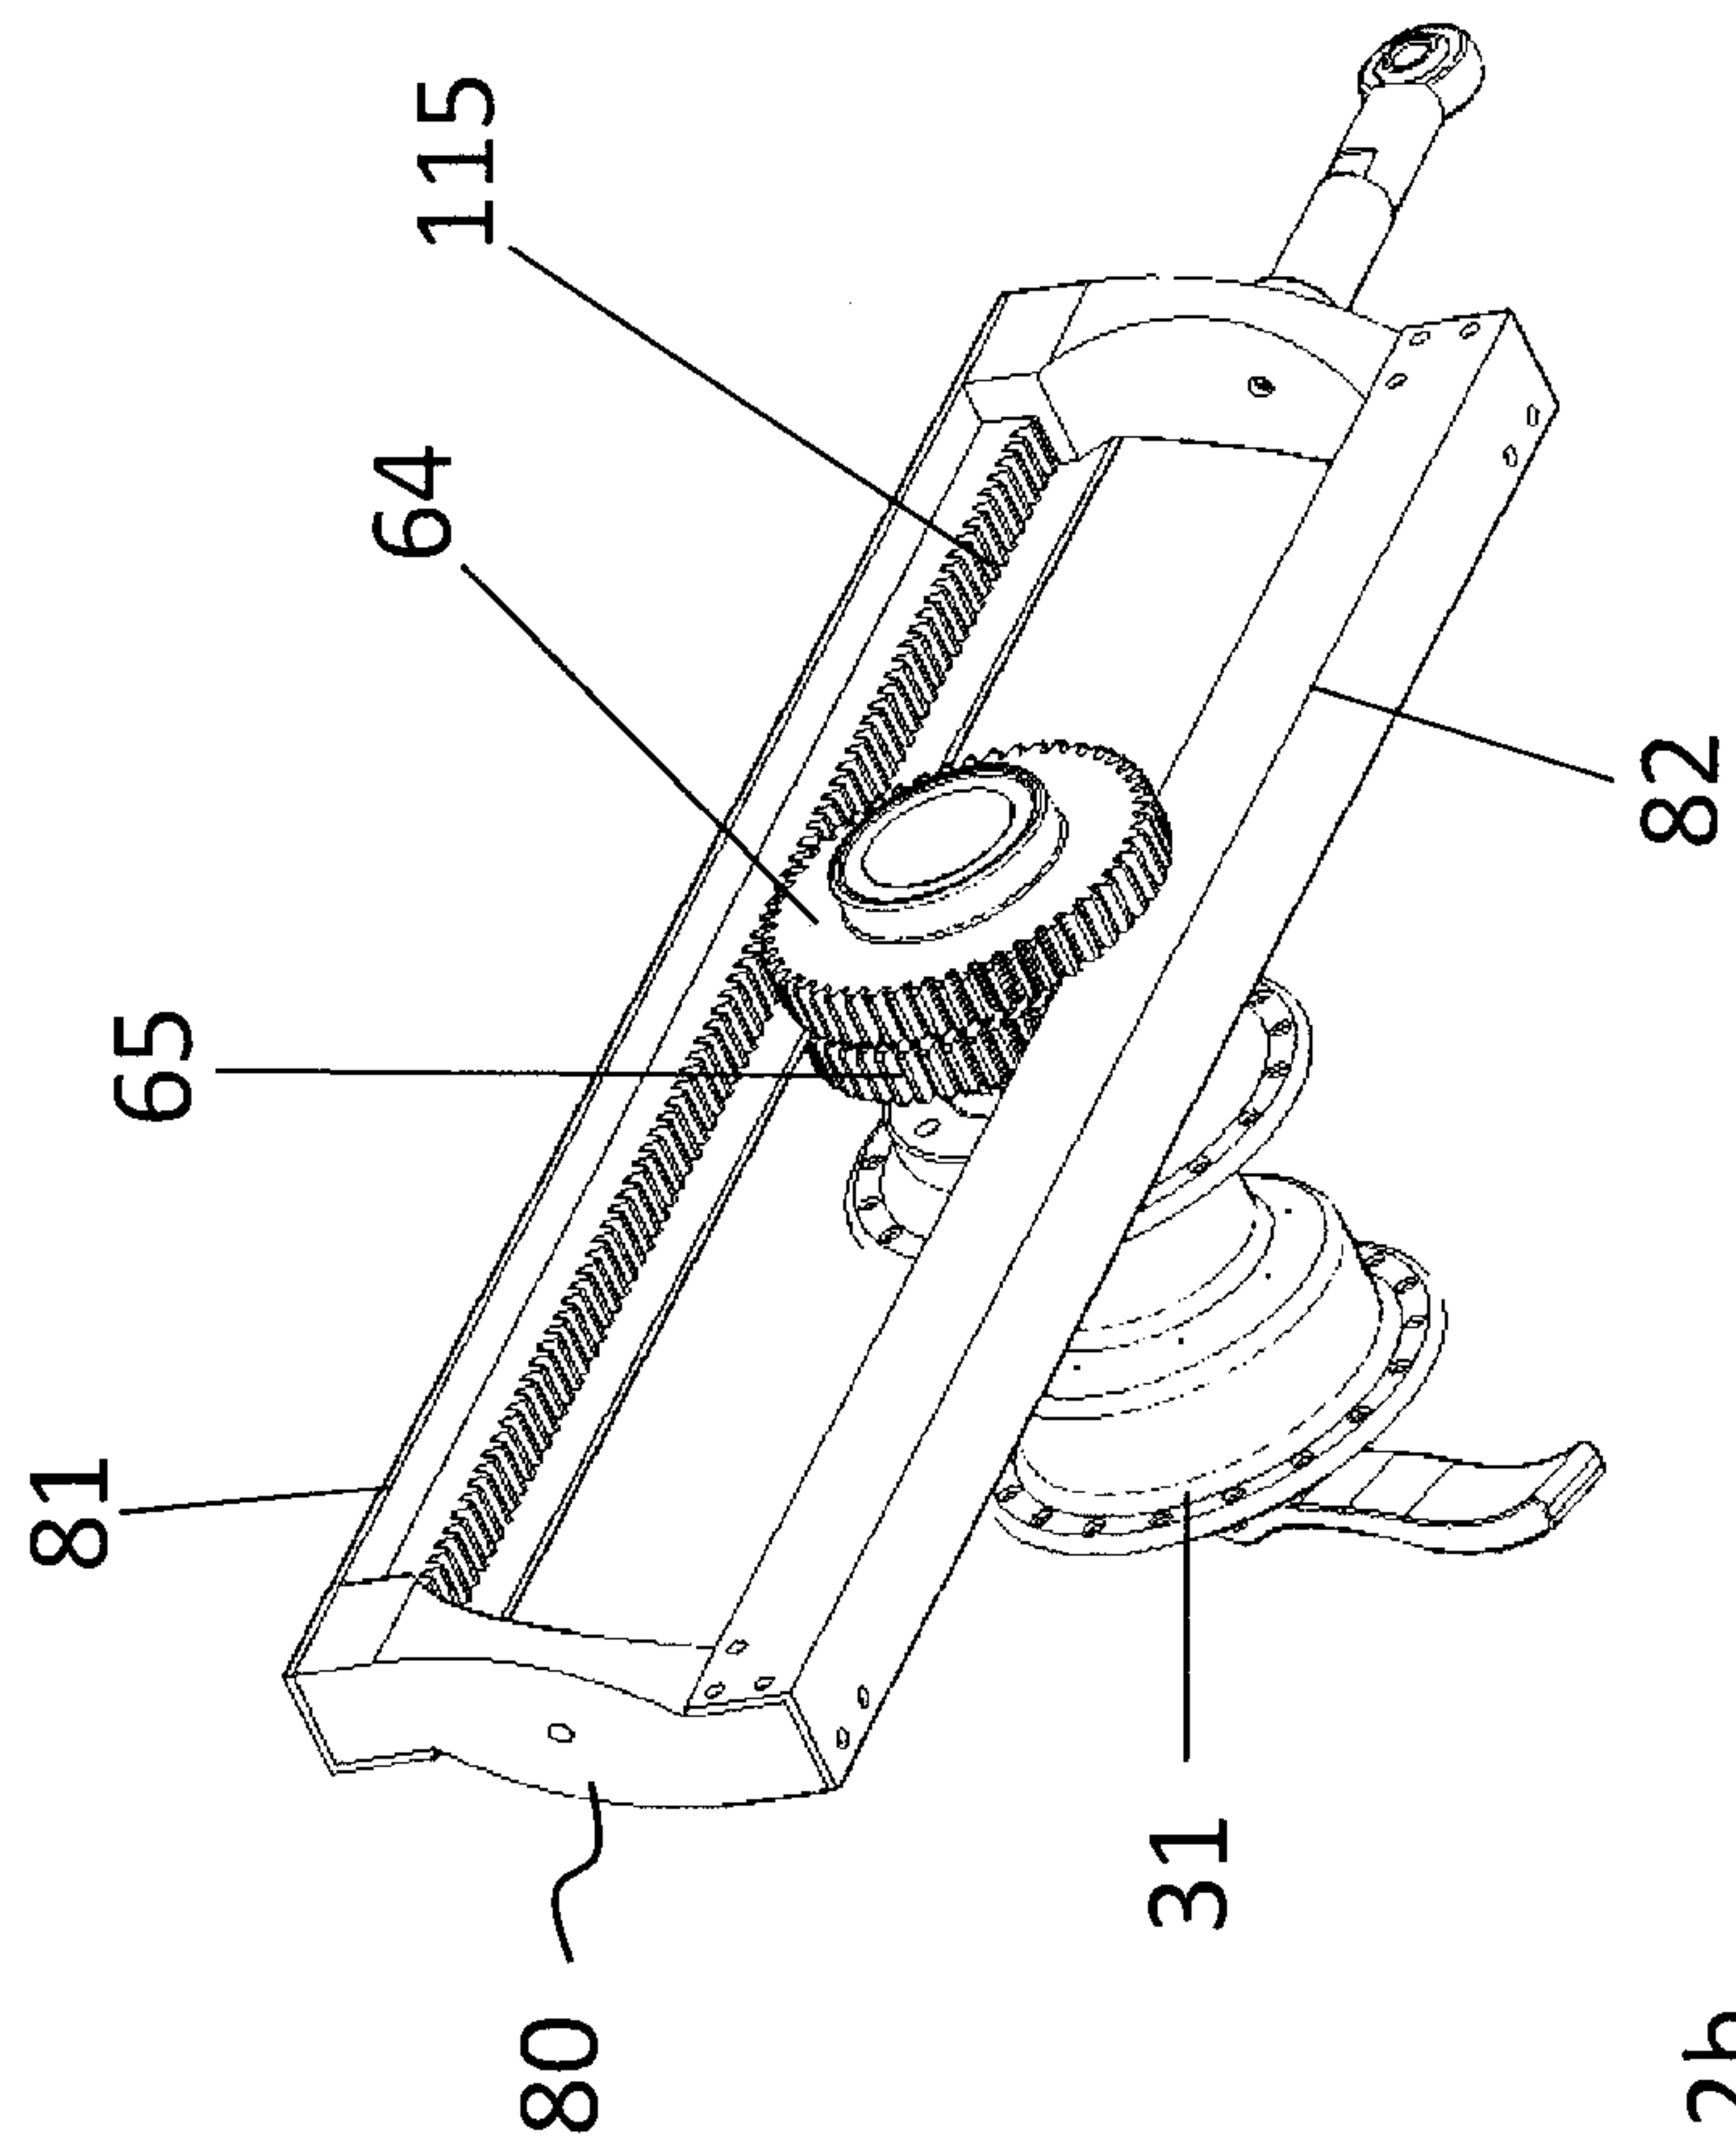
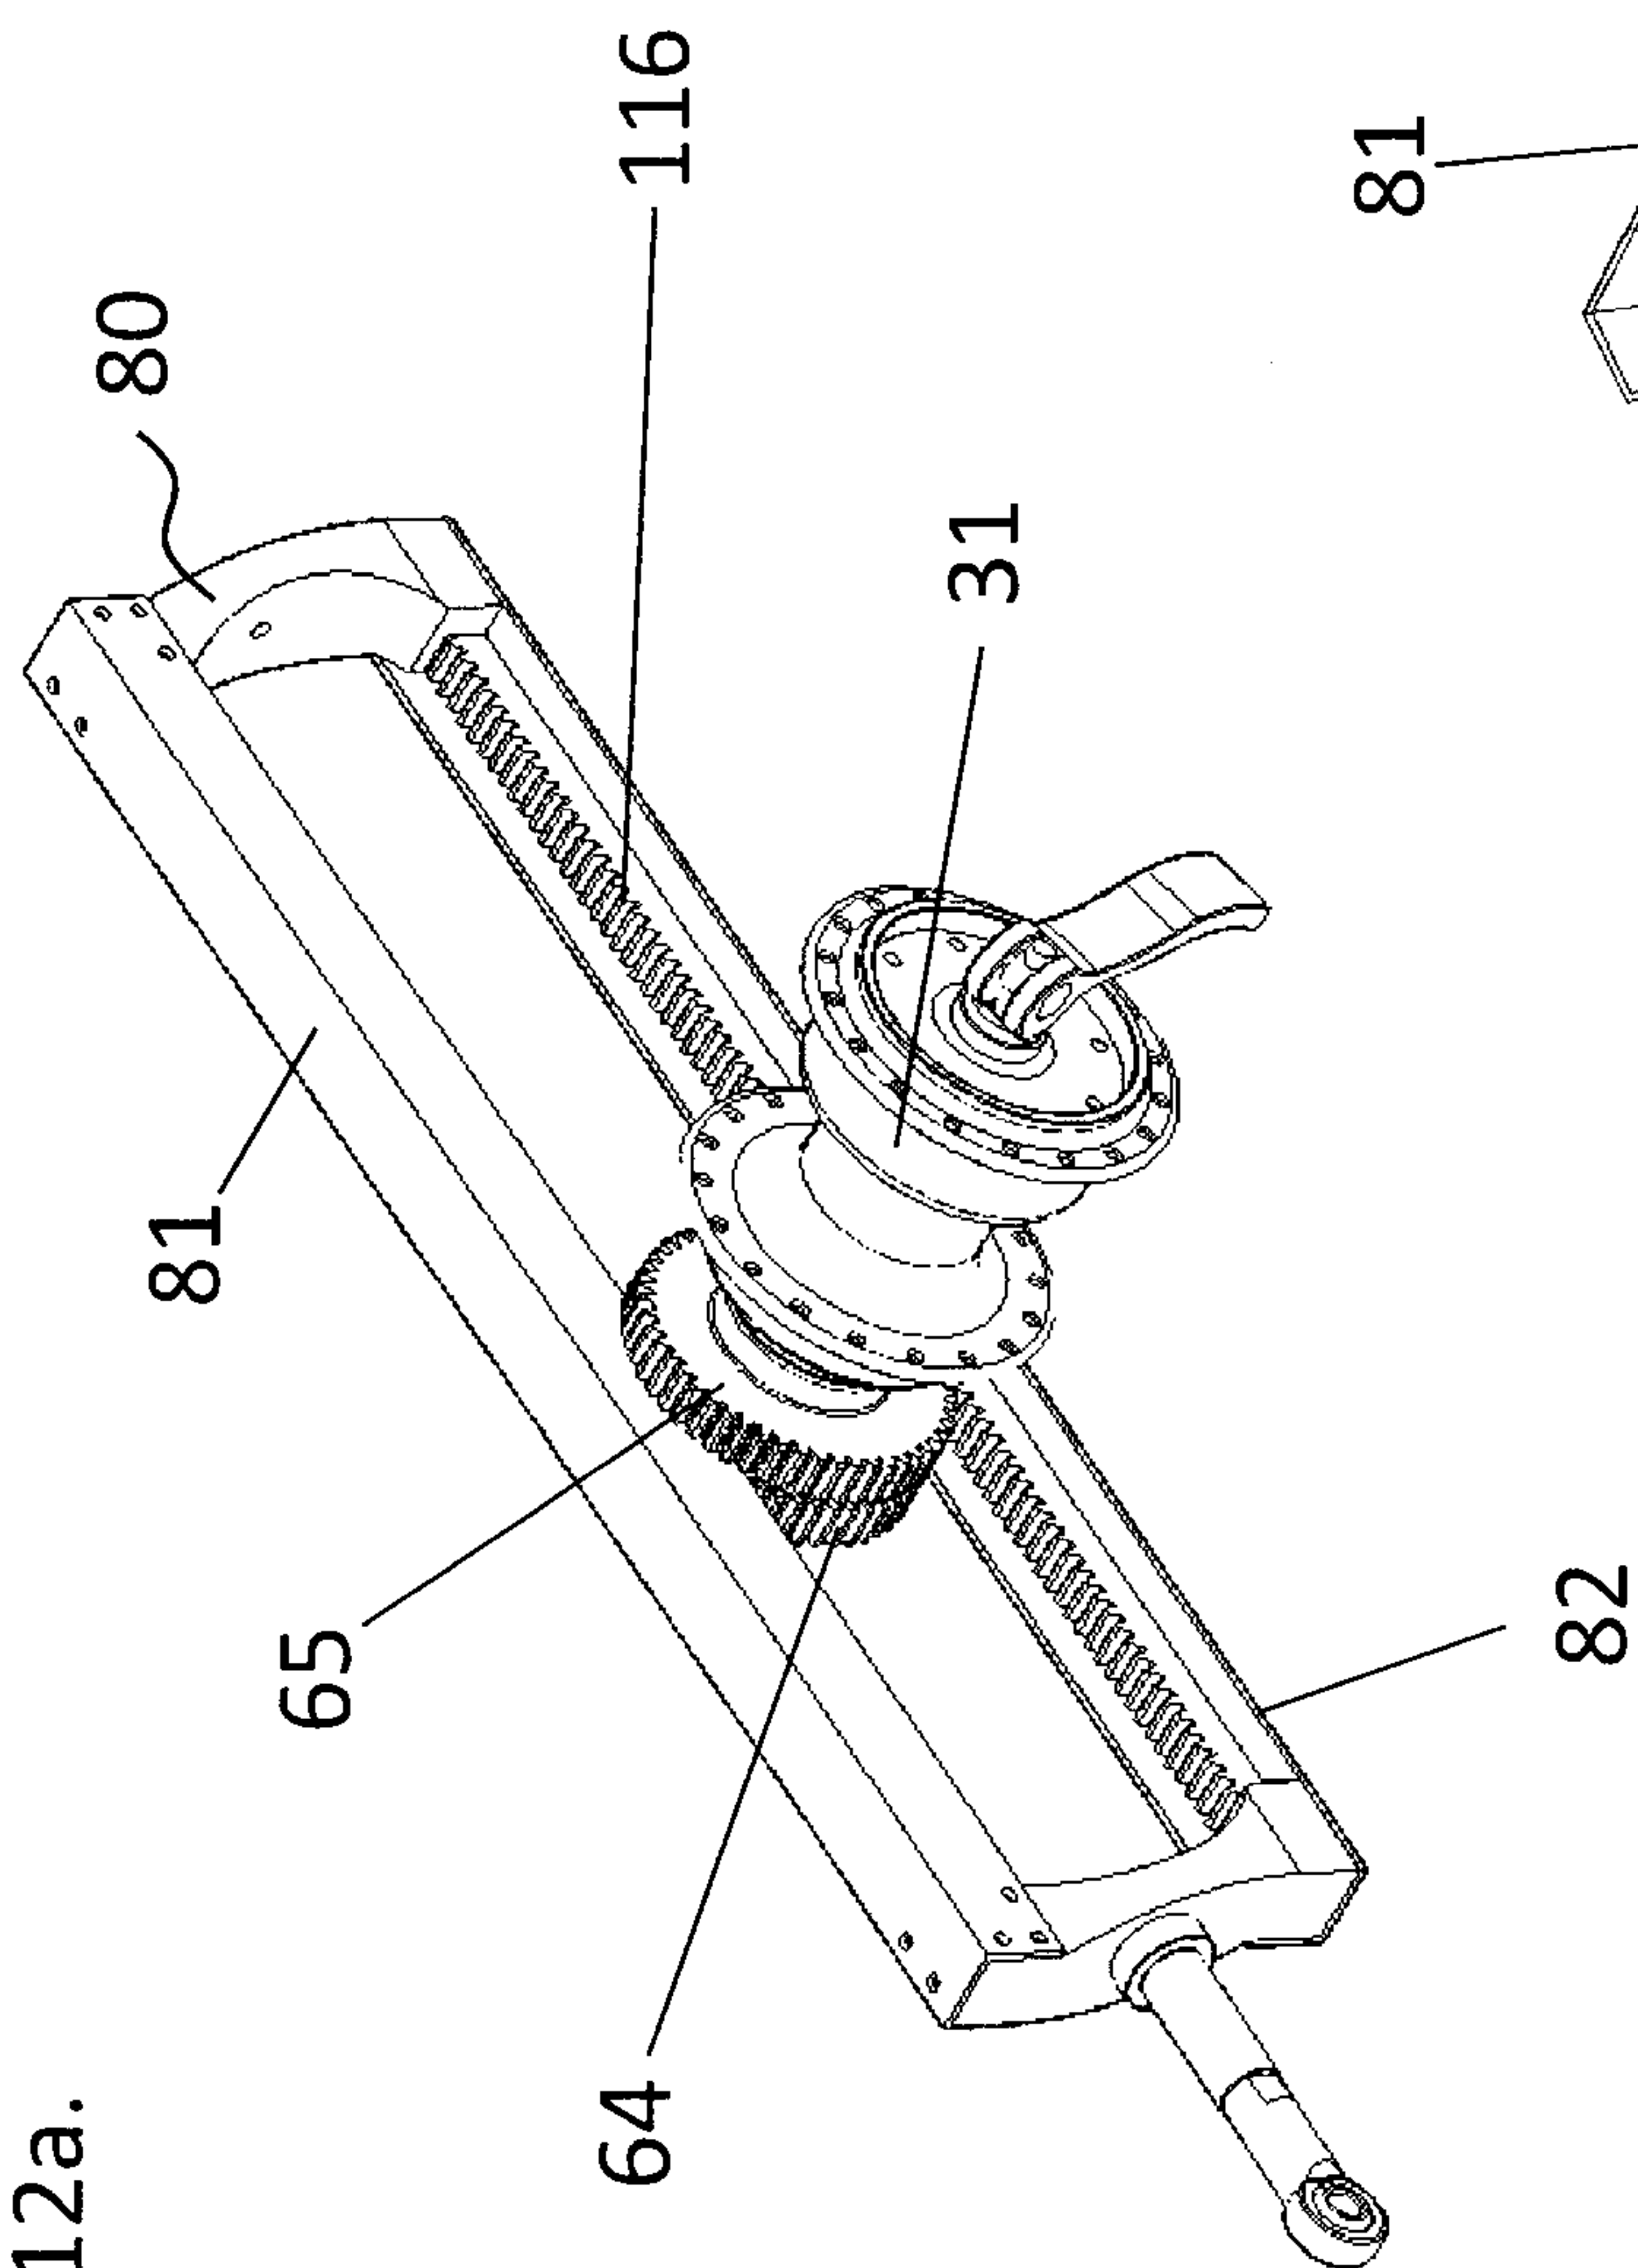


Figure 12b.

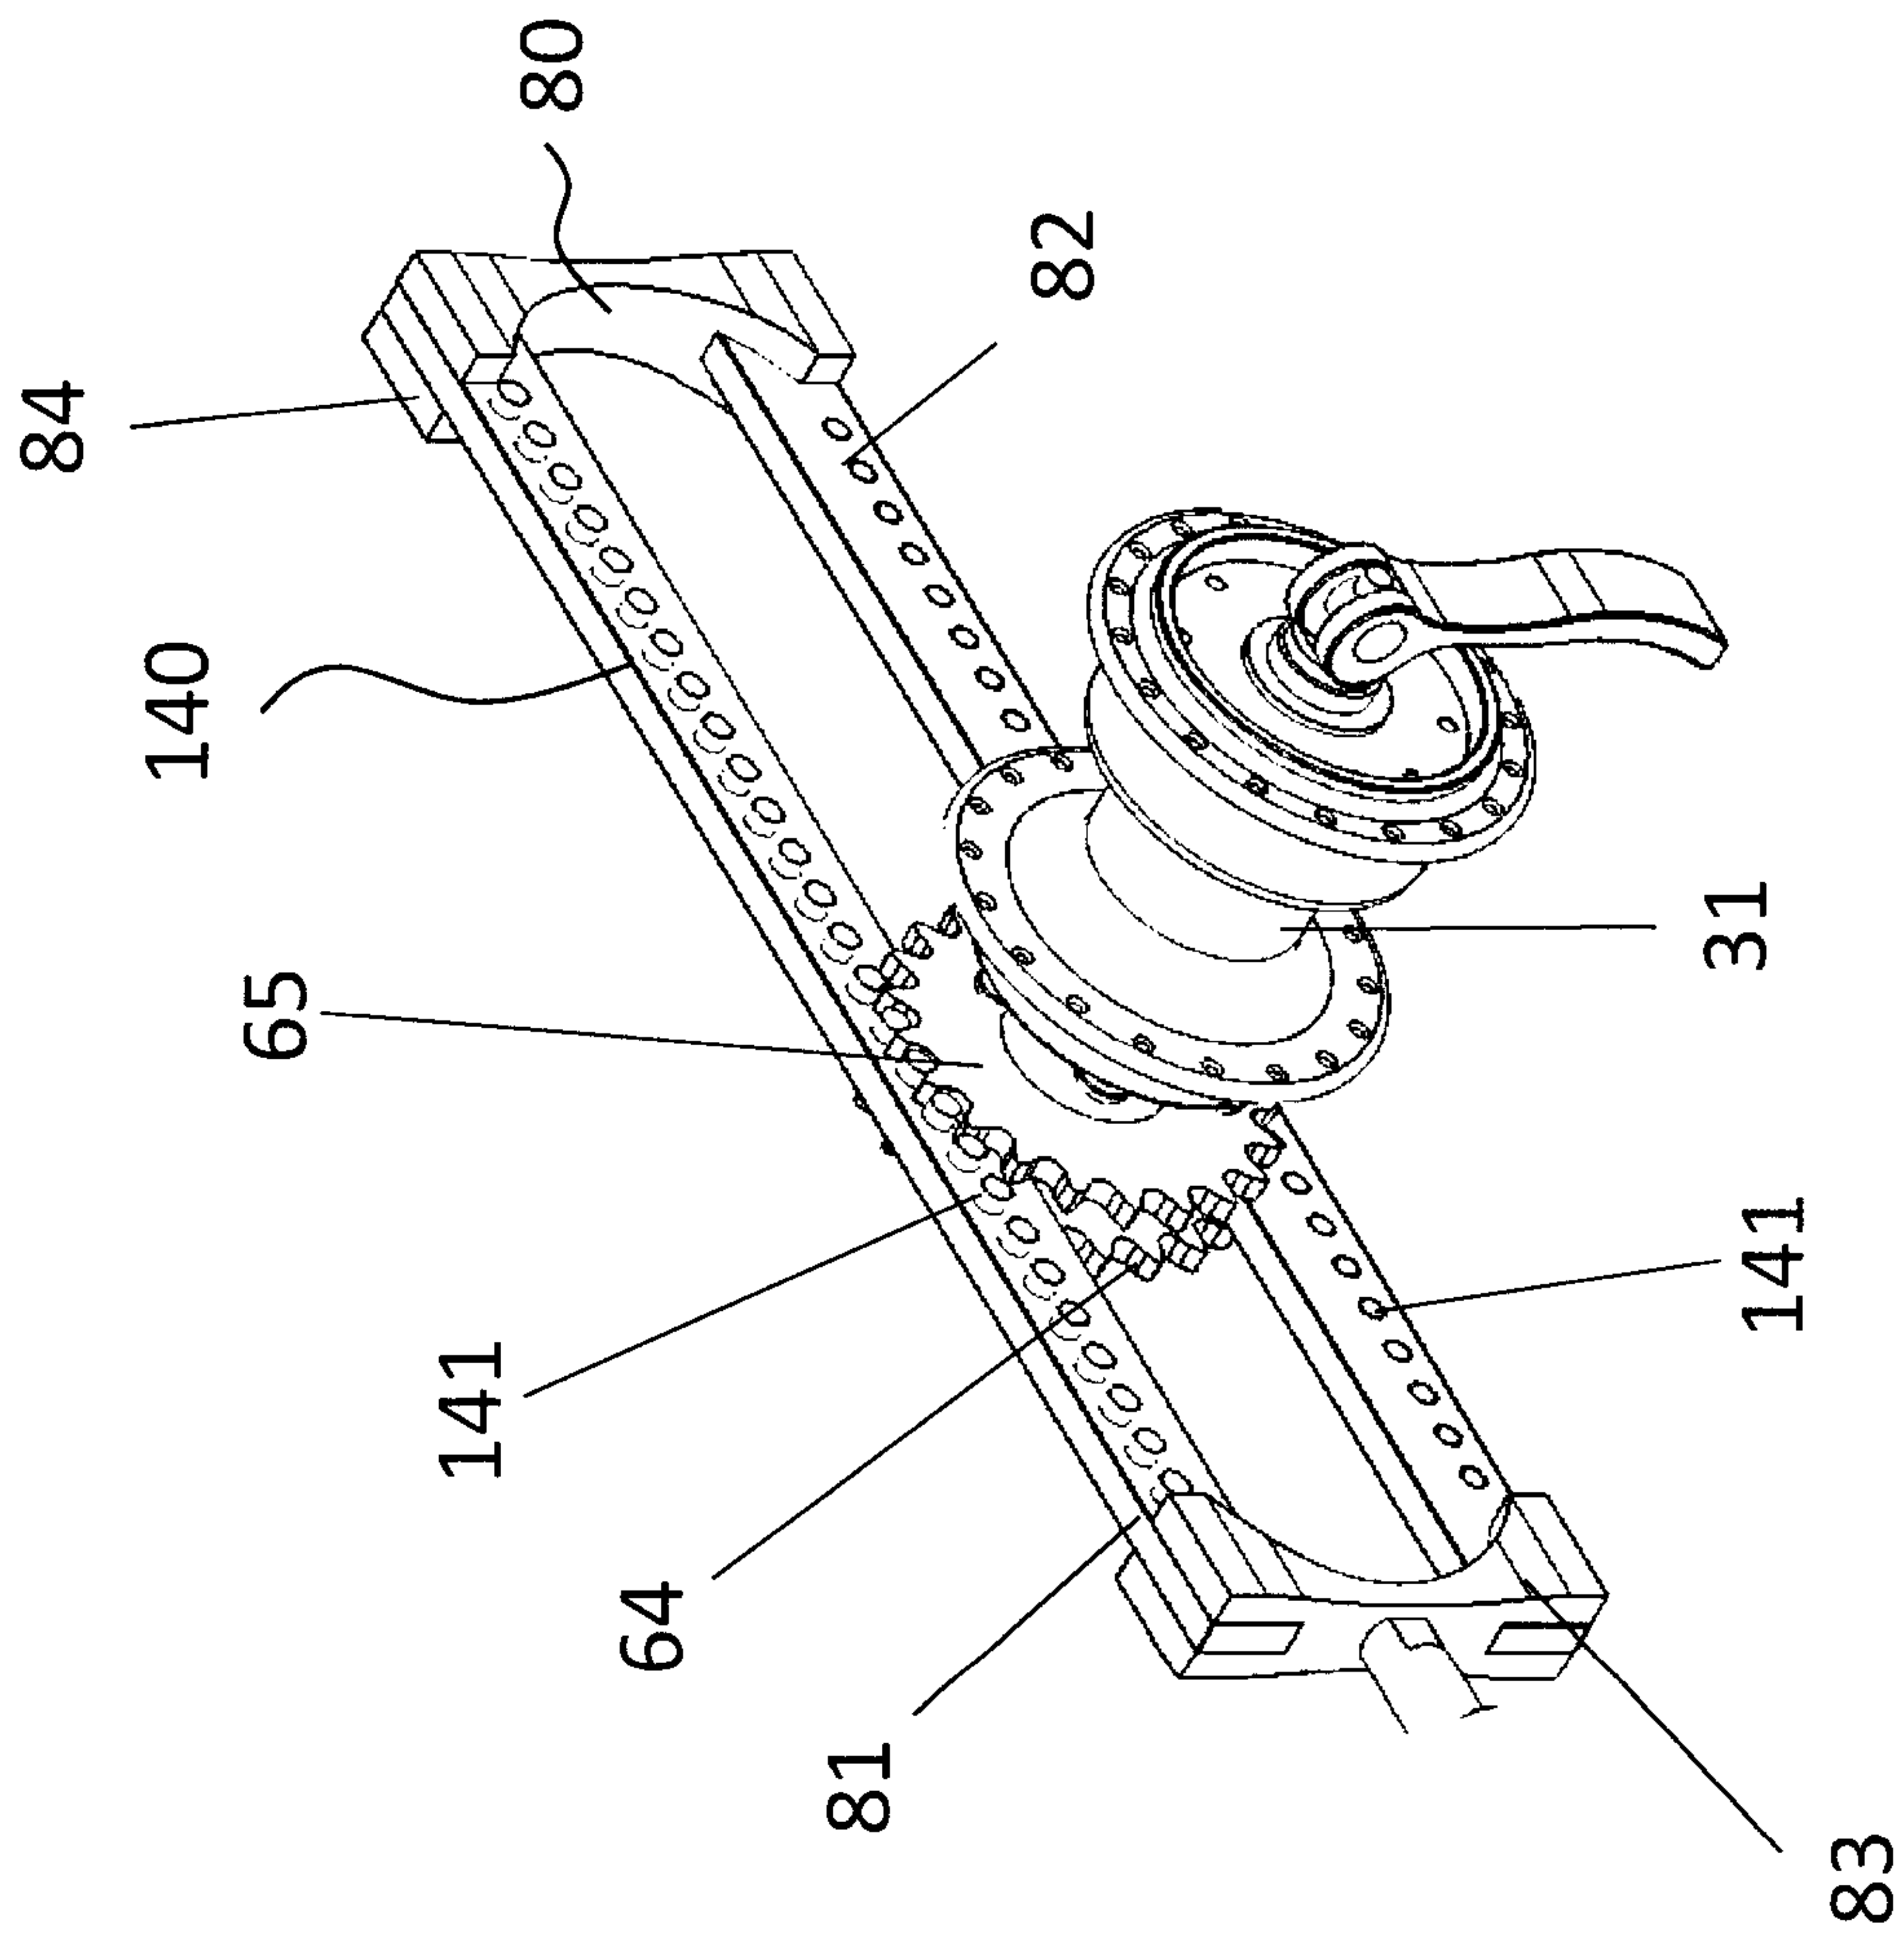


Figure 13.

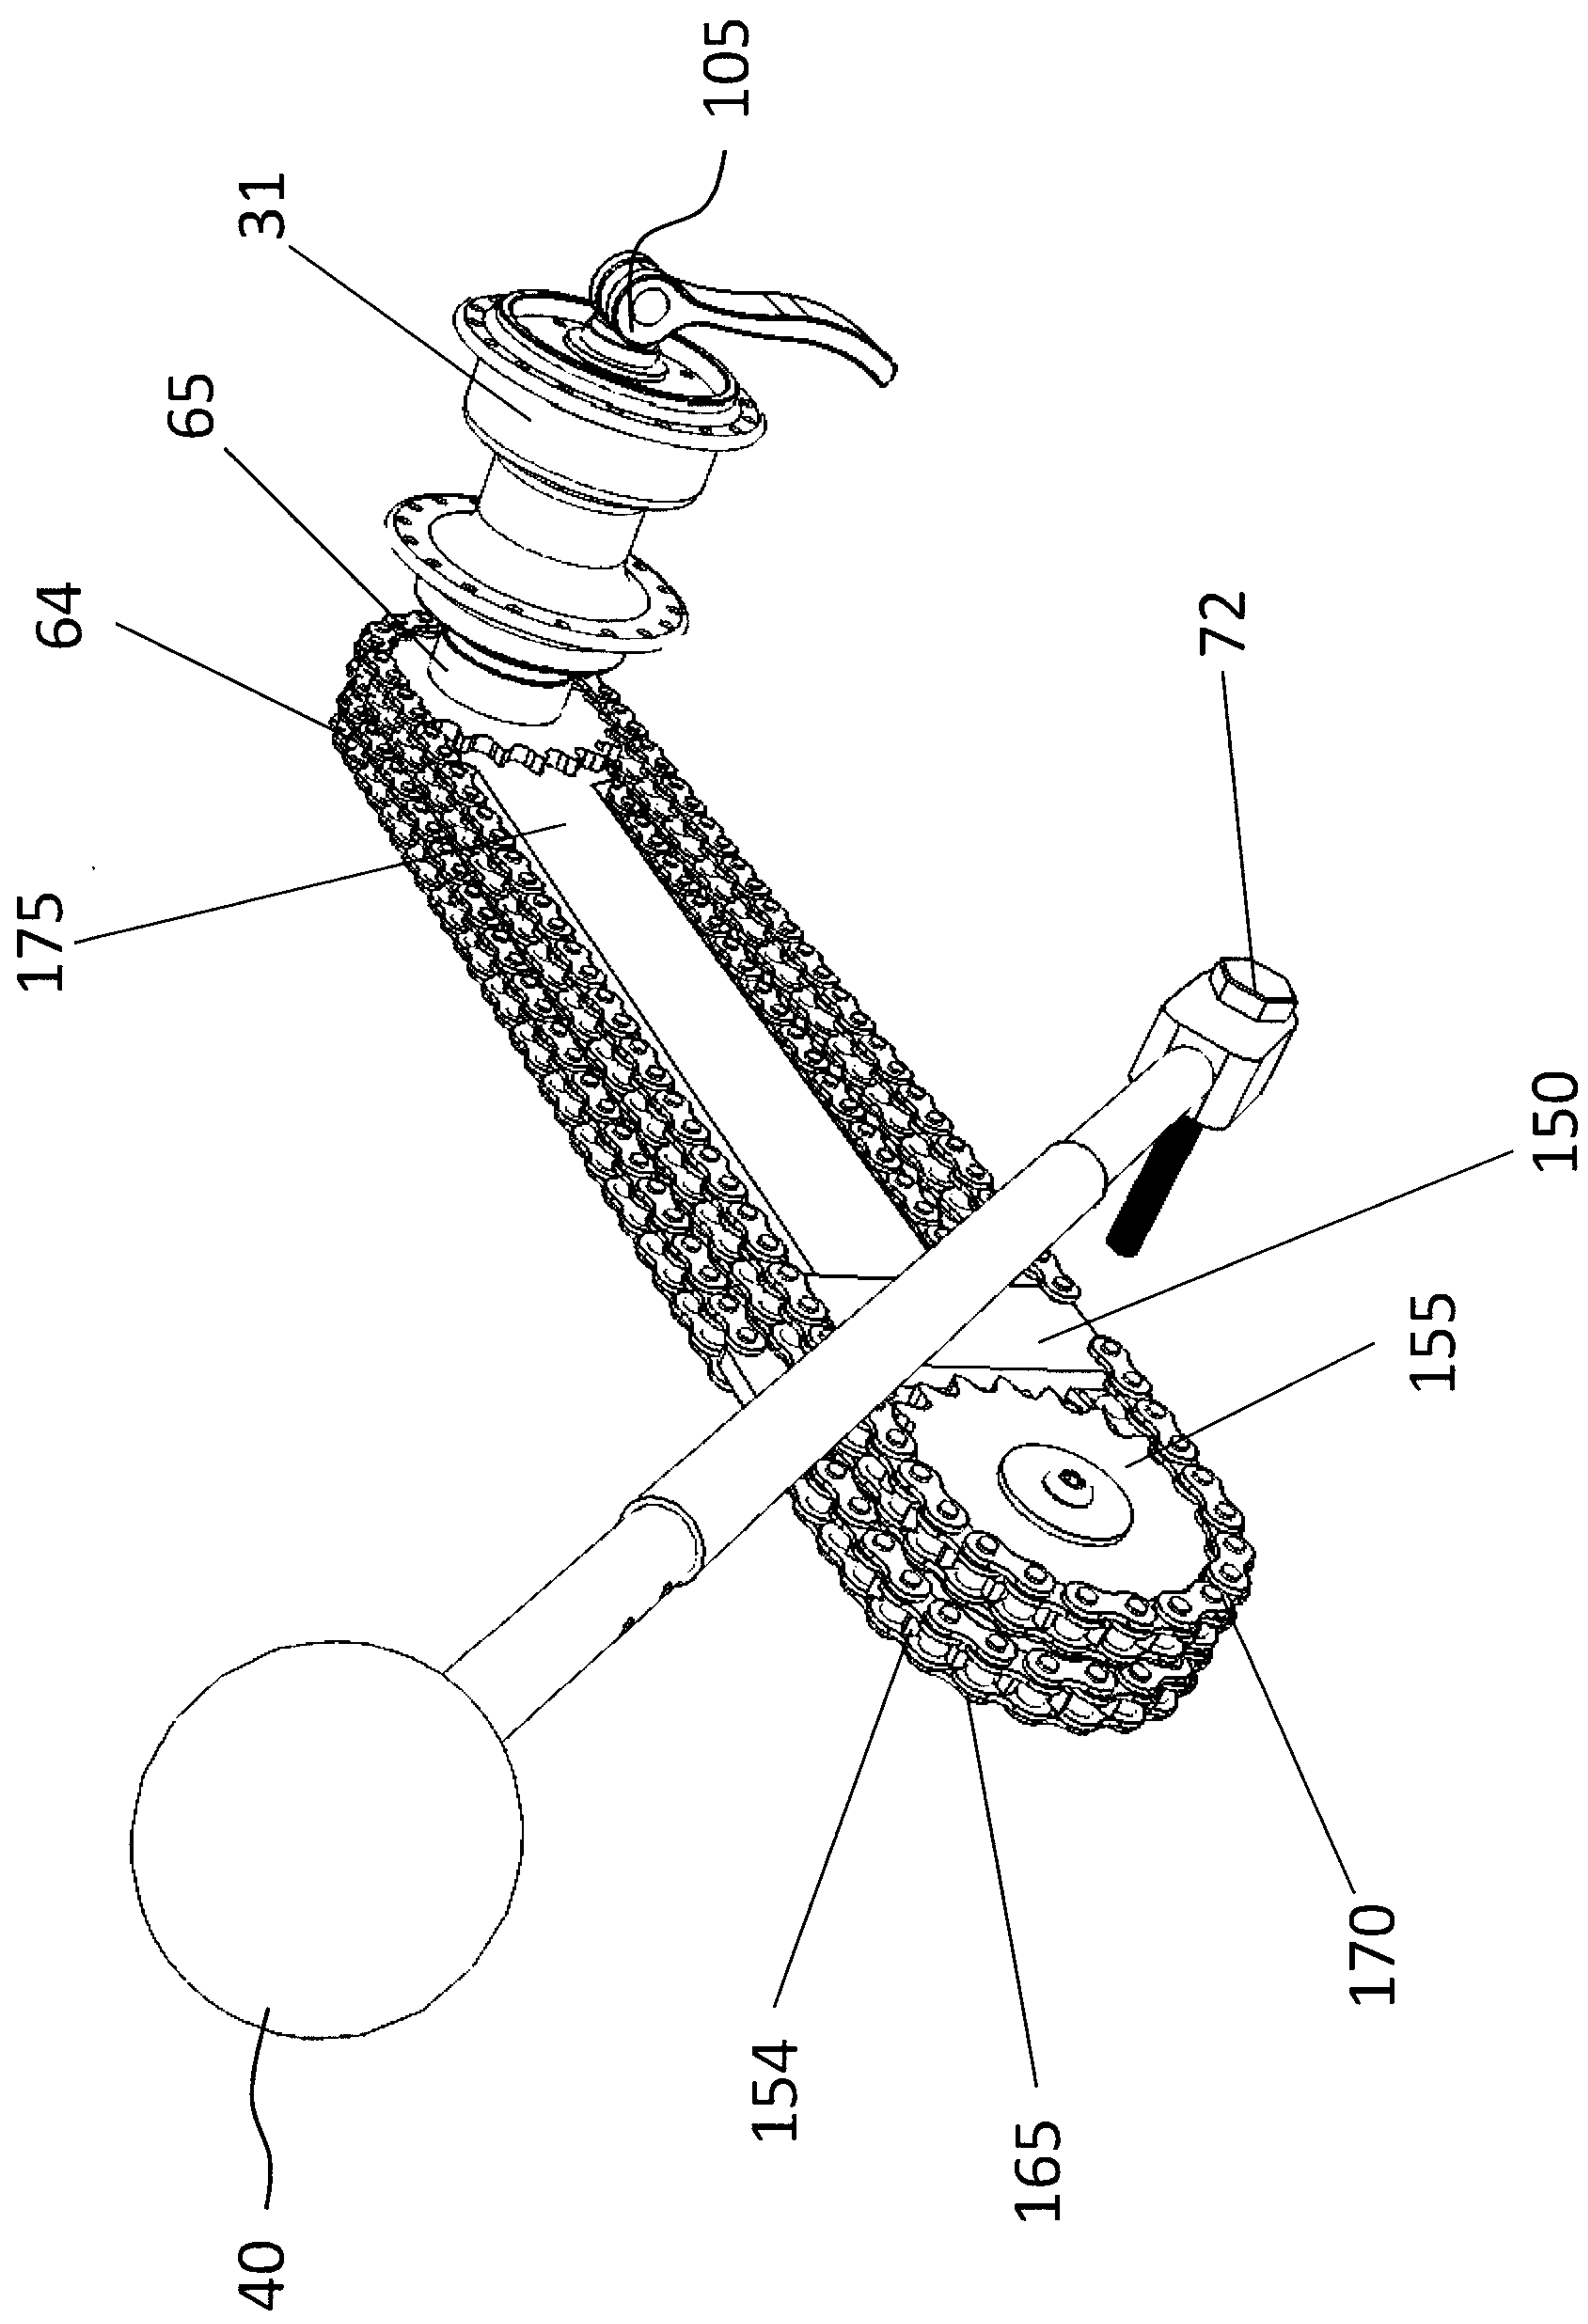


Figure 14.

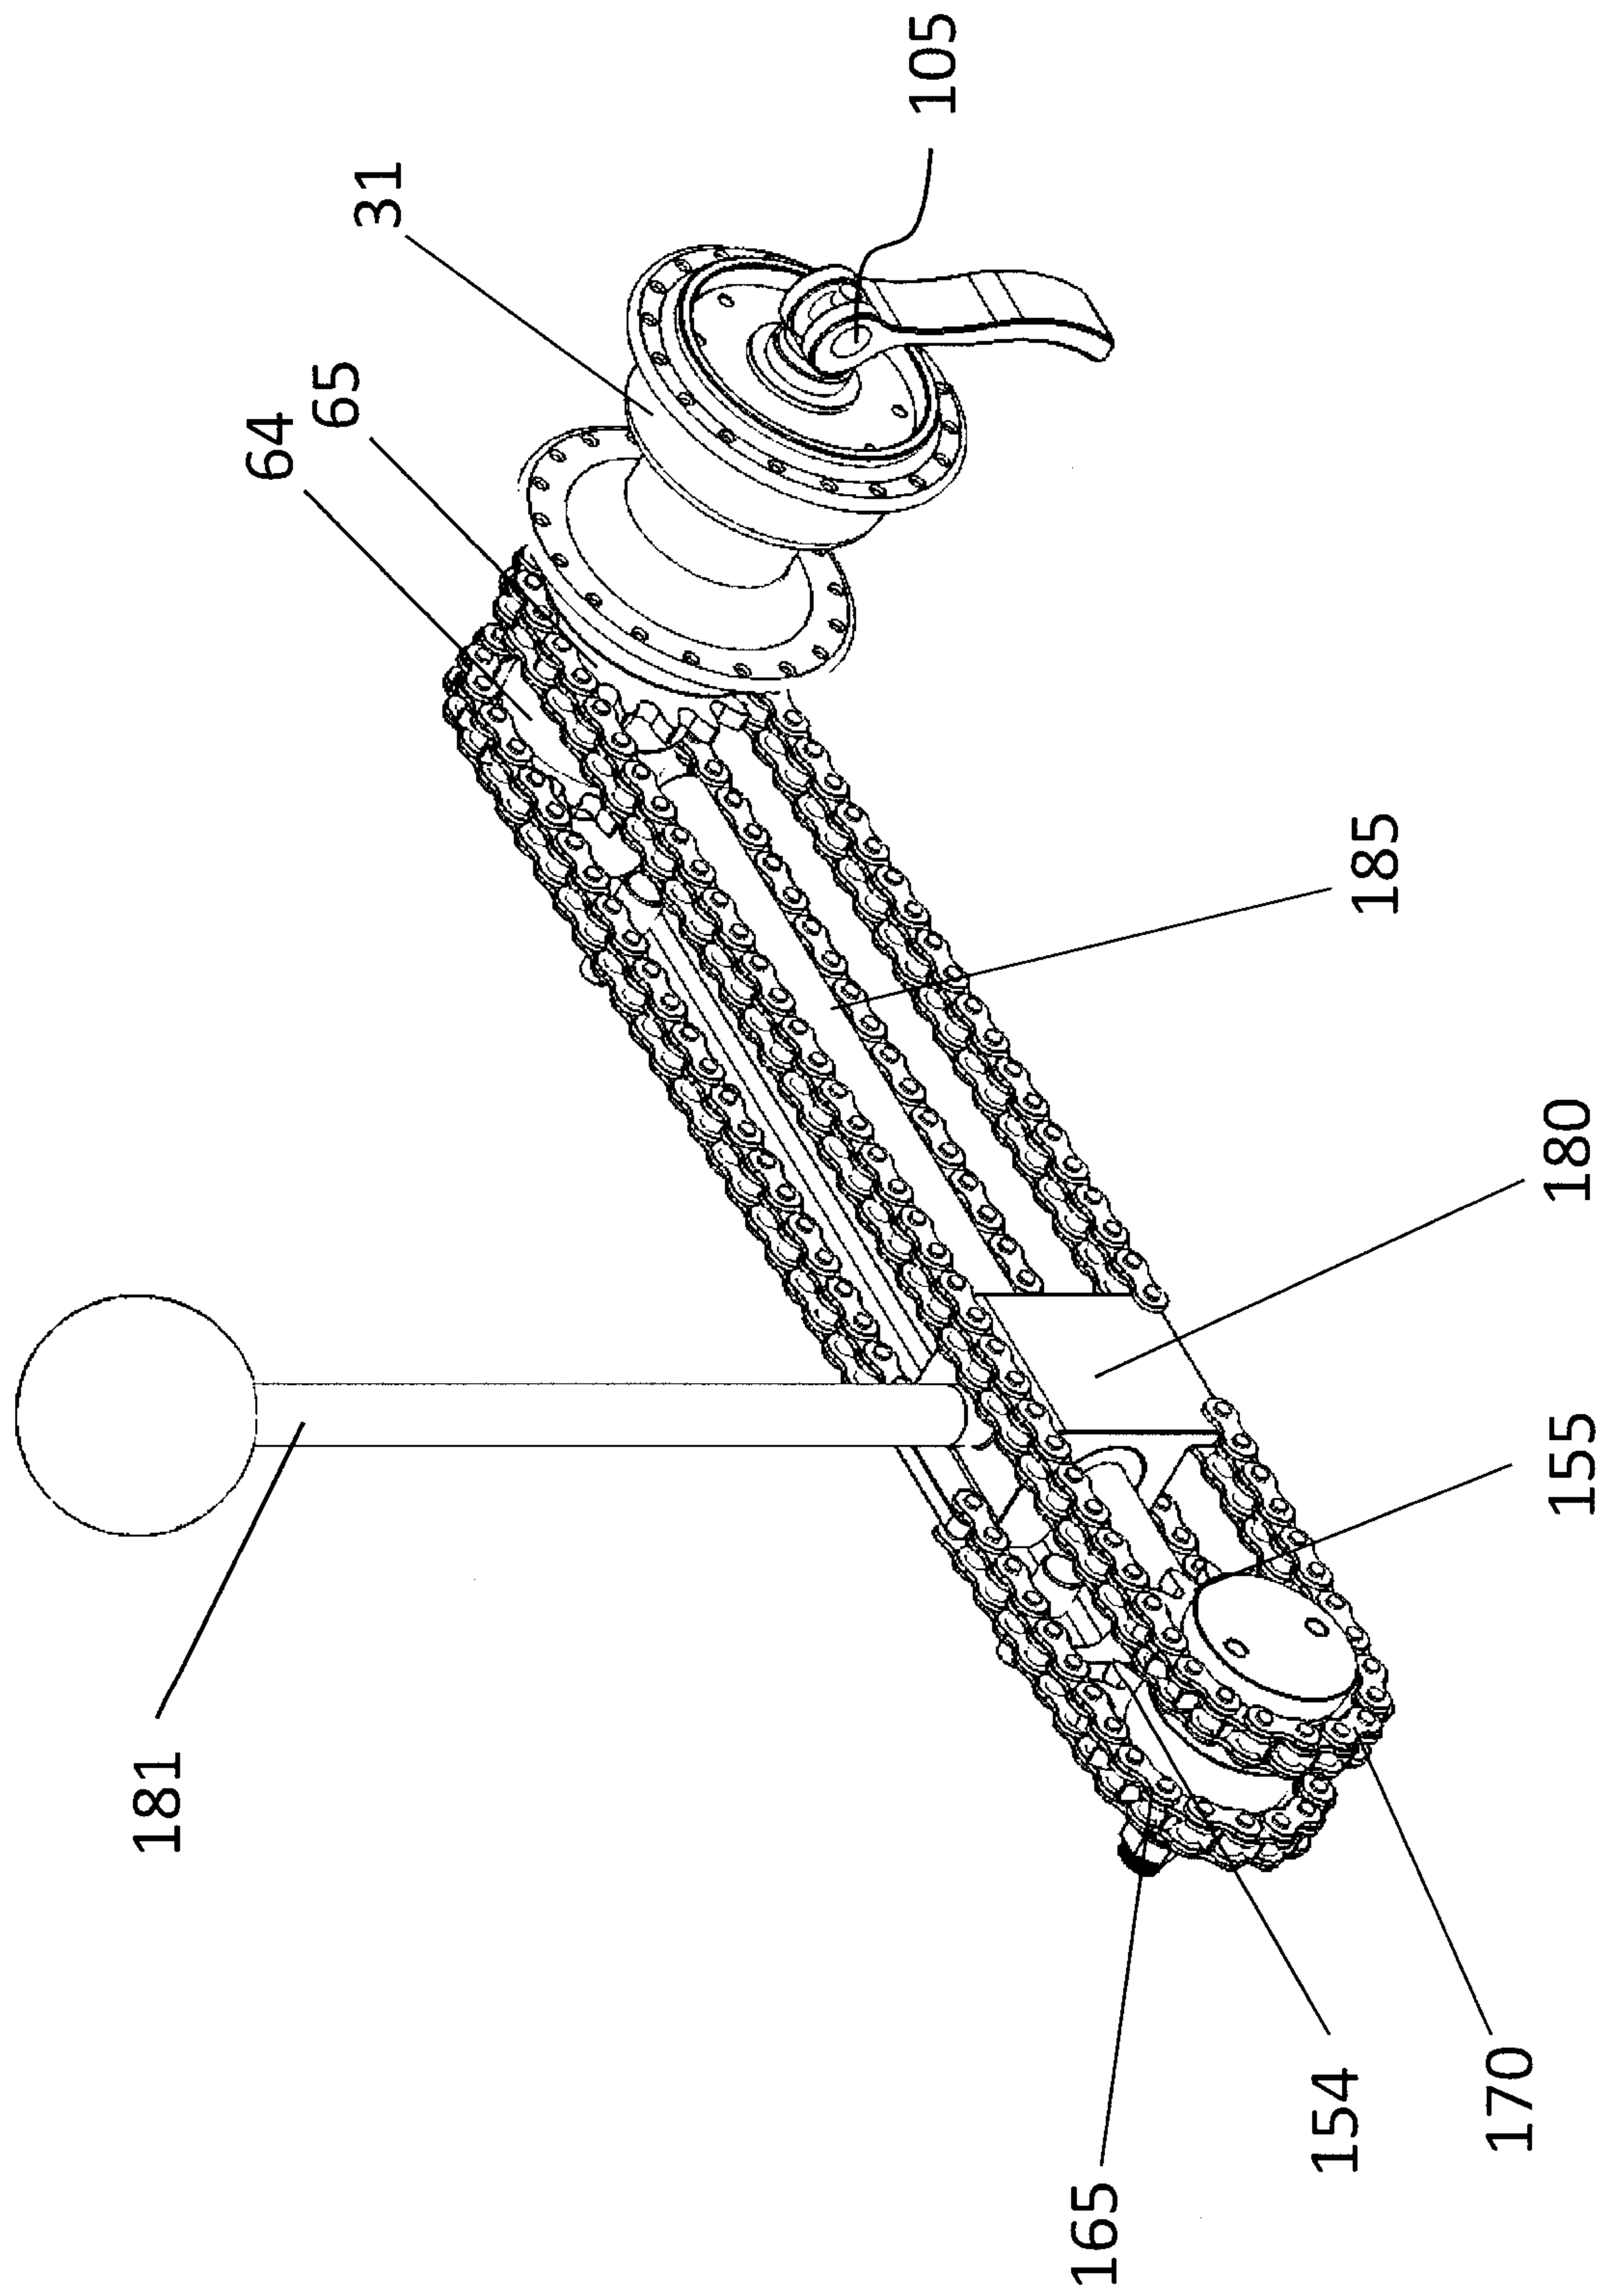


Figure 15.

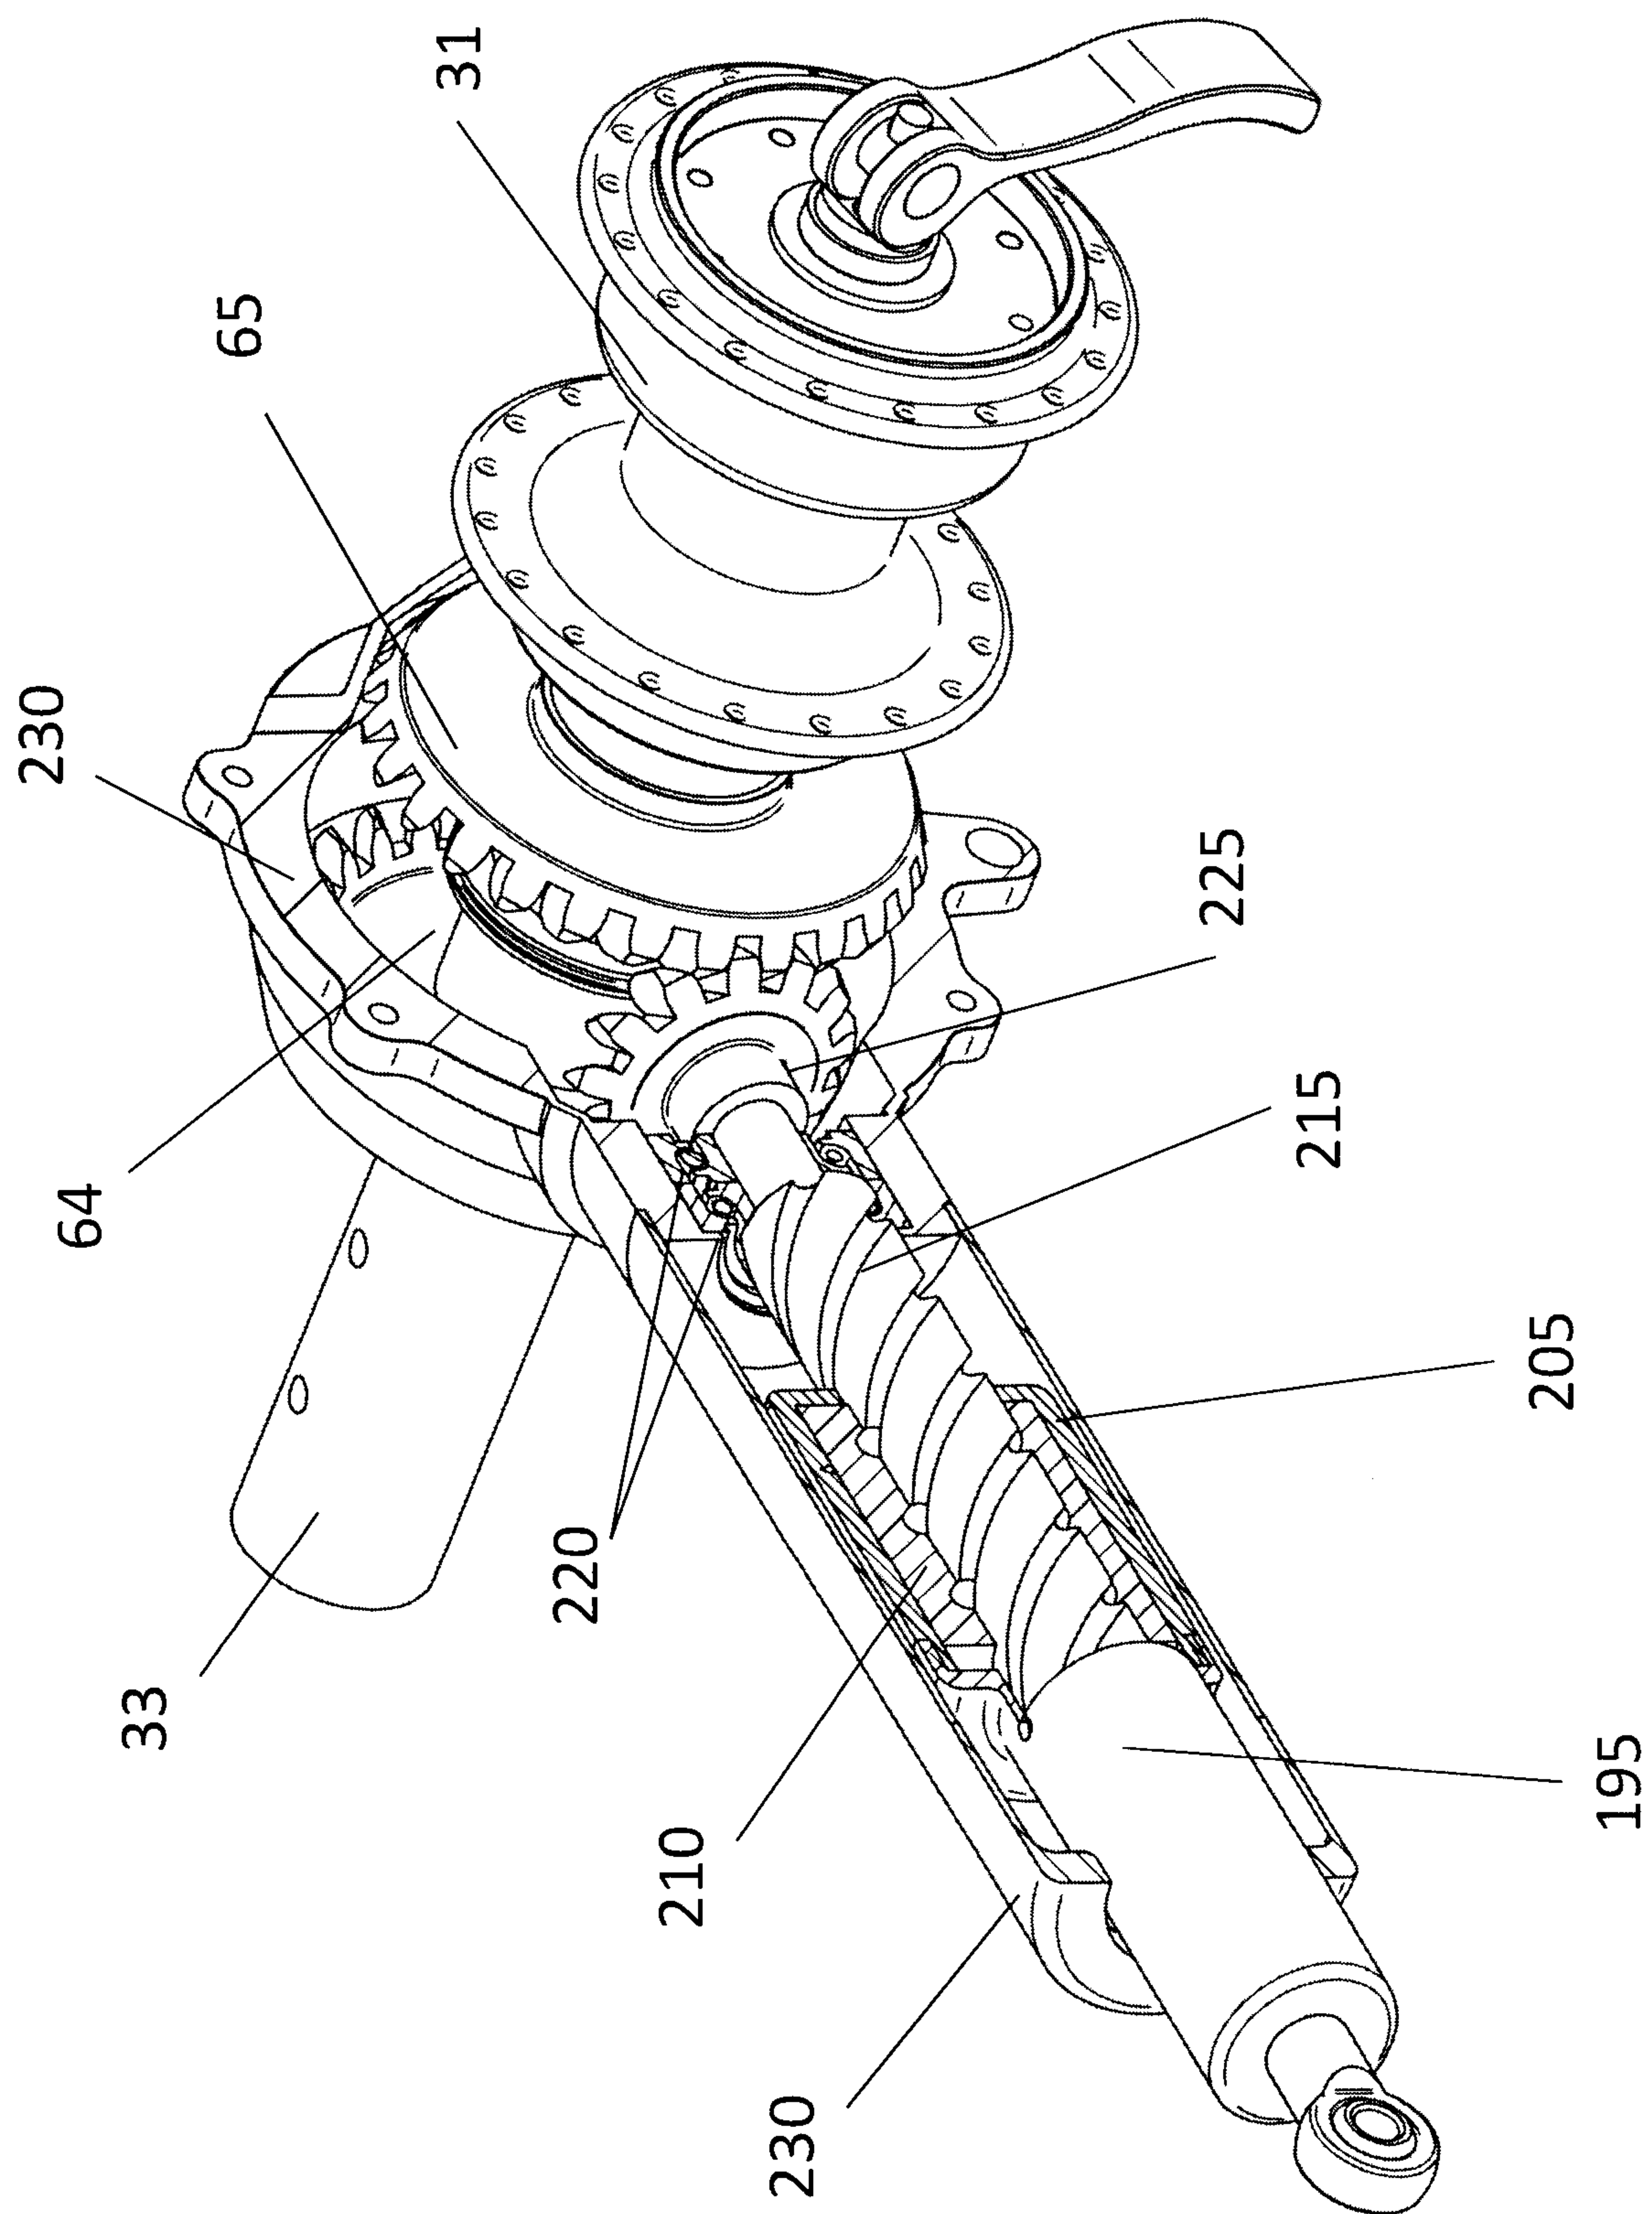


Figure 16.

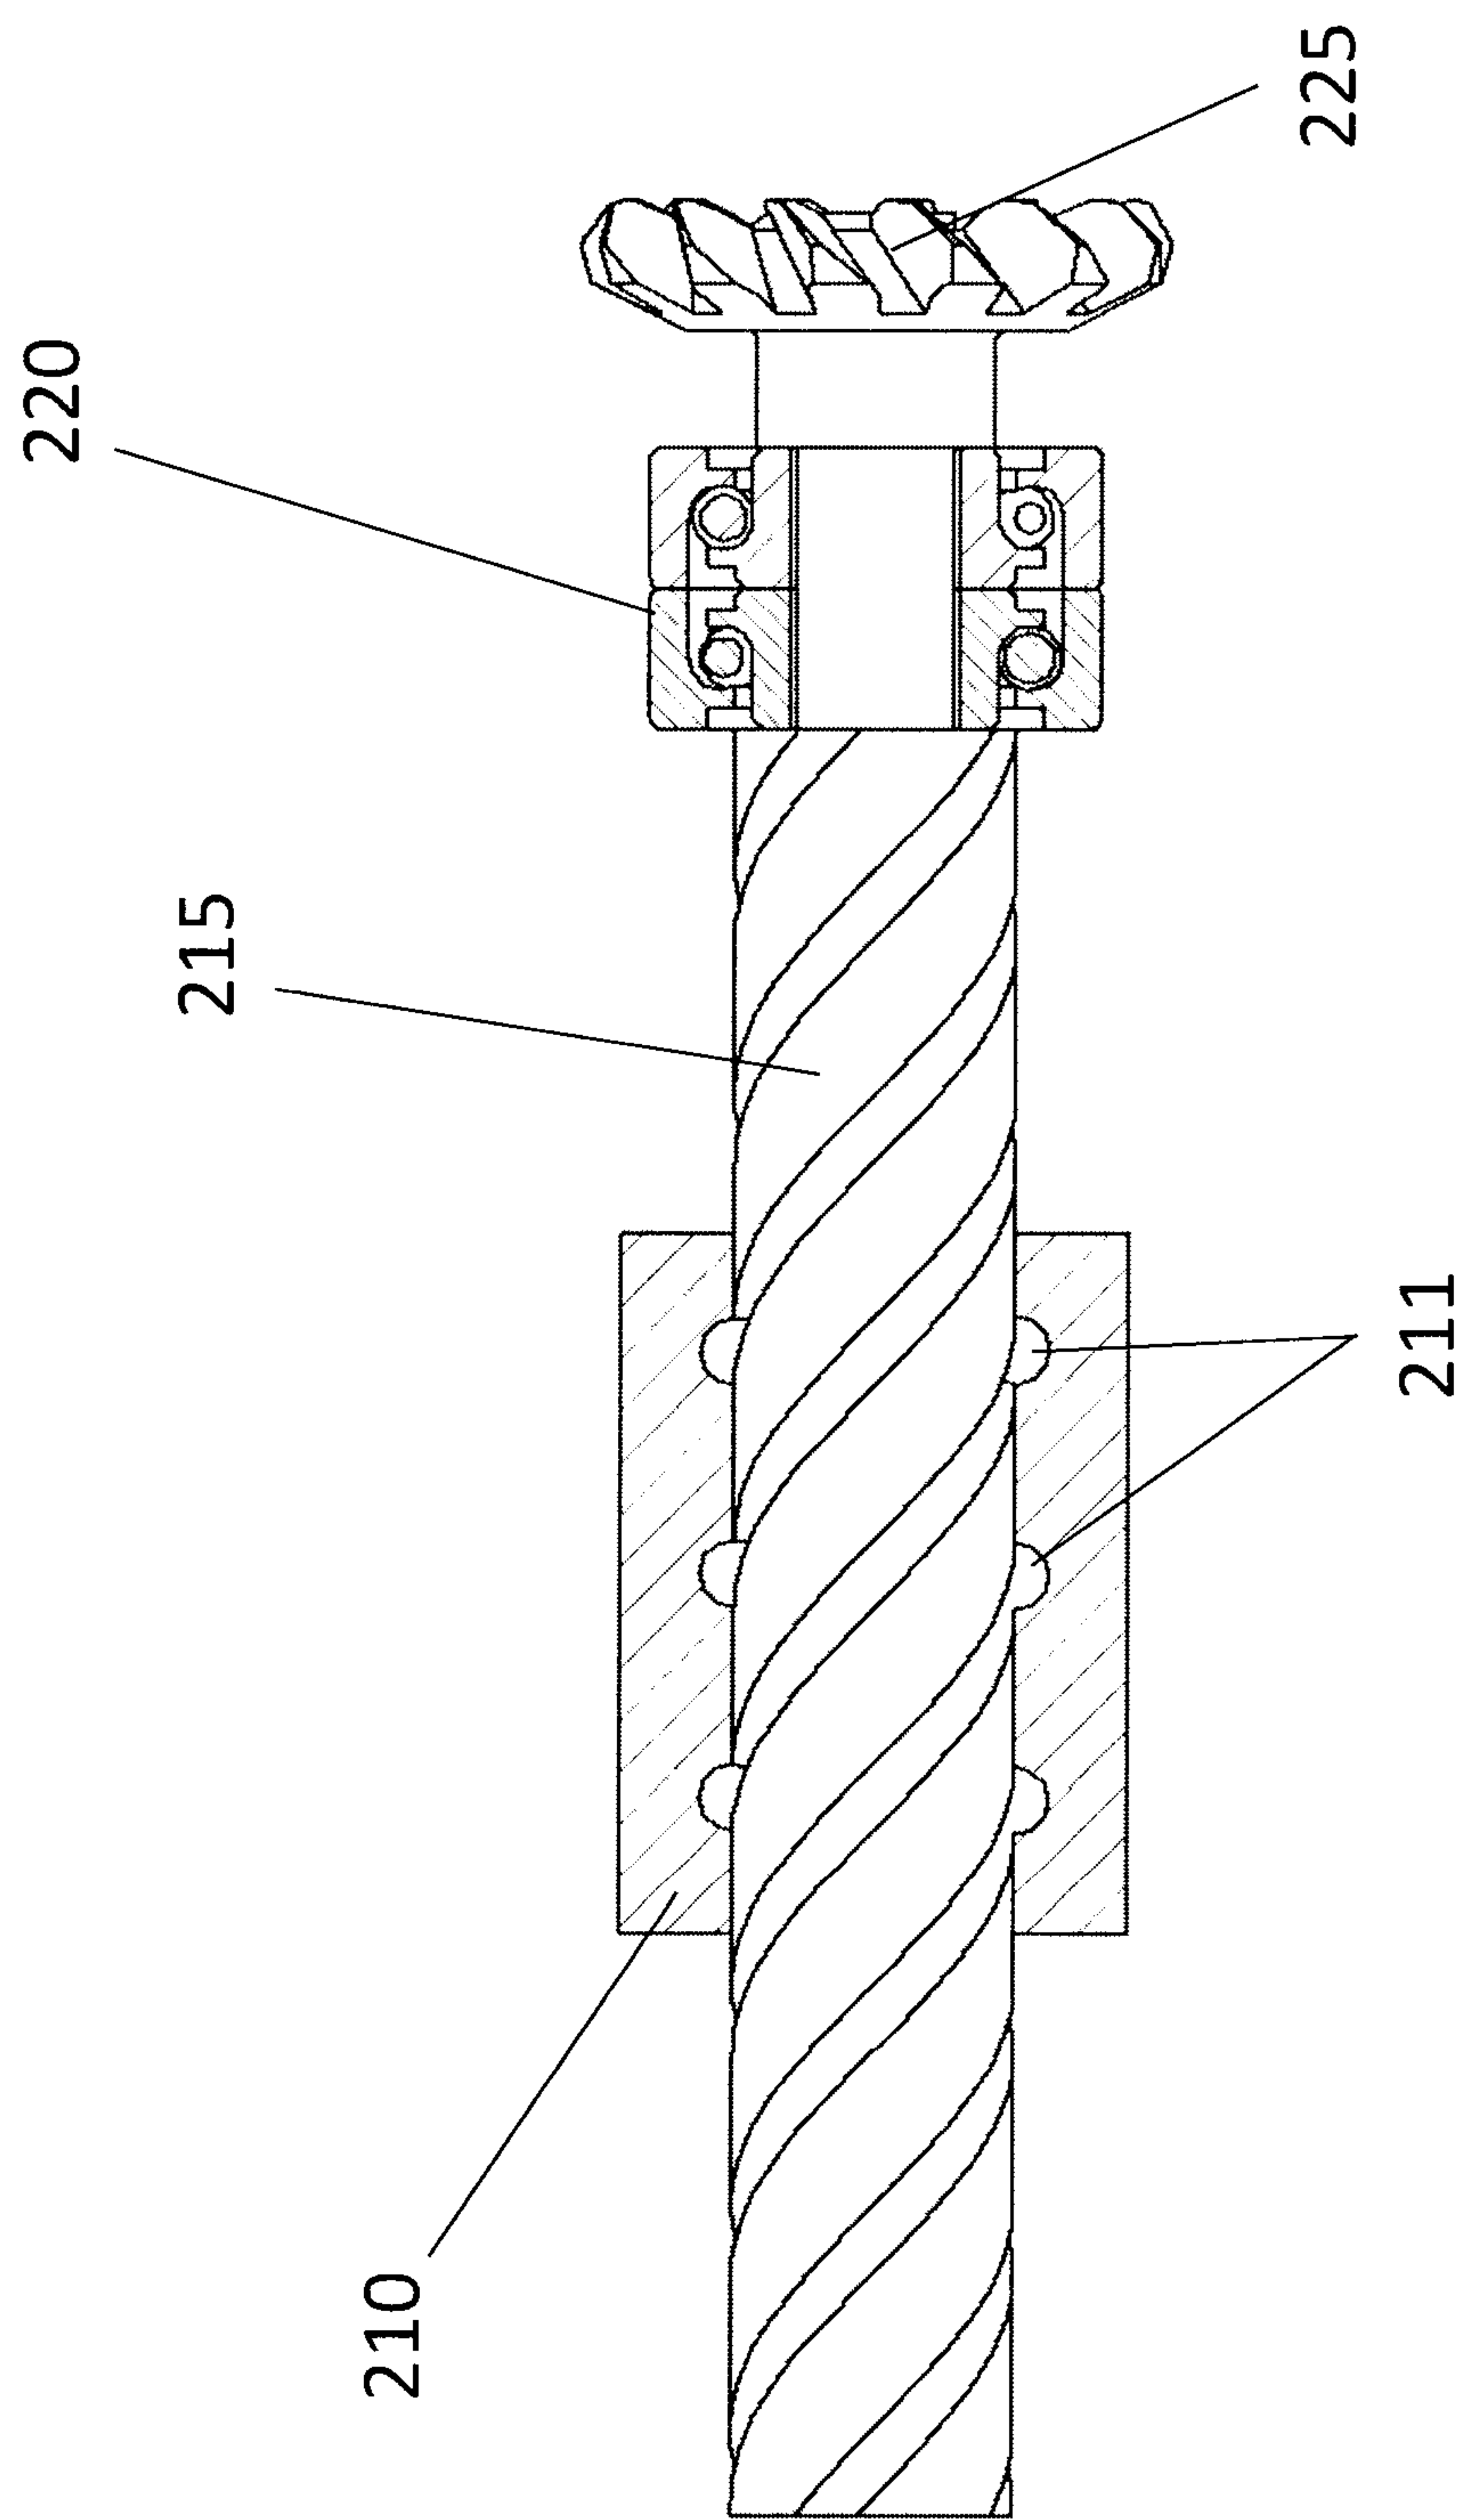


Figure 17.

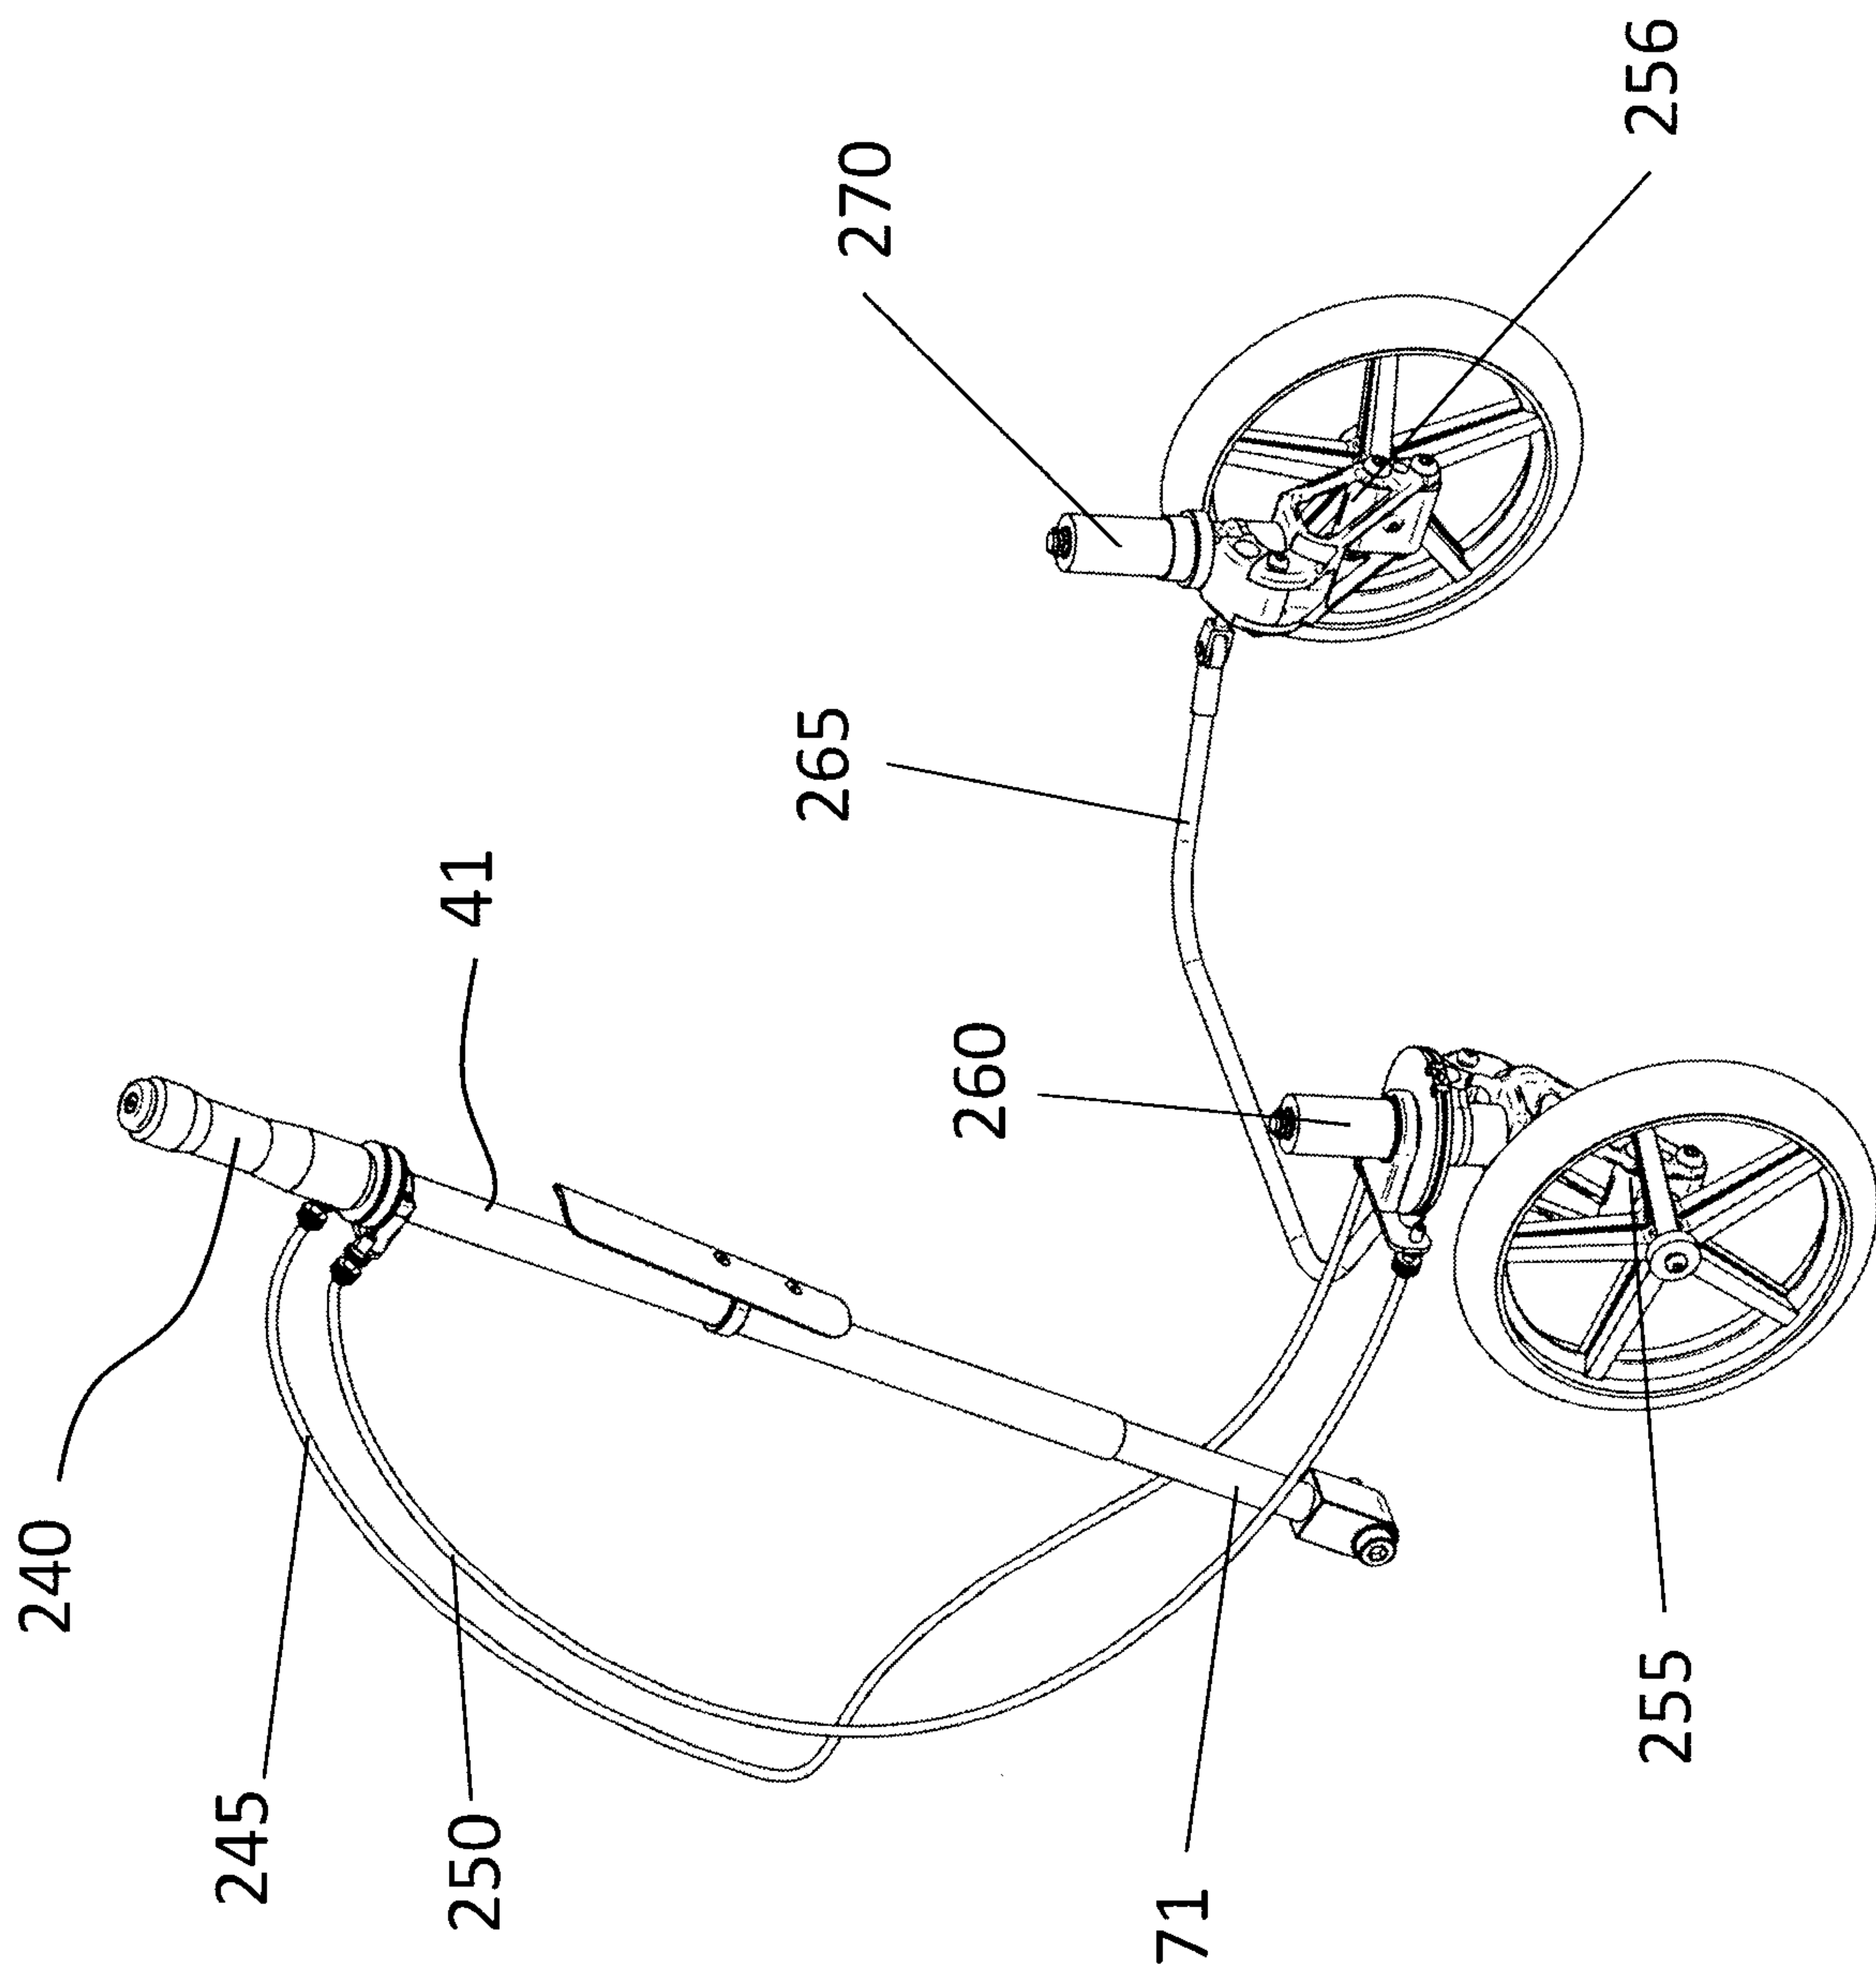


Figure 18.

240

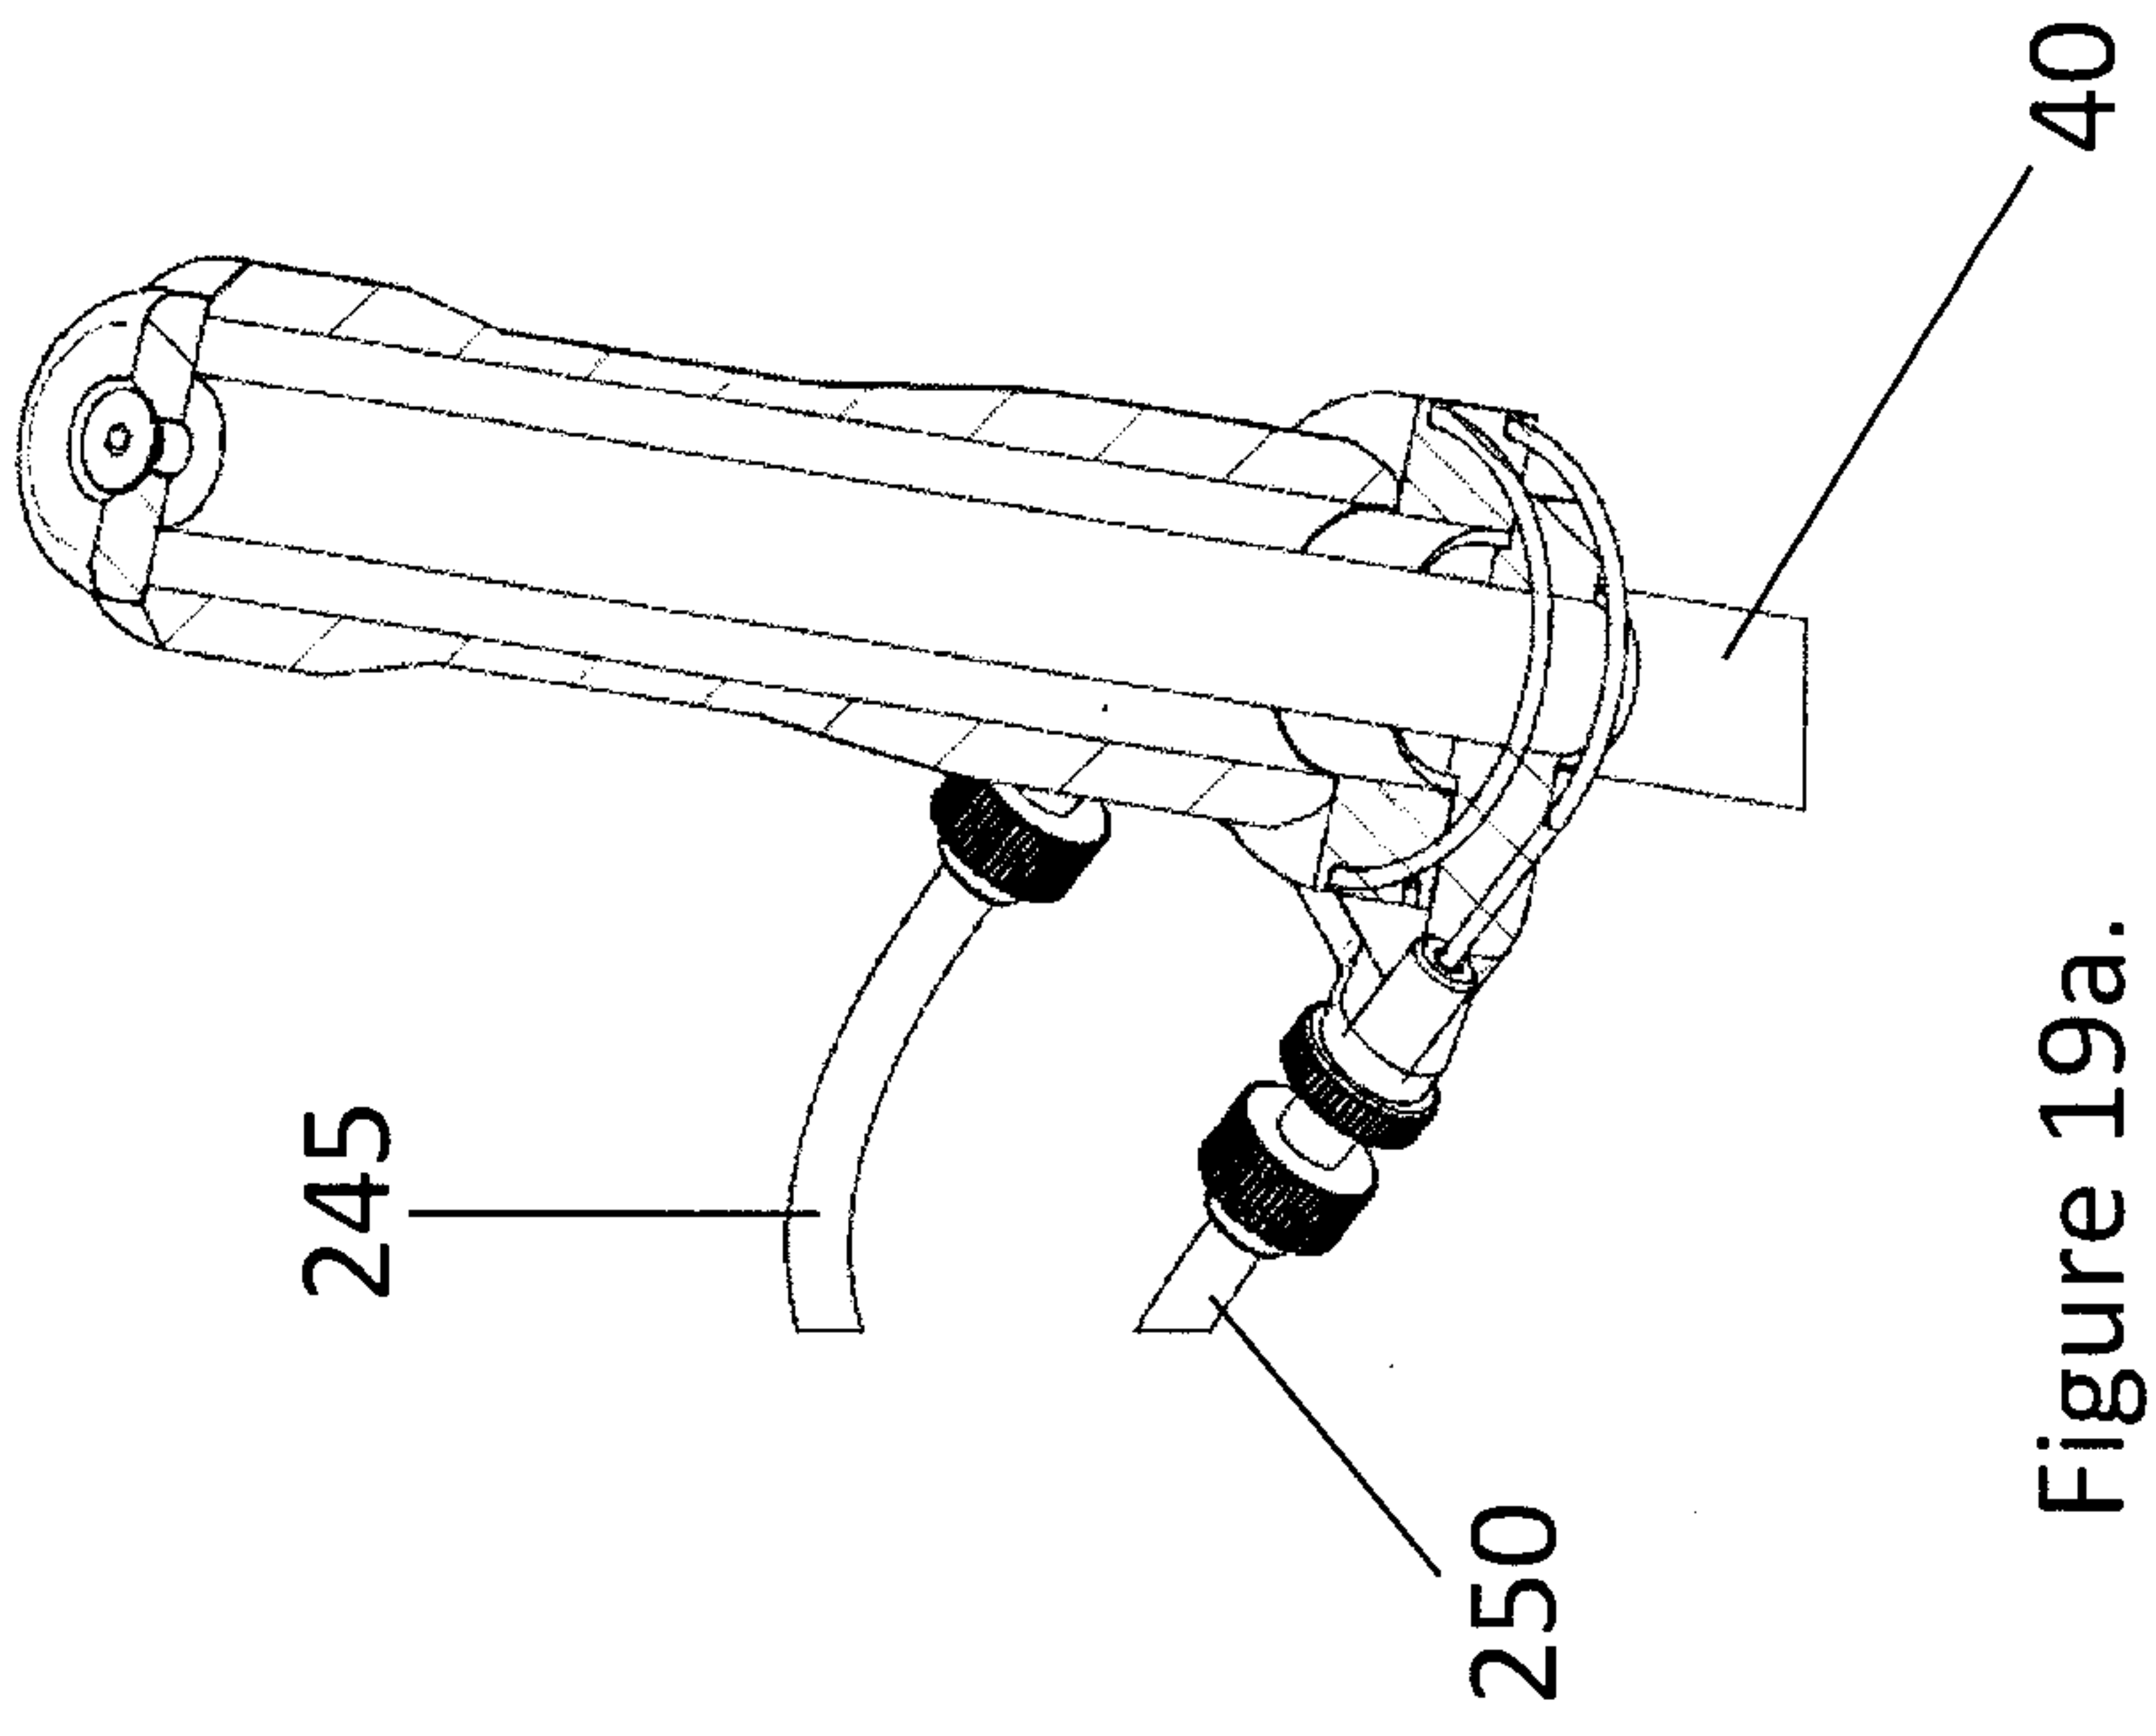


Figure 19a.


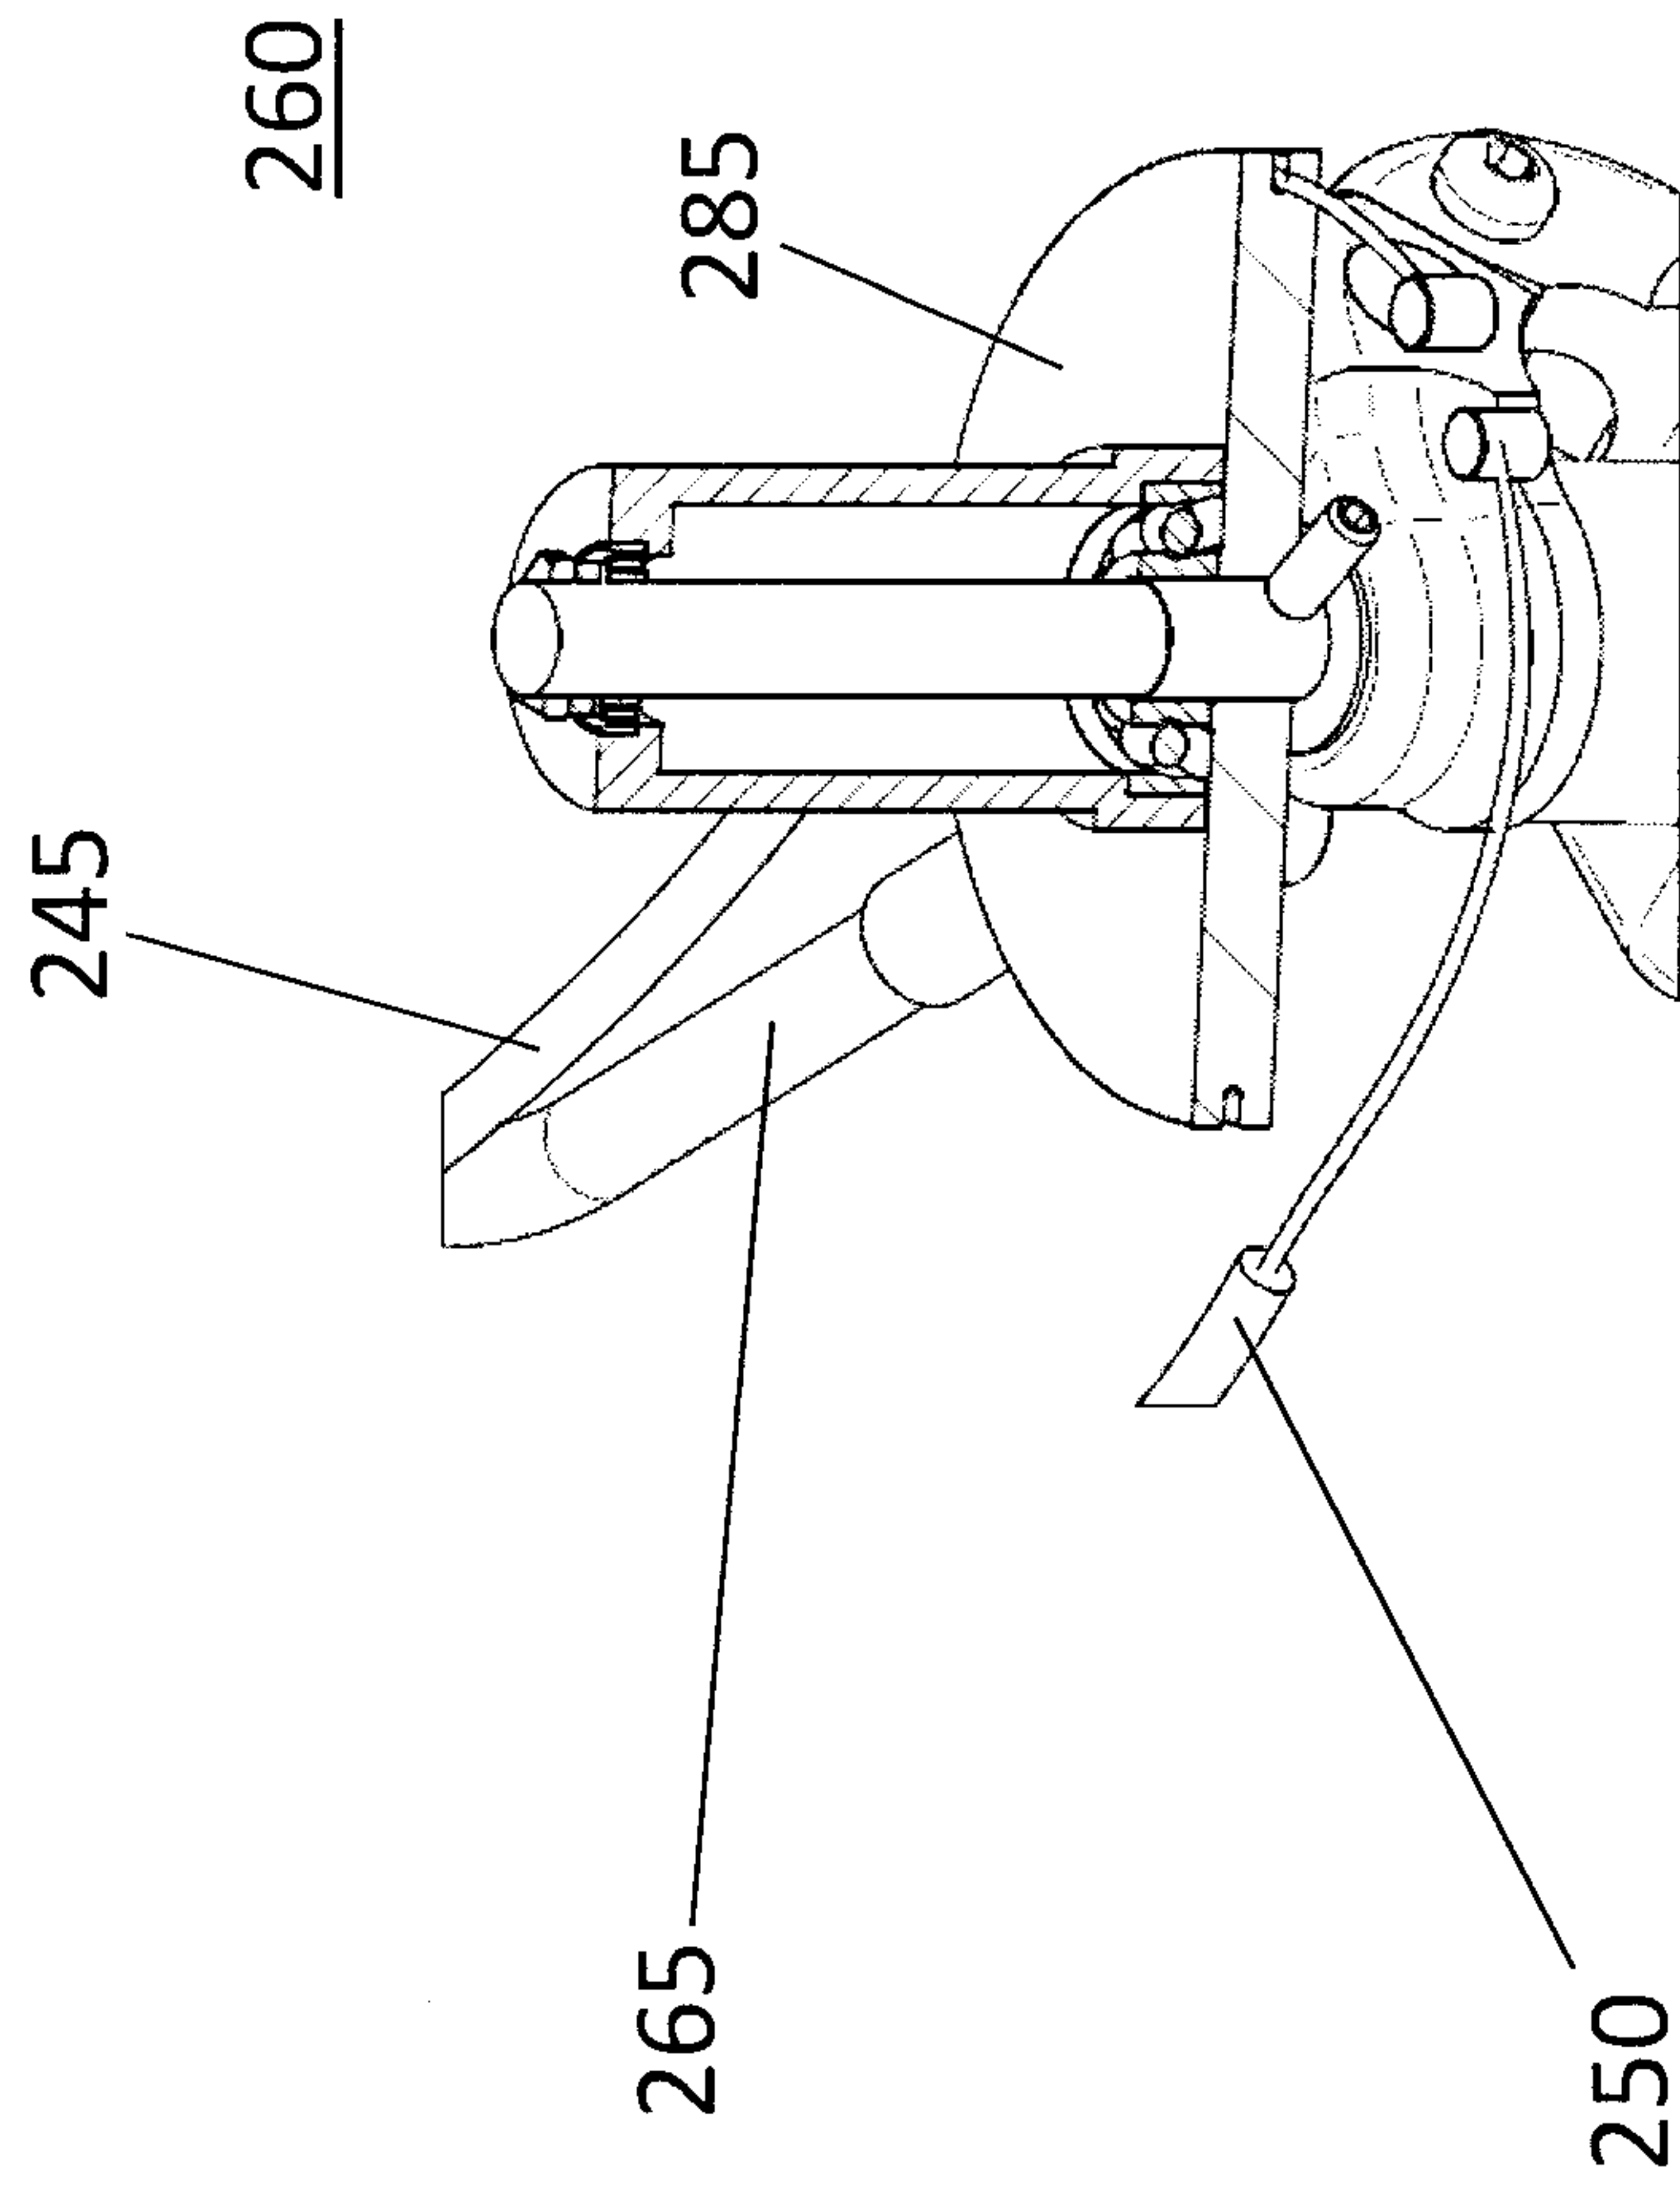


Figure 19b.

Figure 20a.

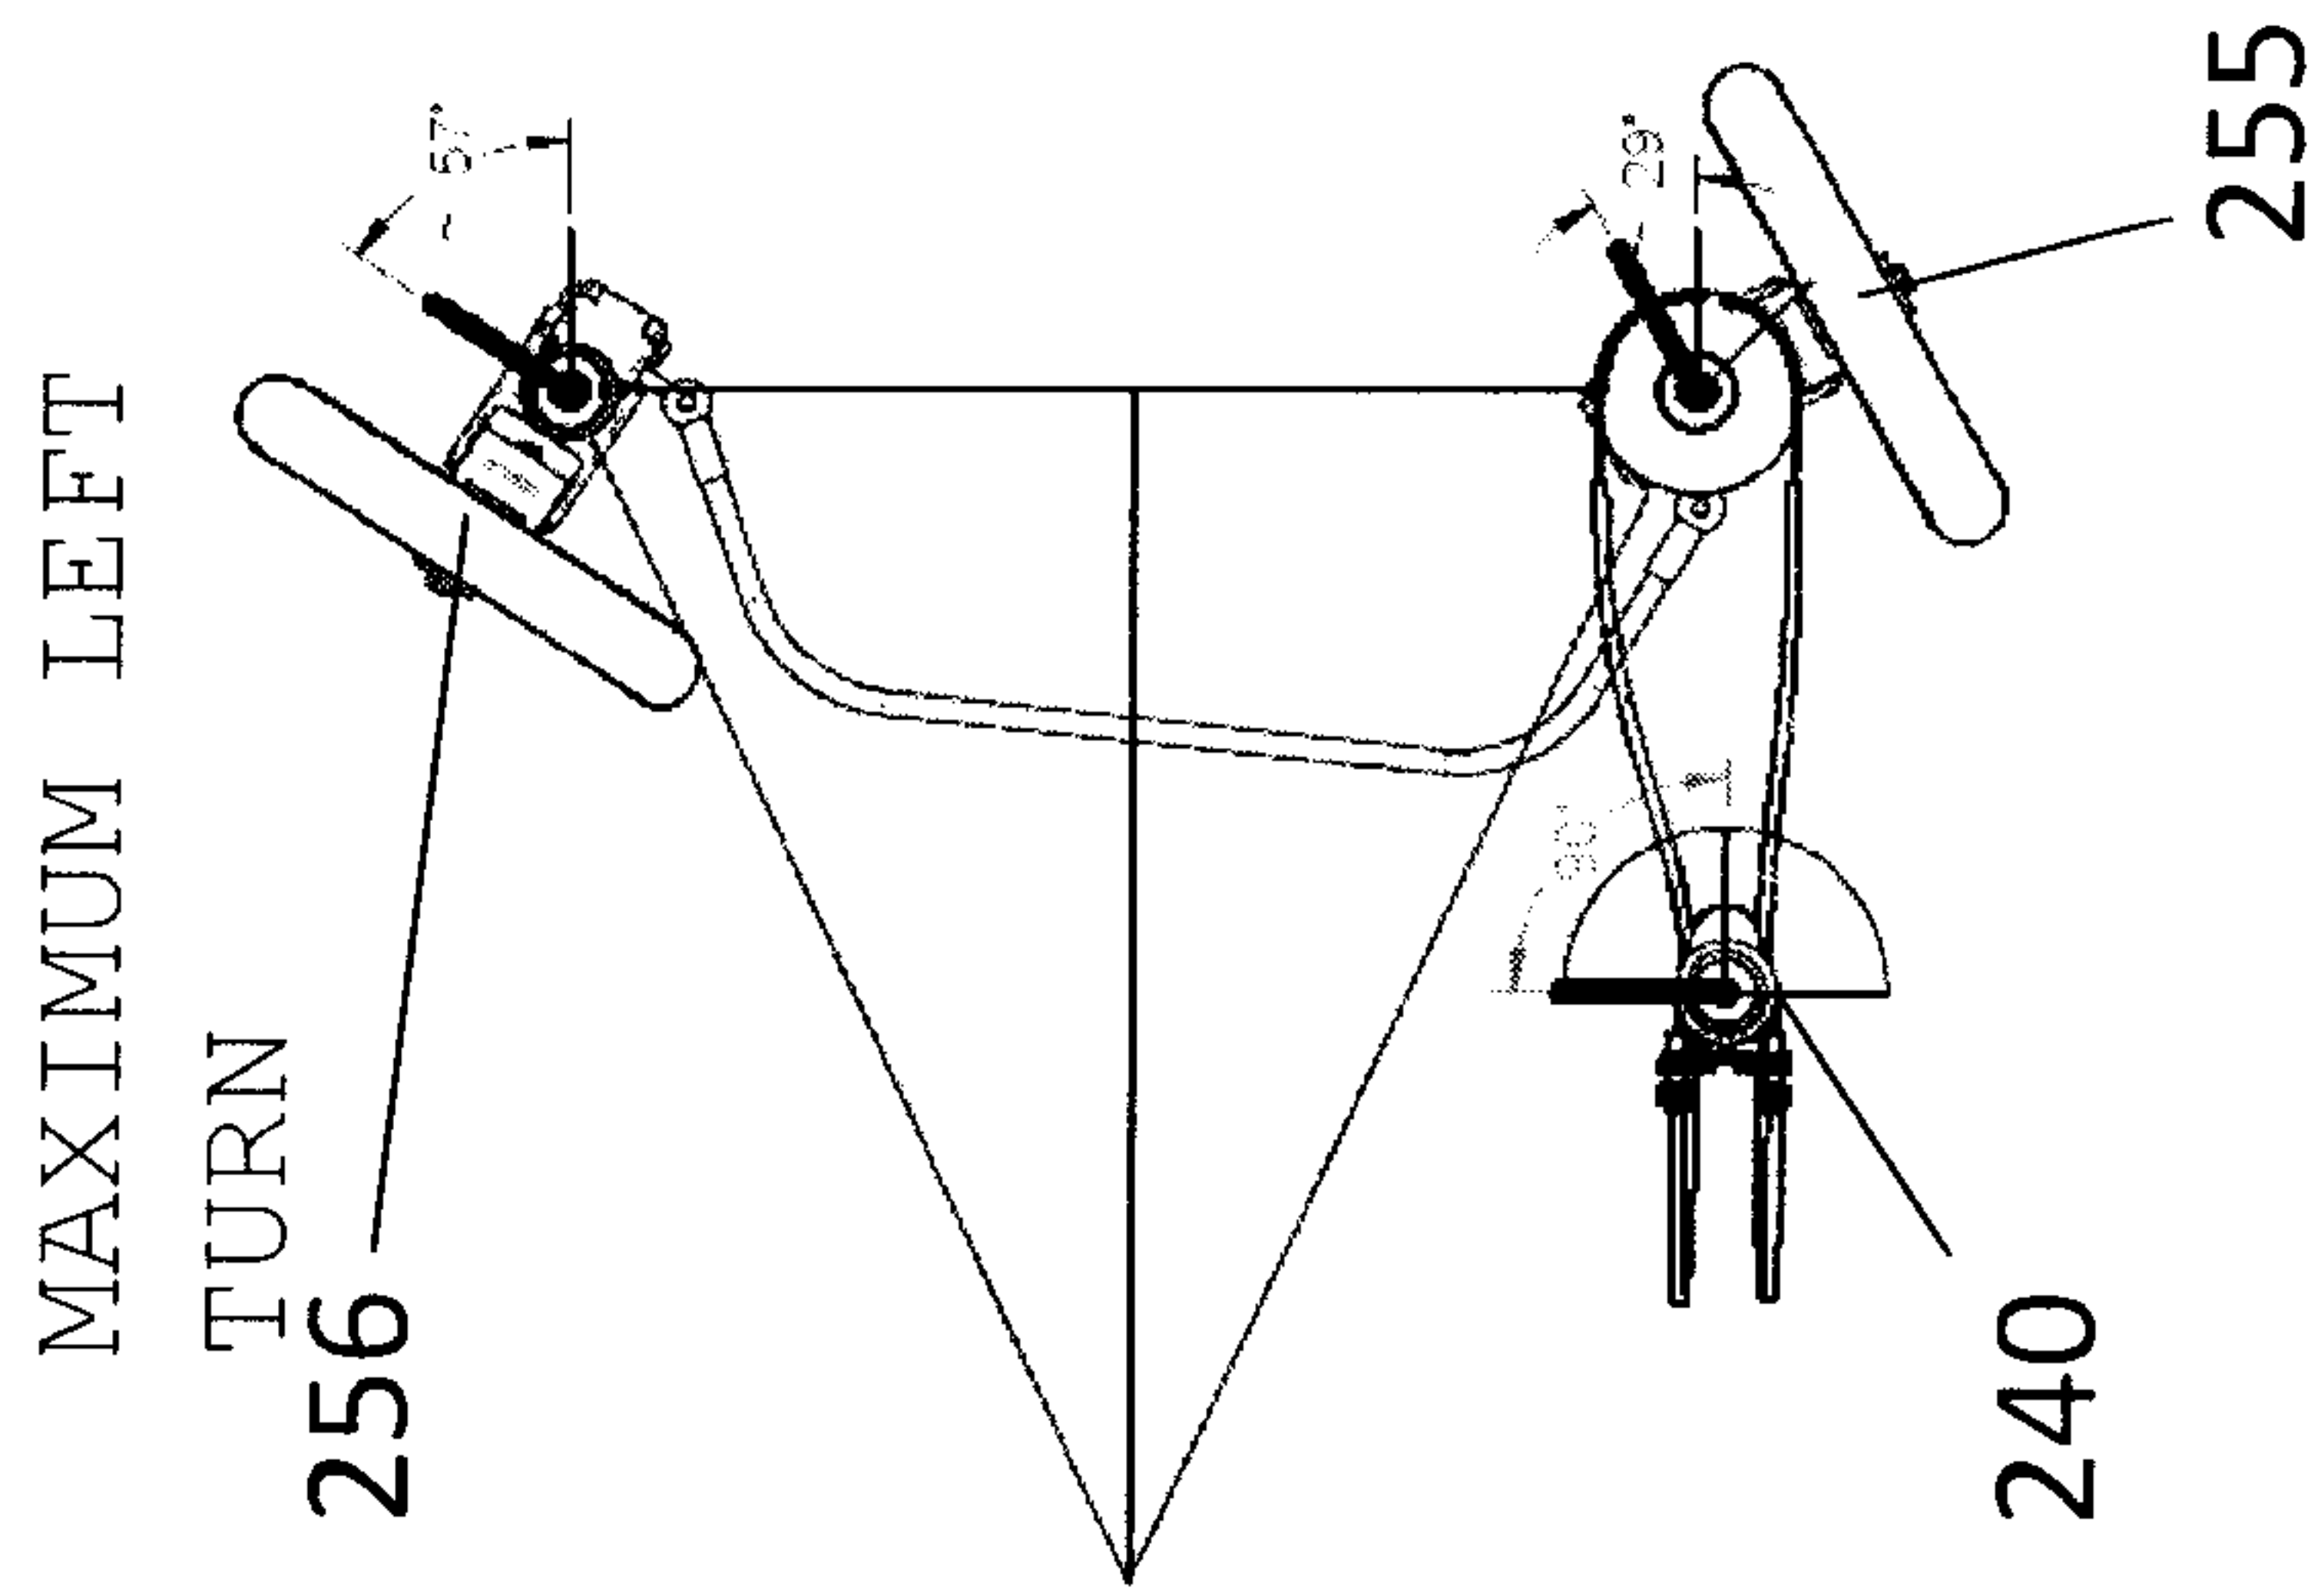

235

Figure 20c.

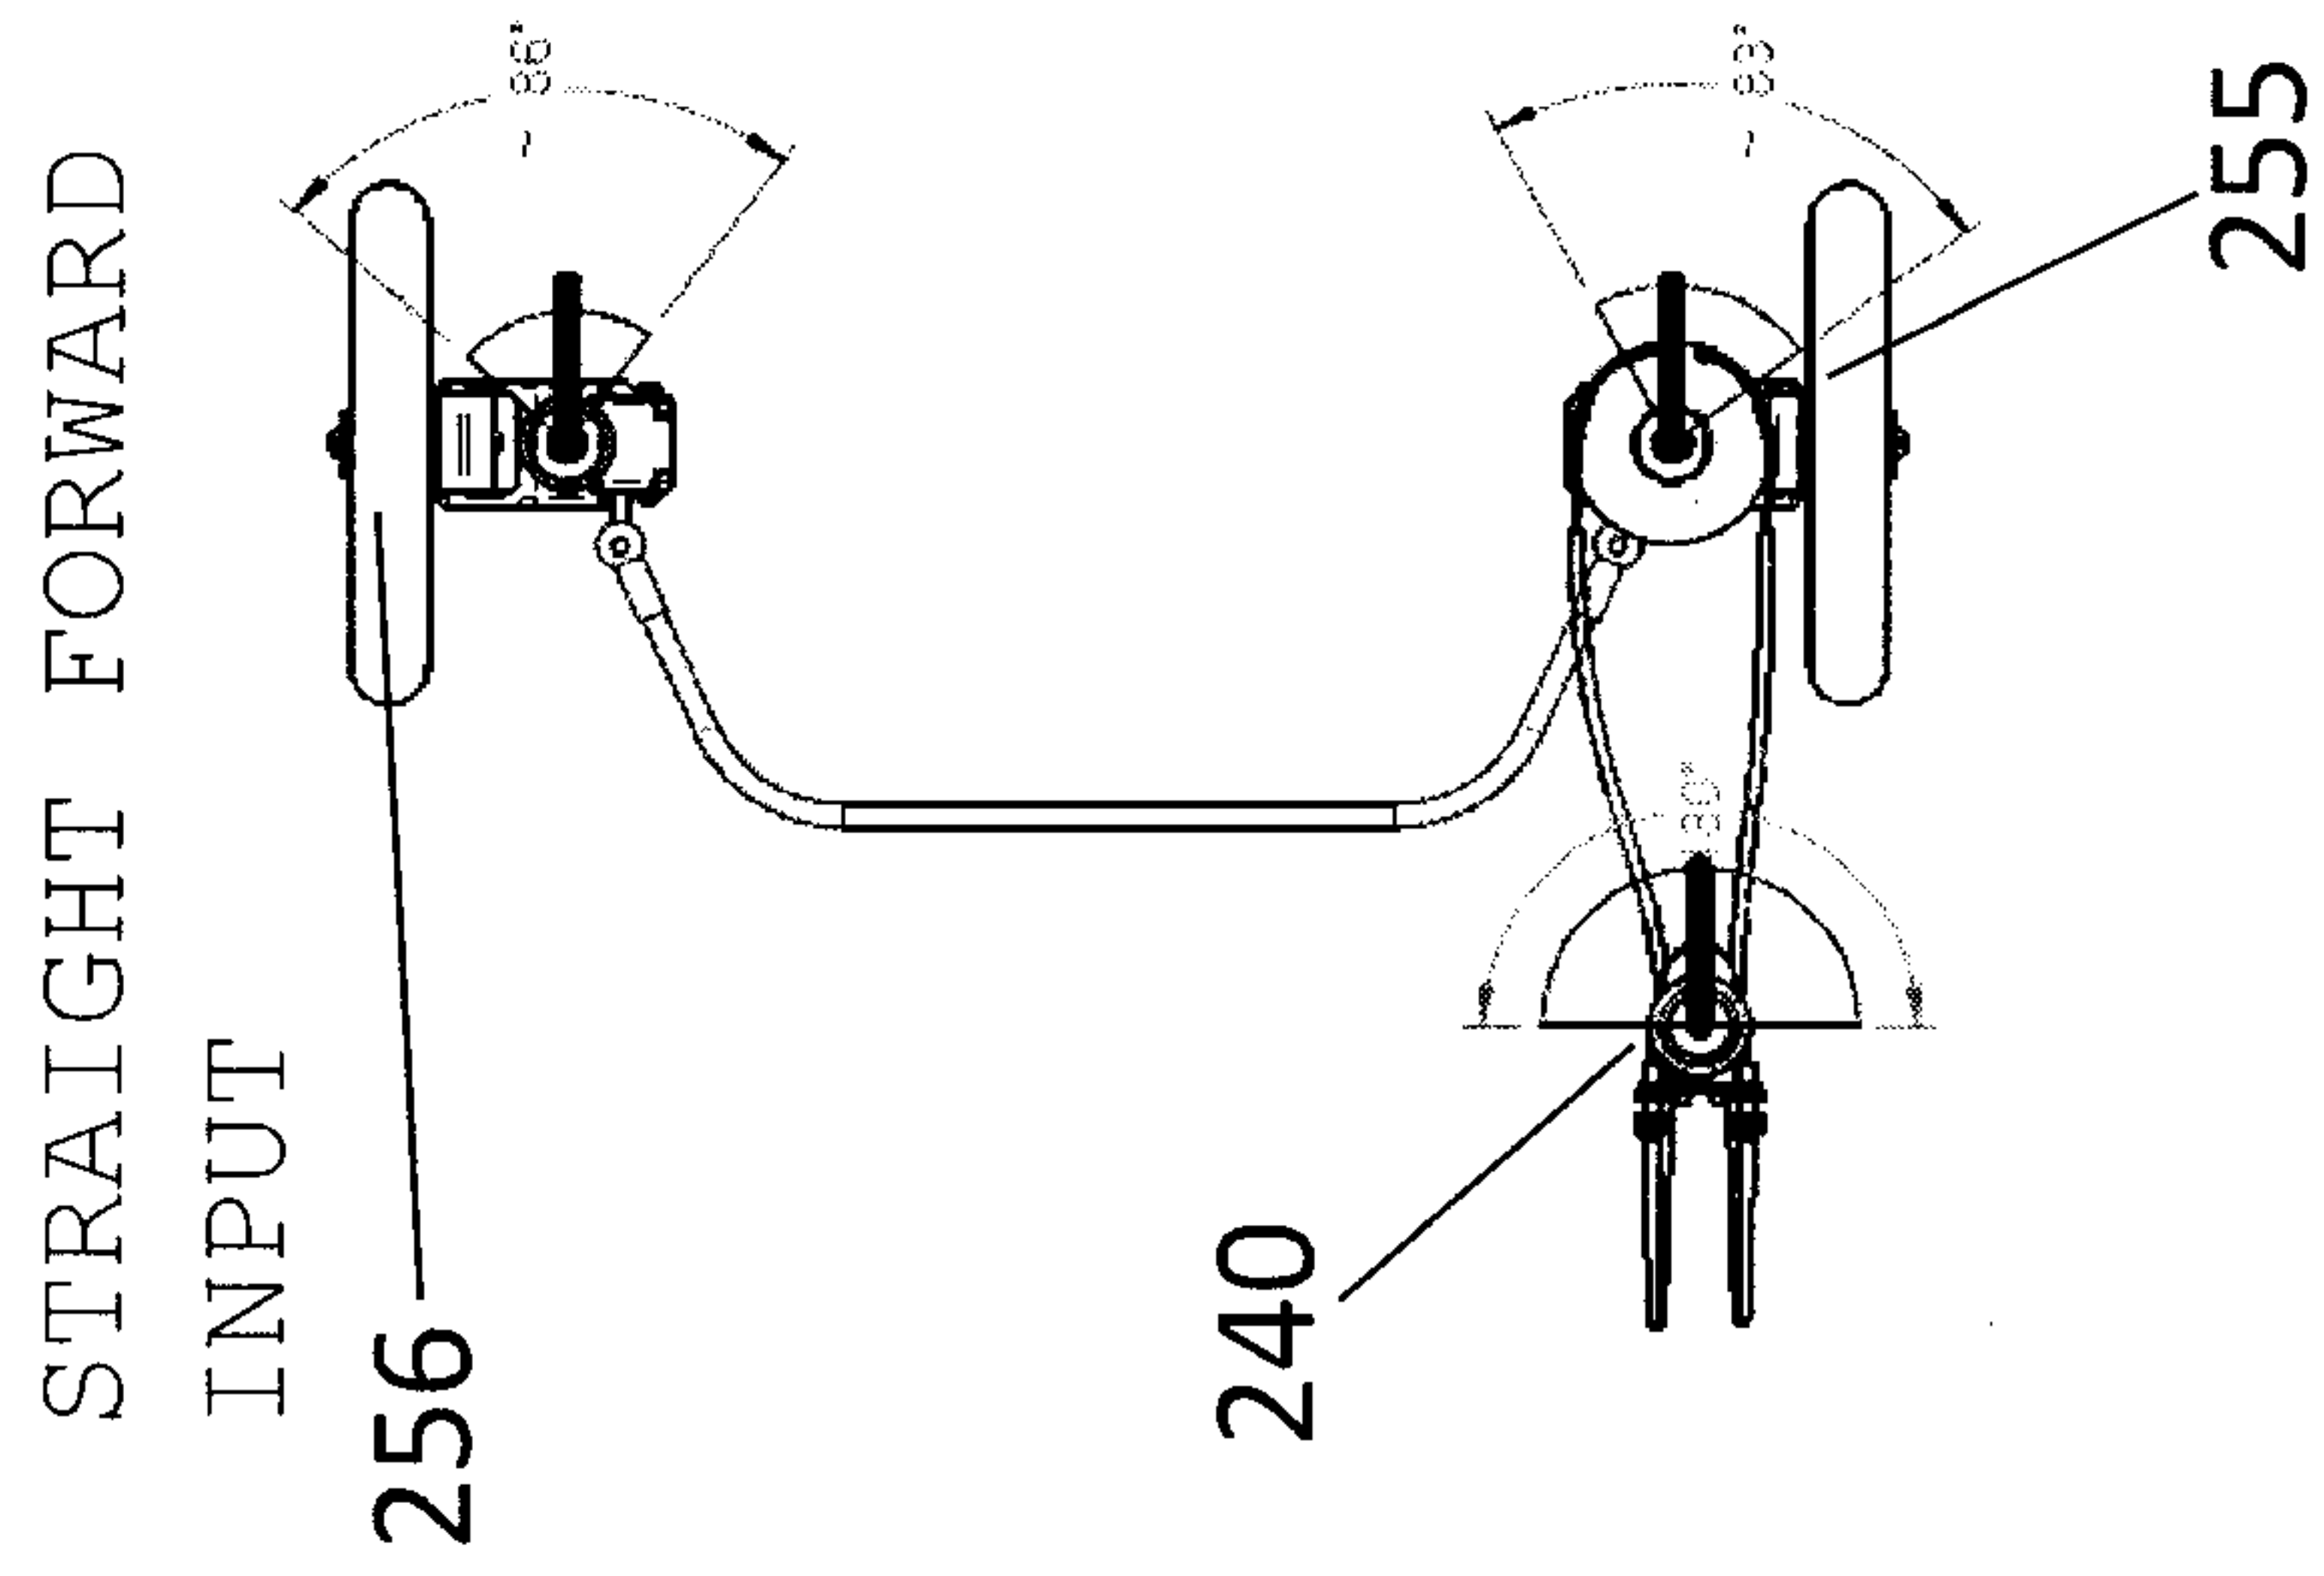
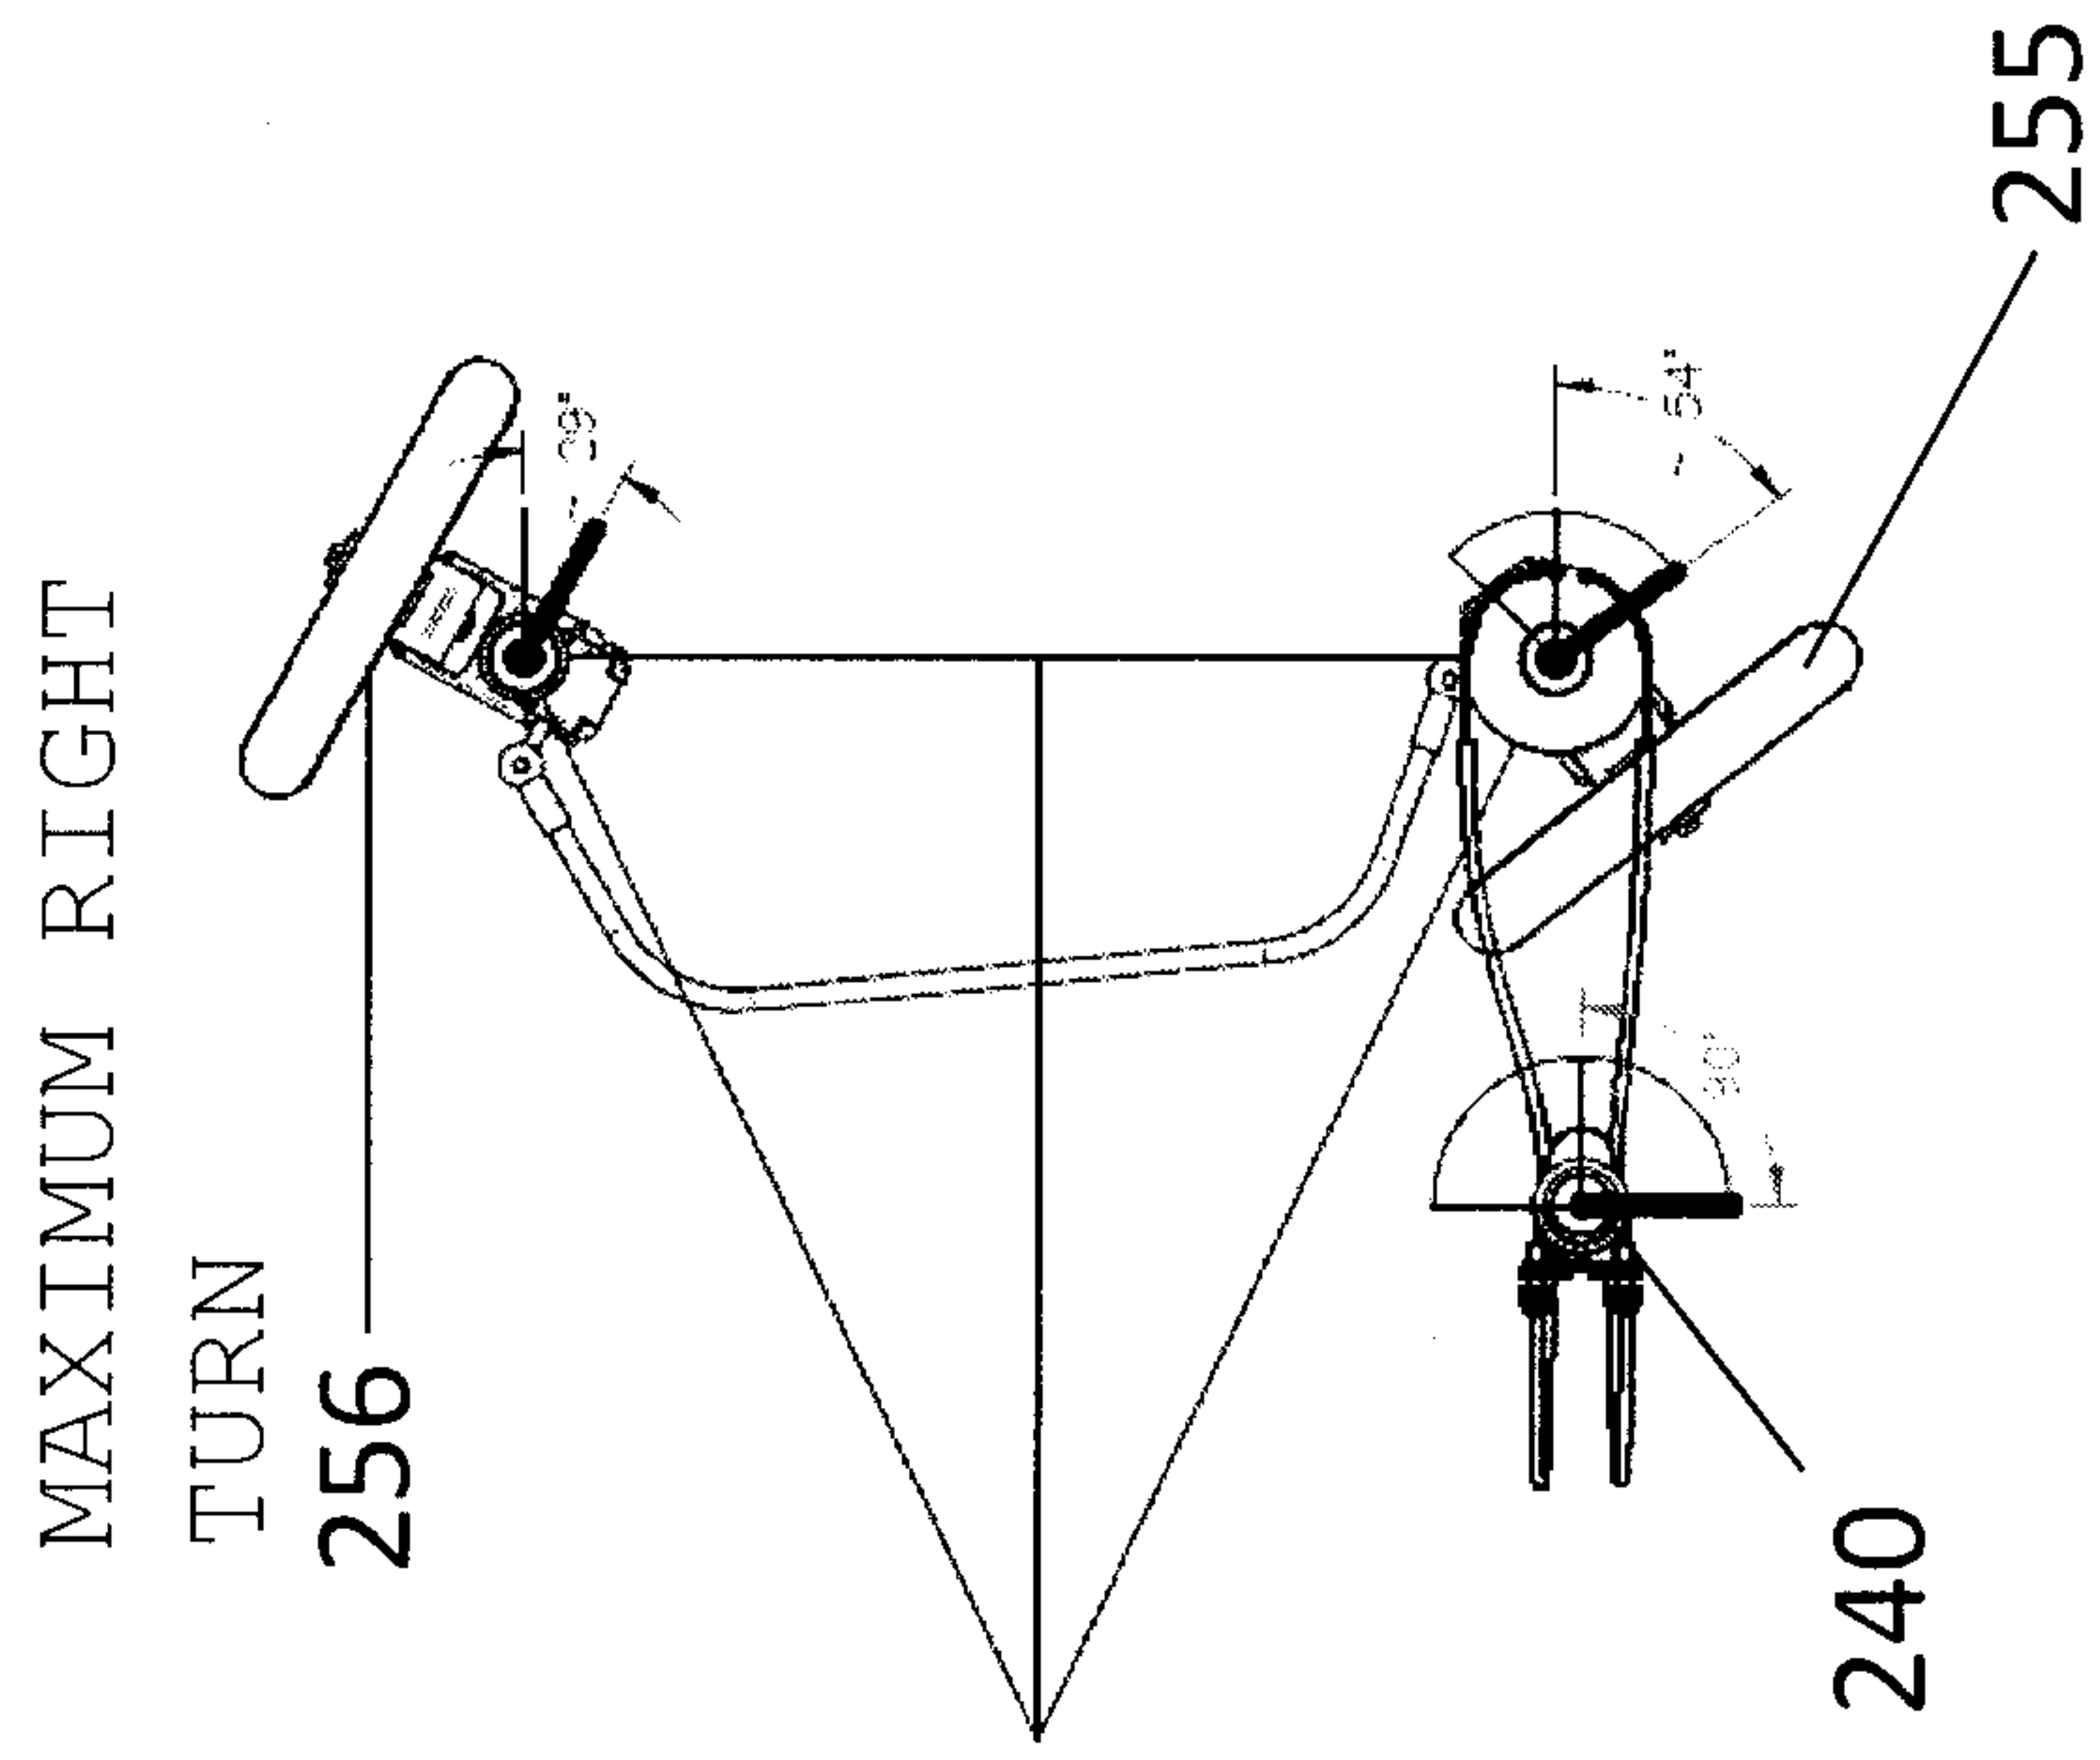


Figure 20b.



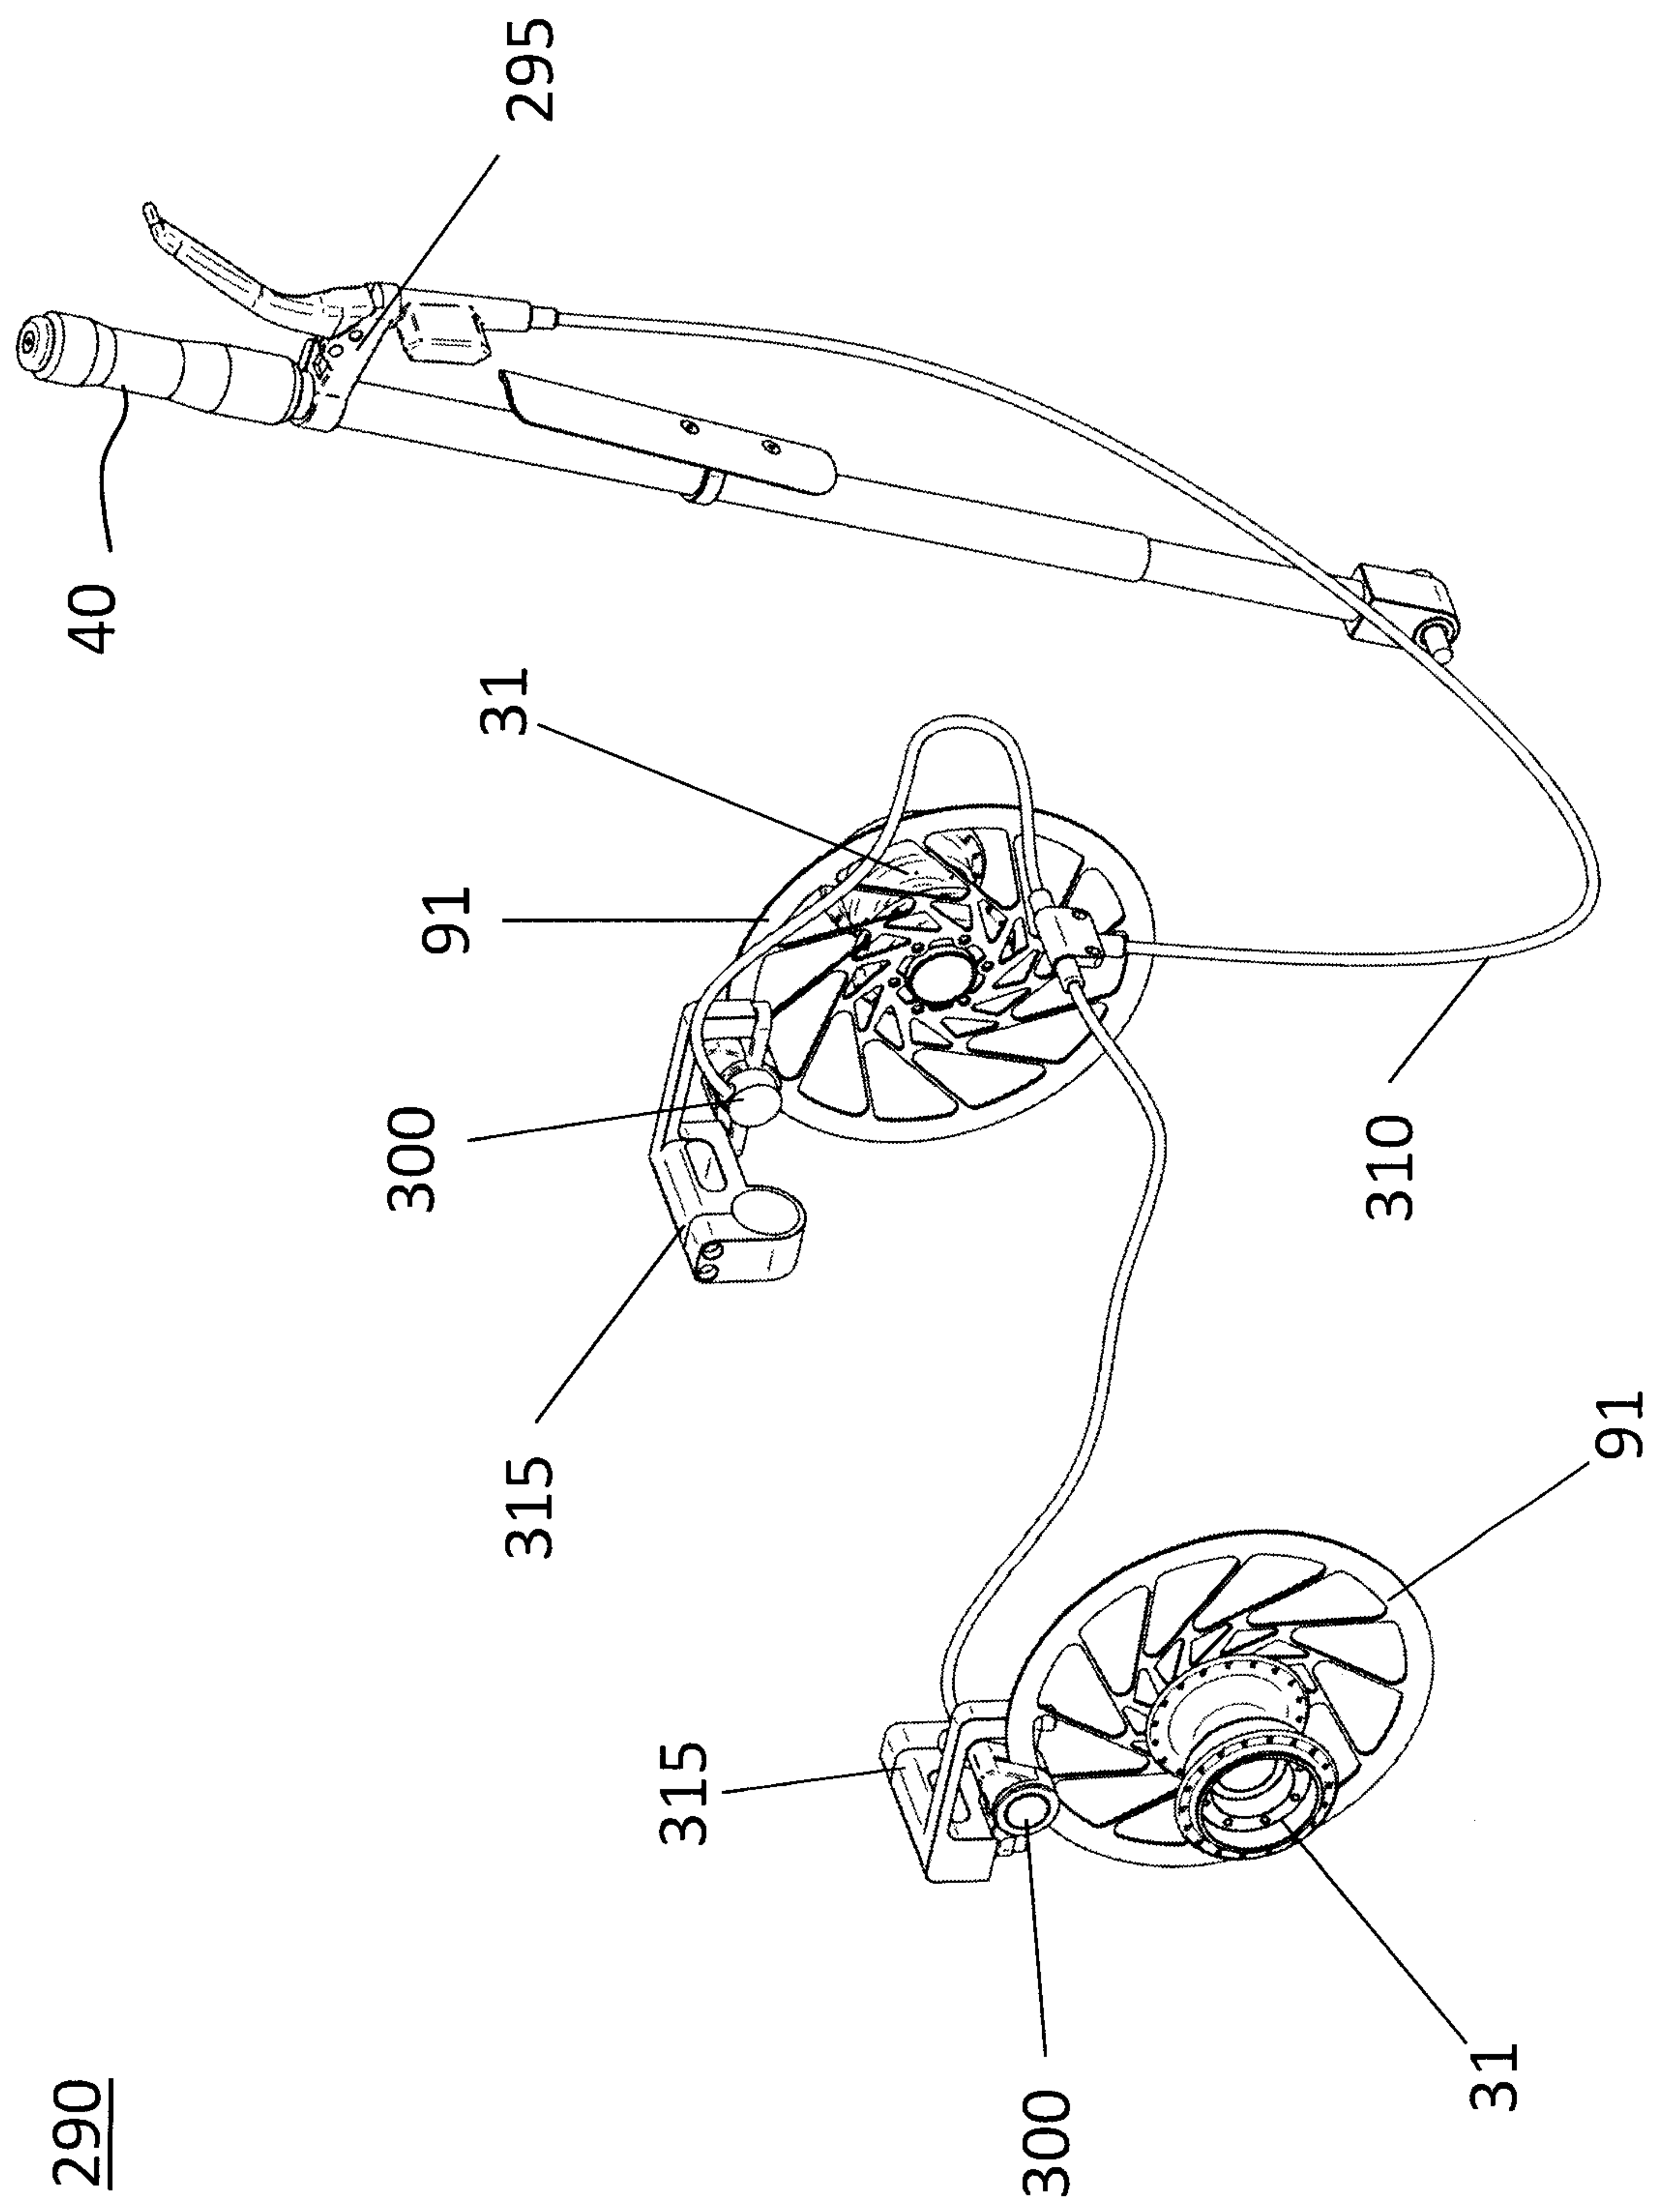


Figure 21.

