



- (51) **International Patent Classification:**
H01Q 13/20 (2006.01)
- (21) **International Application Number:**
PCT/US2011/066201
- (22) **International Filing Date:**
20 December 2011 (20.12.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/425,155 20 December 2010 (20.12.2010) US
61/425,161 20 December 2010 (20.12.2010) US
- (71) **Applicant (for all designated States except US):**
EMPRIMUS, INC. [US/US]; 1660 South Highway 100,
Suite 130, Minneapolis, MN 55416 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **FAXVOG, Freder-
ick, R.** [US/US]; 1220 Oakview Road, Long Lake, MN
55356 (US). **JACKSON, David, B.** [US/US]; 20650
Woodhaven Place, Excelsior, MN 55331 (US). **FUCHS,
Greg** [US/US]; 108 South 5th Street, River Falls, WI
54022 (US). **NORDLING, Gale** [US/US]; 20625 Lin-
wood Avenue, Excelsior, MN 55331 (US). **GROH, Brian**
[US/US]; 15769 Island View Road NW, Prior Lake, MN
55372 (US). **JENSEN, Wallace** [US/US]; 6985 Eagle
Trail, Centerville, MN 55038 (US). **RUEHL, James,
Nicholas** [US/US]; 456 Lafayette Avenue, Excelsior, MN
55331 (US).
- (74) **Agent:** **BRUESS, Steven, C.**; Merchant & Gould P.C.,
P.O. Box 2903, Minneapolis, MN 55402-0903 (US).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) **Title:** LOW POWER LOCALIZED DISTRIBUTED RADIO FREQUENCY TRANSMITTER

(57) **Abstract:** Methods and systems are disclosed for wireless communication, and in particular using a coaxial antenna for distributed wireless transmission. In one example, a wireless transmitter is disclosed that includes a radio frequency signal source and a coaxial cable including a near end and a far end. The near end is electrically connected to the radio frequency signal source and configured to receive signals from the radio frequency signal source. The coaxial cable has an inner conductor and an outer conductor. The wireless transmitter includes a shorting connection at the far end of the coaxial cable, the shorting connection electrically connecting the inner conductor and the outer conductor, and a plurality of openings along the coaxial cable spaced at predetermined locations to output signals generated by the radio frequency signal source. The invention can be used for RF attenuation monitoring and/or testing applications.



**LOW POWER LOCALIZED DISTRIBUTED RADIO FREQUENCY
TRANSMITTER**

5 This application is being filed on 20 December 2011, as a PCT International Patent application in the name of Emprimus, Inc., a U.S. national corporation, applicant for the designation of all countries except the US, and Frederick R. Faxvog, David B. Jackson, Greg Fuchs, Gale Nordling, Brian Groh, Wallace Jensen, and James Nicohlas Reuhl, all citizens of the U.S., applicants for the designation of the US only.

10 **Cross-Reference to Related Applications**

The present application claims priority from U.S. Provisional Application No. 61/425,155, filed December 20, 2010, and U.S. Provisional Application No. 61/425,161, filed December 20, 2010, the disclosures of which are hereby incorporated by reference in their entireties.

15 **Technical Field**

The present disclosure relates methods and devices for providing a low power, localized radio frequency transmitter which allows for localized wireless communications or localized radio frequency attenuation monitoring or testing.

Background

20 Radio frequency (RF) transmitters used in various applications emit electrical signals at power levels adequate for maintaining reliable wireless communications. Typical transmitters emit RF radiation more or less uniformly in all directions. This requires a great deal of energy, due to signal attenuation levels and interference occurring over the air in a typical RF transmission environment.

25 In some cases it is desirable to limit the amount of RF energy levels in surrounding volume and yet still allow a reliable communications channel to specific areas. For example in some circumstances, it may be desirable to reduce interference or lower the amount of power required to communicate in a particular area, which may be far from a radio frequency transmission source, or to penetrate a heavily shielded enclosure. However, current wireless technologies provide a
30 limited useful range.

For these and other reasons, improvements are desirable.

Summary

In accordance with the following disclosure, the above and other issues are addressed by the following:

5 In a first aspect, a wireless transmitter is disclosed that includes a radio frequency signal source and a coaxial cable including a near end and a far end. The near end is electrically connected to the radio frequency signal source and configured to receive signals from the radio frequency signal source. The coaxial cable has an inner conductor and an outer conductor. The wireless transmitter
10 includes a shorting connection at the far end of the coaxial cable, the shorting connection electrically connecting the inner conductor and the outer conductor, and a plurality of openings along the coaxial cable spaced at predetermined locations to output signals generated by the radio frequency signal source.

 In a second aspect, a wireless communication system is disclosed that
15 includes a wireless transmitter and a wireless receiver. The wireless transmitter includes a radio frequency signal source and a coaxial cable including a near end and a far end. The near end is electrically connected to the radio frequency signal source and configured to receive signals from the radio frequency signal source. The coaxial cable has an inner conductor and an outer conductor. The wireless
20 transmitter includes a shorting connection at the far end of the coaxial cable, the shorting connection electrically connecting the inner conductor and the outer conductor, and a plurality of openings along the coaxial cable spaced at predetermined locations to output signals generated by the radio frequency signal source. The wireless receiver is placed in proximity to at least a portion of the
25 coaxial cable.

 In a third aspect, a method for monitoring the effectiveness of electromagnetic shielding of an enclosure is disclosed. The method includes installing a radio frequency receiver within an interior of an enclosure, the enclosure designed to provide shielding from electromagnetic events. The method also
30 includes installing a radio frequency transmitter external to the enclosure and in the proximity of the enclosure. The radio frequency transmitter includes a radio frequency signal source and a coaxial cable including a near end and a far end. The

near end is electrically connected to the radio frequency signal source and configured to receive signals from the radio frequency signal source. The coaxial cable has an inner conductor and an outer conductor. The radio frequency transmitter includes a shorting connection at the far end of the coaxial cable, the
5 shorting connection electrically connecting the inner conductor and the outer conductor, and a plurality of openings along the coaxial cable spaced at predetermined locations to output signals generated by the radio frequency signal source. The method further includes activating the radio frequency transmitter, causing the radio frequency transmitter to emit a radio frequency signal recognizable
10 to the radio frequency receiver, and, upon detection of the radio frequency signal at the radio frequency receiver, generating an alert indicating that shielding effectiveness of the enclosure has been compromised.

Brief Description of the Drawings

Figure 1 is a schematic view of a radio frequency communication
15 system, according to an example embodiment of the present disclosure;

Figure 2 is a schematic perspective illustration of a coaxial cable useable in a radio frequency transmitter, according to an example embodiment;

Figure 3 is a schematic longitudinal cross sectional view of the coaxial cable of Figure 2;

20 Figure 4 is a schematic longitudinal cross sectional view of a coaxial cable useable in a radio frequency transmitter, according to an example embodiment;

Figure 5 is a schematic illustration of an example environment in which the radio frequency communication system of Figures 1-4 can be
25 implemented;

Figure 6 is a schematic illustration of an example environment in which a radio frequency transmitter can be used, according to an example embodiment;

Figure 7 is a flowchart of a method for monitoring the effectiveness
30 of electromagnetic shielding of an enclosure, according to an example embodiment of the present disclosure.

Detailed Description

Various embodiments of the present invention will be described in detail with reference to the drawings, wherein like reference numerals represent like parts and assemblies throughout the several views. Reference to various
5 embodiments does not limit the scope of the invention, which is limited only by the scope of the claims attached hereto. Additionally, any examples set forth in this specification are not intended to be limiting and merely set forth some of the many possible embodiments for the claimed invention.

 In general, the present disclosure relates to a low power, localized
10 radio frequency (RF) transmitter. In general, a coaxial cable can be used which has a series of small emitting holes in the cable which provide a series of closely spaced RF emitters. Such an antenna cable will allow a lower power broadcasting RF communications system when potential interference with other equipment could be a problem. The cable antenna can be placed along a line which is close proximity to
15 the users, such as a hallway or outer rim of an office area, such that the RF energy emitted can be held to a lower level than in a typical installation.

 Referring now to Figure 1, an example wireless communication system 100 (also referred to herein as a radio frequency communication system) is disclosed. The system 100 includes a receiver 102 and a transmitter 104. The
20 receiver is associated with an antenna 106 configured to detect and receive wireless communication signals, to be passed to the receiver for processing.

 The transmitter 104 provides a source of radio frequency signals to excite a coaxial cable line 108. As illustrated in further detail in Figures 2-4, the coaxial cable line 108 includes a plurality of openings disposed along the cable and
25 is shorted at a far end, such that a standing wave is formed within the coaxial cable line 108. By locating the openings at specific locations along the coaxial line (e.g., at local maxima of the standing wave), the openings can emit wireless signals containing the data modulated onto the line 108, for receipt by devices that may be remote from the transmitter 104, but are close to the coaxial cable line 108. As such,
30 local radio frequency communication can be accomplished.

 The receiver 102 and transmitter 104 are communicatively connected to a network interface 110, which can be connected to a remote system, for example

to provide network (e.g. Internet) access to remote locations, or locations where high radio frequency signal levels are undesirable.

Referring now to Figure 2, additional details regarding the coaxial cable line 108 are provided. As seen in this figure, the coaxial cable 108 forms a multi-aperture antenna 200, and includes an outer shield 202 and a center conductor 204. The coaxial cable 108 can be fabricated, for example, using either standard low loss coaxial cables or can be fabricated using interconnected printed circuit boards.

The multi-aperture antenna 200 includes a number of openings, or holes 206, through the outer shield 202 which allow transmission of an electrical field standing wave when the multi-aperture antenna 200 is connected to a radio frequency transmitter, such as is shown in Figure 1. The distance between holes 206 is, in the embodiment shown, determined to be such that distance between two holes represents one half the wavelength of the radio frequency signal for a given frequency (i.e., a desired frequency for data communication).

For example, using a coaxial cable having low loss and providing appropriate small size holes, the holes 206 will emit a nearly equal power from each hole. The wavelength of the exciting source (e.g., the radio frequency transmitter 104 of Figure 1) is approximately given by $\lambda = c/f$, where λ is the wavelength, c is the speed of light in free space and f is the frequency of the source. In practice the speed of the wave in the coax cable, i.e. the phase velocity, will be slightly slower than the free space velocity of light. Therefore, the wavelength will be expected to be slightly smaller than that given by the above equation. As an example for an exciting source of 3 GHz, the wavelength will be 10 centimeters, and the one half wavelength of the standing wave will be 5 centimeters. Using a higher frequency source would produce a closer standing wave spacing, and hence closer-spaced emitting holes 206 in the coaxial cable 108. Other distances and frequencies can be used as well, including those defined in a particular protocol standard (e.g., 802.x communications).

Although in the embodiment shown a coaxial cable is used, in alternative embodiments, a different type of electrical cable and/or with different material and construction could be used to fabricate the cable antenna. For example, a differential, twisted pair cable could be used as well.

The multi-aperture antenna 200 is terminated at an electrically short termination 210, at a one quarter wavelength distance from the last hole 206. This termination distance results in the standing wave as shown, providing local maxima at each hole 206.

5 As seen in Figure 3, a schematic longitudinal cross sectional view of the coaxial cable 108 of Figure 2 is illustrated, forming a multi-aperture antenna 200. As seen in Figure 3, the holes 206 extend through the coaxial cable 108, exposing the center conductor 204.

10 In an alternative embodiment seen in Figure 4, wire stubs 302 are inserted into the holes 206 of the coaxial cable 108, forming multi-aperture antenna 300. In this embodiment, the wire stubs 302 provide a more efficient emitter at the periodic locations along the coaxial cable 108. In such embodiments, the holes 206 can be filled in around the wire stubs 302 with a dielectric insulating material 304, which could also be used to cover and protect the ends of the protruding stubs 302.

15 Referring now to Figure 5, a schematic illustration of an example environment in which the radio frequency communication system of Figures 1-4 can be implemented. In the illustration shown, a radio frequency communication system, including an RF transmitter as described above, could be placed in an area where large signal strength is not desired, for example where it may be desirable to
20 control access to a network by controlling the individuals to whom an RF signal reaches. In the embodiment shown, the environment 400 corresponds to an office building environment. In this embodiment, a wireless transmitter 402, including a multi-aperture antenna such as antennas 200, 300, of Figures 3-4, above, is depicted as placed near a plurality of cubicles 404. In this embodiment, an RF source 406
25 can be located at one end of the cubicles 404, such that a far-end cubicle would otherwise normally not be able to detect a low power RF signal propagated over the air from a location at the RF source 406. Accordingly, a coaxial multi-aperture antenna 408, communicatively connected to the RF source 406, can distribute RF signals down the array of cubicles, such that each cubicle can receive data signals
30 from the RF source 406.

 In alternative applications, an RF transmitter using an associated multi-aperture antenna could be used in different environments. Other example environments can include, for example, installation within an airplane cabin, such

that a data service could be extended to passengers without interfering with airplane instrumentation. Additionally, such a coaxial multi-aperture antenna could be used in the case of a tunnel, to deliver wireless communications to remote areas where RF communication would be otherwise attenuated before reaching. The same may be
5 true in other environments, such as battlefield environments, in which large shielding obstructions may present barriers to RF communication from a single endpoint.

Referring now to Figures 6-7, it is noted that other applications for such a multi-aperture antenna are possible as well. In particular, Figure 6 illustrates
10 an example environment in which a radio frequency transmitter including a multi-aperture antenna can be used to monitor and verify the effectiveness of shielding of an electromagnetically-shielding enclosure.

In the embodiment shown in Figure 6, the environment 500 includes an enclosure monitoring system 502 and an enclosure 504. In this embodiment, the
15 enclosure 504 has a door 506 shown as including hinges 508 and a latch 510. In some embodiments, the door includes a gasketed door seal capable of preventing electromagnetic signals from penetrating the enclosure when the door 506 is closed.

In the embodiment shown, a radio frequency transmitter 512 is positioned external to the enclosure, and includes an RF source 513 and one or more
20 multi-aperture antennas 514. In the embodiment shown, the one or more multi-aperture antennas 514 can correspond to antennas 200, 300 of Figures 3-4, above, and are positioned around a periphery of the enclosure 504, such as around the door 506 at a gasketed seal. One or more radio frequency receivers 516 is positioned
25 within the enclosure 504, and configured to detect radio frequency signals of a predetermined frequency (i.e., the frequency to which the antennas 514 are tuned). Using this arrangement, the existence of a compromised enclosure can be detected, for example according to the method described in connection with Figure 7, below. This arrangement provides a means for applying much lower RF power emissions, which, because of the close proximity to the door seal, will still allow for a reliable
30 measure of door seal integrity.

In accordance with the present disclosure, transmitted power levels using antennas 514, 200, 300 of the present disclosure will be relatively low and similar to or lower than the power levels of a typical wireless router transmitter. This

power level will allow the radio frequency receivers within the enclosure to detect EM attenuation discrepancies which are on the order of 80 – 100 db from that of the specified enclosure effectiveness. For example, if the enclosure shielding effectiveness is specified as having an 80 db attenuation effectiveness, then the systems described herein will measure and alert the user when the attenuation is compromised to at least the 80 db level. To increase the sensitivity of the monitoring system either the transmitter power would need to be increased or the sensitivity of the receiver would need to be increased.

Although, in the embodiment shown, two multi aperture antennas 514 are illustrated, such that each passes along two edges of the door 504, other configurations are possible as well, using one or more such antennas.

Additionally, in alternative embodiments, the cable transmitter 504 and antennas 514 could be placed inside the cabinet with the RF receiver 516 on the outside.

Referring now to Figure 7, a method 600 for monitoring the effectiveness of a shielding enclosure is provided. The method 600 can, for example, represent a generalized methodology for monitoring an enclosure within the environment illustrated in Figure 6, above. In the embodiment shown, the method 600 can include installing an RF receiver, such as receiver 516, within an interior of an enclosure (step 602). The method 600 also can include installing a coaxial transmitter (e.g., an RF transmitter including an RF source 513 and a multi-aperture antenna 514) external to the enclosure, such as around a door gasket (step 604). The method can include, when the enclosure is closed, activating the transmitter (step 606), and determining whether an RF signal of the frequency emitted by the transmitter is detected at an RF receiver, such as receiver 516 (step 608). If no RF signal is detected, flow returns to step 606, for periodic monitoring of the enclosure. If an RF signal is detected at the RF receiver, an alert can be generated (step 610).

Referring to Figures 6-7, it is noted that, in certain embodiments, the source can be modulated and encoded with a specific defining signal that can be uniquely identified by one or more RF receivers located inside the enclosure. Should the identifiable signal be detected by the RF receiver, the receiver indicates

that RF energy is entering the enclosure and consequently that the effectiveness of that enclosure's shielding has been compromised.

In operation, when the system is functioning properly and the enclosure no signal will be detected because of the extremely high attenuation levels provided by the materials of the enclosure, as well as any additional sealing structures of the enclosure, such as finger stock other electrically conductive gasket materials. Openings in the enclosure also include attenuating structures, which may be provided through use of honeycomb-shaped waveguide vents, a fiberoptic waveguide port, or an electrical power filter. As such, if the enclosure is not compromised, there should exist sufficient attenuation that the receiver will not detect the signal transmitted by the transmitter. However should one of the attenuation components or structures used in the enclosure become compromised, the radio frequency receiver interior to the enclosure will detect the encoded radio frequency signal generated by the radio frequency transmitter exterior to the enclosure; in such cases, the radio frequency receiver can send a signal to security personnel, such as a data signal to a remote computing system, to indicate that the effectiveness of the enclosure has been compromised.

It is noted that, if the radio frequency receiver detects the signal from the transmitter, the energy could be entering by a number of paths; namely, an open door, a defective air vent, a defective door gasket or finger stock, fiber waveguide beyond cutoff attenuator, any other finger stock or electrically conducting gaskets or thru an electrical power filter.

In a complementary arrangement according to an alternative embodiment of the present disclosure, the radio frequency transmitter can be placed in an interior of the enclosure, and the radio frequency receiver can be placed external to the enclosure. In this configuration, a larger transmitter signal could be used (without worry of other interference with nearby electronics) and would allow for a more sensitive measurement of the shielding effectiveness of the enclosure.

Referring to Figures 1-7 generally, it is noted that the methods and systems of the present disclosure represent advantages over standard systems. Generally, the distributed RF transmitting antenna disclosed herein allows use in low power applications where interference is or could be a problem. The antenna can be used for localized wireless communications, special RF testing or RF

monitoring applications. Other applications and advantages are apparent as well, based on the systems and methods described herein.

The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since
5 many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

Claims:

1. A wireless transmitter comprising:
a radio frequency signal source;
a coaxial cable including a near end and a far end, the near end electrically connected to the radio frequency signal source and configured to receive signals from the radio frequency signal source, the coaxial cable having an inner conductor and an outer conductor;
a shorting connection at the far end of the coaxial cable, the shorting connection electrically connecting the inner conductor and the outer conductor; and
a plurality of openings along the coaxial cable spaced at predetermined locations to output signals generated by the radio frequency signal source.
2. The wireless transmitter of claim 1, further comprising a plurality of wire emitters, each of the plurality of wire emitters positioned in a corresponding opening in the coaxial cable and configured to couple radio frequency energy out of the coaxial cable at each of the predetermined locations.
3. The wireless transmitter of claim 1, wherein the shorting connection at the far end of the coaxial cable is positioned to form a standing wave of an electrical field within the coaxial cable when the radio frequency signal source emits radio frequency signals within a range of predetermined frequencies.
4. The wireless transmitter of claim 3, wherein the plurality of openings are positioned at local maxima of the standing wave.
5. The wireless transmitter of claim 4, wherein the plurality of openings is spaced apart at a distance of approximately half a wavelength of output signals.
6. The wireless transmitter of claim 5, wherein the shorting connection is located at a far end of the coaxial cable at a distance approximately one quarter of

the wavelength of the output signals from a nearest opening of the plurality of openings.

7. A wireless communication system comprising:
 - a wireless transmitter comprising:
 - a radio frequency signal source;
 - a coaxial cable including a near end and a far end, the near end electrically connected to the radio frequency signal source and configured to receive signals from the radio frequency signal source, the coaxial cable having an inner conductor and an outer conductor;
 - a shorting connection at the far end of the coaxial cable, the shorting connection electrically connecting the inner conductor and the outer conductor; and
 - a plurality of openings along the coaxial cable spaced at predetermined locations to output signals generated by the radio frequency signal source; and
 - a wireless receiver placed in proximity to at least a portion of the coaxial cable.
8. The wireless communication system of claim 7, wherein the wireless receiver comprises an antenna separate from the coaxial cable.
9. The wireless communication system of claim 7, wherein the system is installable at a location selected from a group of locations consisting of:
 - an office;
 - an airplane cabin; and
 - a tunnel.
10. The wireless communication system of claim 7, wherein the plurality of openings are positioned at local maxima of the standing wave.

11. The wireless communication system of claim 10, wherein the plurality of openings is spaced apart at a distance of approximately half the wavelength of output signals.
12. The wireless communication system of claim 7, wherein the shorting connection at the far end of the coaxial cable is positioned to form a standing wave of an electrical field within the coaxial cable when the radio frequency signal source emits radio frequency signals within a range of predetermined frequencies.
13. The wireless communication system of claim 12, wherein the wireless communication system provides a network connection for one or more wireless data users in a proximity of the coaxial cable.
14. The wireless communication system of claim 7, wherein the location of the coaxial cable defines a restricted area of allowed wireless communication within a facility.
15. The wireless communication system of claim 7, wherein the radio frequency signal source comprises a modulated radio frequency signal source.
16. A method for monitoring the effectiveness of electromagnetic shielding of an enclosure, the method comprising:
 - installing a radio frequency receiver within an interior of an enclosure, the enclosure designed to provide shielding from electromagnetic events;
 - installing a radio frequency transmitter external to the enclosure and in the proximity of the enclosure, the radio frequency transmitter comprising:
 - a radio frequency signal source;
 - a coaxial cable including a near end and a far end, the near end electrically connected to the radio frequency signal source and configured to receive signals from the radio frequency signal source, the coaxial cable having an inner conductor and an outer conductor;

a shorting connection at the far end of the coaxial cable, the shorting connection electrically connecting the inner conductor and the outer conductor; and
a plurality of openings along the coaxial cable spaced at predetermined locations to output signals generated by the radio frequency signal source;
activating the radio frequency transmitter, causing the radio frequency transmitter to emit a radio frequency signal recognizable to the radio frequency receiver; and
upon detection of the radio frequency signal at the radio frequency receiver, generating an alert indicating that shielding effectiveness of the enclosure has been compromised.

17. The method of claim 16, wherein the enclosure includes a door having a door seal.

18. The method of claim 17, wherein the coaxial cable comprises a distributed antenna, and wherein the coaxial cable is installed around a perimeter of the door at the door seal.

19. The method of claim 18, whereby detection of the radio frequency signal at the radio frequency receiver provides an indication of effectiveness of the door seal.

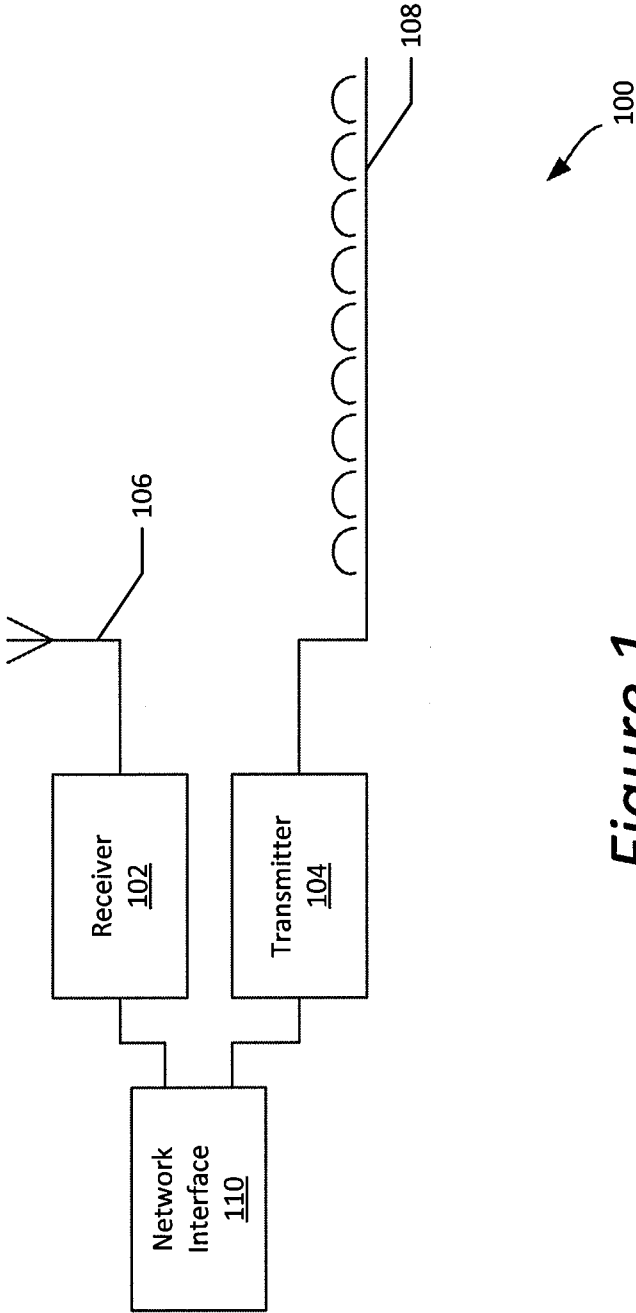


Figure 1

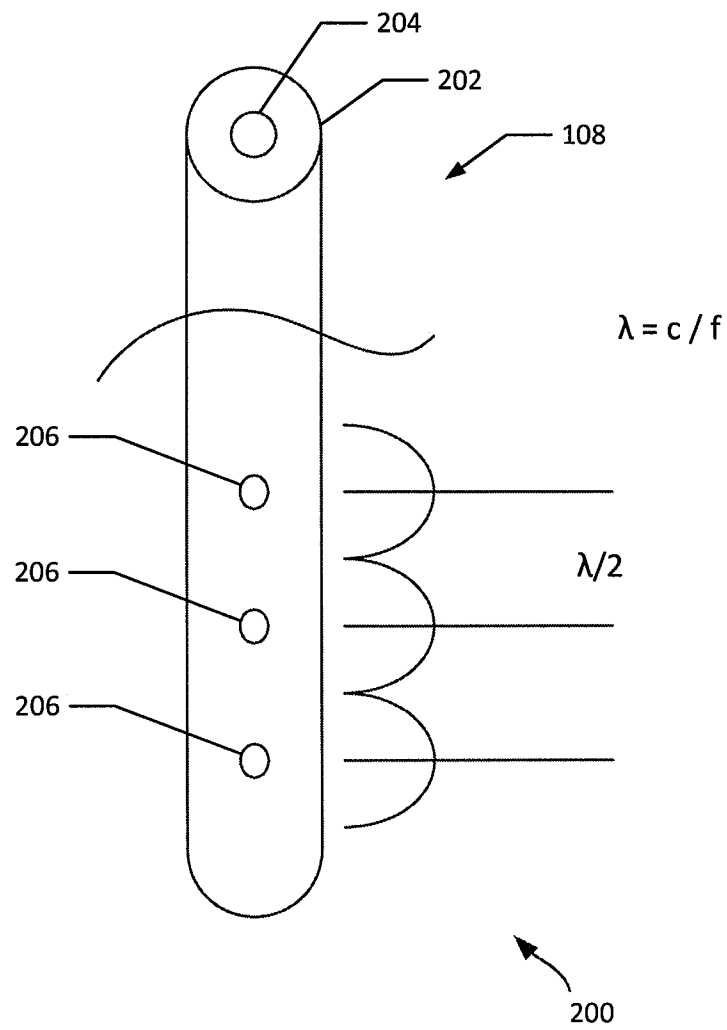


Figure 2

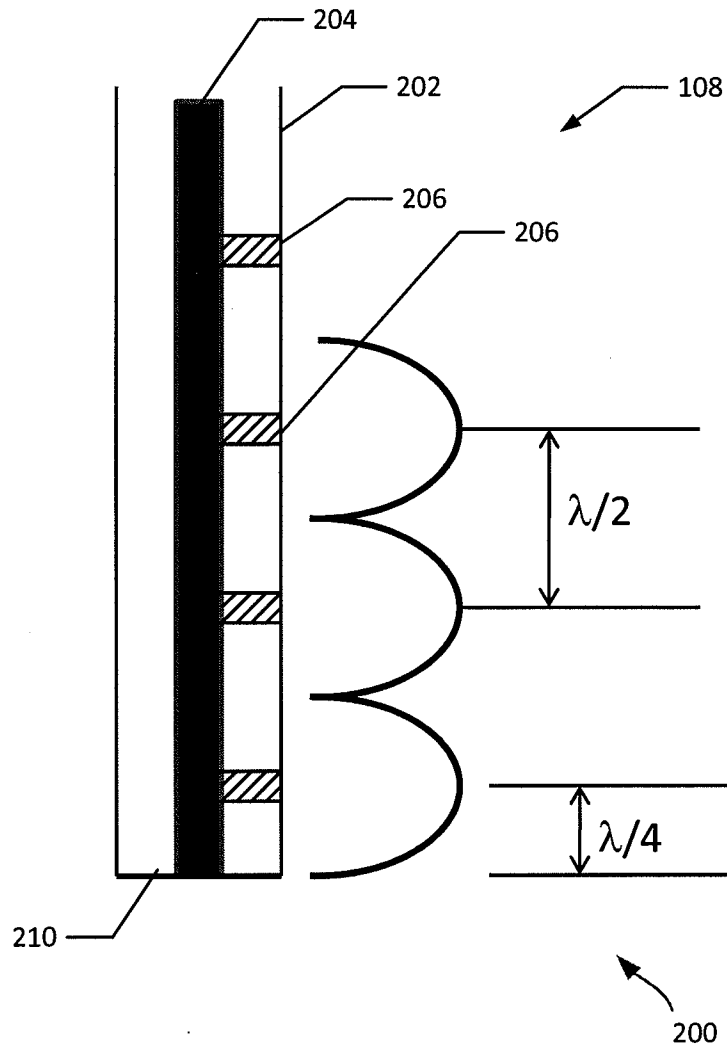


Figure 3

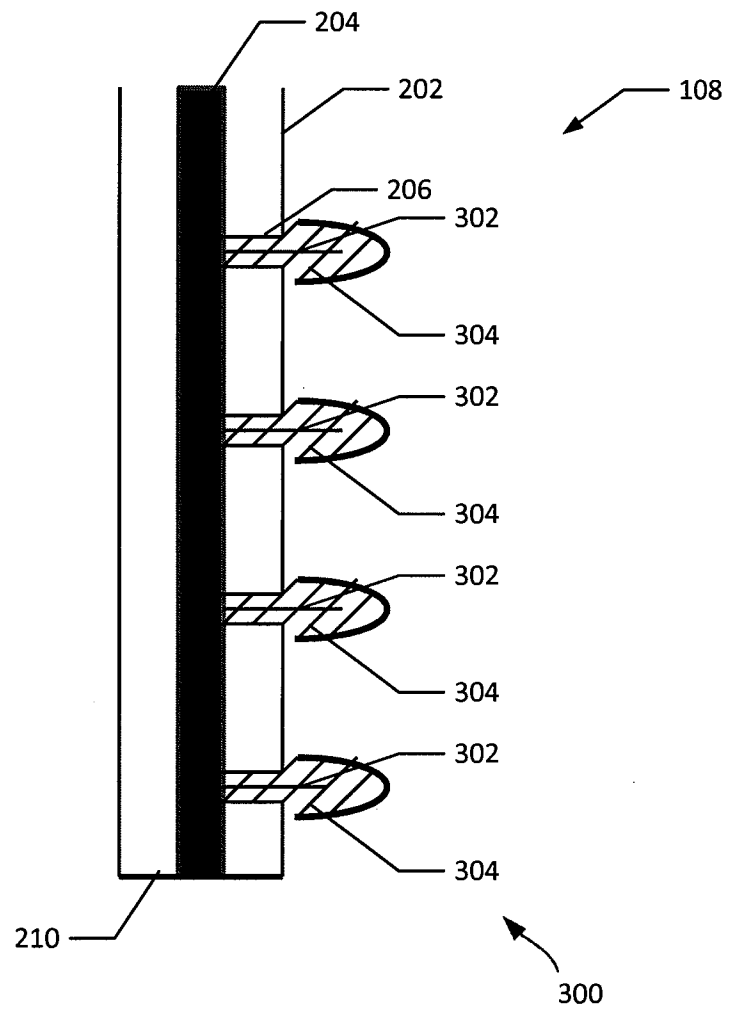


Figure 4

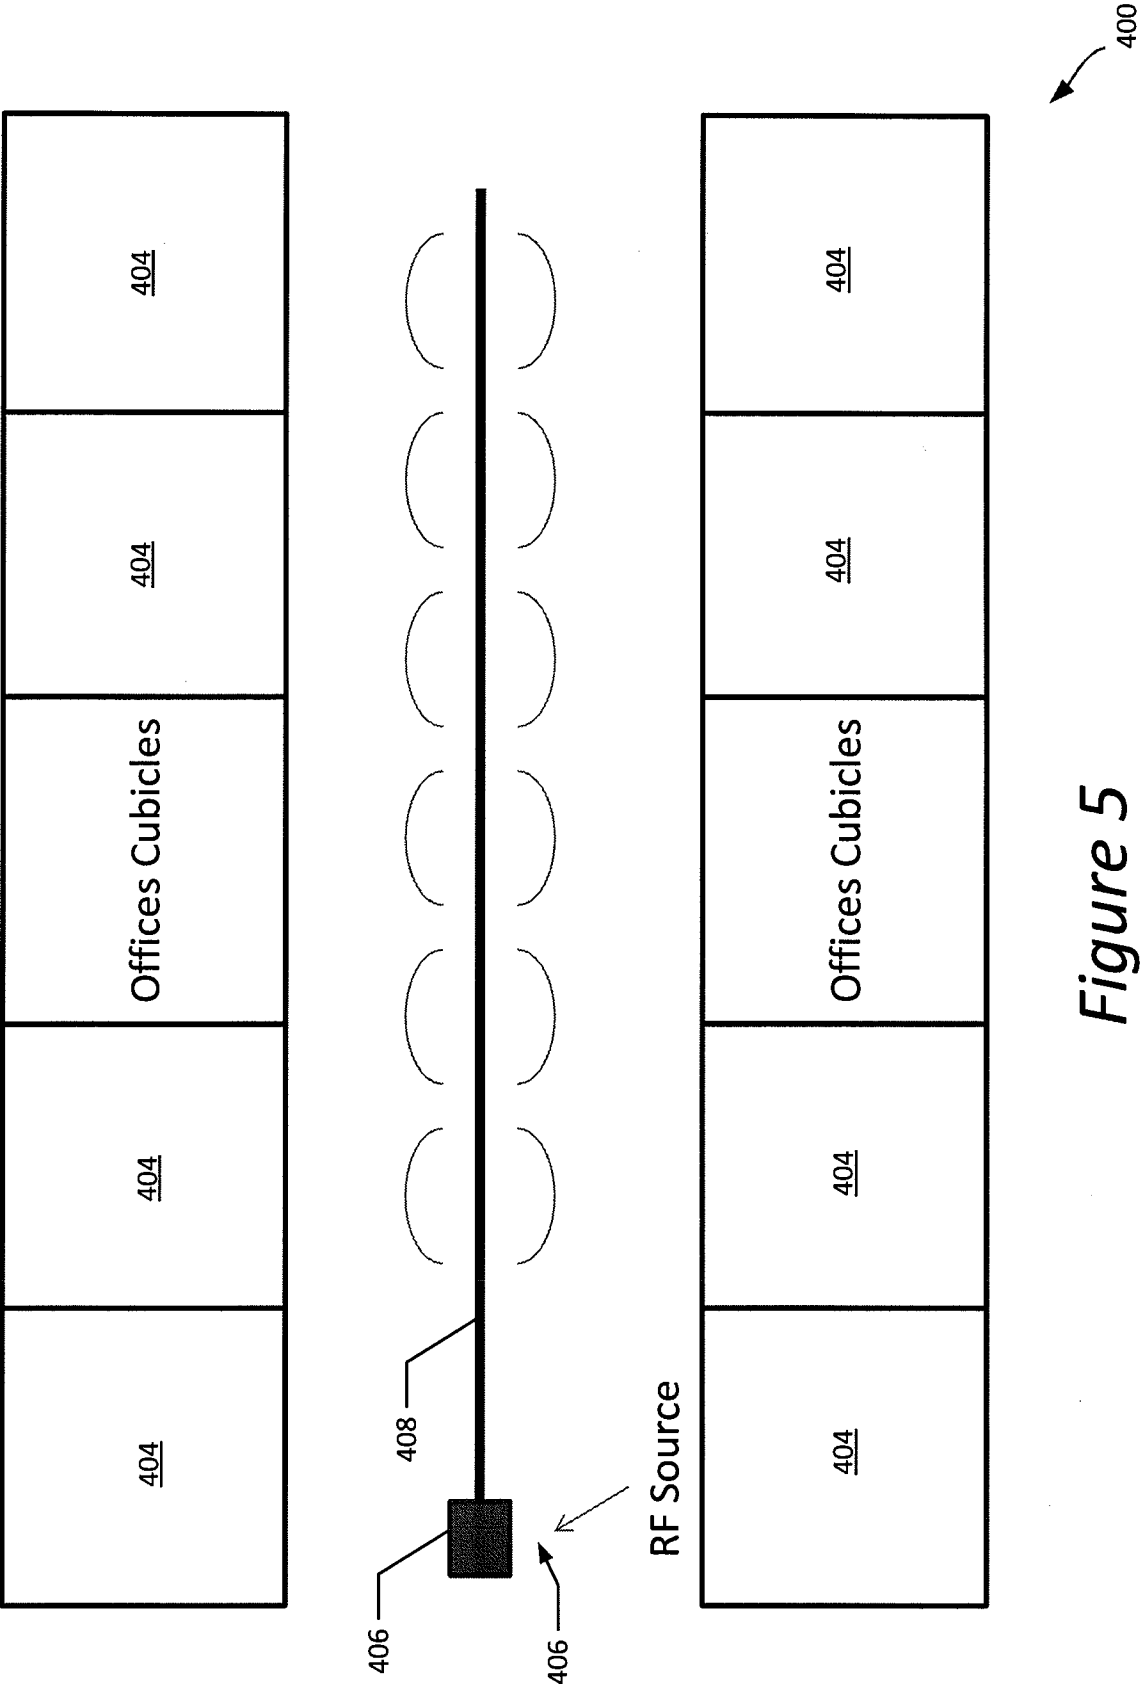


Figure 5

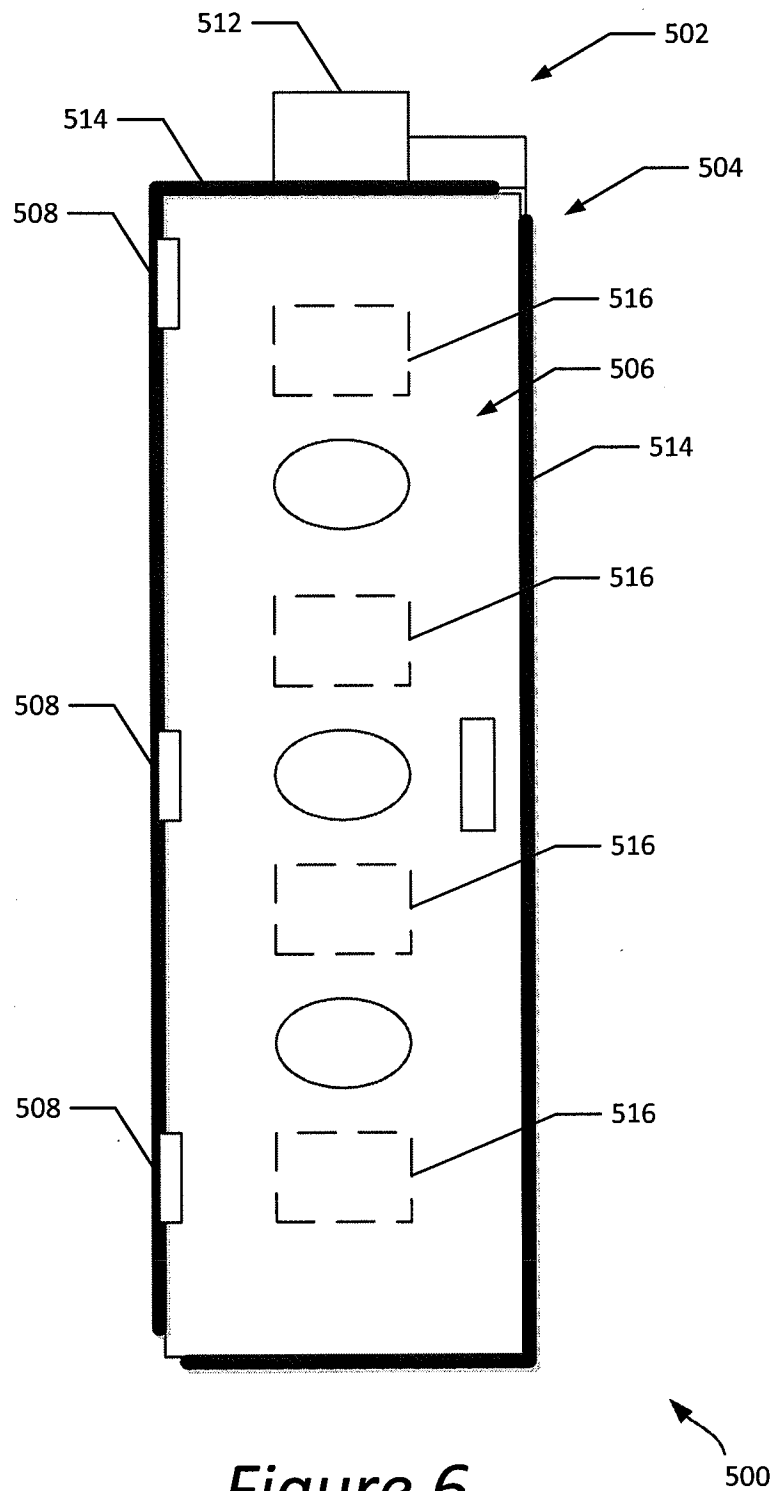
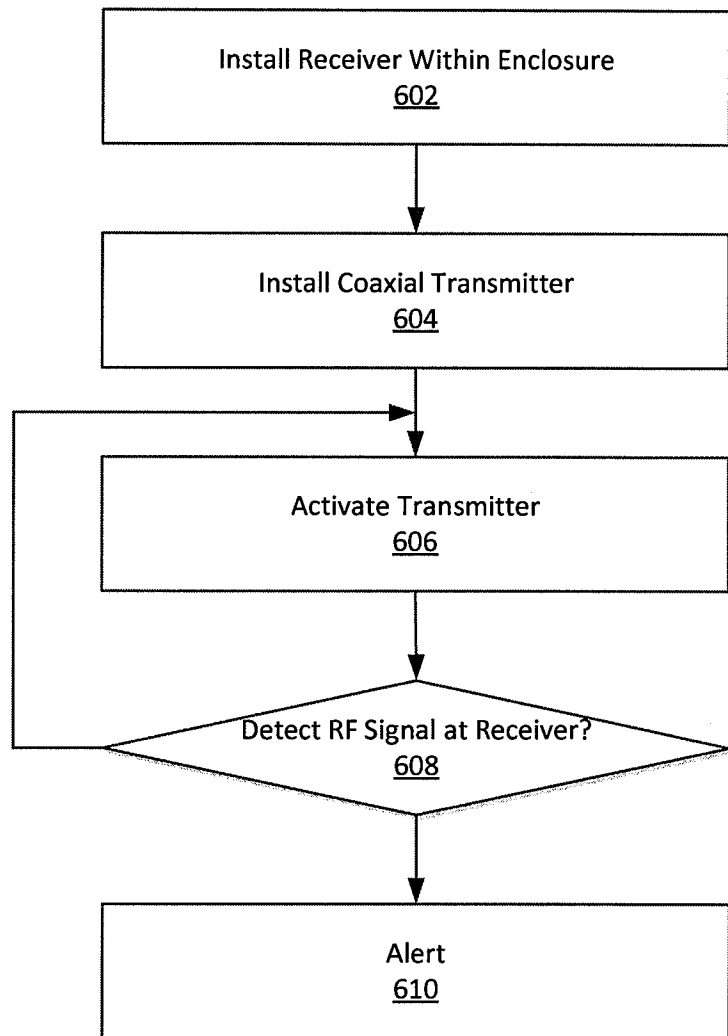


Figure 6

*Figure 7*

600