



US00D723398S

(12) **United States Design Patent**
Ishii

(10) **Patent No.:** **US D723,398 S**

(45) **Date of Patent:** **** Mar. 3, 2015**

(54) **LIGHT WAVE DISTANCE MEASURING THEODOLITE**

(71) Applicant: **Kabushiki Kaisha Topcon**, Tokyo (JP)

(72) Inventor: **Mitsuo Ishii**, Tokyo (JP)

(73) Assignee: **Kabushiki Kaisha Topcon**, Tokyo (JP)

(**) Term: **14 Years**

(21) Appl. No.: **29/470,412**

(22) Filed: **Oct. 21, 2013**

(30) **Foreign Application Priority Data**

Aug. 6, 2013 (JP) 2013-017935

(51) **LOC (10) Cl.** **10-04**

(52) **U.S. Cl.**

USPC **D10/66; D10/69; D10/70**

(58) **Field of Classification Search**

CPC G01C 15/00; G01C 15/06; G01C 15/002;
G01C 21/16; G01C 21/165; G01C 25/00;
G01C 1/04; G01C 3/08; G01S 19/49; G01S
19/51; G01S 5/12; G01S 5/16; G01S 17/10;
G01S 17/42; G01S 7/4818; G01S 33/21;
G01B 11/26
USPC D10/66, 69, 70; 33/276, 277, 281, 285,
33/286, 290, 291-299, DIG. 21; 340/539,
340/825.36, 825.46, 825.49; 356/5.15,
356/4.01, 5.01, 4.05, 5.05-5.09, 5.12, 28.5,
356/345, 375, 3.01, 128-155, 399-400;
385/83, 97-99, 134-139;
264/1.24-1.25

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D563,247 S * 3/2008 Ishii D10/66
D581,819 S * 12/2008 Banba et al. D10/66
RE44,751 E * 2/2014 Riegl D10/66
D699,768 S * 2/2014 Zhang et al. D15/127
D708,970 S * 7/2014 Ishii D10/66

* cited by examiner

Primary Examiner — Antoine D Davis

(74) *Attorney, Agent, or Firm* — Oliff PLC

(57) **CLAIM**

The ornamental design for a light wave distance measuring theodolite, as shown and described.

DESCRIPTION

FIG. 1 is a perspective view of a light wave distance measuring theodolite;

FIG. 2 is a front view thereof;

FIG. 3 is a top view thereof;

FIG. 4 is a right-side view thereof;

FIG. 5 is a left-side view thereof;


FIG. 6 is a rear view thereof; and,

FIG. 7 is a bottom view thereof.

The broken lines depict environmental subject matter only and form no part of the claimed design.

The claimed light wave distance measuring theodolite is for use in measuring distances and angles, wherein measurement data and architectonics data can also be transmitted and received to other instruments.

1 Claim, 7 Drawing Sheets

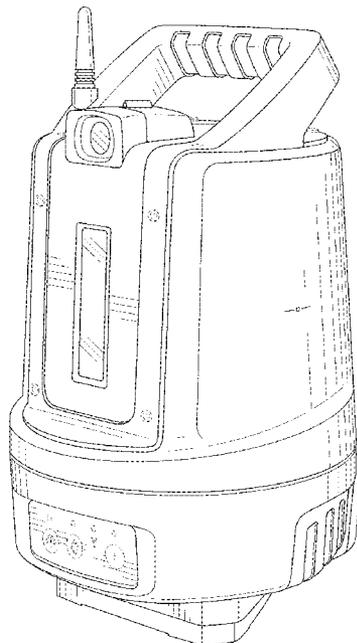

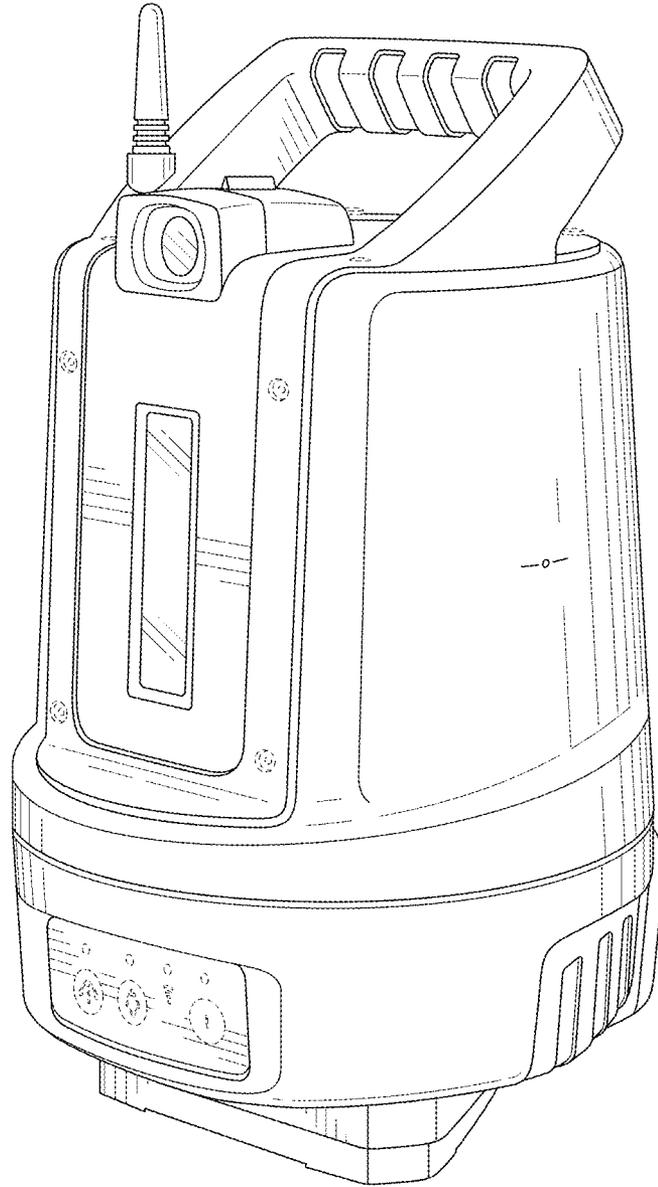


FIG. 1

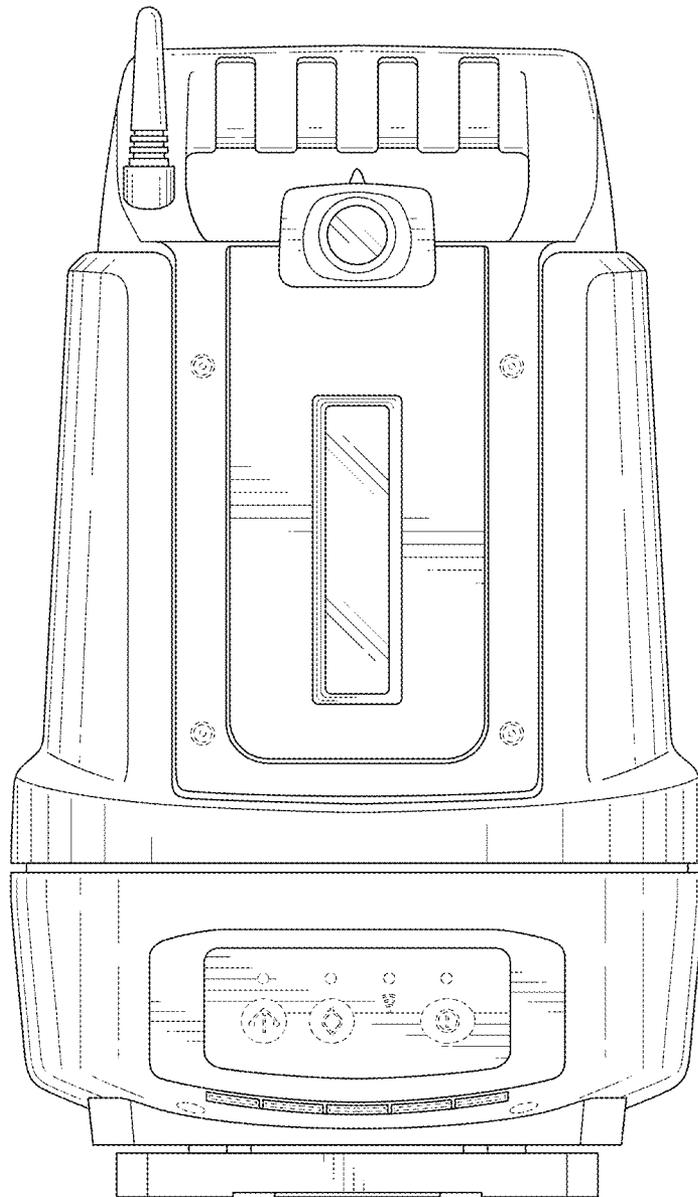


FIG. 2

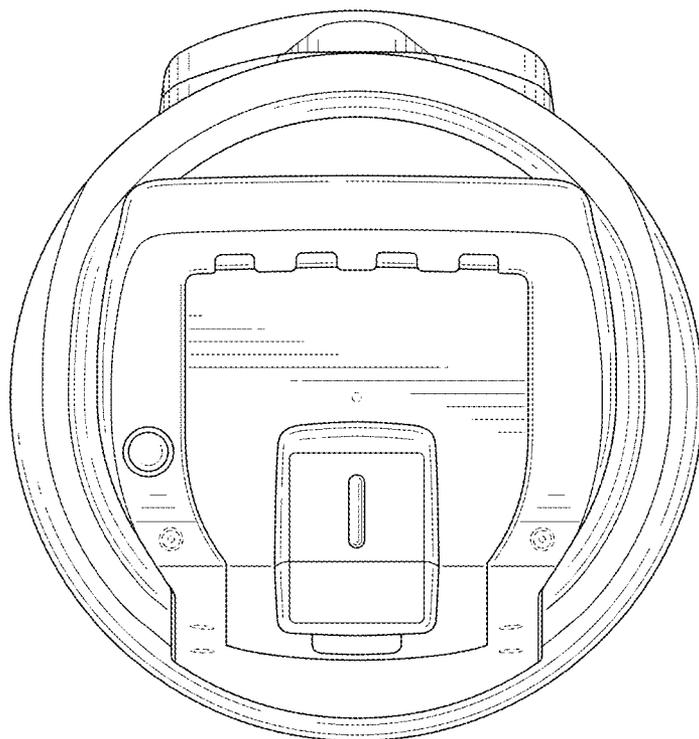


FIG. 3

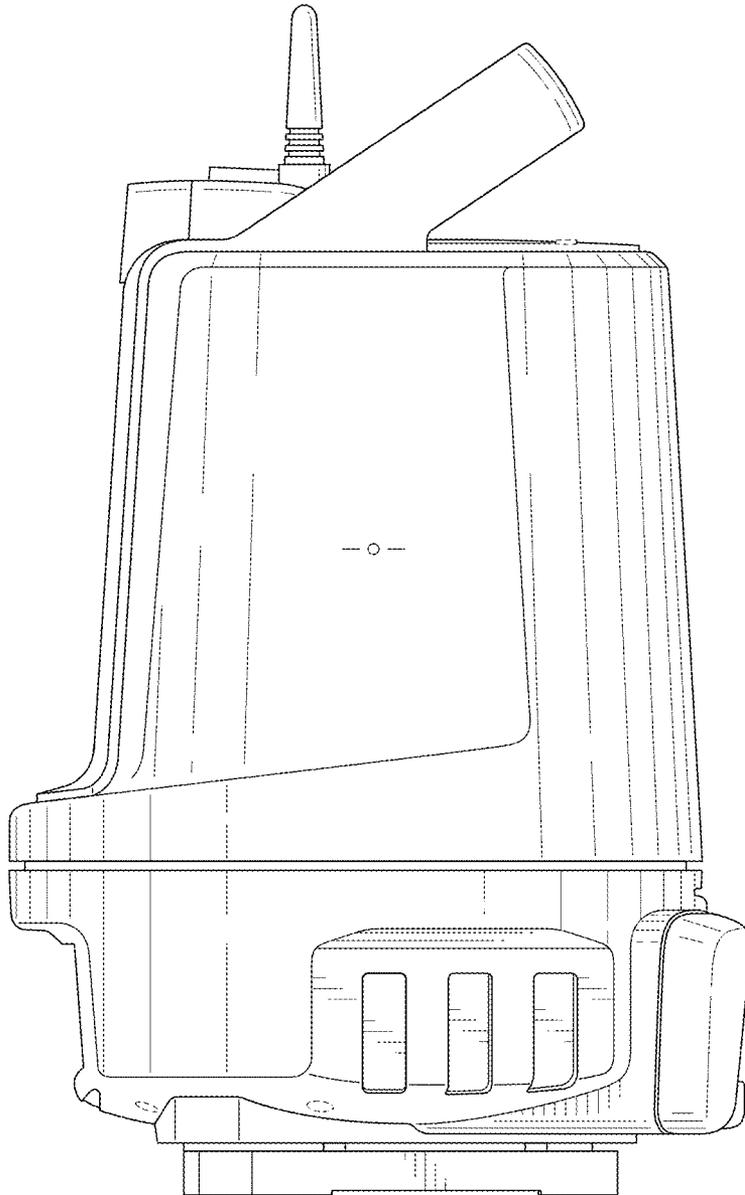


FIG. 4

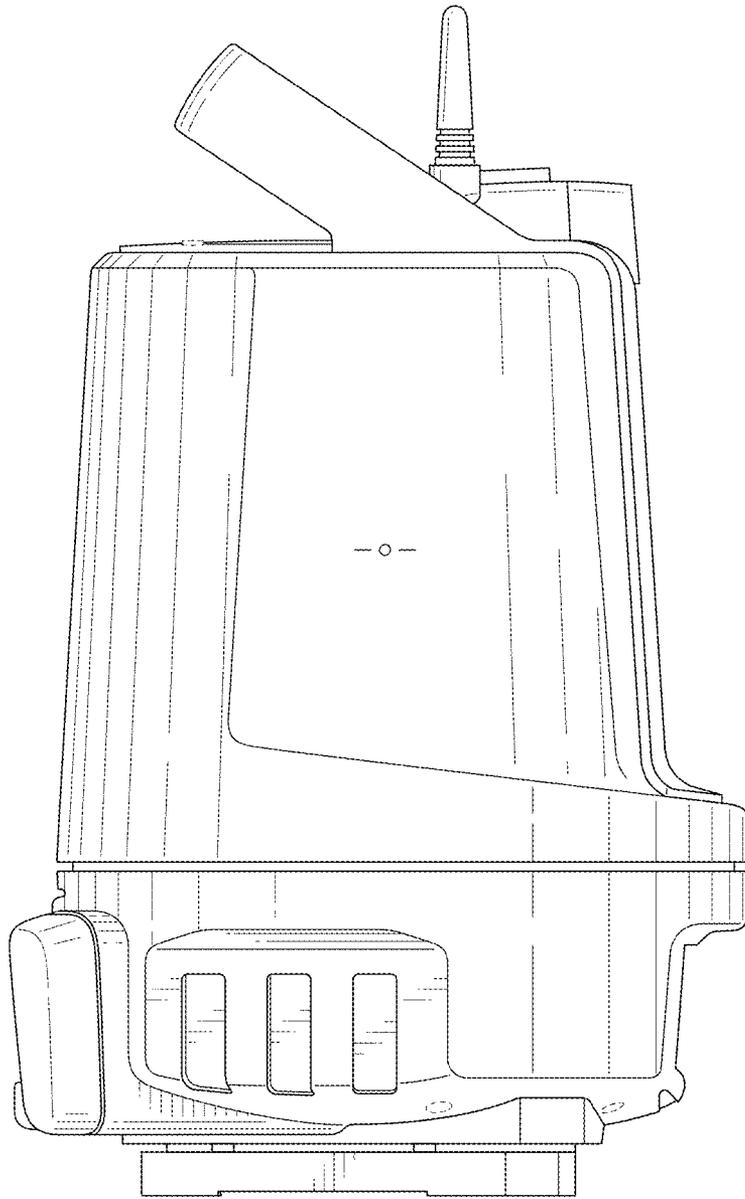


FIG. 5

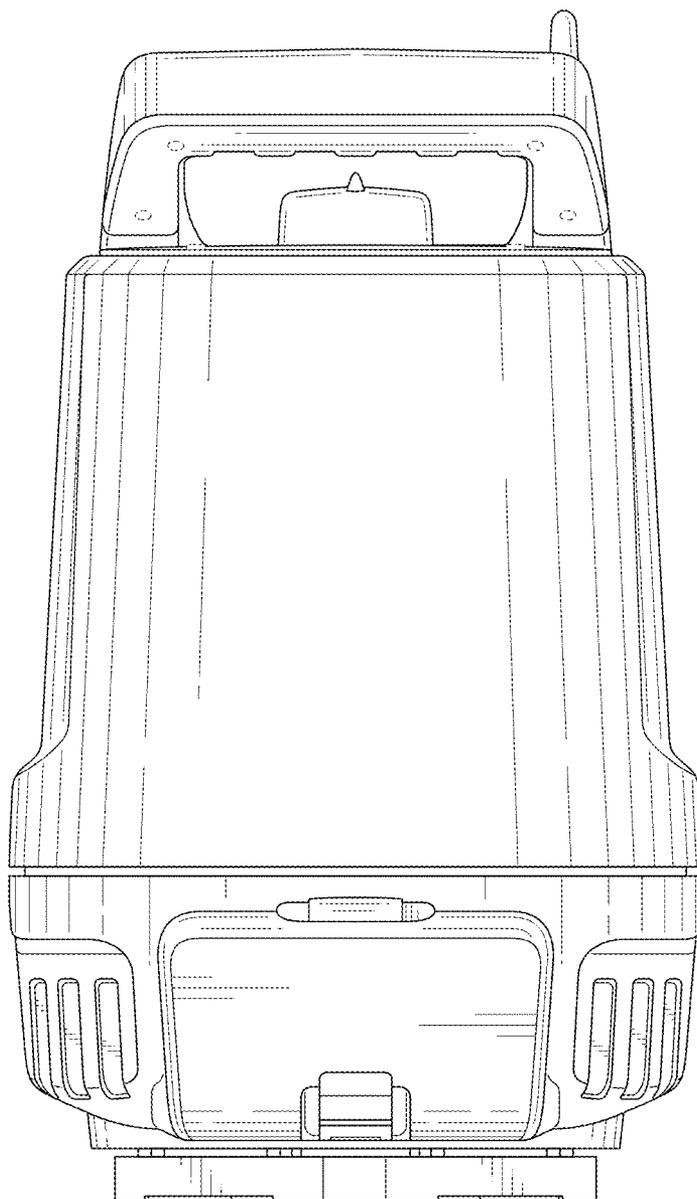


FIG. 6

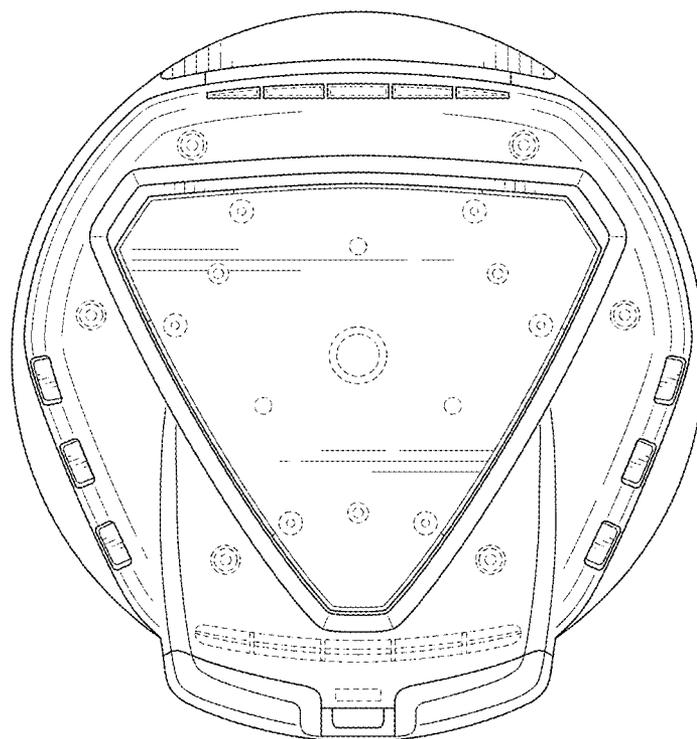


FIG. 7