

(19) **DANMARK**

(10) **DK/EP 3087980 T3**



(12) **Oversættelse af
europæisk patentskrift**

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **A 61 K 9/24 (2006.01)** **A 61 K 9/20 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2019-02-18**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2018-12-05**
- (86) Europæisk ansøgning nr.: **14874251.3**
- (86) Europæisk indleveringsdag: **2014-12-19**
- (87) Den europæiske ansøgnings publiceringsdag: **2016-11-02**
- (86) International ansøgning nr.: **CN2014094367**
- (87) Internationalt publikationsnr.: **WO2015096668**
- (30) Prioritet: **2013-12-23 CN 201310717968** **2013-12-23 CN 201310716482**
2013-12-23 CN 201310718529
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Wen, Xiaoguang, Room A015, A Building, 2 Ruitai Road, Hi-tech District, Guangzhou, Guangdong 510530, Kina**
- (72) Opfinder: **Wen, Xiaoguang, Room A015, A Building, 2 Ruitai Road, Hi-tech District, Guangzhou, Guangdong 510530, Kina**
- (74) Fuldmægtig i Danmark: **Zacco Denmark A/S, Arne Jacobsens Allé 15, 2300 København S, Danmark**
- (54) Benævnelse: **DOBBELTLAGSTABLET OG FREMGANGSMÅDE TIL FREMSTILLING DERAFF**
- (56) Fremdragne publikationer:
EP-A1- 2 380 562
EP-A1- 2 471 521
WO-A1-2012/118180
CN-A- 102 485 219
CN-A- 103 284 974
CN-A- 103 655 505
CN-A- 103 690 503
CN-A- 103 690 505
GB-A- 2 488 731
US-A1- 2013 243 856

DESCRIPTION

Technical field

[0001] The invention refers to the field of medicinal preparation, specifically a novel double-layer tablet and a preparation method thereof.

Background technology

[0002] A double-layer tablet is a double-phase medicine-release system having a double-layer structure, which not only can achieve the ideal pharmacokinetic behavior by combining two medicines together or combining identical medicine in different release modes together, but improve the stability of the medicines having incompatibility and give the special functions to the tablet.

[0003] In preparation of the double-layer tablet, to ensure the medicine of double-layer tablet has the stable structure during the shelf life is the most demanding and practical technology in pharmaceuticals industry.

[0004] The double-layer tablet in the prior art includes two layers of tablets which are adhered to each other; and the preparation method thereof is to press the two layers of tablets one by one usually, for example, mix the medicinal active ingredients and the pharmaceutical excipients of one layer of the double-layer tablet and press the mixture into one layer of tablet; then prepare the double-layer tablet after pressing this tablet with the medicinal active ingredients and the pharmaceutical excipients of the other layer of tablet together.

[0005] The double-layer tablet of the prior art is featured with poor physical stability, easy breaking and separation of the two layers; and the preparation may be cracked, etc. during transportation and storage as a result of difference of dilatation coefficients among the different pharmaceutical excipients because different pharmaceutical excipients are applied to the two layers of tablets usually. Related prior art is disclosed with GB 2 488 731 A, EP 2 380 562 A1, US 2013/243856 A1, CN 102 485 219 A, EP 2 471 521 A and CN 103 284 974 A.

[0006] Therefore, it is necessary to improve the physical stability of the double-layer tablet and ensure integrity of the preparation during transportation and storage.

Contents of the invention

[0007] The invention is to provide a double-layer tablet, which featured with high physical stability, not easy to broken during transportation and storage, approximately constant release of medicine and capability of improving effectiveness and safety of the patient taking the medicine.

[0008] The invention achieves the purpose of the above-mentioned invention by designing the double-layer tablet having a new structure, wherein the technical solution is as follows:

The double-layer tablet refers to a double-layer medicine-release mode, which is formed by combining

two layers of tablets together, wherein one layer of tablet has hole. Moreover, said hole has the ingredients of the other layer of tablet when the preparation is prepared.

[0009] Each layer of said double-layer tablet includes the active ingredients and pharmaceutical excipients, wherein the active ingredients in each layer can be one or two or more than two active ingredients. The active ingredients in two layers of the double-layer tablet can be the same or different from each other.

[0010] Each layer of the double-layer tablet can be the quick release layer or the sustained-release layer, respectively.

[0011] The number of said holes is 1-3, preferably 1.

[0012] The diameters of said holes are 1-10mm, preferably 2-6mm.

[0013] Said double-layer tablet can be coated, etc. by using the conventional method in this field in accordance with the actual need.

[0014] A method of preparing said double-layer tablet includes the steps of:

1. 1) Preparing respectively a component I and a component II ,both of them containing the active ingredients and the pharmaceutical excipients, and said component I and the component II are granules or powder;
2. 2) Implementing the first tableting: preparing the tablet having hole from component I(also called tablet I below);
3. 3) Implementing the second tableting: forming the double-layer tablet composed of the component I layer and the component II layer after pressing said tablet having holes with the component II together, wherein the component II were filled into the holes during compressing.

[0015] Said hole can be formed by using a compressing mould having holes, or punching the tablets after compressing.

[0016] Moreover, in one embodiment of the invention, the tablet I with hole is formed from the component I by using an annular punch.

[0017] As for the advantages of the invention, the component I layer of the double-layer tablet has holes; the double-layer tablet acquired is very firm and cannot be separated during transportation and storage because the component II is filled in the holes of the tablet I. See Figure 1-3 for structure.

[0018] The preparation method of the double-layer tablet in the invention is applicable for preparation of all kinds of double-layer tablet. Further, the technicians in this field can select all kinds of conventional pharmaceutical excipients in accordance with actual need.

[0019] The pharmaceutical excipients is one or more selected from sustained-release material, filler, disintegrating agent, lubricant, binder and glidant. The sustained-release material is one or more preferably selected from hydroxylpropylmethyl-cellulose, ethyecellulose and hydroxy propyl cellulose; the filler is one or more preferably selected from lactose, pregelatinized starch and microcrystalline

cellulose; the disintegrating agent is one or more preferably selected from sodium carboxymethyl cellulose, sodium carboxymethyl starch and polyvinylpyrrolidone; the lubricant is one or more preferably selected from stearic acid, magnesium stearate and talcum powder; the binder is one or more preferably selected from polyvidone, hydroxy propyl cellulose and hydroxypropylmethyl-cellulose; and the glidant is superfine silica powder preferably.

[0020] The component I in the invention preferably includes following ingredients with percentages by weight:

Medicine	1-60%
Sustained-release material	0-25%
Disintegrating agent	0-6%
Binder	0~5%
Filler	5-60%
Lubricant	0.1-0.5%
Glidant	0.1-0.5%

[0021] The granules II in the invention preferably include following ingredients with percentages by weight:

Medicine	1~90%
Sustained-release material	0~40%
Disintegrating agent	0~6%
Binder	0~5%
Filler	5~90%
Lubricant	0.1~0.5%
Glidant	0.1~0.5%

[0022] The double-layer table of the invention also includes the coating preferably, wherein the coating comprises following components with percentage:

Hydroxypropylmethyl-cellose E5	40-60%
Polysorbate 80	20-35%
Talcum powder	6-12%
Titanium dioxide	2-6%

[0023] The following refers to an example of the double-layer tablet prepared in accordance with the solution of the invention and combining with the analgesic quick release/sustained release:

A analgesic double-layer controlled-release tablet comprises a quick release layer and a sustained-release layer; both quick release layer and sustained-release layer comprise the active ingredients having analgesic effect and pharmaceutical excipients, wherein said sustained-release layer has holes in which the granules of medicine of the quick release layer are filled; the diameters of the holes are 2-6mm.

[0024] Said active ingredients having analgesic effect refer to one or more selected from aspirin, magnesium salicylate, sodium salicylate, choline magnesium trisalicylate, diflunisal, salsalate, ibuprofen, indometacin, flurbiprofen, phenoxy ibuprofen naproxen, nabumetone, piroxicam, phenylbutazone, diclofenac sodium, fenoprofen, ketoprofen, ketorolac, tetraclofenamic acid, sulindac, tolmetin, anisodamine, and the derivatives of the above-mentioned compounds; said quick release layer and said sustained-release layer include the identical or different active ingredients; said pharmaceutical excipients refer to one or more selected from filler, disintegrating agent, lubricant, binder and glidant.

[0025] All kinds of pharmaceutical excipients listed below can be selected, but are not limited to the scope of the invention. Actually, all kinds of pharmaceutical excipients used in the invention can be the pharmaceutical excipients which are used by the technicians in this field generally in accordance with actual need, for example, said filler refers to one or more selected from lactose monohydrate, lactose, pregelatinized starch and microcrystalline cellulose; said disintegrating agent refers to one or more selected from sodium carboxymethyl cellulose, croscarmellose sodium, sodium carboxymethyl starch and polyvinylpyrrolidone; said lubricant is one or more selected from stearic acid, magnesium stearate and talcum powder; said binder is one or more selected from polyvidone, hydroxy propyl cellulose and hydroxypropylmethyl-cellose; and said glidant is silicon dioxide. Moreover, the sustained-release layer in the analgesic double-layer tablet also comprises the sustained-release material.

[0026] Said sustained-release material is one or more selected from hydroxypropylmethyl-cellose, ethylcellulose and hydroxy propyl cellulose; and said sustained-release layer comprises the following component by weight:

Analgesic medicine 40-60%	
Sustained-release material	25~35%
Filler	13~24%
Lubricant	0.5 or 1%
Glidant	0.5 or 1%;

[0027] Said quick release layer and the quick release granule comprise the following component by weight:

Analgesic medicine 30-60%	
Disintegrating agent	3~6%
Filler	30~60.5%
Binder	0~5%
Lubricant	0.5 or 1%
Glidant	0.5 or 1%.

[0028] Said double-layer controlled-release tablet also comprises the coating which includes the following component by weight:

Hydroxypropylmethyl-cellose E5	30%
--------------------------------	-----

Polysorbate 80	14%
Talcum powder	5%
Titanium dioxide	2%
Water	Appropriate

[0029] A method of preparing the analgesic double-layer controlled-release layer comprises the steps of:

1. 1) Preparing the sustained-release granules after mixing the analgesic medicine, the sustained-release material and the pharmaceutical excipients; and preparing the quick release granules after mixing the analgesic medicine and the pharmaceutical excipients;
2. 2) Pressing the sustained-release granules into the sustained-release layer having holes, and putting the sustained-release layer into a punching die of a tablet press; implementing the second tableting after filling the quick release granules to form the double-layer tablet composed of the quick release layer and the sustained-release layer, wherein the quick release granules are filled in the holes of the sustained-release layer.
3. 3) Implementing coating.

[0030] The following refers to one example of the double-layer tablet prepared in accordance with the solution of the invention and combining with the hypnotic quick release/sustained release:

Said hypnotic medicine is one of zolpidem, zaleplon, zopiclone, triazolam, midazolam, flurazepam, diazepam, chlordiazepoxide, nitrazepam, estazolam, alprazolam or lorazepam, and the derivatives of the above-mentioned compounds; said sustained-release material is one or more selected from hydroxypropylmethyl-cellulose, ethycellulose and hydroxy propyl cellulose; and said pharmaceutical excipients is one or more selected from filler, disintegrating agent, lubricant, binder and glidant.

[0031] Said filler is one or more selected from lactose monohydrate, lactose, pregelatinized starch and microcrystalline cellulose; said disintegrating agent refers to one or more selected from sodium carboxymethyl cellulose, croscarmellose sodium, sodium carboxymethyl starch and polyvinylpyrrolidone; said lubricant is one or more selected from stearic acid, magnesium stearate and talcum powder; said binder is one or more selected from polyvidone, hydroxy propyl cellulose and hydroxypropylmethyl-cellulose; and said glidant is silicon dioxide.

[0032] Said sustained-release layer in the double-layer controlled-release tablet comprises following components by weight:

Hypnotic medicine	8-12%
Sustained-release material	30-35%
Filler	52-61%
Lubricant	0.5 or 1%
Glidant	0.5 or 1%;

[0033] Said quick release layer and the quick release granules comprise following components by weight:

Hypnotic medicine	5~10%
Disintegrating agent	2~6%
Filler	80.5~91%
Binder	0~5%
Lubricant	0.5 or 1%
Glidant	0.5 or 1%

[0034] The method of preparing said hypnotic double-layer controlled-release tablet comprises steps of

1. 1) Preparing the sustained-release granules after mixing the hypnotic medicine, the sustained-release material and the pharmaceutical excipients; and preparing the quick release granules after mixing the hypnotic medicine and the pharmaceutical excipients;
2. 2) Pressing the sustained-release granules into the sustained-release layer having holes, and putting the sustained-release layer into the punching die of the tablet press; implementing the second tableting after filling the quick release granules to form the double-layer tablet composed of the quick release layer and the sustained-release layer, wherein the quick release granules are filled in the holes of the sustained-release layer.
3. 3) Implementing coating, wherein the formula of the coating layer and the preparation method are the same as those of the analgesic double-layer controlled-release tablet.

[0035] The invention has the technical effects as follows:

1) Nice physical stability

[0036] One layer of the double-layer tablet has holes which will be filled by the components of the other layer during preparation of tablets; therefore, the two layers of tablets are combined together tightly, and cannot be separated easily during storage and transportation.

2) Effectiveness and safety of the medicine improved

[0037] It is detected by leaching test that the time limit of disintegration of the double-layer controlled-release tablet is 10-30s; the sustained-release layer shows the zero order release mode, that is, approximately constant release of medicine, which can facilitate implementation of keeping the stable plasma concentration of the medicine in patient; thus, the effectiveness and the safety of the medicine taken by the patient are improved greatly.

Description of figures

[0038]

Figure 1 is the structure diagram of a double-layer tablet having one hole.

Figure 2 is the structure diagram of the double-layer tablet having two holes.

Figure 3 is the structure diagram of the double-layer tablet having three holes.

In Figure 1, Figure 2 and Figure 3, 1 indicates the tablet I, 2 indicates the tablet II, and 3 indicates the hole.

Figure 4 is the leaching curve of the double-layer tablet in hypnotic embodiment 1 (wherein four curves indicate the table I-no hole available, table I having holes with diameters 3mm, table I having holes with diameters 4mm and table I having holes with diameters 6mm, respectively)

Figure 5 indicates comparison of three leaching curves of the double-layer tablet having sustained-release layer with holes (diameters 4mm and 6mm) and the sustained-release layer with no hole available in hypnotic embodiment 1.

Figure 6 indicates comparison of three leaching curves of the double-layer tablet having sustained-release layer with holes (diameters 4mm and 6mm) and the sustained-release layer with no hole available and only quick release layer in hypnotic embodiment 2.

Figure 7 indicates comparison of three leaching curves of the double-layer tablet having sustained-release layer with holes (diameters 4mm and 6mm) and the sustained-release layer with no hole available in hypnotic embodiment 3.

Figure 8 indicates comparison of two leaching curves of the double-layer tablet having sustained-release layer with holes (diameters 4mm and 6mm) and the sustained-release layer with no hole available in hypnotic embodiment 4.

Figure 9 is an in vitro release curve of the double-layer controlled-release tablet in analgesic embodiment 1.

Figure 10 is the in vitro release curve of the double-layer controlled-release tablet in analgesic embodiment 2.

Figure 11 is the leaching curve of the double-layer controlled-release tablet in analgesic embodiment 3.

Figure 12 is the leaching curve of the double-layer controlled-release tablet in analgesic embodiment 4.

implementations

[0039] The double-layer controlled-release tablet in analgesic embodiments 1-5 is composed of a quick release layer and a sustained-release layer. See Table 1 below for two layers of granules for tableting the double-layer tablets:

Table 1

Prescriptions of the double-layer controlled-release tablet in all embodiments (1000 tablets, g)					
Component	Embodiment 1	Embodiment 2	Embodiment 3	Embodiment 4	Embodiment 5
Sustained-release granules					
Ibuprofen	250	250		300	200
Ketoprofen					
Naproxen			300		
Hydroxypropylmethyl-cellulose K1001v	50	100	0	25	150
Hydroxypropylmethyl-cellulose K4M	100	50	125	100	25
Lactose monohydrate	95	95	65	70	120
Silicon dioxide	2.5	2.5	5	2.5	2.5
Magnesium stearate	2.5	2.5	5	2.5	2.5
Total of sustained-release part	500	500	500	500	500
Sustained-release granules					
Acetaminophen					150
Ibuprofen				150	
Ketoprofen	75				
Naproxen		100	150		
Lactose	87.5	62.5	50	25	75
Microcrystalline cellulose	63.75	60	40	50	0
Polyvidone	8.75	0	0	0	10
Hydroxypropyl-cellulose -HF	0	12.5	0	7.5	0
Croscarmellose sodium	10	10	7.5	15	12.5
Silicon dioxide	2.5	2.5	1.25	1.25	1.25
Magnesium stearate	2.5	2.5	1.25	1.25	1.25
Total of quick release part	250	250	250	250	250

[0040] The coating can be applied to said double-layer tablet and the coating comprises following components:

Hydroxypropylmethyl-cellulose E5	30
Polysorbate 80	14
Talcum powder	5

Titanium dioxide	2
80% alcohol/aqueous solution	Appropriate

[0041] The follows explains the preparation method of the double-layer controlled-release tablet of analgesic embodiments 1-5.

Analgesic embodiment 1

1. Preparation of sustained-release granules:

[0042]

1. (1) Weigh ibuprofen sifted by a 60-mesh screen in accordance with the formula, hydroxypropylmethyl-cellulose K100LV, K4M and lactose, mix them uniformly; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and transfer the materials mixed to a wet type granulator.
2. (2) Prepare the ethanol solution with concentration of 70% and prepare the soft material for the mixture in the first step.
3. (3) Implement granulation for the soft material prepared by using a 24-mesh screen.
4. (4) Dry and sifting the granules.
5. (5) Acquiring the sustained-release granules for preparing the sustained-release layer.

2. Preparation of quick release granules:

[0043]

1. (1) Mix ketoprofen, lactose, microcrystalline cellulose, polyvidone in accordance with the formula and screen the mixture by using the 60-mesh screen; then add silicon dioxide and magnesium stearate, which are 1/2 of the dosages in the formula; and mix them uniformly in a mixer.
2. (2) Prepare the ethanol solution with concentration of 80% and prepare the soft material for the mixture in the first step
3. (3) Implement granulation for the soft material prepared by using a 24-mesh screen.
4. (4) Dry and sifting the granules.
5. (5) Add croscarmellose sodium in accordance with the extra-addition method and mix croscarmellose sodium and dry granules uniformly.
6. (6) Acquiring the quick release granules, which for forming the quick release layer and filling the holes of the sustained-release layer.

3. Preparation of double-layer controlled-release tablet:

[0044]

1. (1) Press the granules of the sustained-release layer, the silicon dioxide and magnesium stearate left into the sustained-release tablets with holes in the middle, wherein the diameters are 3mm, 4mm and 6mm, respectively. Moreover, press the sustained-release tablets without hole.
2. (2) Put the sustained-release tablets into a punching die of a tablet press and fill the granules of quick-release layer; implement the second compressing in the way of shallow concave punching to form the double-layer tablets.
3. (3) Disperse hydroxypropylmethyl-cellulose E5 in accordance with the formula in the ethanol with concentration of 80%; add polysorbate 80 after swelling; stir the mixture until the materials are dissolved completely and add titanium dioxide and talcum powder; then stir them uniformly and filter the mixture as the coating liquid.
4. (4) Implement coating for the double-layer tablets , increasing the weight of each tablet for 5%, then dry and solidify the tablets.

[0045] The sustained-release layer should be pressed into the sustained-release tablets without hole, with holes having diameters 3mm, with holes having diameters 4mm and with holes having diameters 6mm in this embodiment to implement the leaching test, in order to investigate effect of the hole diameter of the sustained-release layer for leaching, wherein the greater the hole diameter of the sustained-release layer is, the faster the leaching speed would be.

[0046] The double-layer tablet prepared is applied to leaching test in order to investigate the sustained-release effect after quick release, wherein the quick release layer has been leached completely when sampling and detecting after 0.5h, see Figure 9 for the result. The zero-order release effect is shown in the sustained-release layer, that is, the medicine is approximately released at constant speed. Moreover, the in vitro release at constant speed is useful for keeping the stable plasma concentration of the patient; and it is worth mentioning that the greater the diameter of the hole of the sustained-release layer, the faster the release speed would be.

Analgesic embodiment 2

1. Preparation of sustained-release granules:

[0047]

1. (1) Weigh ibuprofen sifted by a 60-mesh screen in accordance with the formula, hydroxypropylmethyl-cellulose K100LV, K4M and lactose, mix them uniformly; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and transfer the materials mixed to a wet type granulator.
2. (2) Prepare the ethanol solution with concentration of 75% and prepare the soft material for the mixture in the first step.
3. (3) Implement granulation for the soft material prepared by using a 24-mesh screen.
4. (4) Dry and sifting the granules.

5. (5) Acquiring the sustained-release granules for preparing the sustained-release layer.

2. Preparation of quick release granules:

[0048]

1. (1) Mix naproxen, lactose, microcrystalline cellulose and hydroxy propyl cellulose-HF and sodium carboxymethylcellulose in accordance with the formula, screen by using the 60-mesh screen; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and mix them uniformly in the mixer.
2. (2) Prepare the ethanol solution with concentration of 90% and prepare the soft material for the mixture in the first step
3. (3) Implement granulation for the soft material prepared by using a 24-mesh screen.
4. (4) Dry and sifting the granules.
5. (5) Acquiring the quick release granules, which for forming the quick release layer and filling the holes of the sustained-release layer.

3. Preparation of double-layer controlled-release tablet:

[0049]

1. (1) Press the granules of the sustained-release layer, the silicon dioxide and magnesium stearate left into the sustained-release tablets with holes in the middle, wherein the diameters are 4mm and 6mm, respectively.
2. (2) Put the sustained-release tablets into a punching die of a tablet press and fill the granules of quick-release layer; implement the second compressing in the way of shallow concave punching to form the double-layer tablets.
3. (3) Disperse hydroxypropylmethyl-cellulose E5 in accordance with the formula in the ethanol with concentration of 80%; add polysorbate 80 after swelling; stir the mixture until the materials are dissolved completely and add titanium dioxide and talcum powder; then stir them uniformly and filter the mixture as the coating liquid.
4. (4) Implement coating for the double-layer tablets, increasing the weight of each tablet for 5%, then dry and solidify the tablets.

[0050] Sampling and detection are implemented within 0.25h in order to investigate the disintegrating speed of the quick release layer of the double-layer tablet and the sustained-release effect after quick release of the double-layer tablet, wherein the quick release layer is leached more than 85%; and see Figure 10 for the result. The zero-order release effect is shown in the sustained-release layer, that is, the medicine is approximately released at constant speed. Moreover, the in vitro release at constant speed is useful for keeping the stable plasma concentration of the patient; and it is worth mentioning that the greater the diameter of the hole of the sustained-release layer, the faster the release speed

would be.

Analgesic embodiment 3

1. Preparation of sustained-release granules:

[0051]

1. (1) Weigh naproxen sifted by a 60-mesh screen in accordance with the formula, hydroxypropylmethyl-cellulose K100LV, K4M and lactose, mix them uniformly; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and transfer the materials mixed to a wet type granulator.
2. (2) Prepare the ethanol solution with concentration of 80% and prepare the soft material for the mixture in the first step.
3. (3) Implement granulation for the soft material prepared by using a 24-mesh screen.
4. (4) Dry and sifting the granules.
5. (5) Acquiring the sustained-release granules for preparing the sustained-release layer.

2. Preparation of quick release granules:

[0052]

1. (1) Mix naproxen, lactose, microcrystalline cellulose and hydroxyl propyl cellulose-HF in accordance with the formula and screen the sodium carboxymethylcellulose by using the 60-mesh screen; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and mix them uniformly in the mixer.
2. (2) Prepare the ethanol solution with concentration of 90% and prepare the soft material for the mixture in the first step
3. (3) Implement granulation for the soft material prepared by using a 24-mesh screen.
4. (4) Dry and sifting the granules.
5. (5) Acquiring the quick release granules, which for forming the quick release layer and filling the holes of the sustained-release layer.

3. Preparation of double-layer controlled-release tablet:

[0053]

1. (1) Press the granules of the sustained-release layer, the silicon dioxide and magnesium stearate left into the sustained-release tablets with holes in the middle, wherein the diameters are 4mm and 6mm, respectively. Moreover, press the sustained-release tablets without hole.

2. (2) Put the sustained-release tablets into a punching die of a tablet press and fill the granules of quick-release layer; implement the second compressing in the way of shallow concave punching to form the double-layer tablets.
3. (3) Disperse hydroxypropylmethyl-cellulose E5 in accordance with the formula in the ethanol with concentration of 80%; add polysorbate 80 after swelling; stir the mixture until the materials are dissolved completely and add titanium dioxide and talcum powder; then stir them uniformly and filter the mixture as the coating liquid.
4. (4) Implement coating for the double-layer tablets, increasing the weight of each tablet for 5%, then dry and solidify the tablets.

[0054] The leaching tests are implemented for the double-layer tablet prepared in order to investigate the sustained-release effect after quick release of the tablet. Seen from the leaching curve, the quick release effect and sustained-release effect are significant; and see the Figure 11 for the result.

Analgesic embodiment 4

1. Preparation of sustained-release granules:

[0055]

1. (1) Weigh ibuprofen sifted by a 60-mesh screen in accordance with the formula, hydroxypropylmethyl-cellulose K100LV, K4M and lactose, mix them uniformly; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and transfer the materials mixed to a wet type granulator.
2. (2) Prepare the ethanol solution with concentration of 70% and prepare the soft material for the mixture in the first step.
3. (3) Implement granulation for the soft material prepared by using a 24-mesh screen.
4. (4) Dry and sifting the granules.
5. (5) Acquiring the sustained-release granules for preparing the sustained-release layer.

2. Preparation of quick release granules:

[0056]

1. (1) Mix ibuprofen, lactose, microcrystalline cellulose and hydroxy propyl cellulose-HF in accordance with the formula and screen the sodium carboxymethylcellulose by using the 60-mesh screen; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and mix them uniformly in the mixer
2. (2) Prepare the ethanol solution with concentration of 90% and prepare the soft material for the mixture in the first step
3. (3) Implement granulation for the soft material prepared by using a 24-mesh screen.

4. (4) Dry and sifting the granules.
5. (5) Acquiring the quick release granules, which for forming the quick release layer and filling the holes of the sustained-release layer.

3. Preparation of double-layer controlled-release tablet:

[0057]

1. (1) Press the granules of the sustained-release layer, the silicon dioxide and magnesium stearate left into the sustained-release tablets with holes in the middle, wherein the diameters are 4mm and 6mm, respectively. Moreover, press the sustained-release tablets without hole.
2. (2) Put the sustained-release tablets into a punching die of a tablet press and fill the granules of quick-release layer; implement the second compressing in the way of shallow concave punching to form the double-layer tablets.
3. (3) Disperse hydroxyl propylmethyl-cellose E5 in accordance with the formula in the ethanol with concentration of 80%; add polysorbate 80 after swelling; stir the mixture until the materials are dissolved completely and add titanium dioxide and talcum powder; then stir them uniformly and filter the mixture as the coating liquid.
4. (4) Implement coating for the double-layer tablets to increase the weight of each tablet for 5%, then dry and solidify the tablets.

[0058] The single-layer quick release tablet and the double-layer tablets are prepared to implement the leaching tests in order to investigate the disintegrating speed of the quick release layer of the medicine and the effect of the hole diameter of the sustained-release layer to the sustained-release effect, wherein the quick release layer has been leached more than 90% when sampling and detecting after 0.5h. Moreover, the linear effect of the in vitro leaching curve of the sustained-release layer having hole diameter of 4mm is superior to the one of the in vitro leaching curve of the sustained-release layer having hole diameter of 6mm in this embodiment; and see Figure 12 for the result.

Analgesic embodiment 5

[0059] The preparation method is the same as that in the embodiment 3, but the ingredients used are different, seeing the Table 1

[0060] The following shall explain the stability test of the analgesic double-layer tablet in the invention:

Test 1 Friability test

[0061] The inventor selected 100 double-layer tablets with the sustained-release layers without hole, 100 double-layer tablets with the sustained-release layers having holes with diameters of 3mm, 4mm or 6mm respectively to implement the friability testing and comparison study by using the friability tester,

wherein the raw materials, the pharmaceutical excipients and the proportion were implemented in accordance with the embodiment 1; and see Table 2 for the result.

Table 2 Result of friability testing and comparison of double-layer tablet

Type of the testing double-layer tablet		Quantity of tablets subjected to breaking in 100 tablets	
Number of holes	Diameter of hole	Number of tablets broken	Number of tablets laminated
0	-	20	11
1	6mm	9	0
1	4mm	1	0
1	3mm	1	0

[0062] It was proved from the result of said friability test that:

- 1) The occurrence rate of breaking of the double-layer tablets having holes in the invention was reduced greatly, and no lamination occurred.
- 2) The size of the diameter of the hole plays an active role in preventing lamination; but the degree of breaking of the double-layer tablet would be affected when the diameter of the hole is great.

Test 2 Effect of high humidity to stability of medicine

[0063] 20 double-layer tablets were selected from the embodiment 4 respectively, and were placed in the stability testing box to observe after 24h, wherein the humidity was set at RH95%; and the temperature was set at 25°C. See Table 3 for the result.

Table 3 Effect of high humidity to stability of medicine

Formula of the double-layer tablet	Type of testing double-layer tablet		Number of tablets subjected to lamination among 100 tablets
	Number of holes	Diameter of hole	
In accordance with the embodiment 4	0	--	17
	1	6mm	0
	1	4mm	0
	1	3mm	0

[0064] The result indicated that the double-layer tablet of the invention still had nice stability and was not subjected to lamination under the condition that the ambient humidity was great, the swelling degree of the quick release layer was greater than that of the sustained-release layer and the double-layer tablet could not be separated easily although the quick release layer in the prescription included the super disintegrating agent, and the disintegrating agent had strong hygroscopicity.

Test 3 Effect of number of holes in double-layer tablet to stability

[0065] The double-layer tablets with sustained-release layers having no hole and the double-layer tablets having sustained-release layers with one, two and three holes were pressed in accordance with the formula in embodiment 3 (the quick release layer included only the active ingredients and excipient, but did not include the binder); 20 tablets were selected respectively to implement the friability tests in the friability tester and carry out comparison study; and see Table 4 for the result.

Table 4 Effect comparison of number of holes to stability

Type of testing double-layer tablet		Number of tablets subjected to lamination among 100 tablets	
Formula	Number of holes in the sustained-release layer	Number of tablets broken	Number of tablets laminated
In accordance with the embodiment 3	0	15	9
	1	6	0
	2	2	0
	3	1	0

[0066] It was proved by said friability test that:

1. The occurrence rate of breaking of the double-layer tablets having holes was reduced greatly, and no lamination occurred.
2. The number of the tablets broken would be reduced along increasing number of the holes.

[0067] See Table 5 for the prescription of the double-layer controlled-release tablet in hypnotic embodiments 1-5.

Table 5

Component	Embodiment 1	Embodiment 2	Embodiment 3	Embodiment 4	Embodiment 5
Sustained-release granules					
Zolpidem tartrate	24	24	/	/	/
Zopiclone	/	/	30	/	36/
Zaleplon	/	/	/	30	
Hydroxypropylmethylcellulose K1001v	30	60	105	0	90
Hydroxypropylmethylcellulose K4M	60	30	0	105	15
Lactose monohydrate	183	183	159	159	156
Silicon dioxide	1.5	1.5	3	3	1.5
Magnesium stearate	1.5	1.5	3	3	1.5
Total of sustained-release part	300	300	300	300	300

Quick release granules					
Zolpidem tartrate	8	8	/	/	/
Zopiclone	/	/	5	/	10
Zaleplon	/	/	/	5	/
Lactose	57	55.5	60	60	55
Microcrystalline cellulose	25.5	25.5	31	25	25.5
Polyvidone	3.5	0	0	0	3.5
Hydroxypropylmethyl-cellulose -HF	0	5	0	3	0
Croscarmellose sodium	4	4	2	6	5
Silicon dioxide	1	1	1	0.5	0.5
Magnesium stearate	1	1	1	0.5	0.5
Total of quick release part	100	100	100	100	100

[0068] The formula of the coating of the double-layer controlled-release tablet in hypnotic embodiments 1-5 is the same as that in said hypnotic embodiment.

[0069] The preparation method comprises steps of:

Hypnotic embodiment 1

1. Preparation of sustained-release granules:

[0070]

① Weigh zolpidem tartrate, hydroxypropylmethyl-cellulose K100LV, K4M and lactose monohydrate sifted by the 60-mesh screen in accordance with the formula and mix them uniformly; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and transfer the materials mixed to the wet type granulator.

② Prepare the ethanol solution with concentration of 70% and prepare the soft material for the mixture in the first step.

③ Implement granulation for the soft material prepared by using a 24-mesh screen.

④ Dry and sifting the granules.

⑤ Acquiring the sustained-release granules for preparing the sustained-release layer.

2. Preparation of quick release granules:**[0071]**

- ① Mix zolpidem tartrate, lactose, microcrystalline cellulose and polyvidone in accordance with the formula and screen the mixture by using the 60-mesh screen; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and mix them uniformly in the mixer.
- ② Prepare the ethanol solution with concentration of 80% and prepare the soft material for the mixture in the first step
- ③ Implement granulation for the soft material prepared by using a 24-mesh screen.
- ④ Dry and sifting the granules.
- ⑤ Add croscarmellose sodium and dry granules in accordance with the extra-addition method and mix them uniformly.
- ⑥ Acquiring the quick release granules which for forming the quick release layer and filling the holes of the sustained-release layer.

3. Preparation of double-layer controlled-release tablet:**[0072]**

- ① Press the granules of the sustained-release layer, the silicon dioxide and magnesium stearate left into the sustained-release tablets with holes in the middle, wherein the diameters are 3mm, 4mm and 6mm, respectively. Moreover, press the sustained-release tablets without hole.
- ② Put the sustained-release tablets into a punching die of a tablet press and fill the granules of quick-release layer; implement the second compressing in the way of shallow concave punching to form the double-layer tablets.
- ③ Disperse hydroxypropylmethyl-cellulose E5 in accordance with the formula in the ethanol with concentration of 80%; add polysorbate 80 after swelling; stir the mixture until the materials are dissolved completely and add titanium dioxide and talcum powder; then stir them uniformly and filter the mixture as the coating liquid.
- ④ Implement coating for the double-layer tablets to increase the weight of each tablet for 5%, then dry and solidify the tablets.

[0073] The sustained-release layer should be pressed into the sustained-release tablets without hole, with holes having diameters 3mm, with holes having diameters 4mm and with holes having diameters 6mm in this embodiment to implement the leaching test, in order to investigate effect of the hole diameter of the sustained-release layer to leaching, wherein the greater the hole diameter of the

sustained-release layer is, the faster the leaching speed would be. Moreover, see Figure 4 for the result.

[0074] The double-layer tablet prepared is applied to leaching test in order to investigate the sustained-release effect after quick release, wherein the quick release layer has been leached completely when sampling and detecting after 0.5h, see Figure 5 for the result. See from the figure, the hole of the sustained-released layer can facilitate release at constant speed.

Hypnotic embodiment 2

1. Preparation of sustained-release granules:

[0075]

- ① Weigh zolpidem tartrate, hydroxypropylmethyl-cellulose K100LV, K4M and lactose monohydrate sifted by the 60-mesh screen in accordance with the formula and mix them uniformly; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and transfer the materials mixed to the wet type granulator.
- ② Prepare the ethanol solution with concentration of 75% and prepare the soft material for the mixture in the first step
- ③ Implement granulation for the soft material prepared by using a 24-mesh screen.
- ④ Dry and sifting the granules.
- ⑤ Acquiring the sustained-release granules for preparing the sustained-release layer.

2. Preparation of quick release granules:

[0076]

- ① Mix zolpidem tartrate, lactose, microcrystalline cellulose and hydroxy propyl cellulose-HF in accordance with the formula and screen the sodium carboxymethylcellulose by using the 60-mesh screen; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and mix them uniformly in the mixer.
- ② Prepare the ethanol solution with concentration of 90% and prepare the soft material for the mixture in the first step
- ③ Implement granulation for the soft material prepared by using a 24-mesh screen.
- ④ Dry and sifting the granules.
- ⑤ Acquiring the quick release granules which for forming the quick release layer and filling the holes of the sustained-release layer.

3. Preparation of double-layer controlled-release tablet:

[0077]

- ① Press the granules of the sustained-release layer, the silicon dioxide and magnesium stearate left into the sustained-release tablets with holes in the middle, wherein the diameters are 4mm and 6mm, respectively. Moreover, press the sustained-release tablets without hole.
- ② Put the sustained-release tablets into a punching die of a tablet press and fill the granules of quick-release layer; implement the second compressing in the way of shallow concave punching to form the double-layer tablets.
- ③ Disperse hydroxypropylmethyl-cellulose E5 in accordance with the formula in the ethanol with concentration of 80%; add polysorbate 80 after swelling; stir the mixture until the materials are dissolved completely and add titanium dioxide and talcum powder; then stir them uniformly and filter the mixture as the coating liquid.
- ④ Implement coating for the double-layer tablets to increase the weight of each tablet for 5%, then dry and solidify the tablets.

[0078] The single-layer quick release tablet and the double-layer tablets are prepared to implement the leaching tests in order to investigate the disintegrating speed of the quick release layer of the medicine and the sustained-release effect after quick release of the double-layer tablet, wherein the quick release layer has been leached more than 90% when sampling and detecting after 0.25h. Moreover, see Figure 6 for the result.

Hypnotic embodiment 3

1. Preparation of sustained-release granules:

[0079]

- ① Weigh zopiclone, hydroxypropylmethyl-cellulose K100LV, K4M and lactose sifted by the 60-mesh screen in accordance with the formula and mix them uniformly; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and transfer the materials mixed to the wet type granulator.
- ② Prepare the ethanol solution with concentration of 80% and prepare the soft material for the mixture in the first step
- ③ Implement granulation for the soft material prepared by using a 24-mesh screen.

④ Dry and sifting the granules.

⑤ (5) Acquiring the sustained-release granules for preparing the sustained-release layer.

2. Preparation of quick release granules:

[0080]

① Mix zopiclone, lactose, microcrystalline cellulose and hydroxy propyl cellulose-HF in accordance with the formula and screen the sodium carboxymethylcellulose by using the 60-mesh screen; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and mix them uniformly in the mixer.

② Prepare the ethanol solution with concentration of 90% and prepare the soft material for the mixture in the first step

③ Implement granulation for the soft material prepared by using a 24-mesh screen.

④ Dry and sifting the granules.

⑤ Form the quick release layer and fill the holes of the sustained-release layer after acquiring the

3. Preparation of double-layer controlled-release tablet:

[0081]

① Press the granules of the sustained-release layer, the silicon dioxide and magnesium stearate left into the sustained-release tablets with holes in the middle, wherein the diameters are 4mm and 6mm, respectively. Moreover, press the sustained-release tablets without hole.

② Put the sustained-release tablets into a punching die of a tablet press and fill the granules of quick-release layer; implement the second compressing in the way of shallow concave punching to form the double-layer tablets.

③ Disperse hydroxypropylmethyl-cellose E5 in accordance with the formula in the ethanol with concentration of 80%; add polysorbate 80 after swelling; stir the mixture until the materials are dissolved completely and add titanium dioxide and talcum powder; then stir them uniformly and filter the mixture as the coating liquid.

④ Implement coating for the double-layer tablets to increase the weight of each tablet for 5%, then dry and solidify the tablets.

[0082] The double-layer tablets prepared are applied to leaching test in order to investigate the sustained-release effect after quick release of the tablet; the quick release layer has been leached

completely when sampling and detecting after 0.5h. Moreover, see Figure 7 for the result.

Hypnotic embodiment 4

1. Preparation of sustained-release granules:

[0083]

- ① Weigh zaleplon, hydroxypropylmethyl-cellulose K100LV, K4M and lactose sifted by the 60-mesh screen in accordance with the formula and mix them uniformly; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and transfer the materials mixed to the wet type granulator.
- ② Prepare the ethanol solution with concentration of 80% and prepare the soft material for the mixture in the first step
- ③ Implement granulation for the soft material prepared by using a 24-mesh screen.
- ④ Dry and sifting the granules.
- ④ (5) Acquiring the sustained-release granules for preparing the sustained-release layer.

2. Preparation of quick release granules:

[0084]

- ① Mix zaleplon, lactose, microcrystalline cellulose and hydroxy propyl cellulose-HF in accordance with the formula and screen the sodium carboxymethylcellulose by using the 60-mesh screen; then add silicon dioxide and magnesium stearate which are 1/2 of the dosages in the formula; and mix them uniformly in the mixer.
- ② Prepare the ethanol solution with concentration of 90% and prepare the soft material for the mixture in the first step
- ③ Implement granulation for the soft material prepared by using a 24-mesh screen.
- ④ Dry and sifting the granules.
- ⑤ Form the quick release layer and fill the holes of the sustained-release layer after acquiring the

3. Preparation of double-layer controlled-release tablet:

[0085]

① Press the granules of the sustained-release layer, the silicon dioxide and magnesium stearate left into the sustained-release tablets with holes in the middle, wherein the diameters are 4mm and 6mm, respectively. Moreover, press the sustained-release tablets without hole.

② Put the sustained-release tablets into a punching die of a tablet press and fill the granules of quick-release layer; implement the second compressing in the way of shallow concave punching to form the double-layer tablets.

③ Disperse hydroxypropylmethyl-cellulose E5 in accordance with the formula in the ethanol with concentration of 80%; add polysorbate 80 after swelling; stir the mixture until the materials are dissolved completely and add titanium dioxide and talcum powder; then stir them uniformly and filter the mixture as the coating liquid.

④ Implement coating for the double-layer tablets to increase the weight of each tablet for 5%, then dry and solidify the tablets.

[0086] The single-layer quick release tablet and the double-layer tablets are prepared to implement the leaching tests in order to investigate the disintegrating speed of the quick release layer of the medicine and the sustained-release effect after quick release of the double-layer tablet, wherein the quick release layer has been leached more than 90% when sampling and detecting after 0.25h. Moreover, see Figure 8 for the result.

Hypnotic embodiment 5

[0087] The preparation method is the same as that in the embodiment 3, but the ingredients to be used are different, seeing the Table 1

Friability test and stability test of hypnotic tablet

[0088] 100 double-layer tablets having sustained-release layer without hole and 100 double-layer tablets having sustained-release layer with holes of different diameters are prepared respectively in accordance with the formula and the method in the embodiment 1 in order to implement friability testing and comparison study in the friability tester respectively; and see Table 6 for the result.

Table 6

Testing object		Number of tablets broken	Number of tablets laminated
Double-layer tablet in accordance with the formula in embodiment 1	Drilling condition of sustained-release layer		
	Without hole	12	8
	Hole with diameter of 6mm	4	0
	Hole with diameter of 4mm	1	0

Hole with diameter of 3mm	1	0
---------------------------	---	---

[0089] The result indicates that:

1. 1. The double-layer tablets with sustained-release layer having holes are not subjected to lamination.
2. 2. The tablets having small diameters would less likely to be broken.

[0090] 20 double-layer tablets with sustained-release layer having no hole and 20 double-layer tablets with sustained-release layers having holes of different diameters were prepared in accordance with the formula and method in the embodiment 4 respectively, and were placed in the stability testing box, wherein the humidity was set at RH95%; and the temperature was set at 25°C.

[0091] Observe the double-layer tablets after 24h, and see Table 7 for the result.

Table 7

Testing object		Number of tablets laminated
Double-layer tablets in accordance with the formula in embodiment 4	Drilling condition of sustained-release layer	
	Without hole	17
	Hole with diameter of 6mm	0
	Hole with diameter of 4mm	0
	Hole with diameter of 3mm	0

[0092] The quick release layer of the formula includes the super disintegrating agent having strong hygroscopicity; the degree of swelling of the quick release layer is greater than that of the sustained-release layer, and upper layer and the lower layer of the double-layer tablet without hole may be separated from each other when the ambient humidity is great. The quick release granules in the hole may swell after absorbing the moisture when the sustained-release layer has the hole, and the quick release layer may be combined with the sustained-release layer more tightly. Therefore, the double-layer tablet having hole is not subjected to separation during the test.

[0093] The result indicated that the double-layer tablet of the invention could keep the stability in the high-temperature and high-humidity environment.

[0094] 20 double-layer tablets with sustained-release layer having no hole and 20 double-layer tablets with sustained-release layers having different number of holes were prepared in accordance with the formula and method in the embodiment 3 respectively, and were placed in the friability tester to carry out the friability testing and comparison study, wherein the quick release layer included only the active ingredients and the excipient, but did not include the binder. Moreover, see Table 8 for the result.

Table 8

Testing object	
----------------	--

Double-layer tablets in accordance with the formula in embodiment 3	Drilling condition of sustained-release layer	Number of tablets broken	Number of tablets laminated
	0	15	9
	1	6	0
	2	2	0
	3	1	0

[0095] The result indicates that:

- 1 The double-layer tablets with sustained-release layer having holes are not subjected to lamination.
2. The double-layer tablets having more holes would less likely to be broken.

[0096] Seen from the above-mentioned result, the double-layer tablet prepared in the invention has the physical stability superior to the common double-layer tablet, and is more useful for storage and transportation; further, the medicine in the double-layer tablet can be released approximately at constant speed.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [GB2488731A \[0005\]](#)
- [EP2380562A1 \[0005\]](#)
- [US2013243856A1 \[0005\]](#)
- [CN102485219A \[0005\]](#)
- [EP2471521A \[0005\]](#)
- [CN103284974A \[0005\]](#)

Patentkrav

1. Fremgangsmåde til fremstilling af en dobbeltlagstablet, omfattende trinnene:

5 1) fremstilling af henholdsvis en bestanddel I og en bestanddel II, hvor de begge indeholder de aktive stoffer og de farmaceutiske hjælpestoffer, og bestanddel I og bestanddel II er granulater eller pulver;

2) udførelse af den første tabletering: fremstilling af tabletten med huller af bestanddel I;

10 3) udførelse af den anden tabletering: dannelse af dobbeltlagstabletten bestående af bestanddel I-laget og bestanddel II-laget, efter at tabletten med huller er blevet presset sammen med bestanddel II, hvor bestanddel II er blevet fyldt i hullerne under sammenpresning, hvor et lag af dobbeltlagstabletten er et lag med langvarig frigivelse, og hullerne er dannet i laget med langvarig frigivelse, antallet af hullerne er 1-3, og hullernes diameter er 2-6 mm.

15

2. Fremgangsmåde ifølge krav 1, hvor de aktive stoffer i to lag af dobbeltlagstabletten kan være de samme eller forskellige fra hinanden.

20 3. Fremgangsmåde ifølge krav 1, hvor de farmaceutiske hjælpestoffer er udvalgt blandt materiale med langvarig frigivelse, fyldstof, opløsningsmiddel, smøremiddel, bindemiddel og glidemiddel.

25 4. Fremgangsmåde ifølge krav 3, hvor materialet med langvarig frigivelse er udvalgt blandt hydroxylpropylmethylcellulose, ethyecellulose og hydroxypropylcellulose; fyldstoffet er et eller flere fortrinsvis udvalgt blandt lactose, pregelatineret stivelse og mikrokrySTALLINSK cellulose; opløsningsmidlet er et eller flere fortrinsvis udvalgt blandt natriumcarboxymethylcellulose, natriumcarboxymethylstivelse og polyvinylpolypyrrolidon; smøremidlet er et eller flere fortrinsvis udvalgt blandt stearinsyre, magnesiumstearat og talkumpulver; bindemidlet er et eller flere fortrinsvis udvalgt blandt polyvidon, hydroxypropylcellulose og hydroxylpropylmethylcellulose; og glidemidlet er ekstrarfint silicapulver.

30

5. Dobbeltlagssovetablet med kontrolleret frigivelse, bestående af et lag med hurtig frigivelse og et lag med langvarig frigivelse; hvor både laget med hurtig frigivelse og laget med langvarig frigivelse omfatter de aktive stoffer med søvndyssende virkning og farmaceutiske hjælpestoffer, hvor laget med langvarig frigivelse har huller, hvori granulerne af medicin med hurtig frigivelse er fyldt; og hullernes diameter er 2-6 mm; hvor fremgangsmåden til fremstilling af dobbeltlagssovetabletten med kontrolleret frigivelse omfatter trinnene:
- (1) at fremstille granulerne med langvarig frigivelse efter blanding af sove-medicinen, materialet med langvarig frigivelse og de farmaceutiske hjælpestoffer; og fremstille granulerne med hurtig frigivelse efter blanding af sove-medicinen og de farmaceutiske hjælpestoffer;
- (2) at presse granulerne med langvarig frigivelse til et lag med langvarig frigivelse med huller og anbringe laget med langvarig frigivelse i tabletmaskinens udstansningsform; at udføre den anden tabletering efter ifyldning af granuler med hurtig frigivelse til dannelse af dobbeltlagstabletten bestående af laget med hurtig frigivelse og laget med langvarig frigivelse, hvor granulerne med hurtig frigivelse fyldes i hullerne i laget med langvarig frigivelse.
6. Tablet ifølge krav 5, hvor sovemedicinen er udvalgt blandt zolpidem, zaleplon, zopiclon, triazolam, midazolam, flurazepam, diazepam, chlordiazepoxid, nitrazepam, estazolam, alprazolam eller lorazepam, og derivater af ovennævnte forbindelser; hvor materialet med langvarig frigivelse er udvalgt blandt hydroxypropylmethylcellulose, ethycellulose og hydroxypropylcellulose; og de farmaceutiske hjælpestoffer er udvalgt blandt fyldstof, opløsningsmiddel, smøremiddel, bindemiddel og glidemiddel.
7. Tablet ifølge krav 6, hvor fyldstoffet er udvalgt blandt lactosemonohydrat, lactose, pregelatineret stivelse og mikrokrystallinsk cellulose; opløsningsmidlet refererer til et eller flere udvalgt blandt natriumcarboxymethylcellulose, croscarmellosenatrium, natriumcarboxymethylstivelse og polyvinylpolypyrrolid-

don; smøremidlet er udvalgt blandt stearinsyre, magnesiumstearat og talkumpulver; bindemidlet er udvalgt blandt polyvidon, hydroxypropylcellulose og hydroxypropylmethylcellulose; og glidemidlet er siliciumdioxid.

- 5 **8.** Tablet ifølge krav 6, hvor laget med langvarig frigivelse i dobbeltlagstabletten med kontrolleret frigivelse omfatter følgende bestanddele efter vægt:

Sovemedicin	8-12 %
Materiale med langvarig frigivelse	30-35 %
Fyldstof	52-61 %
Smøremiddel	0,5 eller 1 %
Glidemiddel	0,5 eller 1 %;

hvor laget med hurtig frigivelse og granulerne med hurtig frigivelse omfatter følgende bestanddele efter vægt:

Sovemedicin	5~10 %
Opløsningsmiddel	2~6 %
Fyldstof	80,5~91 %
Bindemiddel	0~5 %
Smøremiddel	0,5 eller 1 %
Glidemiddel	0,5 eller 1 %

- 10 **9.** Tablet ifølge krav 5, hvor dobbeltlagstabletten med kontrolleret frigivelse også omfatter coatingen, som indbefatter følgende bestanddele efter vægt:

Hydroxypropylmethylcellulose E5	30 %
Polysorbat 80	14 %
Talkumpulver	5 %
Titandioxid	2 %
Vand	Passende

10. Smertestillende dobbeltlagstablet med kontrolleret frigivelse, bestående af et lag med hurtig frigivelse og et lag med langvarig frigivelse; hvor både laget med hurtig frigivelse og laget med langvarig frigivelse omfatter de aktive stoffer med smertestillende virkning og farmaceutiske hjælpestoffer, hvor laget med langvarig frigivelse har huller, hvori granulatene af medicin af laget med hurtig frigivelse er fyldt; hullernes diameter er 2-6 mm; og antallet af hullerne er 1-3; hvor fremgangsmåden til fremstilling af den smertestillende dobbeltlagstablet med kontrolleret frigivelse omfatter trinnene:

5

10

(1) at fremstille granulatene med langvarig frigivelse efter blanding af den smertestillende medicin, materialet med langvarig frigivelse og de farmaceutiske hjælpestoffer; og fremstille granulatene med hurtig frigivelse efter blanding af den smertestillende medicin og de farmaceutiske hjælpestoffer;

15

(2) at presse granulatene med langvarig frigivelse til et lag med langvarig frigivelse med huller og anbringe laget med langvarig frigivelse i en udstansningsform af en tabletmaskine; at udføre den anden tabletering efter ifyldning af granulatene med hurtig frigivelse til dannelse af dobbeltlagstabletten bestående af laget med hurtig frigivelse og laget med langvarig frigivelse, hvor granulatene med hurtig frigivelse fyldes i hullerne i laget med langvarig frigivelse.

20

11. Tablet ifølge krav 10, hvor de aktive stoffer med smertestillende virkning er udvalgt blandt aspirin, magnesiumsalicylat, natriumsalicylat, cholinmagnesiumtrisalicylat, diflunisal, salsalat, ibuprofen, indometacin, flurbiprofen, phenoxy-ibuprofen-naproxen, nabumeton, piroxicam, phenylbutazon, diclofenacnatrium, fenoprofen, ketoprofen, ketorolac, tetraclofenaminsyre, sulindac, tolmetin, anisodamin og derivaterne af de ovennævnte forbindelser;

25

hvor materialet med langvarig frigivelse er et eller flere udvalgt blandt hydroxypropylmethylcellulose, ethylcellulose og hydroxypropylcellulose;

30

hvor de farmaceutiske hjælpestoffer refererer til et eller flere udvalgt blandt fyldstof, opløsningsmiddel, smøremiddel, bindemiddel og glidemiddel.

12. Tablet ifølge krav 11, hvor fyldstoffet refererer til et eller flere udvalgt blandt lactosemonohydrat, lactose, pregelatineret stivelse og mikrokrystallinsk cellulose;

5

opløsningsmidlet refererer til et eller flere udvalgt blandt natriumcarboxymethylcellulose, croscarmellosenatrium, natriumcarboxymethylstivelse og polyvinylpyrrolidon; smøremidlet er et eller flere udvalgt blandt stearinsyre, magnesiumstearat og talkumpulver; bindemidlet er et eller flere udvalgt blandt polyvidon, hydroxypropylcellulose og hydroxypropylmethylcellose; og glidemidlet er siliciumdioxid.

10

13. Tablet ifølge krav 10, hvor materialet med langvarig frigivelse er et eller flere udvalgt blandt hydroxypropylmethylcellose, ethylcellulose og hydroxypropylcellulose;

laget med langvarig frigivelse omfatter følgende bestanddele efter vægt:

Smertestillende medicin 40-60 %	
Materiale med langvarig frigivelse	25~35 %
Fyldstof	13~24 %
Smøremiddel	0,5 eller 1 %
Glidemiddel	0,5 eller 1 %;

15

hvor laget med hurtig frigivelse og granulatet med hurtig frigivelse omfatter følgende bestanddele efter vægt:

Smertestillende medicin 30-60 %	
Opløsningsmiddel	3~6 %
Fyldstof	30~60,5 %
Bindemiddel	0~5 %
Smøremiddel	0,5 eller 1 %
Glidemiddel	0,5 eller 1 %.

14. Tablet ifølge krav 10, hvor dobbeltlagstabletten med kontrolleret frigivelse også omfatter coatingen, som indbefatter følgende bestanddele efter vægt:

Hydroxypropylmethylcellose E5	30 %
Polysorbat 80	14 %
Talkumpulver	5 %
Titandioxid	2 %
Vand	Passende.

DRAWINGS

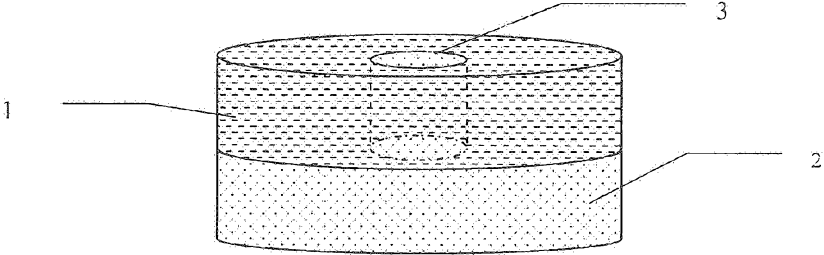


Figure 1

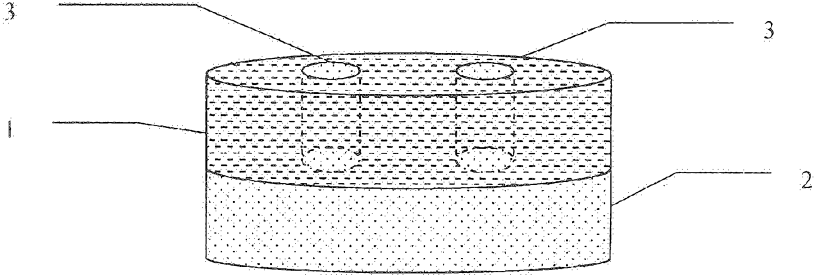


Figure 2

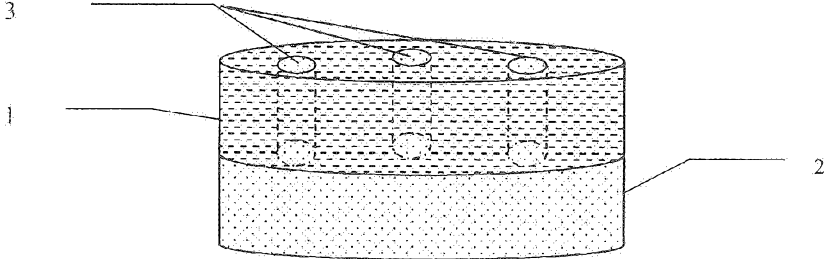


Figure 3

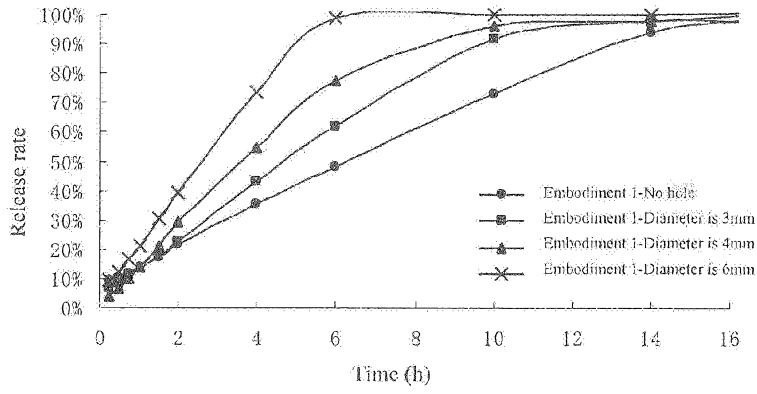


Figure 4

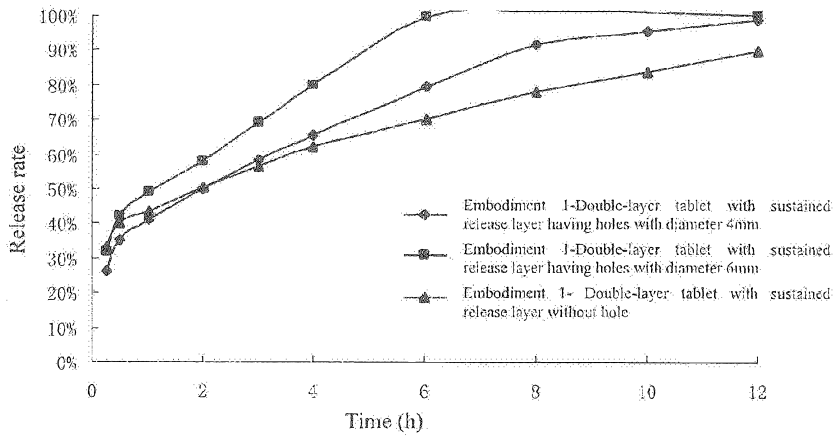


Figure 5

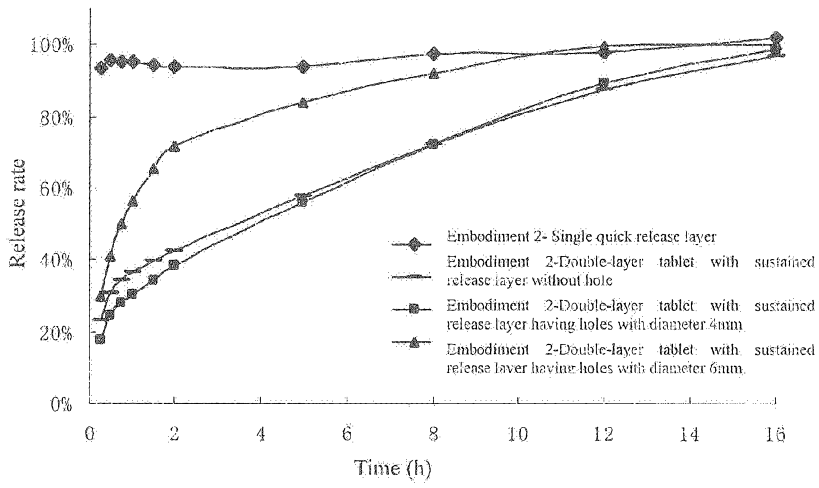


Figure 6

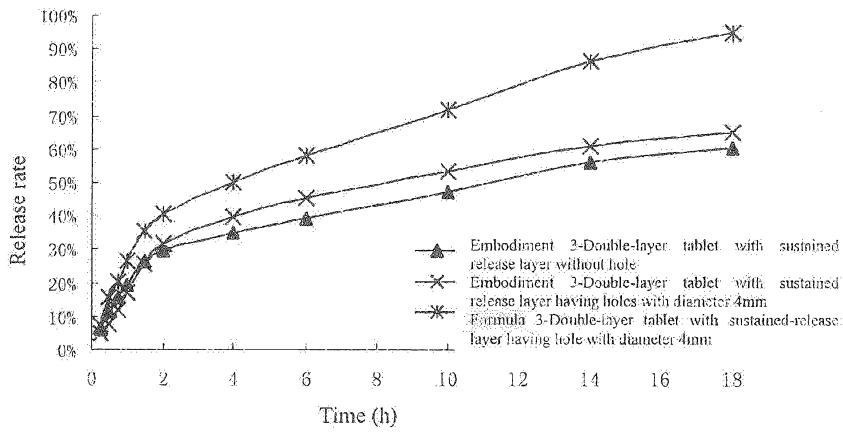


Figure 7

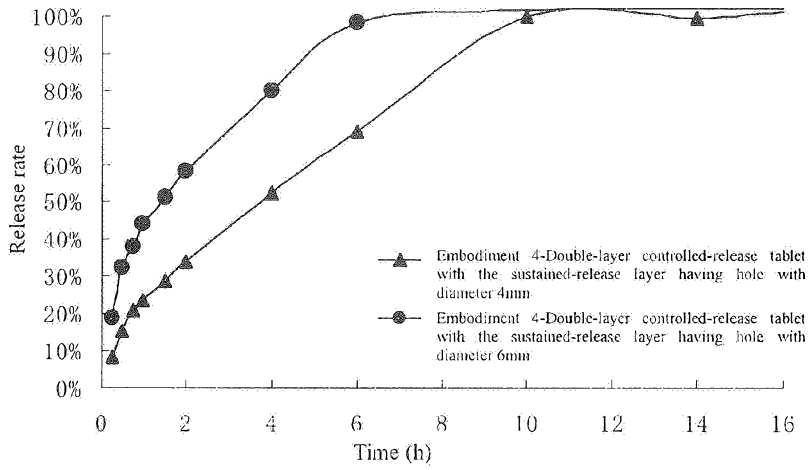


Figure 8

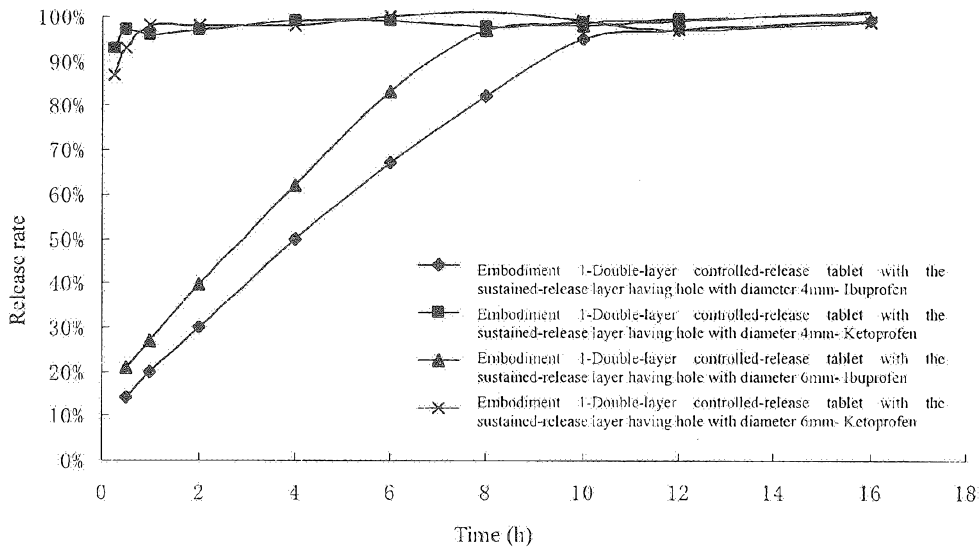


Figure 9

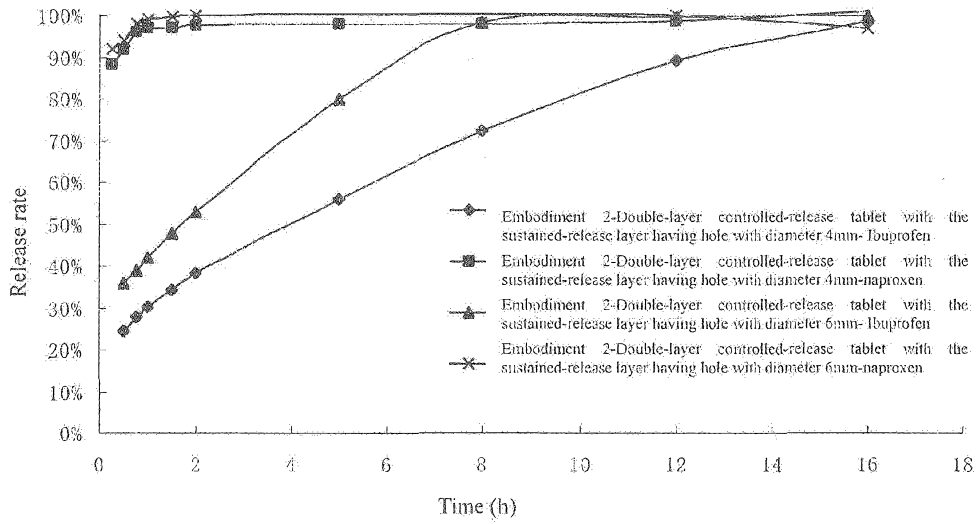


Figure 10

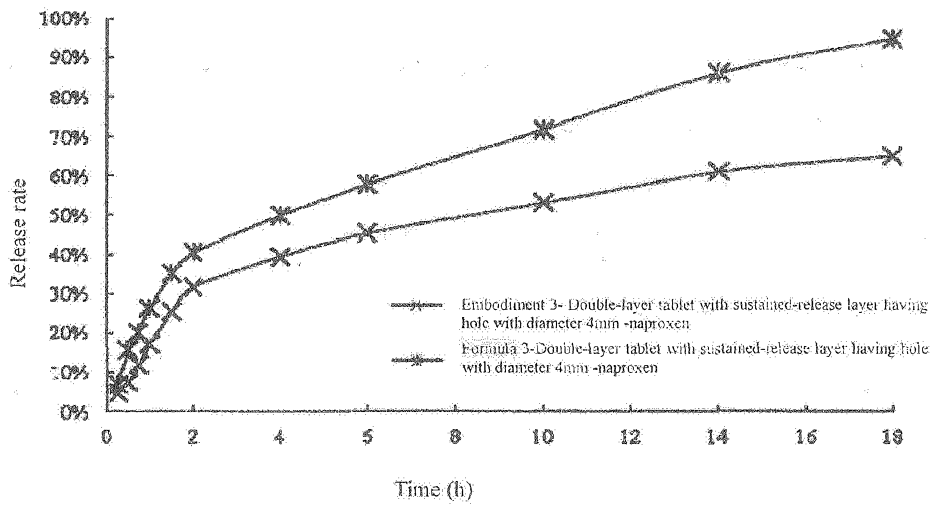


Figure 11

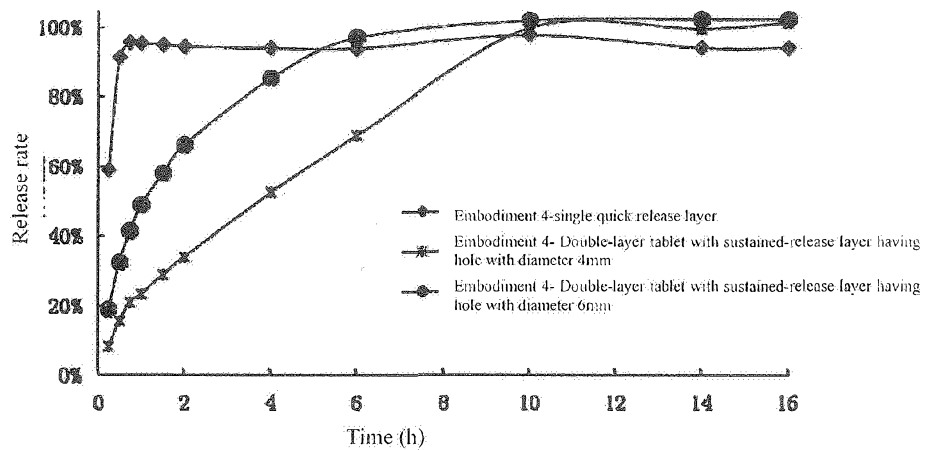


Figure 12