

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199512393 B2**
(10) Patent No. **703155**

(54) Title
Assembly containing a dough and process for its preparation

(51)⁶ International Patent Classification(s)
A21D 004/00 A21D 006/00

(21) Application No: **199512393** (22) Application Date: **1995 .02 .21**

(30) Priority Data

(31) Number (32) Date (33) Country
94104044 1994 .03 .16 EP

(43) Publication Date : **1995 .09 .28**

(43) Publication Journal Date : **1995 .09 .28**

(44) Accepted Journal Date : **1999 .03 .18**

(71) Applicant(s)
Societe des Produits Nestle S.A.

(72) Inventor(s)
Karsten Vidkjaer

(74) Agent/Attorney
BALDWIN SHELSTON WATERS, Level 21, 60 Margaret Street, SYDNEY NSW 2000

(56) Related Art
US 4206870
US 1904741
US 3799427



AU9512393

(12) PATENT ABSTRACT (11) Document No. AU-A-12393/95
(19) AUSTRALIAN PATENT OFFICE

(54) Title
ASSEMBLY CONTAINING A DOUGH AND PROCESS FOR ITS PREPARATION

International Patent Classification(s)
(51)⁶ A21D 004/00 A21D 006/00

(21) Application No. : 12393/95 (22) Application Date : 21.02.95

(30) Priority Data

(31) Number (32) Date (33) Country
94104044 16.03.94 EP EUROPEAN PATENT OFFICE (EPO)

(43) Publication Date : 28.09.95

(71) Applicant(s)
SOCIETE DES PRODUITS NESTLE S.A.

(72) Inventor(s)
KARSTEN VIDKJAER

(74) Attorney or Agent
SHELSTON WATERS , Level 21, 60 Margaret Street, SYDNEY NSW 2000

(57)

The invention relates to an combination (1) containing a dough to be kept under refrigeration comprising a packaging system (2, 7) provided with a one-way valve (8), a dough (4) based on living yeast inside said packaging and a substantially oxygen free atmosphere surrounding the dough.

CLAIM

1) The combination of a dough product based on living yeast which generates gas over time, a closed packaging system for containing said dough product, said packaging system comprising a housing of a material which is essentially impervious to oxygen, valve means operatively associated with the housing for allowing exit of gas from the housing when the gas pressure exceeds a certain minimum value and which closes when said gas pressure drops below the minimum value to prevent entry of oxygen into the housing and a substantially oxygen-free atmosphere surrounding the dough.

12) A process for the preparation of the combination according to any of the preceding claims, wherein the dough is prepared by mixing a live yeast with at least water and flour, the dough is rolled or put into pieces and disposed in a packaging system, the one-way valve is applied on the packaging, the packaging is evacuated, gasflushed and sealed .

(11) 12393/95

-2-

17) A dough disposed in the combination according to claims 1 to 11 containing between 43 and 62% of flour, between 5 and 23% fat, between 0.01 and 1% yeast, between 1.0 and 2.5% of sodium chloride or sugar and between 23 and 33% water.

19) The system for the preparation of the combination according to any of the claims 1 to 11 comprising means for thermoforming the housing of the packaging, means for disposing the dough in said housing, means for delivering the top web with its one-way valve on the upper edge of the housing, means for gas flushing the inside of said packaging and sealing the top web on said upper edge and means for cutting each combination.

Abstract

Assembly containing a dough and process for its preparation

- 5 The invention relates to an combination (1) containing a dough to be kept under refrigeration comprising a packaging system (2, 7) provided with a one-way valve (8), a dough (4) based on living yeast inside said packaging and a substantially oxygen free atmosphere surrounding the dough.

10

Fig. 1

- 1 -

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name of Applicant: SOCIETE DES PRODUITS NESTLE S.A.

Actual Inventor: Karsten Vidkjaer

Address for Service: SHELSTON WATERS
60 Margaret Street
SYDNEY NSW 2000

Invention Title: "ASSEMBLY CONTAINING A DOUGH AND PROCESS FOR
ITS PREPARATION"

The following statement is a full description of this invention,
including the best method of performing it known to us:-

-1a-

Assembly containing a dough and process for its preparation

The invention relates to a combination containing a dough
5 to be kept under refrigeration and a process for its preparation.

The WO 93/01724 patent concerns already a process for
preparing a yeast-leavened dough capable of being stored at
10 refrigeration temperatures. This dough is prepared by
mixing flour, water and yeast, packaging said dough in a
container, which is a spirally wound composite can, sealing
the container, proofing said dough in said container and
storing said product at refrigeration temperatures.

15 The problem at the base of this patent is that during the
storage, the yeasts which are used continue to grow and
produce carbon dioxide. Then, after a period of storage of
several weeks, the internal pressure in the container can
20 be so high, that the container could explode. The reason of
this pressure increase is the fact that for preparing the
dough, they must make a proofing of the dough: when the
yeasts has been highly activated for the step of proofing
the dough, it is problematic to simply inactivate these
25 yeasts by subjecting the obtained dough to a refrigeration
temperature. In fact, these yeasts will probably not stop
to produce gas immediately by refrigeration, because their
metabolism has been induced to produce much gas.

30 The US Patent 1904741 concerns a packaging containing a
dough prepared from a yeast. This packaging allows the
dough to expand, but does not have a controlled atmosphere,
so that it is not possible to have this dough stored for
several weeks.

35 The aim of present invention is to have the possibility of

delivering to the consumer an assembly containing a yeast-based dough, wherein the dough has been prepared and packed without any proofing step.

In a first aspect the invention concerns the combination of a dough product based on living yeast which generates gas over time, a closed packaging system for containing
5 said dough product, said packaging system comprising a housing of a material which is impervious to oxygen, valve means operatively associated with the housing for allowing exit of gas from the housing when the gas pressure exceeds a certain minimum value and which closes when said gas pressure drops below the minimum value to prevent entry of
10 oxygen into the housing and a substantially oxygen-free atmosphere surrounding the dough, wherein the substantially oxygen-free atmosphere comprises nitrogen and carbon dioxide alone or in combination, the content of oxygen being less than 1.5%.

In a second aspect the invention concerns a system when used for the preparation of the combination of the first aspect comprising means for thermoforming the housing of the packaging, means for disposing the dough in said housing, means for delivering
15 the top web with its one-way valve on the upper edge of the housing, means for gas flushing the inside of said packaging and sealing the top web on said upper edge and means for cutting each combination.

Unless the context clearly requires otherwise, throughout the description and the claims, the words 'comprise', 'comprising', and the like are to be construed in an
20 inclusive as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to".

The valve means used is called a one-way valve.

Under living yeast, we understand a yeast containing microorganisms which are still living during the storage.

25 Under refrigeration, we understand a dough to be kept at a temperature of below 12°C, more particularly between 2 and 8°C. The freezing point of the dough being under 0°C, it is possible to keep this dough frozen at -18°C for at least 2 months.

According to the present invention, the dough has not to be proofed and during the storage, the dough is quickly saturated with gas, which allows to directly bake it
30 without any proofing step. In fact, the presence of gas in the dough is sufficient to get the desired raising effect when said dough is baked.



- 2a -

The possible storage duration is of at least 4 weeks at 8°C and at least 3 weeks at 12°C.

8
5
3

8
3

—



1961-00-00C

NO. 789 P005/007

01/02/99 16:35 BSM SYDNEY - 61 02 62853593

During storage at chilled temperature, as specified above, there is carbon dioxide also accumulating in the head space of the packaging. The presence on the packaging of the one-way valve will allow this carbon dioxide to escape from said packaging, however, so that only a small over pressure will build up internally. The overall quality of the dough is improved thanks to the release of the extra gas and other excess volatile compounds.

10 The small residual activity of the baker's yeast during chilled storage has another important positive influence on the dough quality. It supplies at a constant slow rate precursor molecules that can develop the desired bread flavour upon baking of the dough. Since these flavour
15 precursor molecules are unstable they cannot be produced in a single proofing step at the beginning of the storage period as proposed by patent WO 93/01724.

The type of the one-way valve which is used is not
20 critical: we can use any valve on the market, for example from the Goglio type or the Raackmann type. The Goglio-type valve comprises valves from the company Bosch, Wipf and Wico. Both these types of valves will be explained in reference with Figures 4 and 5.

25 The advantage of the combination according to the invention is to make possible to use a more flexible packaging system and not a can as for the above mentioned WO Patent No. 93/01724.

30 The packaging system can be thermoformed or of the flow pack type. The material which is used is not critical. The important is that this material has a gas barrier property, to be sure that no oxygen enters the system.

35 In the case of thermoforming, we can use a base web

housing) which has to be thermoformed. We use for example the following composite sheets: A-PET/PE (amorphous polyester / polyethylene), PP/EVOH/PE (polypropylene / ethylene-vinyl alcohol copolymer / polyethylene) or PVC/PE
5 (polyvinyl chloride / polyethylene).

This base web is more or less rigid, with a thickness comprised between 200 and 1000 microns. The top web has afterwards to be sealed on the thermoformed base web. This
10 latter web, forming the cover for the package must have gas barrier and be heat stable. The material used can be chosen among the following materials: PA/PE (polyamide / polyethylene), OPA/PE (oriented polyamide / polyethylene)
15 PET/PE (polyester/polyethylene) or OPP/PE (oriented polypropylene / polyethylene) which can have gas barriers in types of for example PVDC (polyvinylidene chloride), EVOH, metal or mineral layer. The thickness of the top web is comprised between 50 and 200 microns. Polyethylene has been
20 chosen normally but any sealant which will give a sufficient adhesion between top and base web can be used.

In the case of a flow pack system, there is no obligation of rigidity. The material used is chosen among those which can be used as top webs in thermoforming. As for
25 thermoforming we must use materials having gas barrier properties. The flow pack technique is described in "L'Emballage sous toutes ses facettes", 1988, Chapter 32.

The one-way valve is placed, in the case of thermoforming, on the top web, either on the inside or on the outside of
30 the packaging, but preferably on the inside, to avoid therefore any risk of tearing said valve away.

In the case of a flow pack system, the one-way valve is
35 disposed as on the top web of the thermoformed assembly.

The yeast can be of any type used in the bakery area. It is generally preferred that the species be the *Saccharomyces* genus. One particularly preferred species is *S. Cerevisiae*.

5 The preferred baker's yeast strains are of the lti (Low Temperature Inactive) type, for example those which are the object of Patent EP 0487878 or most preferentially those described in a European Patent application filed by the same applicant under the title "Levure de boulangerie
10 industrielle inactive au froid" (No. 94104043.8). The lti baker's yeast strains unify a very good characteristics in industrial cell mass production and drying with a very low gassing activity in refrigerated dough products up to 12°C.

15 Yeast can be either in the fresh or dry form. In this latter case, the yeast has to be rehydrated just before use. The dough contains between 0.01 and 1% of yeast based on dry matter. In the specification, all the percentages are in weight.

20 The dough is obtained by mixing yeast, water, flour and other ingredients such as salt, sugars, oils or fats. In general, the dough is prepared for bakery products such as pizza, bread or french croissants. The oils or fats can be
25 of vegetal or animal origin, for example butter fat or margarine. The flour can be of any type used in the bakery area. The presence of water binding agents, salt and/or sugar is useful for decreasing the water activity a_w of the dough and for limiting the development of the natural
30 microflora of the dough system.

Under substantially oxygen-free atmosphere, we understand an atmosphere with less than 1.5% oxygen, this atmosphere being nitrogen and carbon dioxide alone or in combination.

35 The content of these gases can vary widely between 0 and 100%. For gases, the percentages are in volume. The fact o

having a combination substantially oxygen-free is critical: this allows the possibility of having a long shelf-life and also to maintain a good texture of the dough after several weeks.

5

The dough in the packaging can be either in the form of blocks or in the form of rolled pieces ready to use for example as mentioned in the European Patent No. 158'590.

10

For reasons of convenience for the consumer, it is preferred that the dough is protected with a cardboard. The type of cardboard is not critical, but must be a material compatible in the food area. The presence of this cardboard can also avoid a plugging of the one-way valve due to dough swelling. Also having the dough wrapped in a paper (separation paper, baking paper or other type of paper) can avoid any risk of plugging the one-way valve. Finally, it is preferred to have the one-way valve sufficiently spaced from said dough.

20

The invention further concerns a process for the preparation of the above mentioned combination wherein the dough is prepared by mixing a live yeast with at least water and flour, the dough is rolled or put into pieces and disposed in a packaging system, the one-way valve is applied on the packaging, the packaging is evacuated, gasflushed and sealed.

25

As already said above, we can use any yeast either in dry or in wet form, with the above mentioned concentrations.

30

The water is normally used at a temperature of below 16°C, and it is preferred to use a part of the water in solid form, i.e. ice. The proportion of ice used is normally comprised between one and two parts of ice for six to ten parts of water.

35

The device used is a step-by-step device which will be explained in more detail in figure 6.

5 After the dough is put rolled or in pieces into the thermoformed packaging, the one-way valve is applied and the packaging is evacuated at a pressure between 0.07 and 0.01 bar. This step is necessary to evacuate the maximum of the oxygen, so that the content of this gas in the assembly is below 1.5%.

10 After the evacuation takes place, the gasflushing occurs with nitrogen and carbon dioxide alone or in combination. The amount of these gases introduced in the assembly is not critical, but it is preferably comprised between 40 and 80% of CO₂.

15 After the sealing of the combination, the different combinations are cut into separate pieces and brought at a temperature of less than 8°C within a duration of less than 4 hours. This is necessary to guarantee a product having a shelf life at the above mentioned storage temperatures of at least 4 weeks.

20 The invention concerns further the dough which is kept under refrigeration. This dough contains between 43 and 62% of flour, between 5 and 23% fat, between 0.01 and 1% yeast, between 1.0 and 2.5% of sodium chloride or sugar, and between 23 and 33% of water.

30 The presence of sodium chloride or sugar is necessary for lowering the water activity. The flour used is already described above. The fat is a vegetable or animal fat, for example wheat gluten oil or margarine.

35 According to another embodiment, the dough contains furthermore between 0.5 and 1.5% of ethanol.

The invention relates finally to the system for the preparation of the combination of the invention comprising means for thermoforming the housing of the packaging, means for disposing the dough in said housing, means for
5 delivering the top web with its one-way valve on the upper edge of the housing, means for gas flushing the inside of said packaging and sealing the top web on said upper edge and means for cutting each combination. As said above, the whole device operates in a step-by-step way.

10 The description is now made in reference with the accompanying drawings, wherein

Fig. 1 is a perspective view of the assembly according to
15 the invention,

Fig. 2 is a schematic cross-sectional view of the Fig. 1,

Fig. 3 is a schematic cross-sectional view of a second
20 embodiment of the assembly according to the invention, and

Fig. 4a is a section through a Goglio valve and Fig. 4b is a schematic top view of the top web;

Fig. 5a is a schematic top view of a Packmann valve and
25 Fig. 5b is a section through the central part of the sheet of Fig. 5a.

Fig. 6 is a schematic view of the operative device for
30 manufacturing the assembly of Fig. 1.

The combination (1) comprises a thermoformed housing (2) obtained as a base web and presenting reinforcement ribs (3), permitting therefore to reduce further the thickness of the used material. In this case, we use as base web a
35 composite sheet of PET/PE having a thickness of 600 microns. The base web presents a flange (6).

A piece of dough (4) prepared according to example 1 is placed on a cardboard (5) and disposed in the thermoformed base web (2). A top web (7) is sealed around the flange (6) of the base web. This top web comprises a one-way valve (8) authorizing the carbon dioxide which can be formed during the storage to escape for avoiding any swelling of the assembly and its explosion. This valve operates as soon as the inside pressure reaches between 3 to 7 mbar above the atmospheric pressure.

The atmosphere inside comprises less than 1.5 % oxygen , the ratio nitrogen : carbon dioxide being of 50/50.

Normally ,the valve is disposed such that a swelling of the dough avoids any risk of plugging of said valve.

Fig. 3 shows an embodiment, wherein the valve (9) is disposed slightly on the side of the dough. In this case, the thermoformed base web (10) presents a shoulder (11) on the whole periphery, the dough (12) being also disposed in a cardboard (13). The valve (9) integral with the top web (14) is in regard with the shoulder (11), and if the dough would grow too much it is practically impossible that it reaches the valve (9). The material used is the same as for Fig. 1.

Fig. 4a and b shows more precisely the top web (7) of Fig. 1 with the corresponding one-way valve (8): the valve is disposed on the inside of the packaging. This valve comprises a base plate (30) with holes (31), an elastic membrane disc (32) and a cap (33) with an air hole (34). The top web (7) is sealed in the concentric area A on the base plate (30) and presents a small cut (35) permitting the gas to escape. When the pressure increases inside of the packaging, the membrane disc (32) moves upward and CO₂ escapes. When the pressure decreases the membrane disc (32)

comes back as shown on Fig. 4a.

Fig. 5a and b show the Raackmann valve. This valve is also disposed on the top web. The great advantage of this solution is that nothing is to be seen on the packaging, the top web forming the valve. The top web (40) is formed with a two-layer laminate (41, 42). In the part B (Fig. 5a), the two layers are not bonded and a channel (46) is formed allowing the gas to escape. The two layers (41, 42) are stuck together in area B with silicon oil. By puncturing the inner layer (42), holes (43) are formed and corresponding holes (44, 45) on the outer layer (41) are also made, allowing the top part of the laminate to rise and let the gas out through the channel (46).

Fig. 6 gives a schematic representation for manufacturing the combination. A reel (15) of thermoformable material (16) supplies with a step-by-step system a thermoforming device (17) : this thermoforming occurs by heating and vacuum forming as known in the art. After the cooling of the base web, a piece of dough (18) is disposed in the formed cavity. A reel (19) for the top web (22) supplies a device (20) for the application of the one-way valve (23) : after the valve is disposed on the top web, this latter enters a closed device (21) where the sealing of the top web takes place. This sealing occurs first by evacuating with a vacuum device, such as a vacuum pump (not shown) all the oxygen of the system. After this step, the assembly is gasflushed with nitrogen and carbon dioxide at a ratio of 50/50 and finally sealed at a temperature of approximately 150°C. When the finished assembly exits enclosure (21), we cut into individual pieces (24), which have then to be cooled as quickly as possible.

According to the invention, it is possible to produce continuously a yeast-based dough to be kept under

refrigeration for at least 28 days.

The following examples are intended to illustrate the present invention.

5 **Example 1**

10 The 1ti baker's yeast NCIMB 40612, deposited on January 28, 1994 according to the Budapest Agreement at the National Collection of Industrial and Marine Bacteria Ltd. (NCIMB), P.O. Box 31, 135 Abbey Road, Aberdeen AB9 8DG, Great Britain is mixed in an amount of 0.1% (dry matter) with 60% of flour, 30% of water, 8% of margarine and 1.8% NaCl.

15 After kneading during several minutes, the dough is cut into pieces of 260 g and disposed in a packaging according to Fig. 1, said packaging being sealed in the manufacturing line according to Fig. 4. The atmosphere of the assembly contains 50% CO₂ and 50% N₂.

20 This dough is stored under refrigeration of about 8°C during 4 weeks. It is then directly baked at 250°C during 10-15 minutes.

25 The baked dough has a taste and a texture very near to that of a dough which has been leavened with baker's yeasts according to a classical method.

30 **Example 2**

0.1% of the same yeast as in example 1 is mixed with 60.5% of flour, 6.3% of vegetable fat, 1.8% of NaCl, 1% of ethanol and 30.2% of water.

35 The same packaging as in example 1 is used and the dough is stored during 4 weeks at about 8°C.

The presence of the valve in the assembly avoids any swelling of said assembly and the baked dough has similar properties (crispness, texture, taste) as a dough prepared according to classical procedure.

5 **Example 3**

0.02% of an ordinary commercial baker's yeast is mixed with 60.5% of flour, 6.3% of vegetable fat, 1.8% of NaCl, 1% of ethanol and 30.2% of water.

10 After kneading, the dough is disposed in the assembly according to the invention and sealed.

15 The presence of the valve in the assembly avoids any swelling of said assembly and the baked dough has similar properties (crispness, texture, taste) as a dough prepared according to classical procedure.

20 **Example 4**

0.1% of LTI baker's yeast is mixed with 44.0% flour, 26.7% vegetable/animal margarine/butter, 1.6% NaCl, 2.1% sucrose, 1.0% ethanol, 140 ppm ascorbic acid (based on flour) and 24.5% water (11% being ice-water).

25 After mixing, the dough is divided, laminated, sheeted, cut, rolled, packed and chilled.

30 The dough is stored at a max. temperature of 8°C for at least 4 weeks. After rolling into croissants, it is baked in a conventional oven at 200°C for 20-25 minutes and gives a product with good properties of crispiness, texture and taste.

35

-13-

Example 5

By replacing in the preceding example the LTI yeast by
0.028 of an ordinary baker's yeast, croissants with the
5 same properties as above are obtained.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

- 1) The combination of a dough product based on living yeast which generates gas over time, a closed packaging system for containing said dough product, said packaging system comprising a housing of a material which is impervious to oxygen, valve means operatively associated with the housing for allowing exit of gas from the housing when the gas pressure exceeds a certain minimum value and which closes when said gas pressure drops below the minimum value to prevent entry of oxygen into the housing and a substantially oxygen-free atmosphere surrounding the dough, wherein the substantially oxygen-free atmosphere comprises nitrogen and carbon dioxide alone or in combination, the content of oxygen being less than 1.5%.
- 2) The combination according to claim 1, wherein the packaging is a thermoformed or a flow pack system.
- 3) The combination according to claim 1 or 2, wherein the thermoformed packaging the material is taken from the following composite sheets: PET/PE, PP/EVOH/PE and PVC/PE.
- 4) The combination according to any one of claims 1 to 3, wherein the packaging material has a thickness comprised between 75 and 1000 microns.
- 5) The combination according to any one of claims 1 to 4, wherein the dough contains between 0.01 and 1% of yeast.
- 6) The combination according to any one of claims 1 to 5, wherein the dough contains up to 2.5% of a compound taken among sodium chloride and sugar.
- 7) The combination according to any one of claims 1 to 6 wherein the yeast is a lti-yeast.
- 8) The combination according to any one of claims 1 to 7, wherein the one way-valve is of the Goglio-type or the Raackman type.
- 9) The combination according to any one of claims 1 to 8, wherein the dough contains between 58 and 62% of flour, between 5 and 9% fat, between 0.01 and 1% yeast, between 1.0 and 2.5% of sodium chloride or sugar and between 27 and 33% water.
- 10) The combination according to claim 9, wherein the dough contains between 0.5 and 1.5% of ethanol.



11) A process for the preparation of the combination according to any one of the preceding claims, wherein the dough is prepared by mixing a live yeast with at least water and flour, the dough is rolled or put into pieces and disposed in a packaging system, the one-way valve is applied on the packaging, the packaging is evacuated,
5 gasflushed and sealed.

12) A process according to claim 11, wherein the mixing of the yeast with water and flour occurs with chilled water.

13) A process according to claim 11 or 12, wherein the evacuation occurs between 0.07 and 0.01 bar.

10 14) A process according to any one of claims 11 to 13, wherein the gasflushing occurs with nitrogen and carbon dioxide alone or in combination.

15) A process according to any one of claims 11 to 14, wherein after the sealing the assembly is brought to a temperature of less than 8°C within a duration of less than 4 hours.

15 16) The combination according to any one of claims 1 to 8 wherein the dough comprises between 43 and 62% of flour, between 5 and 23% fat, between 0.01 and 1% yeast, between 1.0 and 2.5% of sodium chloride or sugar and between 23 and 33% water.

17) A dough according to claim 16, containing between 0.5 and 1.5% of ethanol.

20 18) A system when used for the preparation of the combination according to any one of the claims 1 to 10 comprising means for thermoforming the housing of the packaging, means for disposing the dough in said housing, means for delivering the top web with its one-way valve on the upper edge of the housing, means for gas flushing the inside of said packaging and sealing the top web on said upper edge and means for
25 cutting each combination.

19) The combination according to claim 1, substantially as herein described with reference to any one of the Examples.

20) A process for the preparation of the combination according to claim 1 which process is substantially as herein described with reference to any one of the
30 Examples and accompanying Figures.



21) A system for the preparation of the combination according to claim 1 substantially as herein described with reference to any one of the accompanying drawings.

5 Dated this 6th day of July 1998
SOCIETE DES PRODUITS NESTLE S.A.

Attorney: RUTH M. CLARKSON
Fellow Institute of Patent Attorneys of Australia
of BALDWIN SHELSTON WATERS

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210

21 2 95 10393

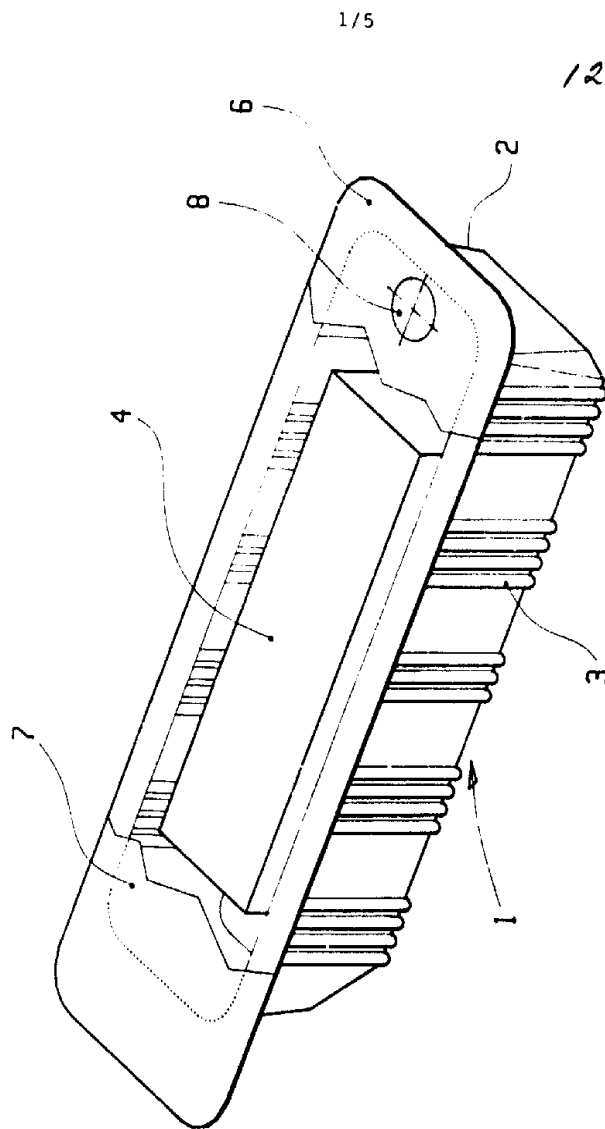


Fig. 1

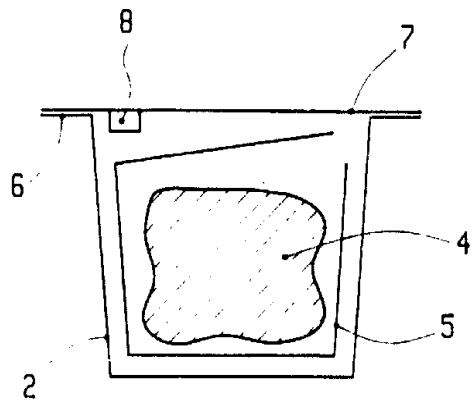


Fig. 2

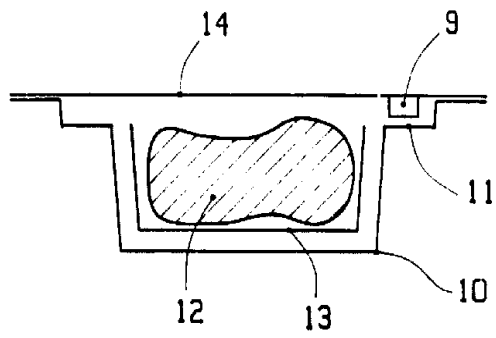


Fig. 3

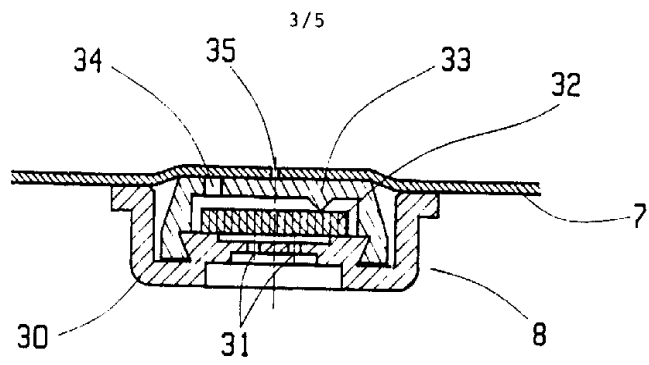


Fig. 4a

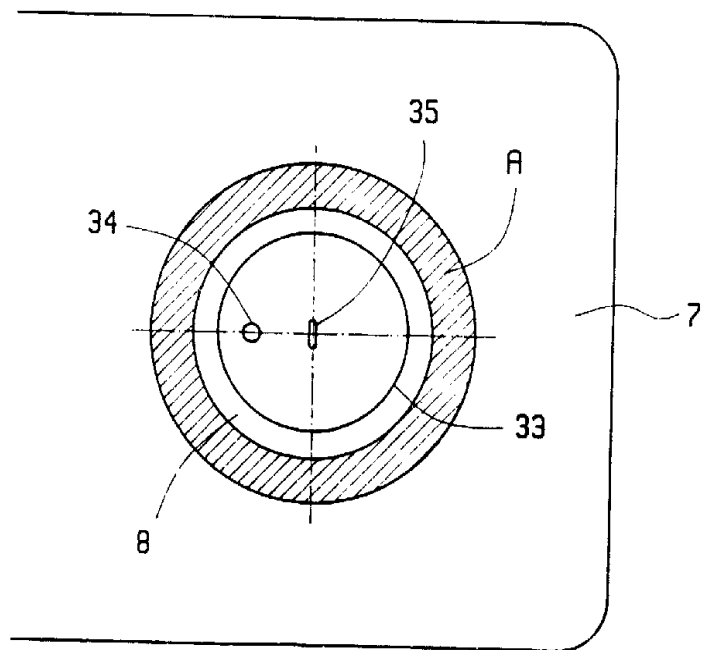


Fig. 4b

4/5

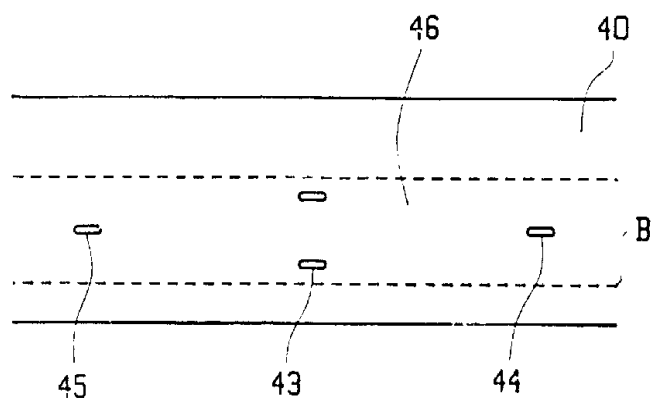


Fig. 5a

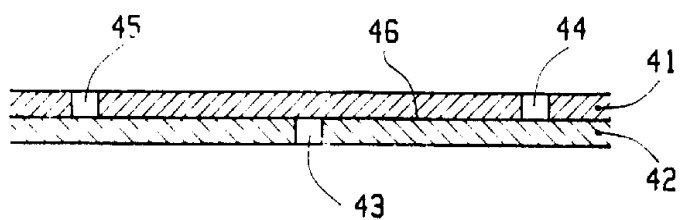


Fig. 5b

91 2 93 10393

5/5

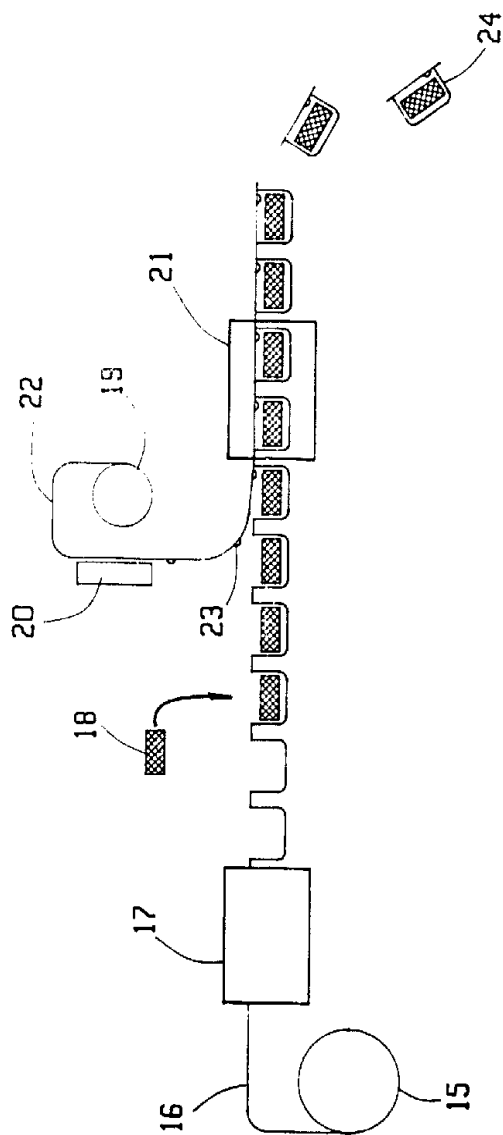


Fig. 6