



(51) International Patent Classification:

C03B 1/02 (2006.01) *C03C 1/02* (2006.01)
C03C 1/00 (2006.01) *C03C 6/08* (2006.01)

(21) International Application Number:

PCT/US2018/031465

(22) International Filing Date:

08 May 2018 (08.05.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/625,551 16 June 2017 (16.06.2017) US

(71) Applicant: OWENS-BROCKWAY GLASS CONTAINER INC. [US/US]; One Michael Owens Way, Perrysburg, OH 43551 (US).

(72) Inventors: WEIL, Scott; 6436 Brixton Road, Apt. 7, Maumee, OH 43537 (US). SHARMA, Pramod, K.; 2287 Hickory Point Drive, Ann Arbor, MI 48105 (US).

(74) Agent: SMITH, Susan, L.; Owens-Brockway Glass Container Inc., One Michael Owens Way, Perrysburg, OH 43551 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: GLASS BATCH MATERIAL AND PROCESS FOR MAKING GLASS

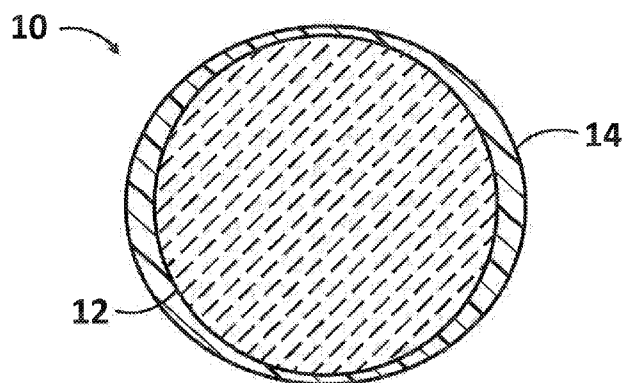


FIG. 1

(57) Abstract: Glass batch materials and processes for preparing and melting structured pellets of glass batch materials to produce molten glass. A structured pellet of glass batch materials may include a core and a shell surrounding the core. The core may include a mixture of glass-forming materials and the shell may include a thermally-activated material. The thermally-activated material may be formulated to undergo an exothermic chemical reaction when heated to a temperature at or above a threshold temperature such that heat is transferred from the shell to the mixture of glass-forming materials in the core.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

GLASS BATCH MATERIAL AND PROCESS FOR MAKING GLASS

[0001] The present disclosure is directed to glass batch materials and to processes for preparing and melting said glass batch materials to produce molten glass.

Background and Summary of the Disclosure

[0002] Silica-based glass, such as soda-lime-silica glass, is prevalent in the manufacture of glass containers and other articles. Molten glass used to make such articles is conventionally prepared by introducing a loose mixture of individual solid glass-forming materials known as a “glass batch” into a glass furnace or tank and melting the glass batch at elevated temperature to form a substantially homogenous glass melt.

[0003] A general object of the present disclosure, in accordance with one aspect of the disclosure, is to provide a structured pellet of glass batch material that can be melted at a lower temperature and in less time than a conventional loose mixture of glass-forming materials, and thus can improve the energy efficiency of the glass manufacturing process.

[0004] The present disclosure embodies a number of aspects that can be implemented separately from or in combination with each other.

[0005] A structured pellet of glass batch material for producing glass in accordance with one aspect of the disclosure includes: a core and a shell surrounding the core. The core includes a mixture of glass-forming materials and the shell includes a thermally-activated material. The thermally-activated material is formulated to undergo an exothermic chemical reaction when heated to a temperature at or above a threshold temperature such that heat is transferred from the shell to the mixture of glass-forming materials in the core.

[0006] In accordance with another aspect of the disclosure, there is provided a process for making glass. A structured pellet of glass batch materials is provided that includes a core and a shell surrounding the core. The core includes a mixture of glass-forming materials and the shell includes a thermally-activated material. The shell is heated to a temperature at or above a threshold temperature to initiate an exothermic chemical reaction that supplies heat to the mixture of glass-forming materials in the core. The core is heated at a sufficient temperature and for a sufficient amount of time to melt the mixture of glass-forming materials in the core and form a body of molten glass.

[0007] In accordance with yet another aspect of the disclosure, there is provided a process for producing a structured pellet glass of glass batch materials. The process includes: providing a particulate mixture of glass-forming materials; mixing the glass-forming materials with a binder to form a plurality of agglomerated bodies; and coating the agglomerated bodies with an overlying layer of a coating material that includes a thermally-activated material. The thermally-activated material is formulated to undergo an exothermic chemical reaction when heated to a temperature at or above a threshold temperature.

Brief Description of the Drawings

[0008] The disclosure, together with additional objects, features, advantages and aspects thereof, will be best understood from the following description, the appended claims and the accompanying drawing(s), in which:

[0009] FIG. 1 is an idealized cross-sectional view of a structured pellet of glass batch materials in accordance with an illustrative embodiment of the present disclosure.

Detailed Description

[0010] FIG. 1 illustrates in idealized fashion a structured pellet 10 of glass batch materials that can be melted, for example, in a glass furnace to produce molten glass. The structured pellet 10 includes an inner core 12 and an outer shell 14 surrounding the core 12. The inner core 12 of the pellet 10 includes a mixture of glass-forming materials (or glass batch materials) and the outer shell 14 includes a thermally-activated material that is formulated to supply heat to the mixture of glass-forming materials in the core 12 to improve the energy efficiency of the melting process. The term “core,” as used herein, refers to a coherent mass of solid particles that have been agglomerated or consolidated together by conventional agglomeration processes and equipment.

[0011] The thermally-activated material in the outer shell 14 of the pellet 10 may comprise a material that is formulated to undergo an exothermic chemical reaction when heated to a temperature at or above a threshold temperature such that heat is transferred from the shell 14 to the mixture of glass-forming materials in the core 12. More specifically, during the early stages of melting, the thermally-activated material in the outer shell 14 of the pellet 10 may be heated to a temperature at or above a threshold temperature to trigger an exothermic chemical reaction which generates heat. The heat generated by the exothermic chemical reaction is then transferred, as least in part, to the mixture of glass-forming materials in the core 12, which reduces the amount of energy and the amount of time required to subsequently melt the mixture of glass-forming materials in the core 12 into a body of molten glass, as compared to conventional glass melting processes. In addition, without intending to be bound by theory, it is believed that the additional, localized source of heat provided by the exothermic chemical reaction occurring in the outer shell 14 of the pellet 10 and the thermally insulating properties of the shell 14 itself may allow the mixture of glass-forming materials in the core 12 to be melted at a relatively rapid pace. For

example, it is believed that the close proximity between the shell 14 and the mixture of glass-forming materials in the core 12 may increase the amount of heat that is locally supplied to each of the glass-forming materials in the early stages of melting and also may help prevent or suppress heat loss or dissipation from the glass-forming materials in the core 12 during the melting process, which may further speed-up the melting rate of the mixture of glass-forming materials in the core 12, as compared to the traditional melting of a loose mixture of materials.

[0012] In one form, the thermally-activated material in the outer shell 14 may comprise a combustible organic material that undergoes an exothermic combustion reaction when heated in the presence of oxygen to a temperature at or above an ignition temperature or ignition point of the material. The term “combustible,” as used herein, refers to a material that reacts with oxygen (O₂) when ignited to produce energy in the form of heat and sometimes light. The amount of heat produced during combustion of a specific material is referred to as the material’s heat of combustion and is measured in units of energy per unit mass. The heat of combustion of the combustible organic material in the outer shell 14 of the pellet 10 may be in the range of 20–80 kJ/g. Some examples of combustible organic materials that may be included in the outer shell 14 of the pellet 10 include: organic polymers or resins, coal, coke, peat, bituminous materials, oil shale, tar sand, petroleum fractions and residues, biomass, cellulosic materials, and organic waste products, such as used tires, polymers, plastics, sludge, wood, and/or paper. Some examples of combustible organic polymers include: acrylate polymers, methacrylate polymers, e.g., poly(methyl methacrylate) (PMMA), polyepoxides, and polyamides. The combustible organic material may have an ignition temperature in the range of 200–700 degrees Celsius.

[0013] The mixture of glass-forming materials in the core 12 may comprise a homogenous mixture of substantially all of the glass-forming materials typically included in a conventional glass batch

or typically needed to achieve a specific, desired glass composition. For example, the core 12 may include a combination of glass-forming materials that can be melted together to produce soda-lime glass, aluminosilicate glass, borosilicate glass, or any other type of silica-based glass. Silica-based glasses are primarily composed of silicon dioxide (SiO_2) and a combination of one or more additional metal oxides. For example, soda-lime glass primarily includes a combination of silicon dioxide (SiO_2), sodium dioxide (Na_2O), and calcium oxide (CaO), but also may include relatively small amounts of aluminum oxide (Al_2O_3), magnesium oxide (MgO), potassium oxide (K_2O), iron oxide (Fe_2O_3), titanium oxide (TiO_2), and sulfur trioxide (SO_3), to name a few. A typical soda-lime glass composition may include, for example, about 60 wt.% to about 75 wt.% SiO_2 , about 10 wt.% to about 20 wt.% Na_2O , about 5 wt.% to about 20 wt.% CaO , and optionally about 0–4 wt.% Al_2O_3 , about 0–4 wt.% MgO , about 0–2 wt.% K_2O , about 0–1 wt.% Fe_2O_3 , about 0–0.5 wt.% TiO_2 , and about 0–0.5 wt.% SO_3 .

[0014] In one form, the mixture of glass-forming materials in the core 12 may include a mixture of metal oxides or metal-containing compounds that can be converted to metal oxides when melted. Examples of some types of metal-containing compounds that can effectively be converted to metal oxides when melted include metal-containing carbonates, e.g., sodium carbonate (Na_2CO_3) and calcium carbonate (CaCO_3), bicarbonates, e.g., sodium bicarbonate (NaHCO_3), sulfates, e.g., sodium sulfate (Na_2SO_4), nitrates, e.g., sodium nitrate (NaNO_3) and potassium nitrate (KNO_3), hydroxides, e.g., sodium hydroxide (NaOH) and calcium hydroxide (Ca(OH)_2), chlorides, fluorides, bromides, and iodides. These metal-containing compounds may be referred to as metal oxide precursor materials.

[0015] The structured pellet 10 may have a diameter in the range of 1 mm to 50 mm and may be formed from a particulate mixture of glass-forming materials having a mean particle diameter of

less than 0.5 μm . The mixture of glass-forming materials in the core 12 may account for between 5 wt% and 95 wt% of the overall pellet 10, with the outer shell 14 of the pellet 10 accounting for the remainder.

[0016] A plurality of structured pellets 10 may be formed by a process that includes the following general steps: (i) providing a particulate mixture of glass-forming materials, (ii) mixing the mixture of glass-forming materials with a binder for a sufficient amount of time to form a plurality of agglomerated bodies, and then (iii) coating the agglomerated bodies with an overlying layer of a coating material that includes a thermally-activated material, as described above. The particulate mixture of glass-forming materials may comprise substantially all of the glass-forming materials needed to achieve a specific, desired glass composition. The binder may comprise a liquid binder and may include alkali or alkaline earth metal hydroxides, alkali or alkaline earth metal silicates, aluminum silicates, or a combination thereof, for example. The particulate mixture of glass-forming materials and the binder may be mixed together, for example, using mechanical stirrers, paddles, a pan, disk, or drum type granulator, or a fluidized bed. The coating material may comprise a gaseous, liquid, or solid material. The agglomerated bodies may be coated with the coating material by any suitable technique, including pan rolling, drum rolling, spray deposition, or heated or cooled fluidization, to name a few.

[0017] A plurality of structured pellets 10 may be melted to produce a body of molten glass by heating the pellets 10 to a temperature in the range of 1300–1500 degrees Celsius, for example, in a conventional glass melting tank or furnace. In one form, a plurality of structured pellets 10 may be continuously introduced, commonly referred to as being ‘charged’, into a conventional glass melting tank or furnace and deposited on a surface of a body of molten glass already in the tank or

furnace. The pellets 10 may rapidly melt into the body of molten glass in the tank or furnace and molten glass may be continuously discharged from a downstream end of the tank or furnace.

[0018] The structured pellets can be charged into a conventional glass melting tank or furnace and used to produce molten glass without having to perform any modifications to existing equipment. And, in comparison to the conventional use of loose mixtures of glass-forming materials, the structured pellets 10 may decrease the amount of dust and/or particulate emissions generated during the material handling processes, which may reduce the need to wet the glass-forming materials or provide add-on particulate control devices such as electrostatic precipitators, bag houses or other filtration devices.

[0019] There thus has been disclosed a glass batch material and a process for making glass, that fully satisfies one or more of the objects and aims previously set forth. The disclosure has been presented in conjunction with several illustrative embodiments, and additional modifications and variations have been discussed. Other modifications and variations readily will suggest themselves to persons of ordinary skill in the art in view of the foregoing discussion. For example, the subject matter of each of the embodiments is hereby incorporated by reference into each of the other embodiments, for expedience. The disclosure is intended to embrace all such modifications and variations as fall within the spirit and broad scope of the appended claims.

Claims

1.

A structured pellet of glass batch materials that includes:

a core including a mixture of glass-forming materials; and

5 a shell surrounding the core including a thermally-activated material,

wherein the thermally-activated material is formulated to undergo an exothermic chemical reaction when heated to a temperature at or above a threshold temperature such that heat is transferred from the shell to the mixture of glass-forming materials in the core.

2.

10 The structured pellet set forth in claim 1 wherein the mixture of glass-forming materials includes a mixture of glass-forming metal oxides or metal oxide precursor materials.

3.

The structured pellet set forth in claim 1 wherein the mixture of glass-forming materials includes at least one metal oxide selected from the group consisting of SiO₂, CaO, Na₂O, MgO,
15 and K₂O.

4.

The structured pellet set forth in claim 1 wherein the mixture of glass-forming materials includes a mixture of particles having a mean particle diameter of less than 0.5 μm.

20

5.

The structured pellet set forth in claim 1 wherein the thermally-activated material is formulated to undergo an exothermic chemical reaction when heated to a temperature in the range of 200–700 degrees Celsius.

5

6.

The structured pellet set forth in claim 1 wherein the thermally-activated material comprises a combustible organic material that is formulated to undergo an exothermic combustion reaction when heated to a temperature at or above the threshold temperature, and wherein the combustible organic material has a heat of combustion in the range of 20–80 kJ/gram.

10

7.

The structured pellet set forth in claim 6 wherein the combustible organic material comprises at least one monomer or polymer selected from the group consisting of acrylates, methacrylates, epoxies, and amides.

8.

15

The structured pellet set forth in claim 1 wherein the core constitutes between 5–95 wt% of the structured pellet.

9.

The structured pellet set forth in claim 1 having a diameter in the range of 1–50 mm.

20

10.

A process for making glass that includes:

providing a structured pellet of glass batch materials as set forth in claim 1;

heating the shell to a temperature at or above a threshold temperature to initiate an
5 exothermic chemical reaction that supplies heat to the mixture of glass-forming materials in the
core; and

heating the core at a sufficient temperature and for a sufficient amount of time to melt the
mixture of glass-forming materials in the core and form a body of molten glass.

11.

10 The process set forth in claim 11 wherein the thermally-activated material comprises a
combustible organic material that undergoes an exothermic combustion reaction when heated in
the presence of oxygen to a temperature at or above an ignition temperature.

12.

15 The process set forth in claim 11 wherein the threshold temperature of the thermally-
activated material is less than the temperature at which the mixture of glass-forming materials is
heated to form the body of molten glass.

13.

The process set forth in claim 11 wherein the shell is heated to a temperature in the range
of 200–700°C to initiate the exothermic chemical reaction.

20

14.

The process set forth in claim 11 wherein the mixture of glass-forming materials in the core are heated at a temperature in the range of 1300–1500°C to melt the mixture of glass-forming materials in the core and form a body of molten glass.

5

15.

A process for producing a structured pellet of glass batch materials as set forth in claim 1, the process including:

providing a particulate mixture of the glass-forming materials;

mixing the glass-forming materials with a binder to form a plurality of agglomerated

10 bodies; and

coating the agglomerated bodies with an overlying layer of a coating material that includes the thermally-activated material.

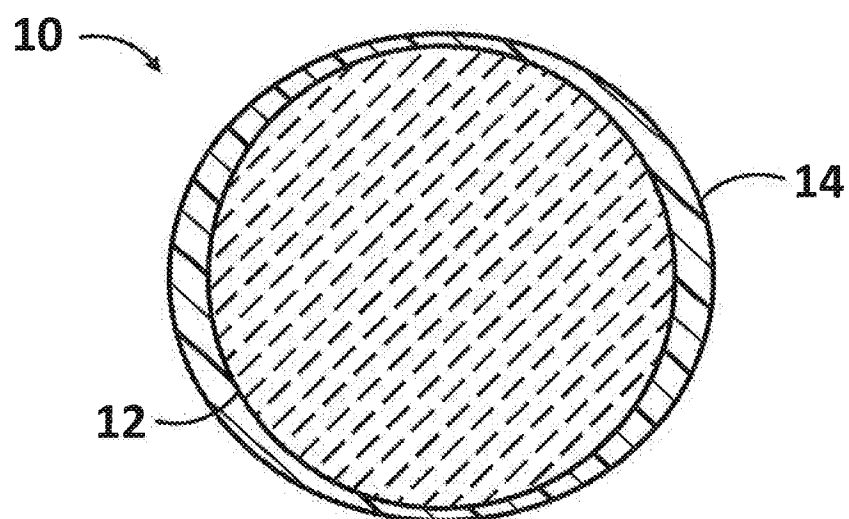


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/031465

A. CLASSIFICATION OF SUBJECT MATTER

INV. C03B1/02 C03C1/00 C03C1/02 C03C6/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C03B C03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2007/141196 A1 (GEGUSSA NOVARA TECHNOLOGY SPA [IT]; COSTA LORENZO [IT]; BRAUN BJOERN [] 13 December 2007 (2007-12-13) page 4, lines 8-11 -----	1-9
X	EP 0 166 398 A2 (PPG INDUSTRIES INC [US]) 2 January 1986 (1986-01-02) page 2, lines 20-32 page 5, lines 9-15 -----	10-14
A	US 2017/157582 A1 (PETERSON IRENE MONA [US] ET AL) 8 June 2017 (2017-06-08) paragraphs [0002], [0012] - [0016] -----	15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 July 2018

Date of mailing of the international search report

17/07/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Flügel, Alexander

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/031465

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2007141196	A1	13-12-2007	
		AU 2007255488 A1	13-12-2007
		CA 2653155 A1	13-12-2007
		CN 101460400 A	17-06-2009
		JP 2009538816 A	12-11-2009
		KR 20090009290 A	22-01-2009
		TW 200815284 A	01-04-2008
		WO 2007141196 A1	13-12-2007
EP 0166398	A2	02-01-1986	
		CA 1233837 A	08-03-1988
		DE 3583898 D1	02-10-1991
		EP 0166398 A2	02-01-1986
		JP H0360779 B2	17-09-1991
		JP S6114141 A	22-01-1986
		US 4551161 A	05-11-1985
US 2017157582	A1	08-06-2017	
		CN 106470811 A	01-03-2017
		US 2017157582 A1	08-06-2017
		WO 2016004047 A1	07-01-2016