United States Patent [19]

Mills et al.

[11] **3,839,189**

[45] **Oct. 1, 1974**

[54] **HYDROREFINED LUBE OIL AND PROCESS OF MANUFACTURE**

[75] Inventors: **Ivor W. Mills,** Media; **Glenn R. Dimeler,** West Chester, both of Pa.

[73] Assignee: **Sun Oil Company of Pennsylvania,** Philadelphia, Pa.

[22] Filed: **Feb. 24, 1972**

[21] Appl. No.: **228,832**

Related U.S. Application Data

[63] Continuation-in-part of Ser. Nos. 850,717, Aug. 18, 1969, abandoned, and Ser. No. 622,398, March 13, 1967, Pat. No. 3,462,358, and Ser. No. 652,026, July 10, 1967, Pat. No. 3,502,567, and Ser. No. 730,999, May 22, 1968, , and Ser. No. 850,716, Aug. 18, 1969, abandoned, and Ser. No. 873,008, Oct. 31, 1969, abandoned, and Ser. No. 22,295, March 24, 1970, Pat. No. 3,681,233, and Ser. No. 165,006, July 22, 1971, , and Ser. No. 165,141, July 22, 1971, Pat. No. 3,759,817, and Ser. No. 175,775, Aug. 27, 1971.

[52] **U.S. Cl.** **208/18,** 208/98, 208/99, 208/264

[51] **Int. Cl.** **C10g 41/00,** C10g 23/00

[58] **Field of Search** 208/14, 18, 264, 143, 98, 208/99

[56] **References Cited**

UNITED STATES PATENTS

3,145,161	8/1964	Anderson et al.	208/14
3,196,102	7/1965	Mills et al.	208/14
3,224,955	12/1965	Anderson	208/28
3,232,863	2/1966	Watson et al.	208/36
3,406,111	10/1968	Wynkoop et al.	208/14
3,434,994	3/1969	Smit et al.	208/14
3,502,567	3/1970	Mills et al.	208/14

FOREIGN PATENTS OR APPLICATIONS

743,525	9/1966	Canada	208/14

OTHER PUBLICATIONS

Bruins, "Plasticizer Technology," Vol. 1, Reinhold Pub. Co., N.Y., 1965, pages 79,80,85 and 86.

Von Hippel, "Dielectric Materials and Applications," Pub. John Wiley and Sons, London, (1961), pgs. 156 to 160.

Primary Examiner—Herbert Levine
Attorney, Agent, or Firm—George L. Church; J. Edward Hess; Barry A. Bisson

[57] **ABSTRACT**

A novel hydrorefined oil of improved stability under severe conditions of use has a viscosity in the range of 150–12,000 SUS at 100°F., contains 10–44 percent gel aromatics and less than 10 p.p.m. (preferably less than 5 p.p.m., more preferably less than 2 p.p.m. of basic nitrogen). Typically, such an oil can contain more than 10 p.p.m. of total nitrogen (e.g., 15–600 p.p.m.) depending on the viscosity of the oil. Preferably the hydrorefined oil is naphthenic or aromatic (by VGC classification). The basic nitrogen in such severely hydrorefined lube oils (typically 15–400 p.p.m.) can be reduced to less than 10 p.p.m. by a process comprising contacting the hydrorefined oil with an acidic adsorbent (such as an adsorbent comprising an acid-activated clay), preferably at 50°–150°F., or by contacting the hydrorefined oils with sufficient quantities of a mineral acid (e.g. 90–120 percent H_2SO_4) followed by a basic wash finished by adsorbent contact (as with a fuller's earth bleaching clay).

14 Claims, 3 Drawing Figures

TOTAL NITROGEN AND BASIC NITROGEN VS ULTRAVIOLET ABSORPTIVITY FOR NAPTHENIC OILS OF DIFFERING VISCOSITY (AT 100° F)


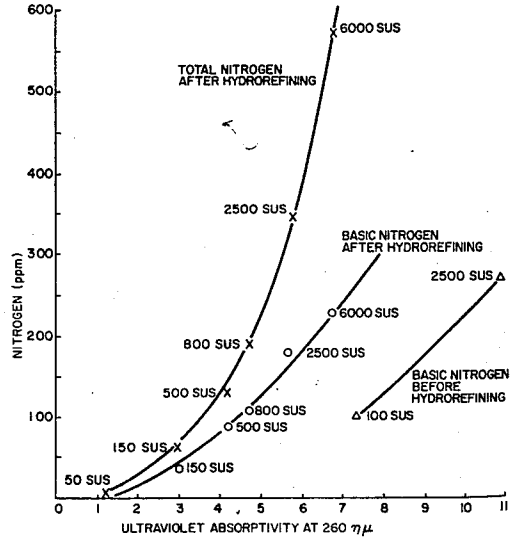


FIGURE 1

TOTAL NITROGEN AND BASIC NITROGEN VS ULTRAVIOLET ABSORPTIVITY FOR NAPTHENIC OILS OF DIFFERING VISCOSITY (AT 100° F)

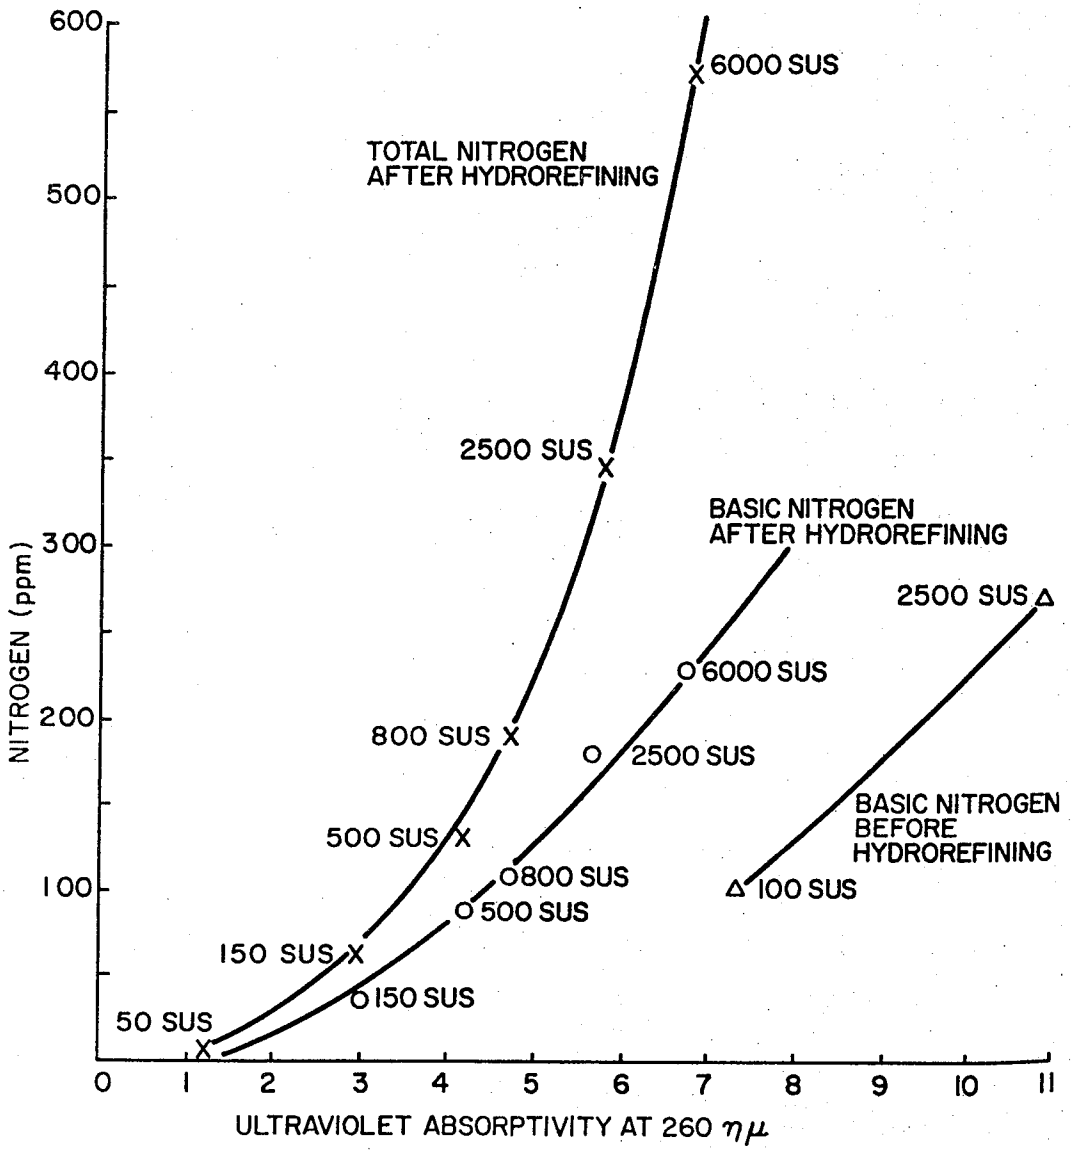


INVENTOR

Barry A. Bisson

ATTORNEY

FIGURE 2

BASIC NITROGEN CONTENT VS ACID ACTIVATED CLAY DOSAGE

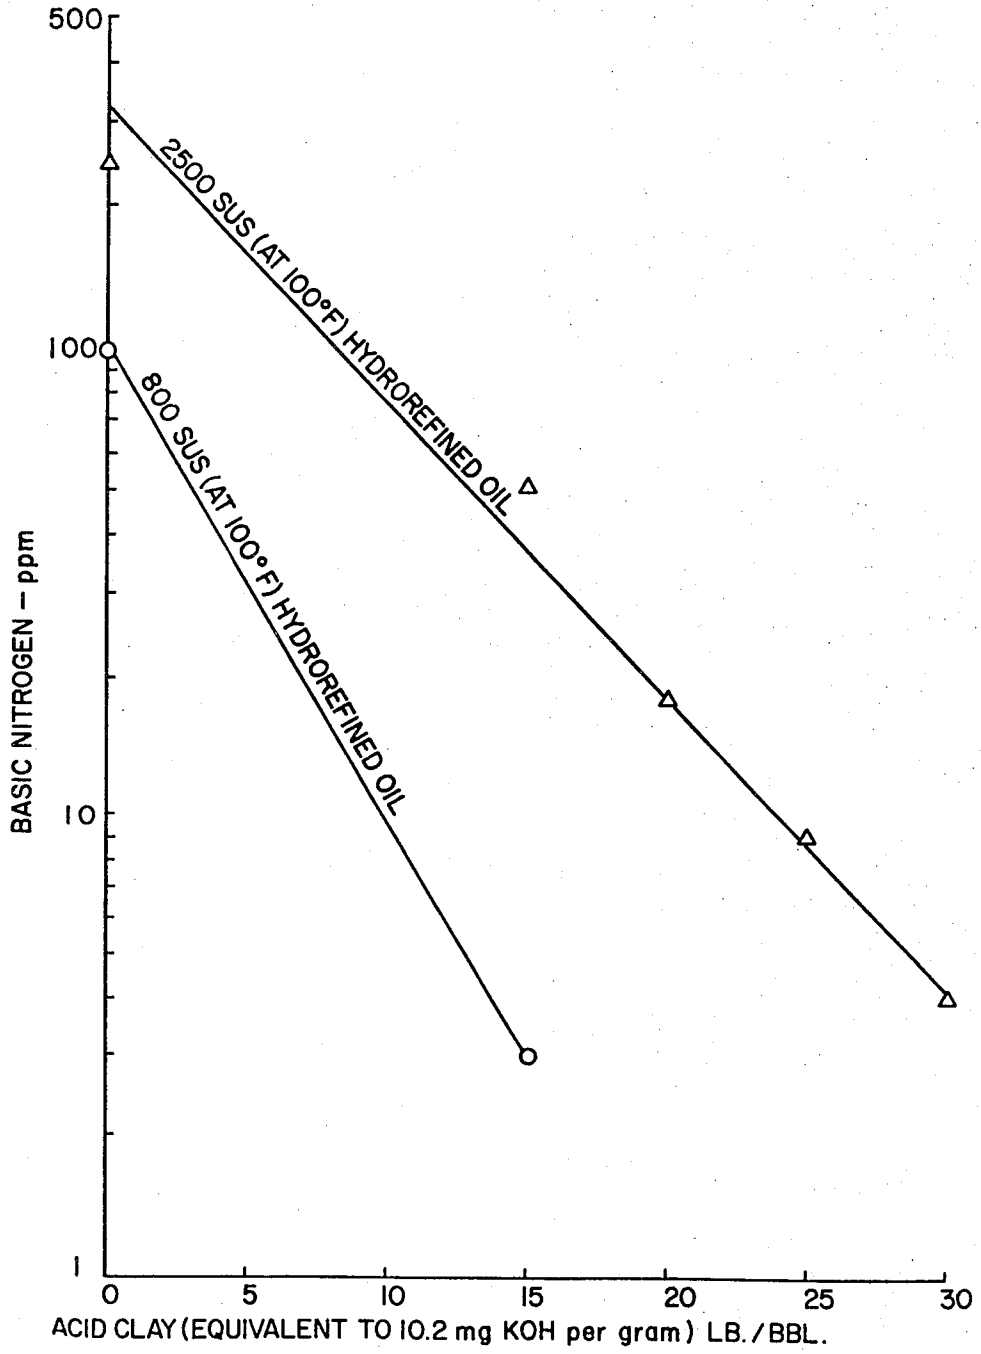


INVENTOR

Barry A. Brisson

ATTORNEY

FIGURE 3

EFFECT OF HYDROGENATION TEMPERATURE ON UV ADSORPTIVITY.

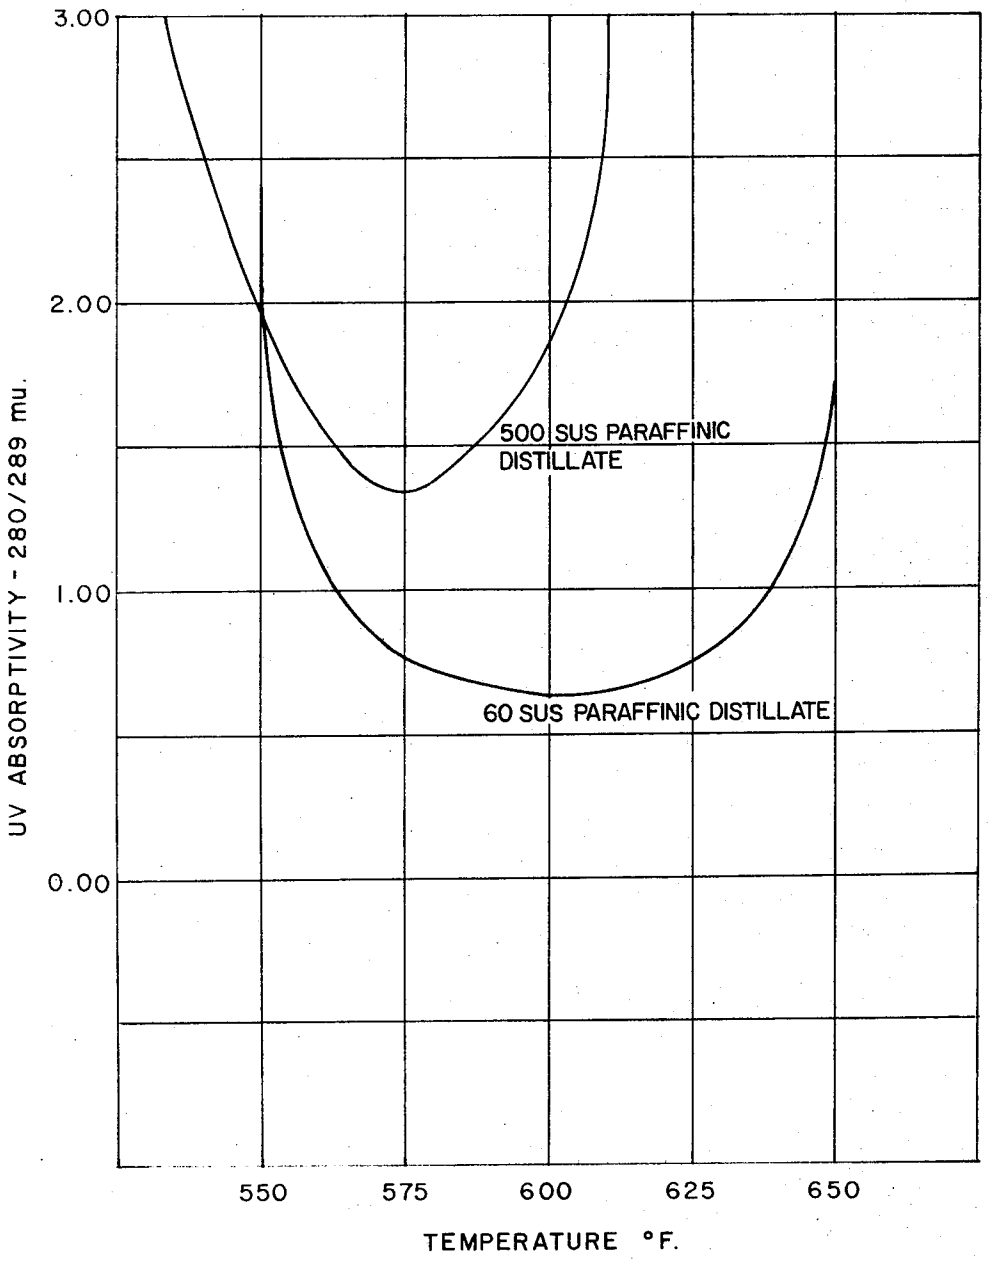

INVENTOR.

BY

Gary A. Gibson

ATTORNEY.

HYDROREFINED LUBE OIL AND PROCESS OF MANUFACTURE

CROSS REFERENCE TO RELATED APPLICATIONS

The present application is a continuation-in-part of all of the following earlier filed applications of the present inventors:

Serial No.	Filing Date	Patent No.	Issue Date	Title
622,398	3-13-67	3,462,358	8-19-69	Clay Treatment of Hydrorefined Cable Oils
652,026	7-10-67	3,502,567	3-24-70	Process for Producing Cable Oils by Sequential Refining Steps
730,999	5-22-68			Hydrorefined Transformer Oil and Process of Manufacture
850,716	8-18-69	now abandoned		Blended Hydrocarbon Oil and Process of Manufacture

—Continued

Serial No.	Filing Date	Patent No.	Issue Date	Title
850,717	8-18-69	now abandoned		Hydrorefined Lube Oil and Process of Manufacture
873,008	10-31-69	now abandoned		Oil and Process of Manufacture of Blended Hydrorefined Oil
22,295	3-24-70	3,681,223	8-1-72	Hydrorefined Cable Oil and Process of Manufacture
165,006	7-22-71			Process for Producing Blended Petroleum Oil
165,141	7-22-71	3,759,817	9-81-73	Blend Comprising Hydrorefined Oil and Raw Distillate
175,775	8-27-71			Blended Hydrocarbon Oil and Process of Manufacture

In addition to the previously noted patent applications the following earlier filed copending applications are related to the disclosure of the present application:

Serial No.	Filing Date	Patent No.	Issue Date	Title
636,493	5-5-67	3,681,279	8-1-72	Process for Preparing An Aromatic Oil and Non-discoloring Rubber Composition Containing Said Oil—IVOR W. MILLS, GLENN R. DIMELER & MERRITT C. KIRK, JR.
657,438	5-29-67			Rubber Containing Acid-Treated Oils and its Preparation—ABRAHAM SCHNEIDER & ARCHIBALD P. STUART
792,131	1-17-69	3,699,071	10-17-72	High Modulus Composition Comprising Hydrocarbon Oil, Rubber and Carbon Black — IVOR W. MILLS, GLENN R. DIMELER, MERRITT C. KIRK, JR. & JACKSON S. BOYER
812,516	2-19-69	3,619,414	11-9-71	Catalytic Hydrofinishing of Petroleum Distillates in the Lubricating Oil Boiling Range — IVOR W. MILLS, MERRITT C. KIRK, JR. & ALBERT T. OLENZAK
828,746	5-28-69	3,658,689	4-25-72	Isomerization of Waxy Lube Streams and Waxes—IB STEINMETZ & DAVID S. BARMBY
850,778	8-18-69	3,654,127	4-4-72	Process for Preparing Hign Viscosity Hydrorefined Cable Oil — IVOR W. MILLS, GLENN R. DIMELER, WILLIAM A. ATKINSON & JAMES P. HOFFMAN
850,779	8-18-69	3,586,752	6-22-71	Electrical Conduit Containing Hydrorefined Oil—IVOR W. MILLS, GLENN R. DIMELER & JOHN J. MELCHIORE
874,087	10-27-69	3,654,127	4-4-72	Light Colored Highly Aromatic Oil and Process of Preparation— IVOR W. MILLS, GLENN R. DIMELER & MERRITT C. KIRK, JR.
35,231	5-6-70			Hyraulic Oil Composition Containing a Blended Base Stock— JOHN Q. GRIFFITH, III, EDWARD S. WILLIAMS, WILLIAM H. REILAND, JR., IVOR W. MILLS & GLENN R. DIMELER
60,642	8-3-70	now	abandoned	Textile Machinery Lubricant Composition—JAMES R. AMAROSO & JOHN Q. GRIFFITH, III

—Continued

Serial No.	Filing Date	Patent No.	Issue Date	Title
70,590	9-8-70	3,732,154	5-8-73	Catalytic Hydrofinishing of Lube Oil Product of Solvent Extraction of Petroleum Distillate—IVOR W. MILLS, MERRITT C. KIRK, JR. & ALBERT T. OLENZAK
178,193	9-7-71			Composition Comprising Stabilized Hydrocracked Lube and an Antioxidant-ROBERT B. BRYER, WILLIAM W. CROUSE, JR., JOHN Q. GRIFFITH, III, THOMAS D. NEWINGHAM & WILLIAM H. REILAND, JR.
200,185	11-18-71	3,791,959	2-12-74	Blended Refrigeration Oil Composition — IVOR W. MILLS & JOHN A. MELCHIORE

The disclosure of all of the above-referred to applications is hereby incorporated herein by reference, particularly as to disclosure therein directed to hydrorefined oils in the lube viscosity range, to uses of such oils, and to the production of such oils.

RELEVANT PATENTS AND PUBLICATIONS

In parent application Ser. No. 850,717, filed Aug. 18, 1969, which claimed a similar invention to that in the present application, (and which was allowed to become abandoned in view of the filing of the present application), the following references were cited by the Examiner:

Patent No.	Issue Date	Patentee	Class/Sub
U.S.			
2,288,373	6/42	Smith et al	208/14
3,224,955	12/65	Anderson	208/18
3,328,293	6/67	Brenken	208/143
3,369,999	2/68	Donaldson et al	208/264
3,462,358	8/69	Mills et al	208/14
Canada			
743,525	9/66	Cibula et al	208/14

Publication: Von Hippel "Dielectric Materials and Applications" pp. 156–160, Wiley and Sons, London (1961).

Other relevant patents, which the Examiner referred to at an interview, are the following:

U.S. Pat. No.	3,232,863 to Watson
do.	3,425,932 to Surrena et al
do.	3,459,656 to Rausch

The examiner also noted a reference to spindle oil at page 9–66 of Petroleum Products Handbook, Guthrie, McGraw, Hill. Also of interest is Canadian Pat. No. 714,533, issued July 27, 1965 (Class 196–60) of Kozlowski et al, which refers to the total nitrogen contents of certain hydrorefined oils; however, Kozlowski et al fail to appreciate that additional refining of said oils to remove basic nitrogen can be advantageous (as is discussed in greater detail hereinafter.)

BACKGROUND OF THE INVENTION

In copending application Ser. No. 622,398, now U.S. Pat. No. 3,462,358, a process is claimed for producing an improved cable oil having an ASTM D-1934 aged dissipation factor (ADF) below 0.010 in the absence of added oxidation inhibitors, from a hydrogenated naphthenic oil having a viscosity in the range of 500–2,000 SUS at 100°F., an ultraviolet absorbency (UVA) less than 8 at 260 millimicrons and having an ADF greater than 0.015, comprising contacting said oil at a temperature in the range of 100–400°F., with an adsorbent comprising an acid-activated adsorbent clay in an amount per barrel of oil such that from 10–90 grams of KOH would be required to neutralize the acidity of the acid-activated adsorbent clay. Also claimed is a naphthenic electrical oil having a viscosity in the range of 500–2,000 SUS at 100°F., having an ADF less than 0.010 in the absence of added oxidation inhibitors, and which requires at least 75 hours at PFVO test conditions to reach a 6 percent power factor. It was further disclosed that, in the case of the high viscosity cable oils (4,000–6,000 SUS at 100°F.), a relatively inexpensive fuller's earth bleaching clay was preferred as the adsorbent for such a hydrorefined oil and that the dosage of clay was not particularly critical insofar as the ADF of the resulting cable oil was concerned.

Also disclosed were hydrogenation conditions and catalysts which could be used to severely hydrorefine distillate oils in the lubricating oil viscosity range (35 and higher SUS at 100°F.). It was further disclosed that such severe hydrogenation should be conducted so that the 260 UVA of the feed to the hydrogenation step be reduced at least 40 percent.

Further disclosed in said application, by example, was that the degree of nitrogen removal caused by the severe hydrorefining can vary according to the viscosity of the charge oil (an oil having a viscosity of 107 SUS and containing 190 p.p.m. N produced an oil containing 47 p.p.m. N; whereas, an oil having a viscosity of 2,901 SUS and containing 467 p.p.m. of N produced, under the same hydrogenation conditions, an oil containing 313 p.p.m. of N).

BRIEF SUMMARY OF THE INVENTION

It has been discovered that, in hydrorefined lubes having viscosities of 100 SUS or higher at 100°F. (whether paraffins, naphthenic or aromatic), the total nitrogen content is not a reliable indicator of the stability of the oil under all conditions of use (as with refrigeration oils, textile oils, electrical oils, transmission fluids, etec.), but that the "basic" nitrogen content of the hydrogenated oil is an important indicator of how the oil (or blends containing the oil) will respond under severe conditions of use. In severely hydrorefined oils (as

defined herein), the basic nitrogen content becomes a greater problem as the viscosity increases. It is a severe problem in oils of about **150** SUS and very severe in oils of 500 SUS or greater.

A novel hydrorefined oil of improved stability under severe conditions of use has a viscosity in the range of 150–12,000 SUS at 100°F., (typically, 500 SUS-6,000 SUS), contains 10–44 percent gel aromatics and less than 10 p.p.m. (preferably less than 5 p.p.m., more preferably less than 2 p.p.m.) of basic nitrogen. Typically, such an oil can contain more than 10 p.p.m. of total nitrogen (e.g., 15–600 p.p.m.) depending on the viscosity of the oil and the severity of the hydrorefining. Preferably, the hydrorefined oil is naphthenic or aromatic by VGC classification; that is, it has a viscosity-gravity constant in the range of 0.820–0.94, or greater, (typically, 0.84–0.92).

The basic nitrogen in such severely hydrorefined lube oils (typically 15–400 p.p.m.) can be reduced to less than 10 p.p.m. by a process comprising contacting the hydrorefined oil with an acidic adsorbent (such as an adsorbent comprising an acid-activated clay), preferably at 50–150°F., or by contacting the hydrorefined oil with sufficient quantities of a mineral acid (e.g., 90–120 percent H_2SO_4) followed by a basic wash to neutralize the oil and remove impurities (as by the procedures referred to in application Ser. No. 657,438 of Schneider and Stuart). More preferably, the contacting is at a temperature in the range of **50°–100°F** (e.g., 70°F).

The oil which has been acid contacted and neutralized can be further finished (as may be desired for an electrical oil) by adsorbent contacting, as with a fuller's earth bleaching clay (attapulgite), activated carbon, alumina, or a crystalline alumino-silicate zeolite (e.g., Linde 5A, or 13X molecular sieves), an acid-activated clay or combinations of two or more such adsorbents (e.g., see U.S. Pat. No. 3,369,993). A preferred adsorbent combination is an admixture of attapulgite and acid-activated clay.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, FIG. **1** is a plot of the **260** UVA versus the nitrogen content (total or basic) of hydrorefined naphthenic oils of various viscosities. The hydrorefining of each charge oil was at 650°F., 0.5 LHSV (of the fresh feed), 1,200 p.s.i.g. of 75 percent hydrogen (at the reactor inlet) with sulfided NiMo oxides on alumina as the catalyst. Also plotted is the basic nitrogen content of the charge stock (in the 100–2,500 SUS viscosity range) before hydrorefining.

FIG. **2** is a plot of the pounds of acid-activated clay (equivalent to 10.2 mg KOH per gram) required per barrel of hydrorefined oil to reduce the basic nitrogen to a given p.p.m. level in two of the severely hydrorefined naphthenic distillates from which the data plotted in FIG. **1** was obtained. The basic nitrogen is on a logarithmic scale, indicating that at lower concentrations it becomes increasingly more difficult to remove basic nitrogen with a single contacting step.

FURTHER DESCRIPTION OF THE INVENTION

Petroleum fractions (e.g., distillates, extracts, raffinates, reformer bottoms, cycle oil fractions, etc.) in the lubricating oil viscosity range (35–12,000 SUS at 100°F.) can be severely hydrorefined (e.g., at 600°F., 1,200 p.s.i.g. of 80 percent hydrogen, 0.3 LHSV, presulfided Ni-Mo oxide catalyst) to produce a hydrogenated oil having a lighter ASTM color, a lower (by at least 40 percent, typically 40–90 percent) ultraviolet absorptivity at 260 millimicrons and containing appreciably less total nitrogen (and, if desired, lower gel aromatics) than was in the charge to the hydrorefining stage.

With some charges, such as paraffinic distillates, dewaxing and/or deasphalting can be advantageous prior to hydrorefining. Preferably, to insure longer catalyst life and to reduce hydrogen consumption, when the petroleum fraction is derived from a stock containing naphthenic acids, such acids should be removed (or substantially reduced) prior to hydrorefining as by the processes disclosed in the following U.S. Pat. Nos.: 1,603,174; 2,770,580; 2,795,532; 2,966,456 and 3,080,312.

In the case of light lubes (e.g., having a viscosity in the range of 35–65 SUS at **100°F.**), such as the transformer oils, the total nitrogen remaining in the oil after a single stage of severe hydrogenation can frequently be less than 10 p.p.m. (typically, less than 5 p.p.m.). Hydrorefining can also be conducted (in a single stage or in multiple stages) so as to obtain a hydrorefined (or hydroaromatized) oil with such low nitrogen and an increased gel aromatic content (e.g., see Ser. No. 636,493).

Therefore, in light lubes and, particularly, in transformer oils, severe hydrogenation in a single stage is normally sufficient to reduce the basic nitrogen to less than 5 p.p.m. Generally, basic nitrogen is not a problem in such severely hydrorefined light lubes. Similarly, when the charge to a severe hydrorefining stage consists essentially of a paraffinic distillate in the lubricating oil boiling range, severe hydrogenation in a single stage is usually sufficient to effectively reduce both total and basic nitrogen to less than 10 p.p.m.

However, as is illustrated in FIG. **1** in the drawings attached hereto, when the charge stock is a naphthenic or aromatic distillate (including a raffinate or extract product from solvent extraction of a naphthenic distillate), having a viscosity greater than about 100 SUS, (typically 150–12,000 SUS) severe hydrogenation in a single stage, as to an ultraviolet absorptivity at 260 millimicrons (i.e., 260 UVA) in the range of 3 for a 150 SUS oil, cannot economically be used to reduce the basic nitrogen content below about 10 p.p.m., nor the total nitrogen content below about 20 p.p.m. As can be seen from FIG. **1**, both the total and the basic nitrogen contents of such hydrorefined oils typically are greater as the viscosity of the oil increases. This is probably due to less efficient utilization of the hydrogen caused by the hindering effect of the larger oil molecules on hydrogen diffusion.

Also shown, in FIG. **2** is the dramatic degree to which such basic nitrogen can be removed from such a hydrorefined oil be means of an acidic adsorbent, particularly, acid-activated adsorbent clay.

For many uses (as in dark colored rubber vulcanizates or in electrical cables where the oil is not in contact with Kraft paper) such severely hydrorefined oils exhibit satisfactory performance even at total nitrogen levels in the range of 30–900 p.p.m. (about 50 percent of the total nitrogen being "basic" nitrogen). For certain end uses (such as in textile spinning oils, light colored oil-rubber vulcanizate, cables where the oil is in contact with Kraft paper and in refrigerator oils sub-

jected to high operating temperatures) a much more satisfactory performance is obtained with a hydrorefined oil which has a viscosity in the range of 100–12,000 SUS at 100°F., contains 5–50 percent (typically 20–44 percent) of gel aromatics, and contains less than 10 p.p.m. of basic nitrogen (preferably, less than 5 p.p.m. and more preferred less than 2 p.p.m.).

The phrase "total nitrogen" refers to the nitrogen content of an oil as determined by such methods as that of P. Gouverneur, Anal. Chim. Acta, 26 (1962) 212 or, more preferred, the modified Gouverneur method described by Smith, A. J. et, al. in Anal. Chim. Acta, 40 (1968) 341–343.

The phrase "basic nitrogen" refers to those nitrogen compounds present in crudes, petroleum distillates and residues which have a basic ionization constant, K_b, greater than 1^{-12}. A preferred analytic method for determining the content of such basic nitrogen compounds in hydrorefined oils in the lube oil viscosity range, involves dissolving a sample of the oil in an appropriate solvent and potentiometrically titrating the solution with perchloric acid in acetic acid. In the case of light-colored oils, the solvent can be glacial acetic acid and para-naphthol-benzein can be used as a colormetric indicator as an alternative to the potentiometric procedure. Dark samples and heavier oils are dissolved in chlorobenzene-acetic acid solvent and titrated potentiometrically (utilizing a pH meter or its equivalent and a glass-calomel electrode system).

For the potentiometric titration, the procedure is to place a 20 gram sample of the oil in a 250 ml. tall-form titration beaker and add about 100 milliliters of a mixture of equal quantities of glacial acetic acid and chlorobenzene. The sample is then titrated potentiometrically, at room temperature, while being stirred continually by a magnetic stirrer, with 0.01 N perchloric acid in glacial acid to which has been added about 20 ml. of acetic anhydride for each liter of glacial acetic acid (in order to insure the removal of any water that might be present). The weight percent basic nitrogen is calculated as follows:

$$\text{PPM Basic N} = (V_1\text{-}V_2)\ (N)\ (0.014)_{10}6/W$$

where:

V_1 = ml titrant for sample
V_2 = ml titrant for blank
N = normality of perchloric acid
W = sample weight (grams)

This potentriometric titration can be used to determine the basic nitrogen content of a hydrorefined oil in the range of 1 to at least 2,000 p.p.m. and, in the range of 1–10 p.p.m. is at least accurate to within 1 p.p.m. when corrections are made for interferences by hydroxides, some oxides, carbonates, naphthenates, and similar bases (if these are present in the sample).

The phrases "severe hydrorefining" or "hydrogenation" refer to processes conducted in the presence of a hydrogenation catalyst at from about 500°–775°F., with hydrogen of 50–100 percent purity, and from 800–3,000 p.s.i. of hydrogen at the reactor inlet (at total pressures from 800–6,000 p.s.i.g.) at a fresh feed liquid hourly space velocity (LHSV) of from 0.1–8.0 (usually below 2.0), preferably conducted either in vapor phase or trickle phase. Such hydrogenation or severe hydrorefining is to be distinguished from hydrocracking in that the production of "overhead" (i.e., hydrocarbons boiling below 485°F.) is less than 25 percent by volume per pass through the reactor (and, typically, less than 10 percent). Product recycle, for example, as in U.S. Pat. No. 2,900,433, can be used to increase severity. Recycle liquid hourly space velocity can vary from 0 to 20; however, we prefer to operate at total liquid throughputs that obtain at greater than 25 percent of flooding velocity and more preferably at from 40–98 percent of flooding velocity.

Preferably, the temperature is below that at which substantial cracking occurs, that is, no more than 20 weight percent (preferably less than 10 percent) of the feed stock is converted to material boiling below 300°F. in a single pass through the reactor. Although the maximum hydrogenation temperature which will not produce substantial cracking is somewhat dependent upon the space velocity, the type of catalyst and the pressure, generally it is below 750°F. but can be as high as 785°F. To allow a margin of safety, we prefer to operate below 700°F. (except when it is desired to obtain a hydrogenated oil containing more gel aromatics than are in the charge). At total pressures below about 2,000 p.s.i. we prefer a temperature below about 660°F., since above that temperature the degradation of oil viscosity can become large.

Typical of such severe hydrorefining methods, when conducted within the aforementioned processing conditions, are those of U.S. Pat. Nos. 2,968,614; 3,993,855; 3,012,963; 3,114,701; 3,144,404; and 3,278,420; and those of the previously referred to copending applications, Ser. Nos. 622,398; 652,026; 636,493; 730,999 and 812,516. The terms "severely hydrorefined oil" or "hydrogenated oil" include the products, within the lubricating oil boiling range, of such severe hydrorefining or hydrogenation. One characteristic of a severely hydrorefined or hydrogenated oil is that the ratio of monocyclic aromatics to polycyclic aromatics is significantly greater than in hydrotreated oils or conventional distillate oils.

Where the desired hydrorefined oil is to be of the naphthenic class, a preferred charge to the hydrogenation reactor can be obtained by vacuum distillation of naphthenic or "mildly aromatic" crude oils (as in U.S. Pat. No. 3,184,396), especially those crude oils wherein the 1,500–3,000 SUS (at 100°F.) distillate fractions have viscosity-gravity constants from 0.84 to 0.92. Preferably, such a charge stock should be substantially free of naphthenic acids prior to the hydrorefining (thus, in some cases distillation in the presence of caustic is advantageous). Usually materials boiling below about 600°F. (including residual H_2S, NH_3, etc.) are removed from the hydrorefined oils, as by atmospheric distillation (and the viscosity can also be adjusted by choice of distillation end point) prior to clay contacting (if the oils are to be clay finished).

The viscosity of the base oil, or of the final hydrorefined oil, can be adjusted by the addition of other oils of higher or lower viscosity and which are within the lube oil boiling range. For example, a preferred cable oil having a viscosity at 100° F. in the range of 500–2,000 SUS with hydrogenated oil having a viscosity from 1,500–3,000 SUS and then contacting the resulting blend of hydrogenated oils with sufficient acidic adsorbent or mineral acid to reduce the basic nitrogen content of the oil to below 10 p.p.m.

By napthenic distillate, we refer to a distillate fraction (or a mildly acid treated distillate fraction, or a sol-

vent raffinate fraction or an acid-treated raffinate) usually from vacuum distillation, of a crude which is classified as naphthenic (including "relatively naphthenic") by the viscosity-gravity constant (VGC) classification method. Preferably, such crudes are "Grade A" (wax-free), typically Gulf Coastal, and include, for example, Refugio, Mirando, and Black Bayou. The lower VGC oils can be obtained from mid-continental crudes; however, dewaxing may be necessary (as by extraction or isomerization) for end uses where the final oil is required to have a low pour point (e.g., less than 30°F.) Such naphthenic fractions will have a VGC in the range of 0.820 to 0.899 and, typically, a viscosity in the range of 150–12,000 SUS at 100°F. (for example, 500–6,000). In some cases the crude (and distillate) can have a VGC as high as 0.94 (such crudes are characterized as "mildly aromatic"), or higher (e.g., 0.96+). Deep furfural extraction (e.g., about 50 percent yield) of a high VGC Grade A crude can be used to produce a wax-free, lower VGC fraction (e.g., 0.83 VGC) which can be used in low floc point (or pour point) blends with paraffinic oils (e.g., see Ser. No. 200,185). Paraffinic oils are those oils having a VGC of 0.819 or less and also having an ASTM viscosity index of 65 or more.

FURTHER DESCRIPTION OF THE DRAWINGS

FIG. 1 herein illustrates the typical contents of total nitrogen and basic nitrogen for severely hydrorefined naphthenic oils in the viscosity range from 50 to over 6,000 SUS. The curves can be extended (either by mathematical means or by use of a French curve), to obtain typical nitrogen contents of oils as high as 12,000 SUS at 100°F.

In FIG. 1, two curves have been drawn to illustrate the relationship between the total and basic nitrogen content of severely hydrorefined oils of a number of viscosity ranges. The nitrogen content has been plotted against the 260 UVA, since the 260 UVA indicates the degree to which the oils have been hydrogenated. Also illustrated in a third curve is the basic nitrogen content of the charge oils before hydrorefining.

For example, in FIG. 2, a 250 SUS naphthenic distillate (which was substantially free from naphthenic acid) was hydrorefined at 650°F., 0.5 LHSV at 1,200 p.s.i.g. of 80 percent hydrogen (at the reactor inlet). The 2,500 SUS oil contained about 270 p.p.m. of basic nitrogen before the hydrorefining. The hydrorefined oil contained about 180 p.p.m. of nitrogen (and about 350 p.p.m. total nitrogen). The UVA of the 2,500 SUS distillate before hydrorefining was about 10.8 and, the hydrorefined oil had a 260 UVA of about 5.6, indicating a severe hydrogenation for such a relatively highly viscous distillate.

FIG. 2 of the drawings illustrates the degree to which the basic nitrogen in a hydrorefined oil can be reduced by contacting the oil with an acid clay. In the figure, the acid clay used had an acidity equivalent to 10.2 mg KOH per gram. In FIG. 2, the basic nitrogen is plotted on a logarithmic scale, indicating that as the lower levels of nitrogen content are approached, it becomes progressively more difficult to remove basic nitrogen with the acid clay adsorbent. The two curves in FIG. 2 illustrate that as the viscosity of the hydrorefined oil increases, greater amounts of acid clay are necessary to reduce the basic nitrogen content to less than 10 p.p.m. (and, or more preferably to less than 5 p.p.m.). With the more highly viscous, hydrorefined oils, it becomes more economical to utilize a mineral acid, and to dilute the oils with a non-reactive, less viscous, lower boiling solvent (such as iso-octane or gas oil).

ILLUSTRATIVE EXAMPLES

EXAMPLE I

A 2,500 SUS naphthenic distillate (which was substantially free from naphthenic acid) was hydrorefined at 650°F., 0.5 LHSV at 1,200 p.s.i.g. of 80 percent hydrogen (at the reactor inlet). The 2,500 SUS oil contained about 270 p.p.m. of basic nitrogen before the hydrorefining. The hydrorefined oil contained about 180 p.p.m. of nitrogen (and about 350 p.p.m. total nitrogen). The UVA of the 2,500 SUS distillate before hydrorefining was about 10.8 and, the hydrorefined oil had a 260 UVA of about 5.6, indicating a severe hydrogenation for such a relative highly viscous distillate. The appropriate values for the charge and hydrogenated oil produced from this charge are plotted in FIG. 1.

EXAMPLE II

FIG. 2 of the drawings illustrates the degree to which the basic nitrogen in a hydrorefined oil can be reduced by contacting the oil with various amounts of an acid-activated clay. The upper curve in FIG. 2 shows the nitrogen levels which were obtained by such contact of the 2,500 SUS hydrorefined oil of Example 1. In the figure, the acid clay used had an acidity equivalent to 10.2 mg KOH per gram. In FIG. 2, the basic nitrogen is plotted on a logarithmic scale, indicating that as the lower levels of nitrogen content are approached, it becomes progressively more difficult to remove basic nitrogen with the acid clay adsorbent. The two curves in FIG. 2 illustrate that as the viscosity of the hydrorefined oil increases greater amounts of acid clay are necessary to reduce the basic nitrogen content to less than 10 p.p.m. (and or more preferably to less than 5 p.p.m.). With the more highly viscous, hydrorefined oils it becomes more economical to utilize a mineral acid, and to dilute the oil with a non-reactive, less viscous, lower boiling solvent (such as iso-octane or gas oil). Such contacting with a mineral acid can be by the processes shown in the previously referred to applications Ser. No. 622,398 (now U.S. Pat. No. 3,462,358 or Ser. No. 652,026 (now U.S. Pat. No. 3,502,567). Other preferred processes for removing basic nitrogen from such oils are those shown in the application of Schneider and Stuart, Ser. No. 657,438. Cables containing Kraft paper and the oils containing less than 5 p.p.m. of basic nitrogen show good performance under service conditions, (see Ser. No. 850,779, now U.S. Pat. No. 3,586,752).

EXAMPLE III

A residuum was obtained from the distillation of a naphthenic crude (VGC of 0.89) by the caustic distillation process described in U.S. Pat. No. 3,184,396. This residuum was distilled under a lower pressure than that used in the first distillation and a 35 volume percent overhead fraction (viscosity 13,000 SUS at 100°F. and 200 SUS at 210°F.) was recovered. This overhead will be referred to hereinafter as "heavy distillate from heavy residuum" or by the abbreviation "HDFHR." The HDFHR was hydrorefined, in the presence of a sulfided Ni-Mo oxide catalyst, at a temperature of about

605°F., 1,140 p.s.i.g. total pressure (about 75 percent H_2 at reactor inlet), at a 7 to 1 volume ratio of recycle to charge and with a reactor gas bleed of 18,000 scfh. The hydrogenated product (95volume percent yield) had a viscosity at 100°F. of **8050** SUS and 170 SUS at 210°F. this hydrogenated oil had an initial ASTM color of 2.0 and remained stable in color if stored at temperatures below 130°F. when contacted with 10 lb/bbl. of H_2SO_4, washed and neutralized and finished with 10 lb./bbl. of attapulgite. The final oil had an initial power factor (100°C.) of 0.0006 and an aged (with Cu) 100°C. power factor of 0.012.

Table 1 herein reports the additional improvement in electrical properties which can be obtained when the "HDFHR" is treated with an acid such as H_2SO_4, washed and neutralized prior to the hydrogenation step. Also shown is the additional improvement which can be obtained by a final contacting with acid-activated clay.

A preferred class of hydrorefined oil of the present invention is characterized by having an ASTM-VI of less than 65 (typically less than 50) and containing at least 20 wt. percent aromatics (typically 25–45 percent). Generally, the Engler viscosity at 20°C. will be greater than 10°(typically, over 15°E). Technical grade white oils, useful as agrucultural spray oils, or for blending with the novel oils discussed above, and having viscosities in the range of 50–600 SUS at **100**°F. can be made from hydrogenated paraffinic oils when the hydrogenation is effected under the conditions shown in the accompanying FIG. **3** and Table II. Such technical white oils can have improved oxidation stability if they are blended with from 1–10 percent of unhydrogenated paraffinic distillate (and the resulting blend can be added to the hydrorefined naphthenic and aromatic oils described herein).

FIG. **3** illustrates the ultraviolet absorptivity in the 280–289 millimicron region for paraffinic distillates of varying viscosities (60 SUS and 500 SUS, respectively). The curves show that within a very narrow temperature range the UV absorptivity in the 280–289 millimicron region (280–289 UVA) can be minimized. At a temperature between 550–600°F., a 500 SUS distillate can be hydrogenated, at 800 p.s.i. or more of hydrogen partial pressure, to produce a technical white oil having a 280–289 UVA less than 2.0. For a 60 SUS paraffinic distillate, a hydrogenation temperature in the range of 565°–640°F. can be used to produce a hydrogenated oil having a 280–289 UVA less than 1.0. At hydrogen pressures in the range of 800–2,000 p.s.i., a temperature of about 575°F. (or a range of 565°–585°F) can be used to provide an optimum hydrogenation (as indicated by a low 280–289 UVA) for paraffinic distillates having viscosities in the range of 50–600 SUS at 100°F. Such hydrogenated oils can be advantageously finished with acidactivated or fuller's earth bleaching clays or with mixtures of such clays (5–50 lbs/bbl). Table II herein reports on further properties of such technical white oils.

TABLE I

800 SUS (at 100°F.) Cable Oils Made From Heavy Distillate from Heavy Residuum (HD-FHR)

Step	Further Treatment of "HDFHR"	Basic Nitrogen ppm	ASTM Dissipation Factor Initial At 100°C.	ASTM Dissipation Factor Aged 4 days Cu, 115°C.
1st	10 lb/bbl H_2SO_4			
2nd	Hydrogenation	1	—	0.0361
3rd	10 lb/bbl acid-activated clay			
1st	25 lb/bbl H_2SO_4			
2nd	Hydrogenation	23	—	—
1st	225 lb/bbl H_2SO_4			
2nd	Hydrogenation	1	0.0002	0.0160
3rd	10 lb/bbl acid-activated clay			
1st	40 lb/bbl H_2SO_4			
2nd	Hyrogenation	8	—	—
1st	40 lb/bbl H_2SO_4			
2nd	Hydrogenation	1	0.0001	0.0092
3rd	10 lb/bbl acid-activated Clay Commercial Polybutene (2500 SUS at 100°F.)	1	0.0002 max	0.0021

TABLE II

Ultraviolet Absorptivity Data for Hydrogenated Paraffinic Distillates

Run	Hydrogenation Conditions (1000 psig of 100% H_2) Temp°F.	LHSV	FDA Absorptivities, mμ 280/289	290/299	300/329	330/350	UV Absorptivities, mμ 260	325	335
A[a]	(Charge)		10.73	8.85	7.45	3.30	0.93	0.08	0.05
B	550	0.5	1.98	1.74	1.39	0.46	0.41	0.02	0.01
C	575	0.5	1.36	1.14	0.90	0.34	0.32	0.02	0.01
D	600	0.5	1.88	1.45	1.16	0.54	0.28	0.02	0.01
E	625	0.5	11.18	7.85	6.45	3.20	0.57	0.04	0.03
F	650	0.5	10.35	6.95	5.62	3.70	0.32	0.03	0.02
G	625	0.25	5.65	3.68	2.90	2.12	0.19	0.02	0.02
Spec. FDA Tech. White Oil			4.0	3.3	2.3	0.8	—	—	—
H[b]	650	0.5	6.41	3.32	2.60	2.60	—	—	—
I[c]	550	0.5	0.68	0.41	0.33	0.17	—	—	—

(a) 500 SUS paraffinic distillate charge hydrogenated at indicated conditions (Runs B–G).
(b) 60 SUS at 100°F. paraffinic distillate charge hydrogenated at indicated conditions (Runs H and I).
(c) Sample H (650°F., 0.5 LHSV) rerun at 550°F. 0.5 LHSV (2 stage process).

The invention claimed is:

1. A severely hydrorefined oil having improved stability under severe conditions of use and having a viscosity in the range of 2050–12,000 SUS at 100°F, said severely hydrorefined oil containing 10–44 wt percent gel aromatics and less than 10 ppm of basic nitrogen, and wherein said severely hydrorefined oil has a viscosity gravity constant in the range of at least 0.84 to 0.92.

2. A hydrorefined oil according to claim **1** and containing more than 10 p.p.m. of total nitrogen.

3. A hydrorefined oil according to claim **1** and containing from 15–600 p.p.m. of total nitrogen.

4. A hydrorefined oil according to claim **3** and containing less than 2 p.p.m. of basic nitrogen.

5. A hydrorefined oil according to claim **1** wherein said hydrorefined oil has a viscosity in the range of 8,100–12,000 SUS at 100°F.

6. A hydrorefined oil according to claim **1** wherein said hydrorefined oil has a viscosity in the range of **2050-2950** SUS at 100°F.

7. Process for preparing a hydrorefined oil containing less than 10 ppm of basic nitrogen, said process comprising obtaining a severely hydrorefined oil having a viscosity-gravity constant of at least 0.84, a viscosity at 100°F in the range of 2050–12,000 SUS and containing more than 10 ppm of basic nitrogen, and contacting said oil with an acidic adsorbent or a mineral acid and recovering as a product of said contact a severely hydrorefined oil containing less than 10 ppm of basic nitrogen.

8. Process according to claim **7** wherein the basic nitrogen content of said severely hydrorefined oil is determined prior to said contacting.

9. Process according to claim **7** and wherein said contacting is with an adsorbent comprising an acidactivated adsorbent clay.

10. Process according to claim **8** wherein said contacting is at a temperature in the range of 50°–150°F.

11. Process according to claim **9** and wherein said adsorbent comprises acid-activated adsorbent clay and a naturally occurring fuller's earth bleaching clay.

12. Process according to claim **10** and wherein said naturally occurring fuller's earth bleaching clay is attapulgite.

13. Process according to claim **7** wherein said mineral acid is 90–120 percent H_2SO_4.

14. A process according to claim **7** wherein the total nitrogen in said hydrorefined oil prior to said contacting is greater than 50 p.p.m.

* * * * *