



(19) **United States**  
(12) **Patent Application Publication**  
**Kiernan**

(10) **Pub. No.: US 2014/0259272 A1**  
(43) **Pub. Date: Sep. 18, 2014**

(54) **GARMENTS FOR PROVIDING ACCESS FOR SENSORS TO CONTACT SKIN**

**Publication Classification**

- (71) Applicant: **WARE LLC**, Darien, CT (US)
- (72) Inventor: **Pamela Kiernan**, Darien, CT (US)
- (73) Assignee: **WARE LLC**, Darien, CT (US)

- (51) **Int. Cl.**  
*A41D 13/12* (2006.01)
- (52) **U.S. Cl.**  
CPC ..... *A41D 13/1281* (2013.01)  
USPC ..... *2169; 2/227*


- (21) Appl. No.: **14/294,455**
- (22) Filed: **Jun. 3, 2014**



**Related U.S. Application Data**

- (63) Continuation of application No. 12/751,712, filed on Mar. 31, 2010, now Pat. No. 8,776,264.
- (60) Provisional application No. 61/166,415, filed on Apr. 3, 2009.



(57) **ABSTRACT**

A garment for wearing during monitoring of muscle activity of a subject includes a torso portion defining an interior space configured and adapted to accommodate and cover at least a portion of the subject's torso. The torso portion defines an exterior space external to the interior space. A plurality of access fittings are defined in the torso portion. Each access fitting is configured and adapted to accommodate access to skin of the subject adjacent a muscle group to be monitored by a sensor unit external to the torso portion, such that at least a portion of the sensor unit remains external to the torso portion with the sensor unit accessing the skin via the access fitting.

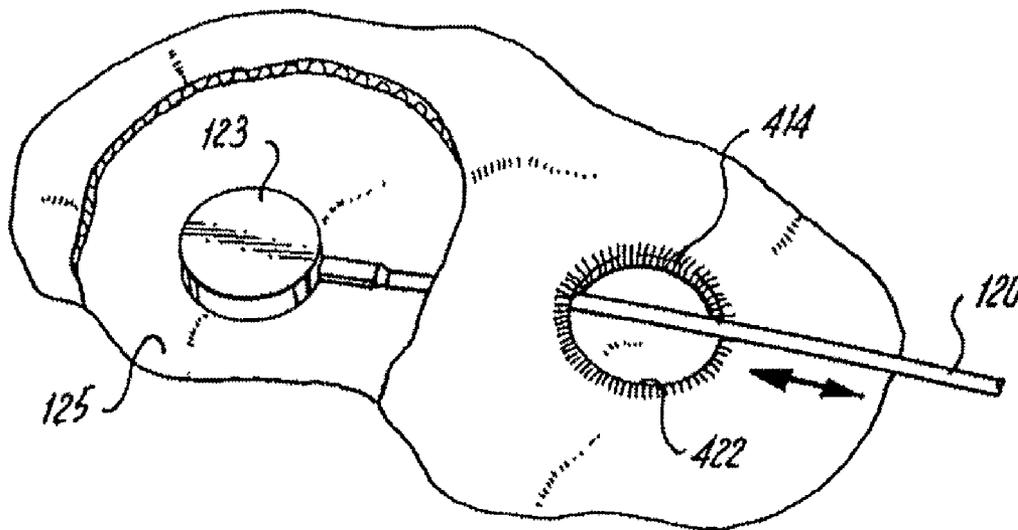


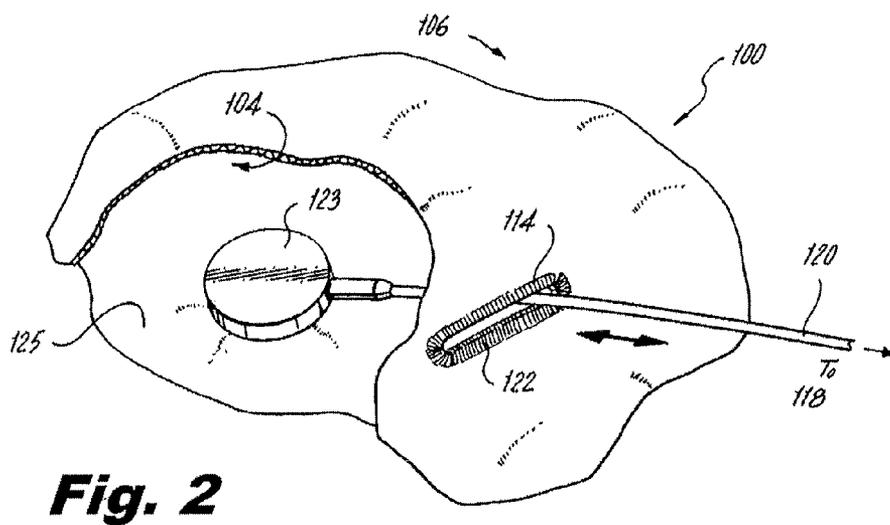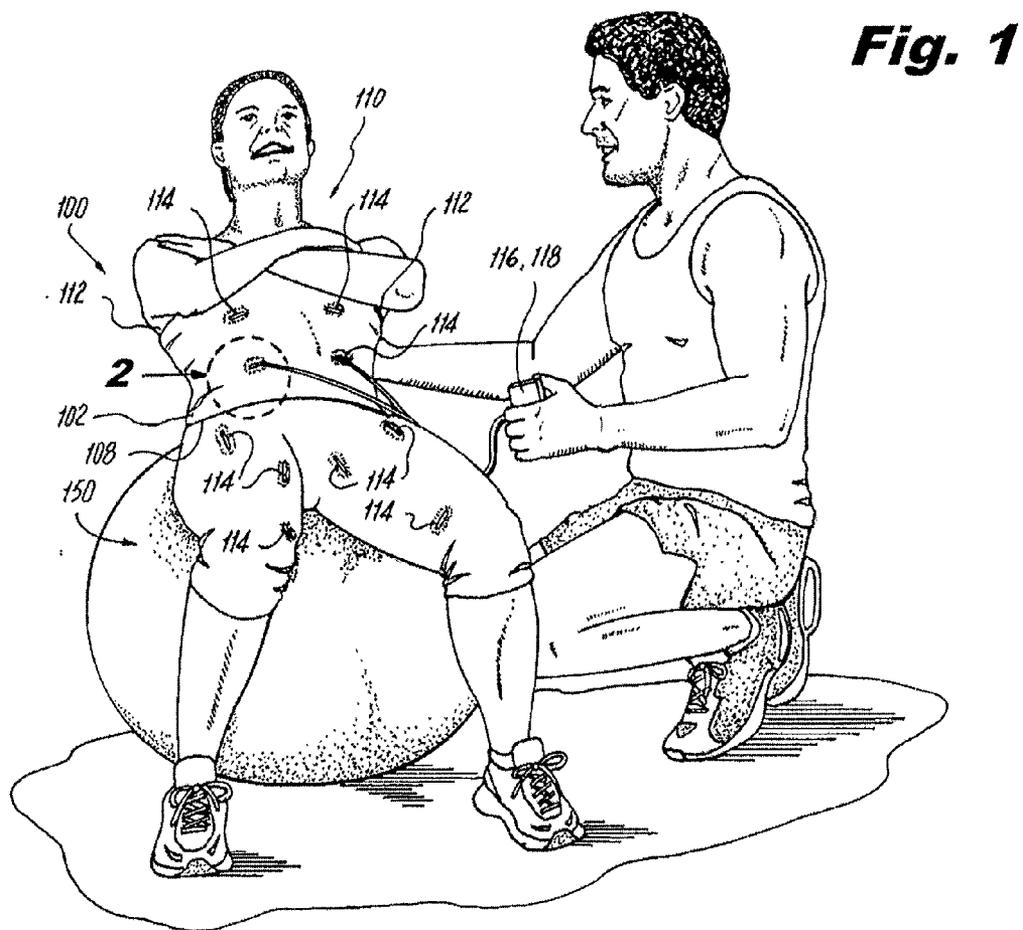


**Fig. 3**

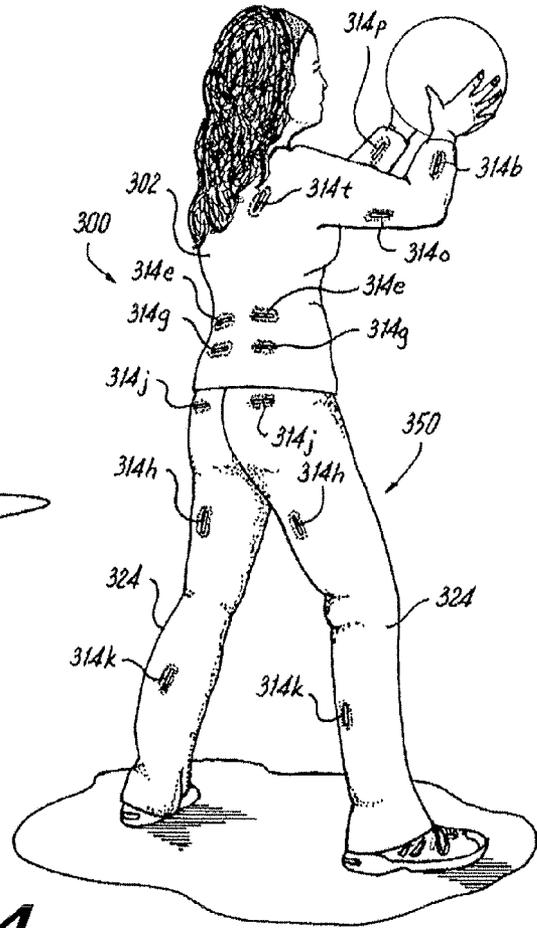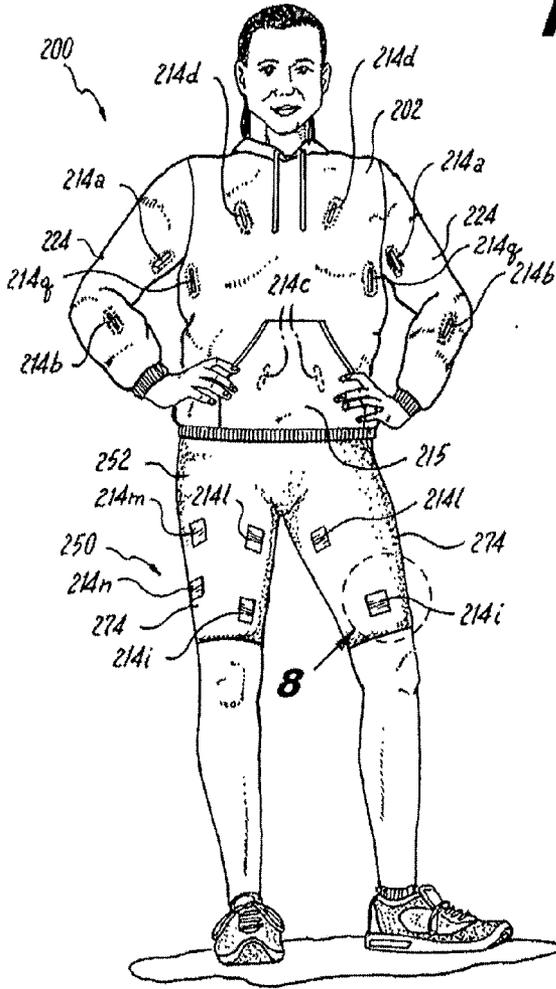


**Fig. 4**

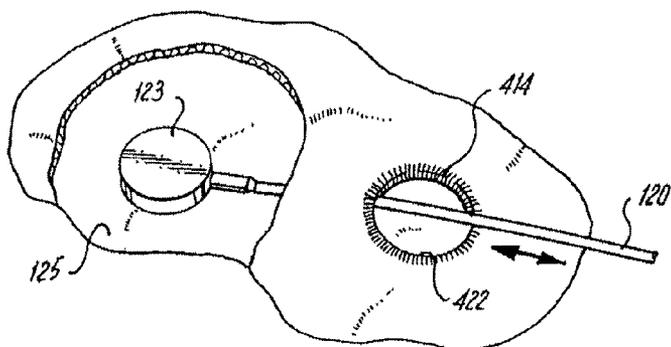


**Fig. 5**

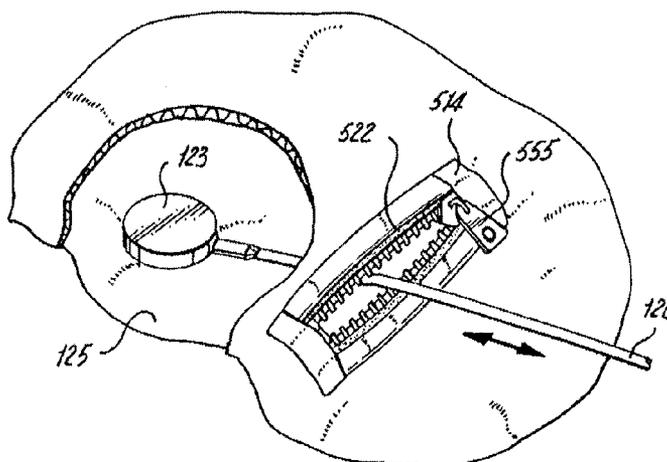


**Fig. 6**

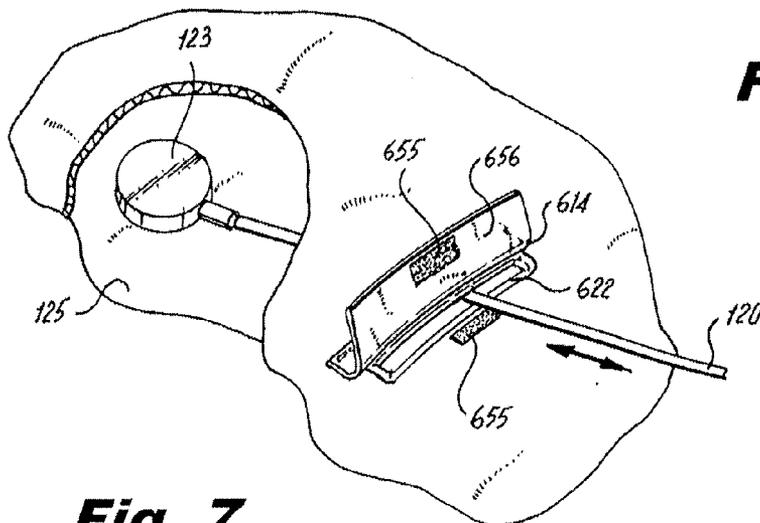

**Fig. 7**

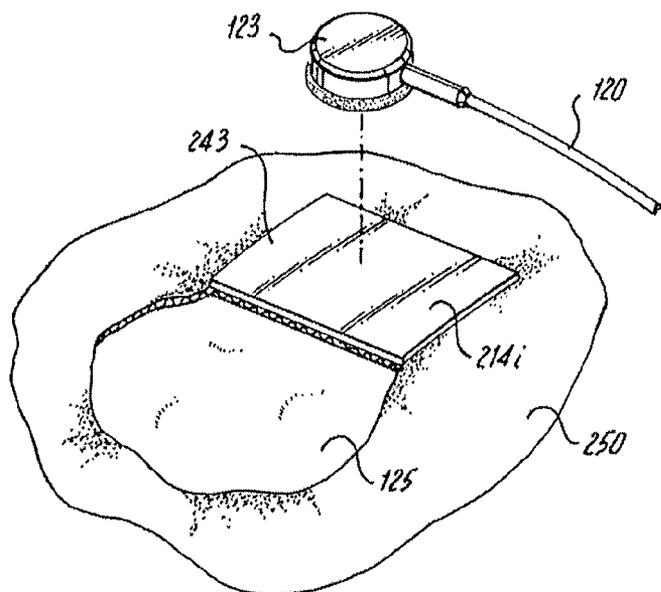

**Fig. 8**

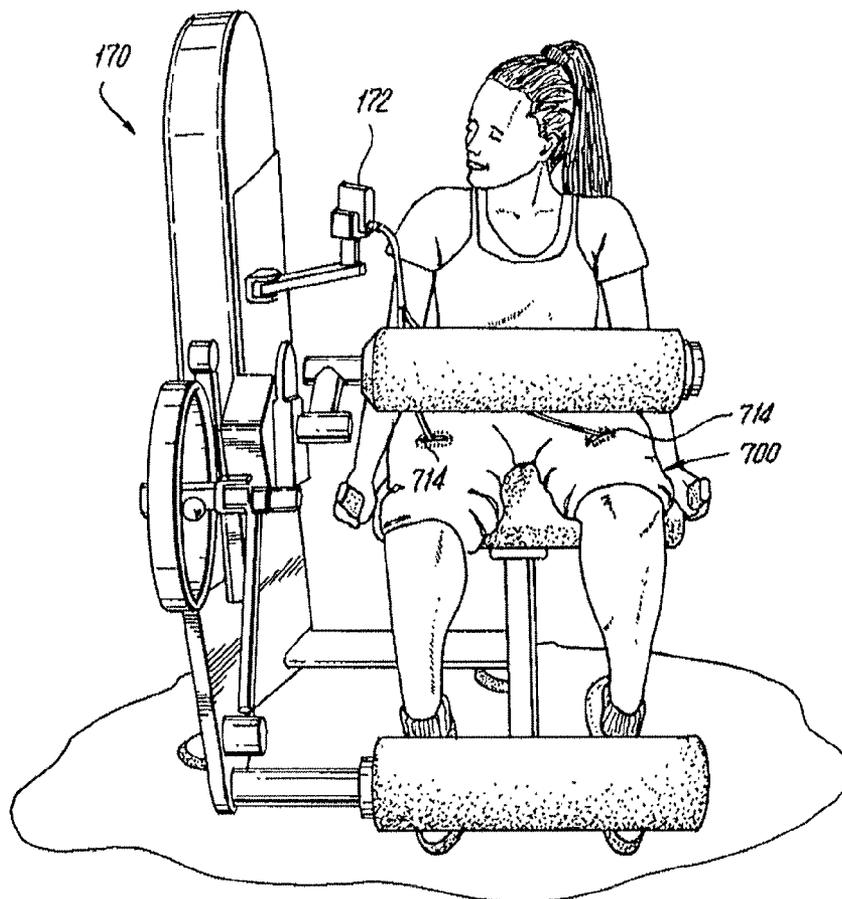

**Fig. 9**

## GARMENTS FOR PROVIDING ACCESS FOR SENSORS TO CONTACT SKIN

### CROSS-REFERENCE TO RELATED APPLICATIONS

**[0001]** This application is a continuation of U.S. patent application Ser. No. 12/751,712 filed Mar. 31, 2010, which claims the benefit of priority to U.S. Provisional Application Ser. No. 61/166,415, filed on Apr. 3, 2009, each of which is incorporated by reference herein in its entirety.

### BACKGROUND OF THE INVENTION

**[0002]** 1. Field of the Invention

**[0003]** The present invention relates to electrical sensors used in treatment and monitoring of human and animal bodies, and more particularly to wearable garments that provide direct and easy access for such sensors to contact skin.

**[0004]** 2. Description of Related Art

**[0005]** Sensing and treatment devices that require contact with the surface of the skin are well-known in the art. It is also well-known that such devices require close and direct access to the skin of the subject being treated or tested.

**[0006]** One exemplary sensor requiring access to the skin is an sEMG (surface electromyography) sensor used for sensing muscle activity. sEMG technology is a state of the art way of determining real-time information about the functioning of body parts, especially muscles. Muscle tissue contracts and relaxes as a function of the presence or absence of biologically generated electrical signals. sEMG sensors can be employed to detect such electrical signals. sEMG technology can be found in such fields as athletic training, physical rehabilitation medicine, biofeedback during strength training, and the like. sEMG monitoring equipment can be mounted in a medical cart or the like for use in a medical setting, with wires connecting the processing equipment, such as a computer system and display, in the cart with the sensors on the patient. Various sensors have recently been incorporated in gym equipment, for example as in U.S. Pat. No. 7,645,213 to Watterson et al., and in rehabilitation equipment. Portable electromyogram devices are known for example from U.S. Patent Application Publication No. 2005/0049517. Such portable devices can be worn around an arm or leg to detect muscle engagement during a work out, for example.

**[0007]** sEMG and other similar sensors include one or more individual sensors attached to a power source, a signal processor, and optionally one or more displays. Preferably, an electromyogram sensor joins its housing in such a fashion as to permit the sensor to detect muscle activity when the housing is conformably disposed about a body part such as an arm or leg, as described in the above-cited publication. If this is not possible or convenient, for example if it is desired to monitor chest or shoulder muscles, remote wired or wireless sensors can be adhered to the skin directly above the muscle group to be monitored. The data can be sent via wires or wirelessly from the sensor to the signal processor.

**[0008]** The current state of the art requires garments worn by the subject to be removed, rolled up, or otherwise adjusted to accommodate sensors if the muscles or tissues of interest are covered by the garment. For example, use of an sEMG sensor can require untucking or unbuttoning of a shirt, rolling up a sleeve or pant leg, removal or pulling down of a sock, or the like, in order to gain access to monitor a desired muscle group. These arrangements can cause undue stress on sensors

and leads, and in some cases dislodge the sEMG sensor from the skin entirely. These arrangements can also be painful or uncomfortable. Moreover, these arrangements can be undependable, if for example, the pant leg or shirt sleeve is not rolled up tightly enough, especially while in motion. Depending on the design of the garment being worn, and the desired sensing location, direct sensor contact with the skin can require complete removal of the garment, as is done, for example during electrocardiography testing. Discomfort and embarrassment can result for the person having to remove or adjust garments to accommodate proper sensor access, either in public or in private. In a gym or physical rehabilitation facility, for example, use of such sensors on certain muscles can be precluded because it is not permissible or desirable to disrobe to the necessary extent to allow proper sensor access to the muscle group.

**[0009]** Such conventional methods and systems have generally been considered satisfactory for their intended purpose. However, there is still a need in the art for a garment that allows for significantly improved access of electrical sensors to monitor muscles. There also remains a need in the art for such a garment that is easy to make and use. The present invention provides a solution for these problems.

### SUMMARY OF THE INVENTION

**[0010]** The subject invention is directed to a new and useful garment for wearing during monitoring of muscle activity of a subject. The garment includes a torso portion defining an interior space configured and adapted to accommodate and cover at least a portion of the subject's torso. The torso portion defines an exterior space external to the interior space. At least one opening, e.g., a waist opening, is defined in the torso portion from the exterior space to the interior space for accommodating the garment being put on and taken off of the subject's torso. A plurality of access fittings are defined in the torso portion. Each access fitting is configured and adapted to accommodate access to skin of the subject adjacent a muscle group to be monitored by a sensor unit external to the torso portion, such that at least a portion of the sensor unit remains external to the torso portion with the sensor unit accessing the skin via the access fitting.

**[0011]** In certain embodiments, the torso portion is configured to be worn on a subject's lower torso, e.g., as pants, shorts, or the like. The garment can include two legs attached to the torso portion for accommodating the subject's legs. Each leg can include a plurality of access fittings. Each leg can include an access fitting adjacent a hamstring portion of the leg, configured to provide access to skin adjacent the subject's hamstrings. It is also contemplated that each leg can include an access fitting adjacent a quadriceps portion of the leg, generally opposite the hamstring portion, configured to provide access to skin adjacent to the subject's quadriceps. The torso portion can include a plurality of access fittings proximate a gluteus maximus portion located superior to the access fittings in the hamstring portion, configured to provide sensor access to skin adjacent the subject's gluteus maximus. It is also contemplated that each leg can include at least one access fitting configured to provide sensor access to skin adjacent the subject's lower leg muscles. For example, each leg can include at least one shin access fitting configured to provide sensor access to skin adjacent the subject's shin muscles, and at least one calf access fitting generally opposite the at least one shin access fitting configured to provide sensor access to the subject's calf muscles.

**[0012]** In certain embodiments, the torso portion is configured to be worn on a subject's upper torso, e.g., as a shirt. The garment can include two sleeves attached to the torso portion for accommodating the subject's arms. Each sleeve can include a plurality of access fittings. Each sleeve can include at least one upper arm access fitting configured to provide sensor access to skin adjacent the subject's upper arm muscles. Each sleeve can include at least one lower arm access fitting inferior with respect to the upper arm access fitting thereof for providing sensor access to skin adjacent the subject's lower arm muscles. The torso portion can include at least one abdominal access fitting configured to provide sensor access to skin adjacent the subject's abdominal muscles. It is also contemplated that the torso portion can include at least one chest access fitting superior with respect to the at least one abdominal access fitting configured to provide sensor access to skin adjacent the subject's chest muscles. The torso portion can include at least one lumbar access fitting opposite at least one abdominal access fitting configured to provide access to skin adjacent the subject's lumbar muscles. It is also contemplated that the torso portion can include at least one shoulder access fitting superior with respect to the at least one lumbar access fitting for providing access to skin adjacent the subject's shoulder muscles. The torso portion can include at least one gluteus maximus access fitting inferior with respect to the at least one lumbar access fitting for providing access to skin adjacent the subject's gluteus maximus.

**[0013]** In certain embodiments, each access fitting includes a slit defined through the torso portion for passage of a portion of a sensor device therethrough. The slit can be covered by a pocket, flap, or the like, or can be exposed without any covering, and can include a closure device such as a zipper, hook-and-loop fastener, or the like. It is contemplated that the access fittings can have a width that is open at all times, and/or can be incorporated into a patch, decorative design, logo, or the like. It is also contemplated that some or all of the access fittings can include a patch of electrically conductive material configured to allow sensor access to the subject's skin by way of electrical signals conducted from the subject's skin, through the patch, to the sensor with the sensor located completely outside the interior space of the torso portion of the garment.

**[0014]** These and other features of the systems and methods of the subject invention will become more readily apparent to those skilled in the art from the following detailed description of the preferred embodiments taken in conjunction with the drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0015]** So that those skilled in the art to which the subject invention appertains will readily understand how to make and use the devices and methods of the subject invention without undue experimentation, preferred embodiments thereof will be described in detail herein below with reference to certain figures, wherein:

**[0016]** FIG. 1 is a perspective view of exemplary embodiments of garments constructed in accordance with the present invention, showing a subject wearing the garment during training with an sEMG or other monitoring device connected to the subject's abdomen through an access fitting in the garment to monitor muscle engagement during sit-ups;

**[0017]** FIG. 2 is an enlarged perspective view of a portion of the garment of FIG. 1, showing an access fitting in the form of

a slit providing access for a sensor lead through the garment for a device outside the garment to be able to sense the subject's muscle engagement;

**[0018]** FIG. 3 is a front perspective view of exemplary embodiments of upper and lower garments constructed in accordance with the present invention, showing a subject wearing upper and lower garments and showing multiple exemplary locations for access fittings in each garment as viewed from the front;

**[0019]** FIG. 4 is a rear perspective view of exemplary embodiments of upper and lower garments constructed in accordance with the present invention, showing a subject wearing upper and lower garments and showing multiple exemplary locations for access fittings in each garment as viewed from the back;

**[0020]** FIG. 5 is a perspective view of an exemplary embodiment of an access fitting in a garment constructed in accordance with the present invention, showing an access fitting with a round, open aperture through the garment;

**[0021]** FIG. 6 is a perspective view of another exemplary embodiment of an access fitting in a garment constructed in accordance with the present invention, showing an access fitting having a slit through the garment incorporating a zipper for closing the slit;

**[0022]** FIG. 7 is a perspective view of another exemplary embodiment of an access fitting in a garment constructed in accordance with the present invention, showing an access fitting having a slit through the garment incorporating a flap with a hook-and-loop closure for concealing the slit;

**[0023]** FIG. 8 is a perspective view of another exemplary embodiment of an access fitting in a garment constructed in accordance with the present invention, showing an access fitting having a conductive patch in the garment for providing sensor access to the underlying skin while keeping the sensor completely external to the garment; and

**[0024]** FIG. 9 is a perspective view of exemplary embodiments of garments constructed in accordance with the present invention, showing the garments being worn by a subject who is using gym equipment that has sensors incorporated therein, accessing the subject's skin through access fittings in the garment to monitor muscle activity.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0025]** Reference will now be made to the drawings wherein like reference numerals identify similar structural features or aspects of the subject invention. For purposes of explanation and illustration, and not limitation, a partial view of an exemplary embodiment of a garment in accordance with the invention is shown in FIG. 1 and is designated generally by reference character 100. Other embodiments of garments in accordance with the invention, or aspects thereof, are provided in FIGS. 2-9, as will be described. The systems and methods of the invention can be used to provide access for sensors to a subject's skin without requiring removal of the garment, rolling up of the garment, or the like.

**[0026]** Garment 100 is configured for wearing during monitoring of muscle activity of a subject, such as during working out, physical therapy, or any other suitable activity. Garment 100 includes a torso portion 102 defining an interior space 104 (not visible in FIG. 1, but see FIG. 2) configured and adapted to accommodate and cover at least a portion of the subject's torso, which in the case of garment 100 in FIG. 1 is the upper torso, as in a shirt or sweater, or other similar

garment, and in the case of garment **150** in FIG. **1** is a lower garment. Torso portion **102** defines an exterior space **106** external the interior space **104**, i.e., interior space **104** and exterior space **106** are the inside and outside of the garment, respectively, when it is being worn. A waist opening **108**, a neck opening **110**, and two sleeve openings **112** are defined in the torso portion **102** from the exterior space to the interior space for accommodating the garment being put on, worn, and taken off of the subject's torso. A plurality of access fittings **114** are defined in the torso portion **102**. Each access fitting **114** is configured and adapted to allow immediate access to skin of the subject adjacent to a muscle group to be monitored by a sensor unit, e.g. sensor unit **116**, external to the torso portion **102**, such that at least a portion of the sensor unit remains external to the torso portion **102** with the sensor unit accessing the skin via the access fitting.

[0027] With continued reference to FIG. **1**, access fittings **114** allow sensor unit **116**, the main processor portion **118** of which remains outside of garment **100** during use, to have access for sensor lead **120** to pass through garment **100**. In the exemplary use shown in FIG. **1**, sensor unit **116** has leads **120** passing through access fittings **114** in torso portion **102** so that the subject wearing garment **100** and/or a personal trainer can monitor engagement of the subject's left and right external abdominal oblique muscles during sit-ups. The sensor unit **116** includes wires, but wireless sensors can also be used with garment **100**.

[0028] Referring now to FIG. **2**, a sensor lead **120** is shown passing through an access fitting **114** in garment **100**. Access fitting **114** is a slit, reinforced with optional tubing **122**, which can be stitching or embroidering, or other suitable reinforcement, passing from interior space **104** to exterior space **106**. At the end of lead **120** is a sensor **123** that can be adhered to the skin **125** just superficial to a muscle group that is the desired target for monitoring. A portion of garment **100** in FIG. **2** is shown cut away to reveal sensor **123** and skin **125** inside garment **100**. The length of the slit or opening of access fitting **114** can be of any suitable length or width for accommodating a particular type of sensor therethrough. Access fittings **114** allow for sensors, wired or wireless, to be used, removed, and replaced in different access fittings **114** without the subject wearing garment **100** having to disrobe entirely, roll up, or otherwise unduly adjust garment **100**. Thus, the slit length should be long enough to accommodate sensors passing therethrough but not be so long as to be overly revealing. For example, slits for sEMG leads can be around 1 inch in length or up to 4 inches in length or more as needed for particular applications. Slits can be sized appropriately depending on the material used in the garment. For example, smaller slits can be used in garments made of stretchable material than in garments made of non-stretchable material, since a stretchable slit can stretch to accommodate sensors larger than itself. Those skilled in the art will readily appreciate that any suitable slit dimensions can be used without departing from the spirit and scope of the invention.

[0029] By way of comparison, using a traditional garment, as in the state of the art described above, to test muscle engagement in various muscle groups would require complete removal of the subject's shirt, or else wiring the lead through the neck, sleeves, or waist opening, since conventional active wear, gym attire, and the like, provides no other access openings, with the possible exception of a fly, which does not provide a practical access where modesty is concerned. With snug fitting work out garments, wiring through

the neck, sleeves, or waist opening may not be possible or practical, and with loose garments, the weight or tension of the garment against the lead can damage the lead, sensor, and/or sensor unit or dislodge the sensor from the desired location on the skin.

[0030] Referring now to FIG. **3**, another exemplary garment **200** is shown from the front. Garment **200** is a hooded sweatshirt that includes two sleeves **224** attached to torso portion **202** for accommodating the subject's arms. Each sleeve **224** includes an one upper arm access fitting **214a** configured to provide sensor access to skin adjacent the subject's upper arm muscles, e.g. biceps and/or deltoids. Each sleeve includes at least one lower arm access fitting **214b** inferior with respect to upper arm access fitting **214a** thereof (when the arms are straight down) for providing sensor access to skin adjacent the subject's lower arm muscles. Torso portion **202** includes abdominal access fittings **214c** configured to provide sensor access to skin adjacent the subject's abdominal muscles, and chest access fittings **214d** superior with respect to abdominal access fittings **214c** for providing sensor access to skin adjacent the subject's chest muscles. Access fittings **214g** are provided in the ribs portion of the garment for accessing the subject's rib muscles, such as the serratus anterior muscles. An optional pocket or pouch **215** covers access fittings **214c**, and the hood is also optional. Additionally, those skilled in the art will readily appreciate that garments in accordance with the invention can be tight, relatively loose, or any suitable combination of both without departing from the spirit and scope of the invention.

[0031] Reference is now made to FIG. **4**, which shows an exemplary garment **300** from the back. Garment **300** is a long sleeve shirt that can have the same access fittings in the front as in garment **200**. Torso portion **302** includes lumbar access fittings **314e** that are generally opposite the abdominal access fittings (not shown but see **214c** in FIG. **3**) for providing access to skin adjacent the subject's lumbar muscles. Shoulder access fittings **314f** are provided superior with respect to lumbar access fittings **314e** for providing access to skin adjacent the subject's shoulder muscles. Triceps access fittings **314o** are provided in a triceps portion of the sleeve for access to the subject's triceps muscles. Near the wrists openings of the sleeves, lower arm access fittings **314p** and **314b** are provided in the bottom and top portions, respectively, of the lower arms of the sleeves to provide access to the muscles on the top and bottom of the subject's lower arms. Gluteus maximus access fittings **314g** are located inferior with respect to lumbar access fittings **314e**, e.g., in the seat of garment **300**, for providing access to skin adjacent the subject's gluteus maximus. While not shown in FIG. **3**, similar access fittings can be included in the rear of garment **200** as well.

[0032] With continued reference to FIGS. **3-4**, garment **250** includes a torso portion **252** configured to be worn on a subject's lower torso, e.g., as shorts. Garment **250** includes two legs **274** attached to torso portion **252** for accommodating the subject's legs. Each leg **274** includes an access fitting in a hamstring portion of the respective leg **274** (not shown but see **314h** in FIG. **4**), configured to provide access to skin adjacent the subject's hamstring muscles. Each leg **274** includes access fittings **214i** adjacent a quadriceps portion of the respective leg **274**, generally opposite the hamstring portion thereof, configured to provide access to skin adjacent to the subject's quadriceps muscles. Adductor access fittings **214l** are included for monitoring adductor muscle engagement. Access fittings **214m** and **214n** are provided substantially

lateral with respect to access fittings **214l** and **214i**, respectively, to provide access to lateral portions of the subject's upper and lower thighs. Access fittings are provided in a gluteus maximus portion of garment **200** (not shown, but see **314j** in FIG. 4), located superior to the access fittings in the hamstring portion thereof, configured to provide sensor access to skin adjacent the subject's gluteus maximus and/or gluteus medius muscles.

**[0033]** Referring now to FIG. 4, pants garment **350** includes the access fittings **314h** and **314j** described above, and includes access fittings in the front at the locations shown in garment **250** of FIG. 3. Each leg **324** also includes a calf access fitting **314k** configured to provide sensor access to skin adjacent the subject's calf muscles, and a shin access fitting (not shown) generally opposite the respective calf access fitting **314k** configured to provide sensor access to the subject's shin muscles can optionally be included.

**[0034]** The garments above have been described in the exemplary context of shorts, pants, knickers, sweatshirts, and short sleeve shirts. Other exemplary garment configurations include sleeveless shirts, cropped shirts, trousers, vests, undergarments, coats, parkas, snow pants, construction overalls, and the like. Those skilled in the art will readily appreciate that any suitable garment type or configuration can be used, any other suitable access fitting locations can be used, and any of the access fittings shown herein can optionally be omitted in a garment without departing from the spirit and scope of the invention. Suitable materials for garments constructed in accordance with the present invention include spandex, terry cloth, cotton, and fleece. Those skilled in the art will readily appreciate that these materials are exemplary only, and that any suitable material can be used for a particular application without departing from the spirit and scope of the invention.

**[0035]** With reference now to FIG. 5, another embodiment of access fitting **414** is shown, which includes a generally round opening **422** in lieu of a slit. FIG. 6 shows another embodiment of access fitting **514** in which the slit **522** includes a zipper **555** for closing slit **522** fully or partially. FIG. 7 shows another embodiment of an access fitting **614**, in which slit **622** can be covered by flap **656**. Flap **656** includes a hook-and-loop closure device **655** for securely concealing slit **622** when not in use. Buttons, clasps, or any other suitable closure device can be used without departing from the spirit and scope of the invention. Access fittings in accordance with the present invention can be incorporated in patches, embroidery, logos, decorative design features, or the like. Those skilled in the art will readily appreciate that the slits and openings described herein are exemplary and that any suitable opening type, fenestration, or the like can be used without departing from the spirit and scope of the invention.

**[0036]** FIG. 8 shows yet another embodiment of an access fitting **214i** in which there is no opening or slit. Instead, a patch **243** of electrically conductive material is used to allow sensors to make electrical contact with the underlying skin **125**. In this way, electrical signals can be conducted from the subject's skin, through patch **243**, to a sensor located completely outside the interior space of the garment, e.g., attached to the outside surface of patch **243**. Access fitting **214i** is shown also in FIG. 3. In FIG. 8, a portion of garment **250** is cut away to reveal the underlying skin **125**. For the best electrical contact, garments using this type of access fitting are preferably tight to the skin, at least locally around the access fittings. Suitable electrically conductive materials for garments are

described, for example in U.S. Patent Application Publication No. 2004/0009731 to Rabinowicz, which is incorporated herein by reference in its entirety.

**[0037]** Referring now to FIG. 9, use of a garment such as those described above is contemplated for allowing access to the wearer's skin during use of gym equipment, physical therapy equipment, diagnostic equipment, and the like, that incorporates sensors like sEMG sensors. FIG. 9 shows a subject using a workout machine **170** wearing garment **700**. Machine **170** has a built in sensor unit **172**. The subject can monitor muscle engagement for training or safety purposes attaching sensors **123**, connected to sensor unit **172** via leads **120**, or wirelessly, as described above, to skin adjacent a key muscle group being exercised by machine **170**, in this case the thigh muscles, but such a sensor can be applied to any other particular muscle group as well. Access fittings **714** in garment **700** allow leads **120** to pass through garment **700** without requiring disrobement, whether partial or total. Time is also saved by having convenient access for multiple muscle groups without having to rearrange or remove garments. As the subject moves from machine to machine throughout a workout, for example, different access fittings can provide convenient, immediate, personal, private, and successful access to the different muscles being exercised. The same also applies to moving from exercise to exercise where no machines are used, or from exercise to exercise in physical therapy or rehabilitation, or the like.

**[0038]** While described herein with the exemplary application of providing access for sEMG sensors, those skilled in the art will readily appreciate that this is an exemplary application only. Any suitable sensors can be used with garments constructed in accordance with the invention, whether wired or wireless. The garments described above can be used to allow wires to pass through the garment directly to be attached to a sensor already on the skin, or any electronic device underneath the garment, such as a music player or other mobile device. Garments as described herein can be used to provide quick access to apply treatment such as electrical pulses for defibrillation purposes, for example, which may be needed during physical therapy, rehabilitation, or the like.

**[0039]** The methods and systems of the present invention, as described above and shown in the drawings, provide access for muscle engagement sensors while allowing the user to remain fully clothed, without having to fully or partially disrobe or otherwise unduly adjust garments to accommodate proper sensor access. While the apparatus and methods of the subject invention have been shown and described with reference to preferred embodiments, those skilled in the art will readily appreciate that changes, different combinations, and/or modifications may be made thereto without departing from the spirit and scope of the subject invention.

1. A garment comprising:

- a) a torso portion defining an interior space configured and adapted to accommodate and cover at least a portion of the subject's torso, and defining an exterior space external to the interior space, wherein at least one opening is defined in the torso portion from the exterior space to the interior space for accommodating the garment being put on and taken off of the subject's torso;
- c) a plurality of access fittings defined in the torso portion, each access fitting being configured and adapted to accommodate access to skin of the subject adjacent a muscle group to be monitored by a device wherein each

access fitting is a slit defined for passage of a portion of a sensor therethrough, wherein the slit, in an unused state, has at least a portion of opposing edges thereof abutting one-another.

2. A garment as recited in claim 1, wherein the torso portion is configured to be worn on a subject's lower torso, and wherein the garment further comprises two legs attached to the torso portion for accommodating the subject's legs, and wherein each leg includes a plurality of access fittings.

3. A garment as recited in claim 2, wherein each leg includes an access fitting adjacent a hamstring portion of the leg, configured to provide access to skin adjacent the subject's hamstring, and an access fitting adjacent a quadriceps portion of the leg, opposite the hamstring portion, configured to provide access to skin adjacent to the subject's quadriceps.

4. A garment as recited in claim 3, wherein the torso portion includes a plurality of access fittings proximate a gluteus maximus portion located superior to the access fittings in the hamstring portion, configured to provide sensor access to skin adjacent the subject's gluteus maximus.

5. A garment as recited in claim 2, wherein each leg includes at least one access fitting configured to provide sensor access to skin adjacent the subject's lower leg muscles.

6. A garment as recited in claim 1, wherein the torso portion is configured to be worn on a subject's upper torso, and wherein the garment further comprises two sleeves attached to the torso portion for accommodating the subject's arms, and wherein each sleeve includes a plurality of access fittings.

7. A garment as recited in claim 6, wherein each sleeve includes at least one upper arm access fitting configured to provide sensor access to skin adjacent the subject's upper arm muscles.

8. A garment as recited in claim 7, wherein each sleeve includes at least one lower arm access fitting inferior with respect to the upper arm access fitting thereof for providing sensor access to skin adjacent the subject's lower arm muscles.

9. A garment as recited in claim 6, wherein the torso portion includes at least one abdominal access fitting configured to provide sensor access to skin adjacent the subject's abdominal muscles.

10. A garment as recited in claim 9, wherein the torso portion includes at least one chest access fitting superior with respect to the at least one abdominal access fitting configured to provide sensor access to skin adjacent the subject's chest muscles.

11. A garment as recited in claim 9, wherein the torso portion includes at least one lumbar access fitting opposite the at least one abdominal access fitting configured to provide access to skin adjacent the subject's lumbar muscles.

12. A garment as recited in claim 11, wherein the torso portion includes at least one shoulder access fitting superior with respect to the at least one lumbar access fitting for providing access to skin adjacent the subject's shoulder muscles.

13. A garment as recited in claim 11, wherein the torso portion includes at least one gluteus maximus access fitting inferior with respect to the at least one lumbar access fitting for providing access to skin adjacent the subject's gluteus maximus.

14. (canceled)

15. A garment as recited in claim 1, further comprising an additional access fitting with a patch of conductive material

configured to allow access to the subject's skin by way of signals conducted from the subject's skin, through the patch.

16. A shirt comprising:

- a) a torso portion defining an interior space configured and adapted to accommodate and cover at least a portion of the subject's upper torso, and defining an exterior space external to the interior space, wherein at least one opening is defined in the torso portion from the exterior space to the interior space for accommodating the garment being put on and taken off of the subject's upper torso;
- b) a pair of sleeves attached to the torso portion and defining arm portions of the interior space for accommodating the subject's arms; and
- c) a plurality of access fittings defined in at least one of the torso portion and the pair of sleeves, each access fitting being configured and adapted to accommodate access to skin of the subject adjacent a muscle group to be monitored by a device, wherein each access fitting is a slit defined for passage of a portion of a sensor therethrough, wherein the slit, in an unused state, has at least a portion of opposing edges thereof abutting one-another.

17. A shirt as recited in claim 16, wherein the plurality of access fittings includes at least one abdominal access fitting configured to provide sensor access to skin adjacent the subject's abdominal muscles, at least one chest access fitting superior with respect to the at least one abdominal access fitting configured to provide sensor access to skin adjacent the subject's chest muscles, at least one lumbar access fitting opposite the at least one abdominal access fitting configured to provide access to skin adjacent the subject's lumbar muscles, and at least one shoulder access fitting superior with respect to the at least one lumbar access fitting for providing access to skin adjacent the subject's shoulder muscles.

18. A shirt as recited in claim 17, wherein each sleeve includes at least one upper arm access fitting configured to provide sensor access to skin adjacent the subject's upper arm muscles.

19. A lower garment comprising:

- a) a torso portion defining an interior space configured and adapted to accommodate and cover at least a portion of the subject's lower torso, and defining an exterior space external to the interior space, wherein a waist opening is defined in the torso portion from the exterior space to the interior space for accommodating the garment being put on and taken off of the subject's lower torso;
- b) a pair of legs attached to the torso portion defining legs of the interior space for accommodating the subjects legs; and
- c) a plurality of access fittings defined in at least one of the torso portion and the pair of legs, each access fitting being configured and adapted to accommodate access to skin of the subject adjacent a muscle group to be monitored by a device, wherein each access fitting is a slit defined for passage of a portion of a sensor therethrough, wherein the slit, in an unused state, has at least a portion of opposing edges thereof abutting one-another.

20. A lower garment as recited in claim 19, wherein the plurality of access fittings includes at least one access fitting adjacent a hamstring portion of each leg of the garment, configured to provide access to skin adjacent the subject's hamstrings, an access fitting adjacent a quadriceps portion of the leg, opposite the hamstring portion, configured to provide access to skin adjacent to the subject's quadriceps, and at least one gluteus maximus access fittings proximate a gluteus

maximus portion located superior to the access fittings in the hamstring portion, configured to provide sensor access to skin adjacent the subject's gluteus maximus.

**21.** A lower garment as recited in claim **20**, wherein each leg includes at least one shin access fitting configured to provide sensor access to skin adjacent the subject's shin muscles, and at least one calf access fitting opposite the at least one shin access fitting configured to provide sensor access to the subject's calf muscles.

\* \* \* \* \*