



- (51) International Patent Classification:  
A61M 25/01 (2006.01)
- (21) International Application Number:  
PCT/AU2014/050167
- (22) International Filing Date:  
1 August 2014 (01.08.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2013902909 2 August 2013 (02.08.2013) AU
- (72) Inventor; and
- (71) Applicant : WITHERS, Teresa Kathryn [AU/AU];  
Suite 5.06, Level 5, Pindara Specialist Suites, 29 Cararra  
Street, Benowa, Queensland 4217 (AU).
- (74) Agent: CULLENS PATENT AND TRADEMARK AT-  
TORNEYS; Level 32, 239 George Street, Brisbane,  
Queensland 4001 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CATHETER PLACEMENT DEVICE

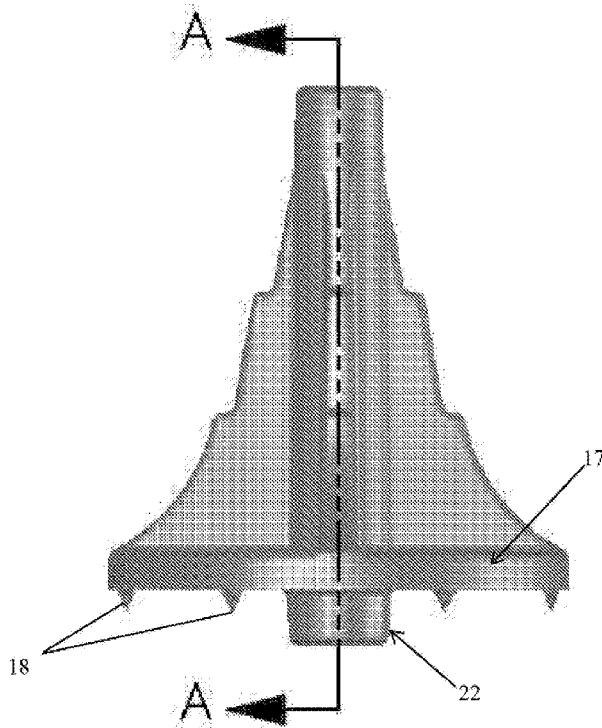


Figure 11

(57) Abstract: A catheter placement device including a location portion for locating the device relative to a body part and a tubular up stand extending upwardly from the location portion and having a bore therethrough, the bore being oriented such that the bore extends angularly relative to the body part in use.

WO 2015/013771 A1

**Published:**

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

## CATHETER PLACEMENT DEVICE

### TECHNICAL FIELD

[0001] The present invention relates to medical devices generally and in particular to a catheter placement device to guide introduction of a catheter into a patient.

### BACKGROUND ART

[0002] The brain has within it, fluid filled chambers called ventricles. A schematic illustration of the ventricles in the brain is illustrated in Figures 1 and 2, which are an anterior and left lateral view of the brain respectively.

[0003] The fluid which surrounds and cushions the brain and spinal cord is called cerebrospinal fluid or CSF. The ventricles are interconnected and are critical in maintaining the structure of the brain and altering pressure within the brain which is known as the intra-cerebral pressure (ICP). In the event of a change in intra-cerebral pressure (generally following some type of injury to the brain which could be caused by a knock or infection for example) it may be critical to monitor this change and if necessary, draw off some of the cerebrospinal fluid located in the ventricles in order to decrease the intra-cerebral pressure.

[0004] Intra-ventricular catheters have been used for more than 20 years to monitor cerebrospinal fluid pressure by connecting them to a pressure transducer. If the pressure is high, it is possible to draw off fluid to decrease the intra-cerebral pressure.

[0005] The catheters used are typically soft but have a firm, metal stylet which runs through the centre of the catheter. The stylet is typically withdrawn once the catheter is in the correct position.

[0006] The process of placement of an intra-ventricular catheter is illustrated in Figures 3 to 6. As illustrated in Figure 3, an incision 10 is typically made in the skin of the patient's head 11. A burr hole 12 is drilled into the bone of the patient's skull to create an opening for the catheter as illustrated in Figure 4. The skin of the head is spread using retractors and a catheter is inserted manually through the burr hole 12 as illustrated in Figure 5. The medical practitioner must manually insert the catheter 13 such that the lower end of the catheter 13 sits in a ventricle 14. A pressure transducer 15 is then connected to the outer end of the catheter to monitor the intracranial pressure as illustrated in Figure 6.

[0007] One problem with catheters and their placement occurs if the angle of entry is not

perpendicular in all planes, then there is the possibility of both a horizontal and vertical error from the desired destination point. This is illustrated schematically in Figure 7 showing the insertion of a catheter at an angle through a patient's skull 16. Vector mathematics illustrate that a significant error rate exists in the correct placement of catheters manually.

[0008] The average length of insertion of intra-ventricular catheters placed into the intra-cerebral ventricles generally ranges from 5 to 8 cm (but is of course limited by the distance of the ventricle from the skull and the size of the ventricle). A greater angle of error at introduction, leads to a greater increase in both horizontal and vertical error as illustrated in Figure 7. An increase in depth of penetration also exacerbates the horizontal and vertical error.

[0009] Expressed in a tabular form, Table 1 below, shows the increased horizontal and vertical error with angle of deviation from perpendicular and according to depth of penetration.

Angle of Deviation (degrees)	Depth of Penetration (cm)	Horizontal Error (cm)	Vertical Error (cm)
10	5	0.87	0.07
10	6	1.04	0.09
10	7	1.2	0.1
10	8	1.39	0.12
20	5	1.71	0.30
20	6	2.05	0.36
20	7	2.38	0.42
20	8	2.74	0.48
30	5	2.5	0.66
30	6	3	0.8
30	7	3.5	0.94
30	8	4	1.1

**Table 1:** Horizontal and vertical error with angle of deviation from perpendicular and depth of penetration.

[0010] Misplacement of an intra-ventricular catheter may lead to a failure of the catheter to function, or may inadvertently damage delicate structures within the brain causing neurological injury.

[0011] It will be clearly understood that, if a prior art publication is referred to herein, this reference does not constitute an admission that the publication forms part of the common general

knowledge in the art in Australia or in any other country.

#### SUMMARY OF INVENTION

[0012] The present invention is directed to a catheter placement device, which may at least partially overcome at least one of the abovementioned disadvantages or provide the consumer with a useful or commercial choice.

[0013] With the foregoing in view, the present invention in one form, resides broadly in a catheter placement device including a location portion for locating the device relative to a body part and a tubular upstand extending upwardly from the location portion and having a bore therethrough, the bore being oriented such that the bore extends angularly relative to the body part in use.

[0014] The catheter placement device of the present invention is designed to introduce a catheter to a body part or relative to the body part.

[0015] Normally, a catheter will be introduced perpendicularly as this will reduce both horizontal error and vertical error at the same time allowing correct placement of the catheter.

[0016] The present invention will typically be used for intra-ventricular catheters but can be used for any catheter in which precise placement of the catheter is important, or where introduction of a catheter at a particular angle is required.

[0017] The device of the present invention will normally be moulded, and typically, as a unitary device. It is preferably manufactured from an appropriate material for use in medical procedures or environments and therefore, a medical grade plastic material is particularly preferred. It is also preferred that the device be at least partially translucent or transparent to assist the medical practitioner with a visual guide as to the location of the catheter within the device, during insertion. It is preferred that the material used results in a substantially rigid device.

[0018] Typically, the device will be a single use device after which it will be disposed of.

[0019] The device is preferably circular in cross-sectional shape as this shape will typically allow simplified manufacturing.

[0020] The device includes a location portion for locating the device relative to a body part. The location portion will normally be a foot portion which in use, will generally abut the body

part through which the catheter is inserted. Normally, the foot portion will have a substantially planar lower surface.

[0021] The location portion can have any shape, any thickness and any lateral dimension.

[0022] As to preferred dimensions, the device will usually be approximately 25 mm in diameter and approximately 25 mm in height. It is been found that these dimensions provide the required precision for maintaining the correct angle of introduction of a catheter as well as allowing the device to be easily handled manually. A further advantage with providing a relatively small diameter device is that the footprint of the device is typically small enough to account for variations in shape of the body part once the location portion abuts the body part.

[0023] Typically, the underside of the preferred foot portion may include one or more gripping configurations. The provision of one or more gripping configurations will preferably prevent or at least minimise movement of the device relative to the body part when the device is placed and typically pressed against the body surface. It is preferred that the gripping configuration(s) are such that the device can easily be moved if lifted away from the surface of the body part.

[0024] Any configuration could be used, for example a rippled surface, a roughened surface or one or more protrusions. A preferred embodiment is the provision of at least 2, and generally more than 2 teeth or similar, extending from a lower surface of the location portion. It is preferred that the teeth are pointed or tapered in order to allow engagement with the body part surrounding the catheter entry point.

[0025] It is further preferred that the teeth are located toward an outer edge of the location foot. Normally, more than two teeth are provided and usually, between four and eight teeth are provided.

[0026] In general, an intra-ventricular catheter requires a burr hole to be drilled in the skull. Typically this burr hole is a fixed size. A tubular collar may preferably extend from a lower surface of the location portion. Where provided, the tubular collar will typically be coaxial with the bore through the up stand portion. The collar is generally annular in shape and is preferably located centrally on the location portion. The tubular collar will preferably be located at least partially within the catheter entry opening or burr hole formed in the body part in order to assist with location and seating of the device relative to the body part.

[0027] The collar will normally be circular as the burr hole is typically circular. Further, the

collar is typically sized to be received at least partially within the burr hole. An outer surface of the collar may taper inwardly and downwardly. The outer surface will preferably abut the periphery of the burr hole and the location foot abuts the surrounds of the burr hole in order to locate and orient the device and particularly the upstand portion.

**[0028]** It is particularly preferred that the tubular collar be a low profile collar and normally, extend not more than 3 mm in height from the lower surface of the location portion.

**[0029]** The device also preferably includes a tubular upstand extending upwardly from the location portion and having a bore therethrough, the bore being oriented such that the bore extends angularly to the body part in use.

**[0030]** Normally, the upstand and the bore therethrough will be substantially perpendicular to the location portion but the tubular up stand can be provided at an angle which is other than perpendicular if required. The location and orientation of the upstand relative to the location portion is normally fixed in order to maintain the angle of the bore relative to the location portion.

**[0031]** Generally, the upstand is annular in cross-sectional shape. The bore may taper inwardly towards the centre of the bore from an upper or outer end of the upstand to a lower or inner end but this is typically for manufacturing purposes rather than to provide enhanced functionality.

**[0032]** The upstand is typically approximately 25 mm in height as this has been found to be a sufficient height to keep the catheter properly oriented and to make the device small enough to be relatively easily manually located. The internal dimension of the bore is typically dimensioned to closely receive the catheter as this will assist with maintaining the proper angle of insertion. An internal dimension of the bore which is too large will still allow error to be introduced in location of the catheter. The device may be manufactured in different models in order to receive different diameter catheters and therefore the dimensions may be adjusted accordingly.

**[0033]** One or more bracing structures may be used in order to maintain the angle of the upstand relative to the location portion. Generally, one or more bracing members are provided, and typically at least three bracing members are provided spaced around the upstand. The bracing members will normally be buttress or web members extending between a substantially planar location portion and a sidewall of the upstand. A further advantage of providing the bracing members is that the device is then more easily manually located by a medical

practitioner during use.

[0034] The device of the present invention will preferably find use in the placement of cerebral intra-ventricular catheters but can be used in relation to the introduction of any catheter to any patient, whether human or otherwise. For example, the device can be used on animals by a veterinarian.

[0035] Any of the features described herein can be combined in any combination with any one or more of the other features described herein within the scope of the invention.

[0036] The reference to any prior art in this specification is not, and should not be taken as an acknowledgement or any form of suggestion that the prior art forms part of the common general knowledge.

#### BRIEF DESCRIPTION OF DRAWINGS

[0037] Preferred features, embodiments and variations of the invention may be discerned from the following Detailed Description which provides sufficient information for those skilled in the art to perform the invention. The Detailed Description is not to be regarded as limiting the scope of the preceding Summary of the Invention in any way. The Detailed Description will make reference to a number of drawings as follows:

[0038] Figure 1 is an interior view of the human brain with the location of the ventricles illustrated.

[0039] Figure 2 is a left lateral view of the human brain with the location of the ventricles illustrated therein.

[0040] Figure 3 is a schematic illustration showing the first step of introducing an intra-ventricular catheter forming an incision in the skin of a patient's head.

[0041] Figure 4 is a schematic illustration of a second step of forming a hole in the skull using a burr.

[0042] Figure 5 is a schematic illustration of a third step of manually introducing a catheter through the formed hole.

[0043] Figure 6 is a schematic illustration of the proper placement of an intra-ventricular catheter according to the conventional method.



[0044] Figure 7 is a schematic view showing the variation in final position of a catheter depending upon the angle of insertion.

[0045] Figure 8 is an isometric view from the front of a catheter placement device according to a preferred embodiment of the present invention.

[0046] Figure 9 is an isometric view from below of the catheter placement device illustrated in Figure 8.

[0047] Figure 10 is a plan view of the catheter placement device illustrated in Figure 8.

[0048] Figure 11 is a side elevation view of the catheter placement device illustrated in Figure 8.

[0049] Figure 12 is a sectional view along line A-A of the catheter placement device illustrated in Figure 11.

[0050] Figure 13 is a sectional view along line B-B of the catheter placement device illustrated in Figure 10.

#### DESCRIPTION OF EMBODIMENTS

[0051] According to a particularly preferred embodiment of the present invention, a catheter placement device is provided.

[0052] As illustrated in Figures 8 to 13, the catheter placement device 50 of the preferred embodiment includes a location foot 17 for locating the device relative to a body part and a tubular upstand 20 extending upwardly from the location foot 17. The upstand 20 has a bore 21 therethrough oriented such that the bore 21 extends perpendicularly relative to the body part in use.

[0053] The device of the preferred embodiment is adapted to guide insertion of a cerebral intra-ventricular catheter. An intra-ventricular catheter is inserted following the process described above in relation to Figures 3 to 6 and the device of the preferred embodiment is used in addition to that process being manually located and maintained as illustrated in Figure 14 during the insertion process.

[0054] The device illustrated in Figures 8 to 13 is moulded of an at least partially transparent medical grade plastic material. The device is a single use device after which it will be disposed of. The illustrated device is circular in cross-sectional shape as this shape will typically allow

simplified manufacturing.

[0055] The location foot 17 of the illustrated embodiment abuts the skull through which the catheter 13 is inserted and has a substantially planar lower surface 19.

[0056] As to preferred dimensions, the device illustrated in Figures 8 to 13 is approximately 25 mm in diameter and approximately 25 mm in height. The underside of the location foot 17 includes six (6) teeth 18 extending from a lower surface of the location foot spaced about the circumference of the location foot 17. The teeth 18 are pointed or tapered in order to allow engagement with the body part surrounding the catheter entry point.

[0057] A tubular collar 22 extends from a lower surface of the location foot 17 which is coaxial with the bore 21 through the upstand 20. The collar 22 on the illustrated embodiment is annular in shape. The tubular collar is located at least partially within the catheter entry opening or burr hole formed in the skull in order to assist with location and seating of the device relative to the skull.

[0058] The collar 22 is circular as the burr hole is typically circular. Further, the collar is typically sized to be received at least partially within the burr hole. The outer surface preferably abuts the periphery of the burr hole and the location foot 17 abuts the surrounds of the burr hole in order to locate and orient the device and particularly the upstand 20.

[0059] It is particularly preferred that the tubular collar extend not more than 3 mm in height from the lower surface of the location foot 17.

[0060] Normally, the tubular upstand 20 and the bore 21 therethrough is substantially perpendicular to the location foot 17 as illustrated. Generally, the upstand 20 is annular in cross-sectional shape. The bore 21 of the illustrated taper inwardly towards the centre of the bore 21 from an upper or outer end of the upstand to a lower or inner end but this is typically for manufacturing purposes rather than to provide enhanced functionality.

[0061] The upstand 20 is typically approximately 25 mm in height as this has been found to be sufficient height to keep the catheter properly oriented and to make the device small enough to be relatively easily manually located. The internal dimension of the bore 21 is dimensioned to closely receive the catheter as this will assist with proper insertion.

[0062] Bracing members 23 are used in order to maintain the angle of the up stand relative to the location portion. The bracing members 23 of the illustrated embodiment are buttress or

web members extending between a substantially planar location foot 17 and a sidewall of the upstand 20.

**[0063]** The process of placement of an intra-ventricular catheter is generally that illustrated in Figures 3 to 6. As illustrated in Figure 3, an incision 10 is made in the skin of the patient's head at the recognised landmarks for placement of an intraventricular catheter. This is known as Kochers Point. The skin of the head is then spread using retractors. A circular burr hole 12 is formed into the bone of the patient's skull to create an opening for the catheter as illustrated in Figure 4.

**[0064]** At this point, the conventional process is changed. The device of the present invention is located against the skull manually with the collar partially within the burr hole and held there firmly. A catheter is inserted manually through the bore of the device which ensures that the catheter is inserted perpendicularly. The medical practitioner need then only control the depth of insertion.

**[0065]** Once the catheter is in the correct place, the device can then be withdrawn over the catheter and disposed of. A pressure transducer 15 is then attached at the outer end of the catheter to monitor the intracranial pressure as illustrated in Figure 6.

**[0066]** The manual location of the device is illustrated in Figure 14.

**[0067]** In the present specification and claims (if any), the word 'comprising' and its derivatives including 'comprises' and 'comprise' include each of the stated integers but does not exclude the inclusion of one or more further integers.

**[0068]** Reference throughout this specification to 'one embodiment' or 'an embodiment' means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, the appearance of the phrases 'in one embodiment' or 'in an embodiment' in various places throughout this specification are not necessarily all referring to the same embodiment. Furthermore, the particular features, structures, or characteristics may be combined in any suitable manner in one or more combinations.

## CLAIMS

1. A catheter placement device including a location portion for locating the device relative to a body part and a tubular upstand extending upwardly from the location portion and having a bore therethrough, the bore being oriented such that the bore extends angularly relative to the body part in use.
2. A catheter placement device as claimed in claim 1 moulded as a unitary device.
3. A catheter placement device as claimed in claim 1 or claim 2 wherein the device is at least partially translucent or transparent to assist the medical practitioner with a visual guide as to the location of the catheter within the device, during insertion.
4. A catheter placement device as claimed in any one of the preceding claims wherein the location portion includes a foot portion which in use, is located to abut the body part through which the catheter is to be inserted.
5. A catheter placement device as claimed in claim 4 wherein the foot portion has a substantially planar lower surface.
6. A catheter placement device as claimed in claim 4 or claim 5 wherein the underside of the preferred foot portion may include one or more gripping configurations.
7. A catheter placement device as claimed in claim 6 wherein the gripping configuration includes at least two teeth extending from a lower surface of the location portion.
8. A catheter placement device as claimed in any one of the preceding claims wherein a tubular collar extends from a lower surface of the location portion to be located at least partially within a catheter entry opening formed in the body part.
9. A catheter placement device as claimed in claim 8 wherein the tubular collar is coaxial with the bore through the tubular upstand.
10. A catheter placement device as claimed in claim 8 or claim 9 wherein the tubular collar is annular in shape and is located centrally on the location portion.
11. A catheter placement device as claimed in any one of claims 9 to 10 wherein an outer surface of the tubular collar tapers inwardly and downwardly.
12. A catheter placement device as claimed in any one of the preceding claims wherein the

upstand is fixed relative to the location portion in order to maintain an angle of the bore relative to the location portion.

13. A catheter placement device as claimed in any one of the preceding claims wherein the upstand and the bore therethrough are substantially perpendicular to the location portion.
14. A catheter placement device as claimed in any one of the preceding claims wherein the upstand is approximately 25 mm in height.
15. A catheter placement device as claimed in any one of the preceding claims wherein an internal dimension of the bore is dimensioned to closely receive the catheter to assist with maintaining the proper angle of insertion and decrease error.

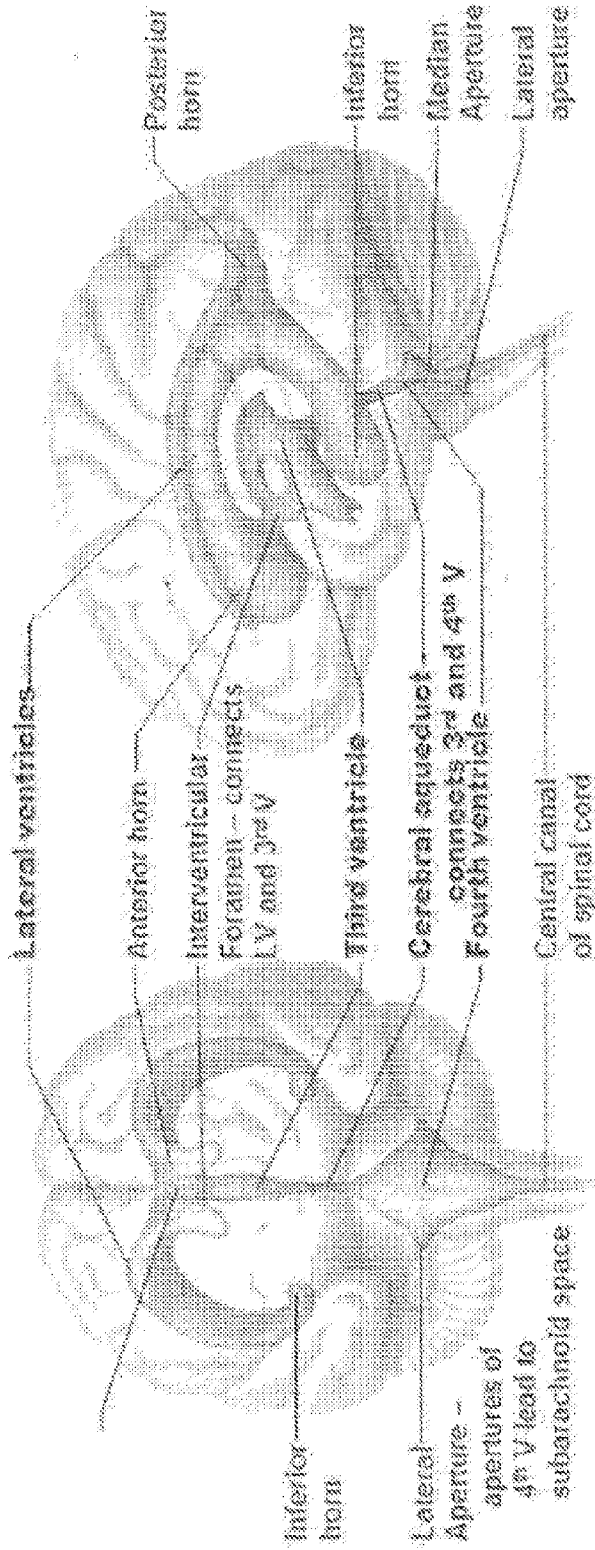


Figure 1

Figure 2

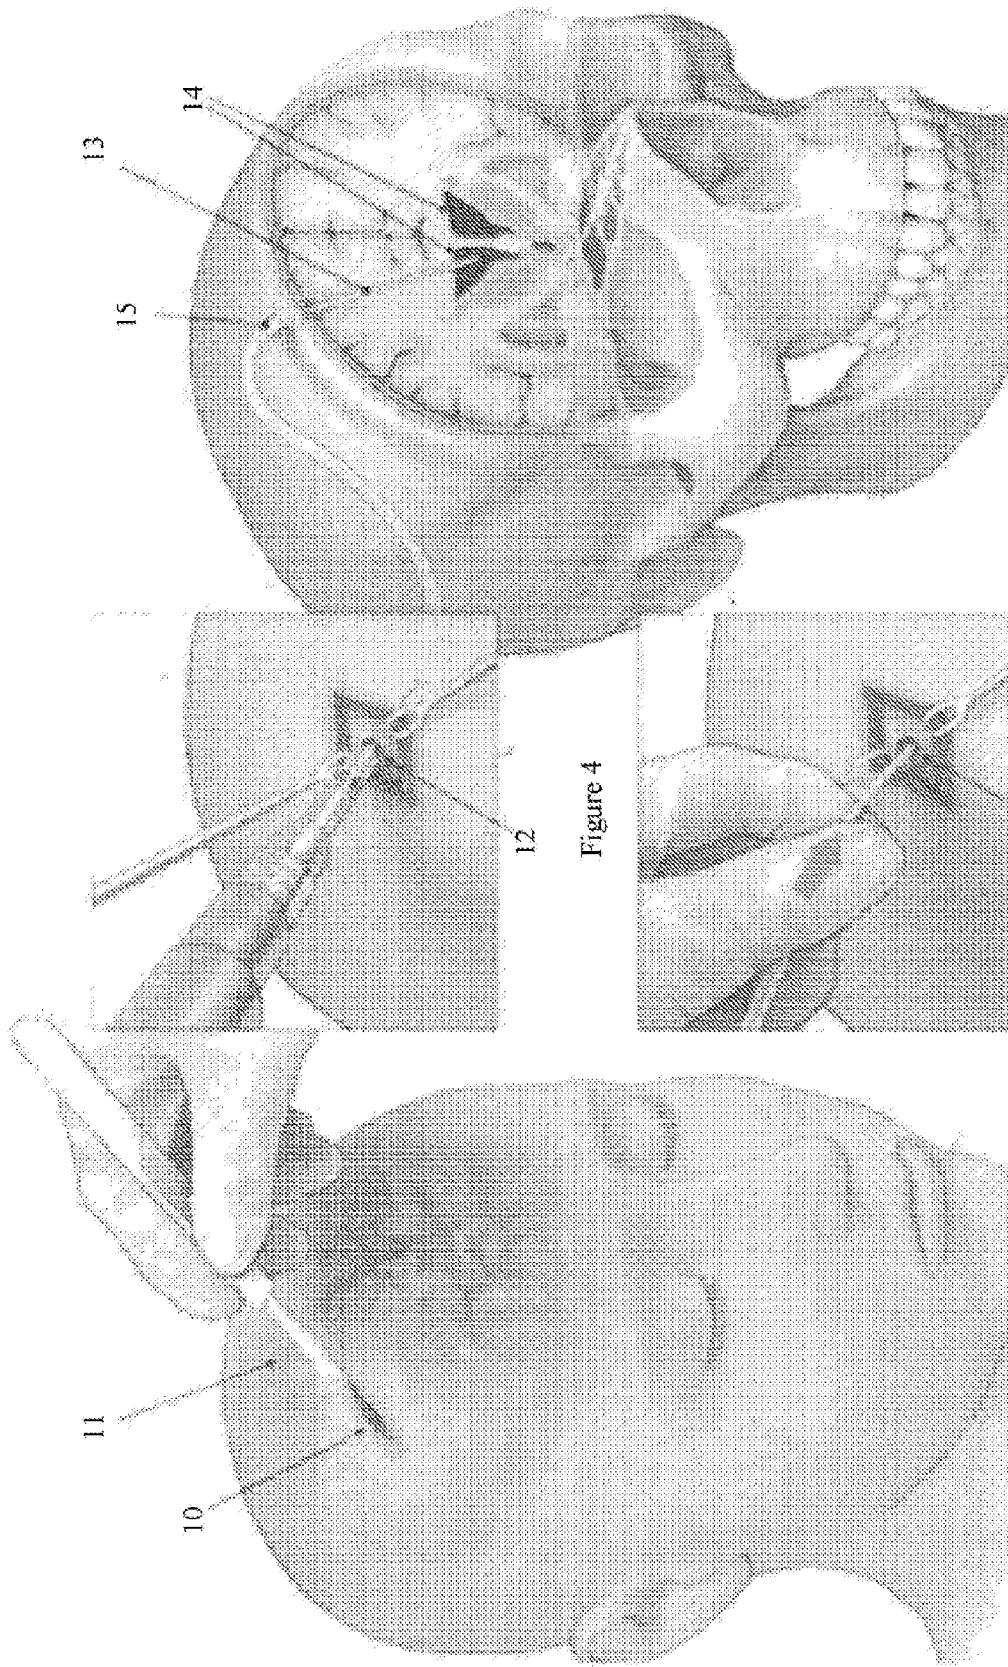


Figure 3

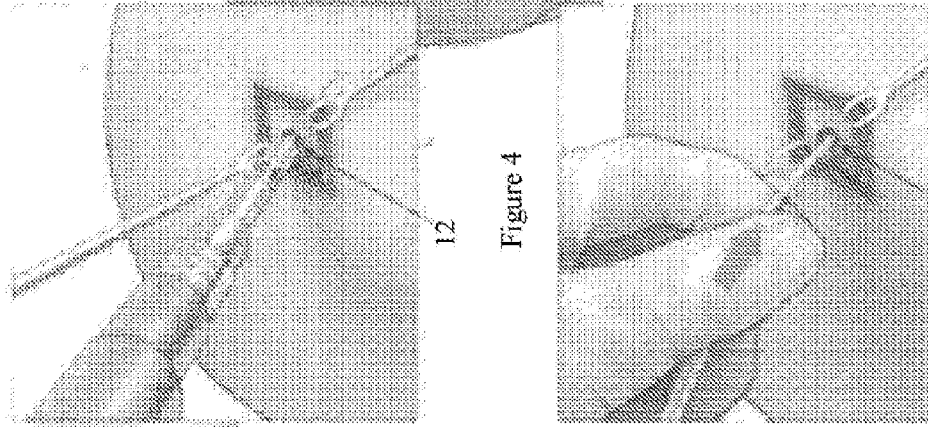


Figure 4

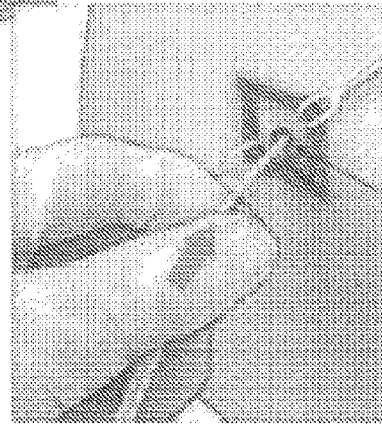


Figure 5

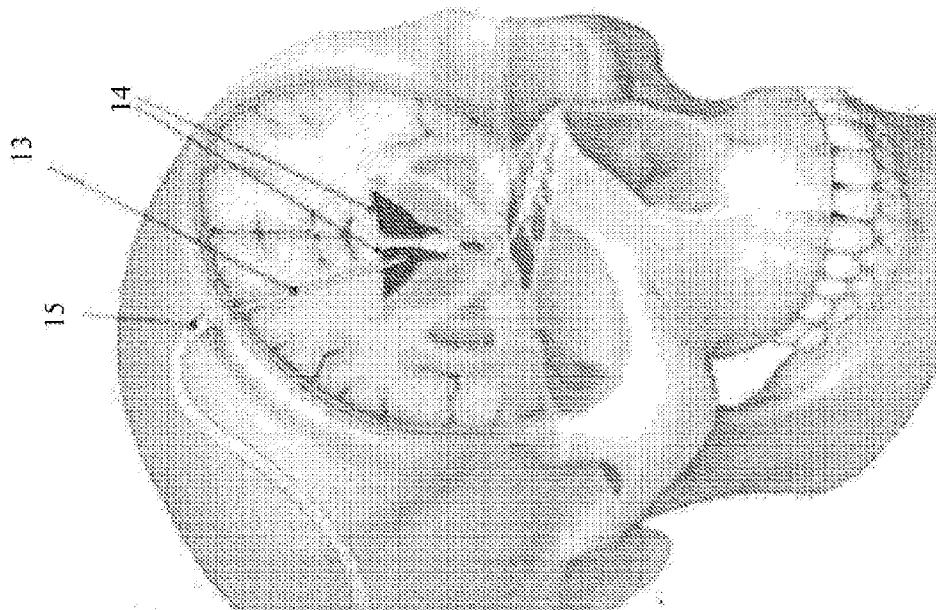


Figure 6

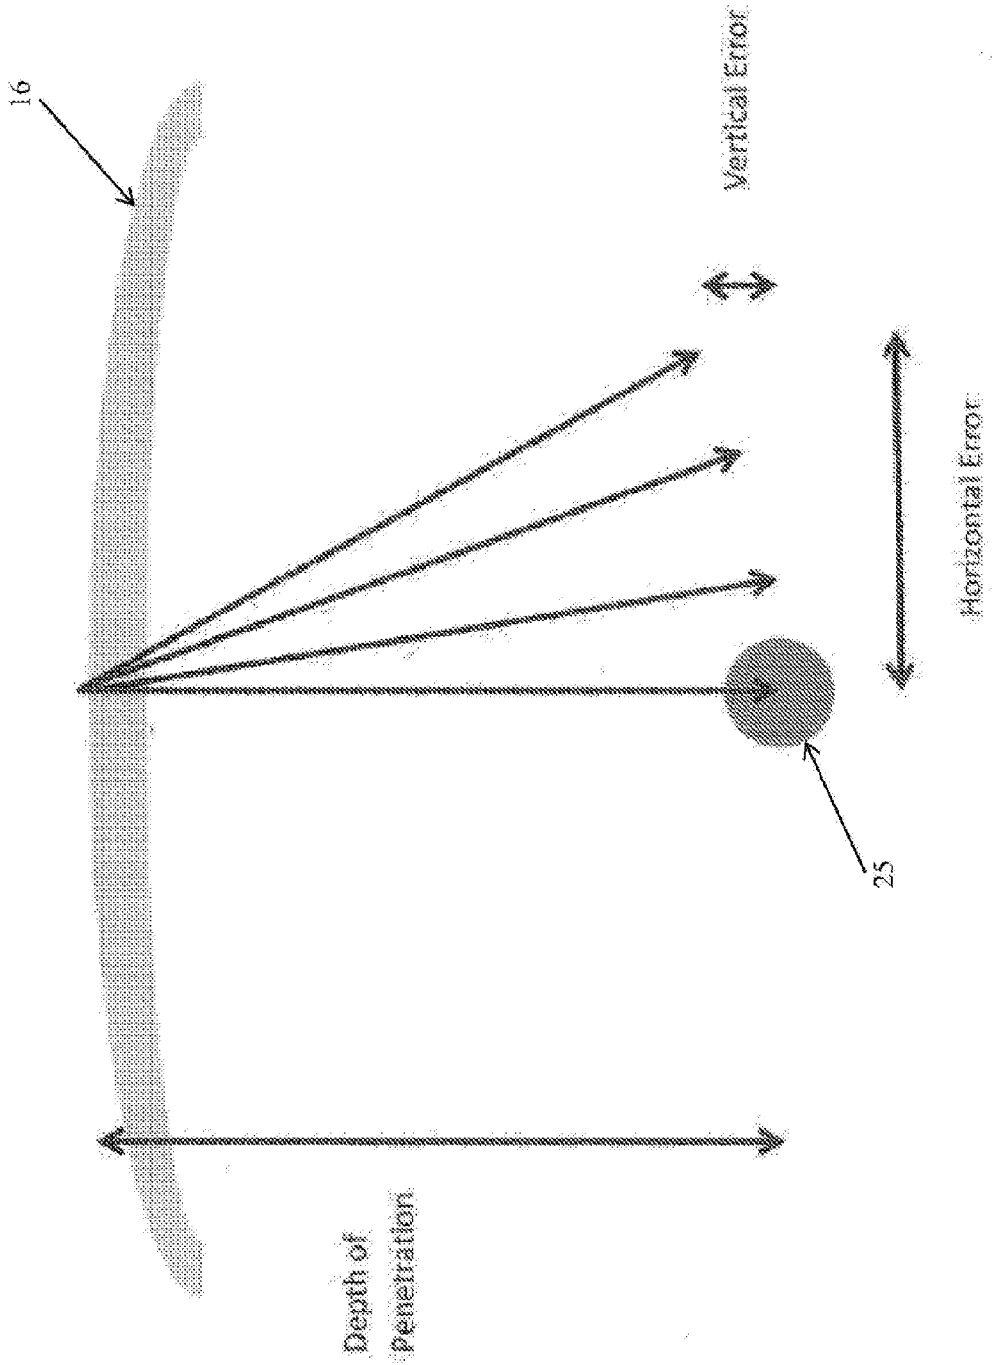


Figure 7



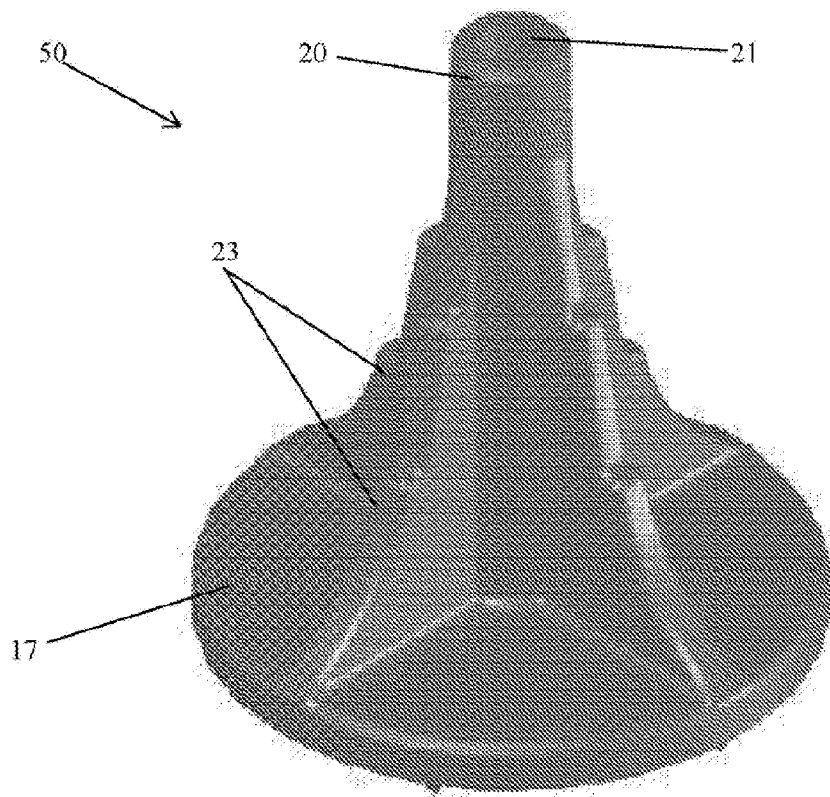


Figure 8

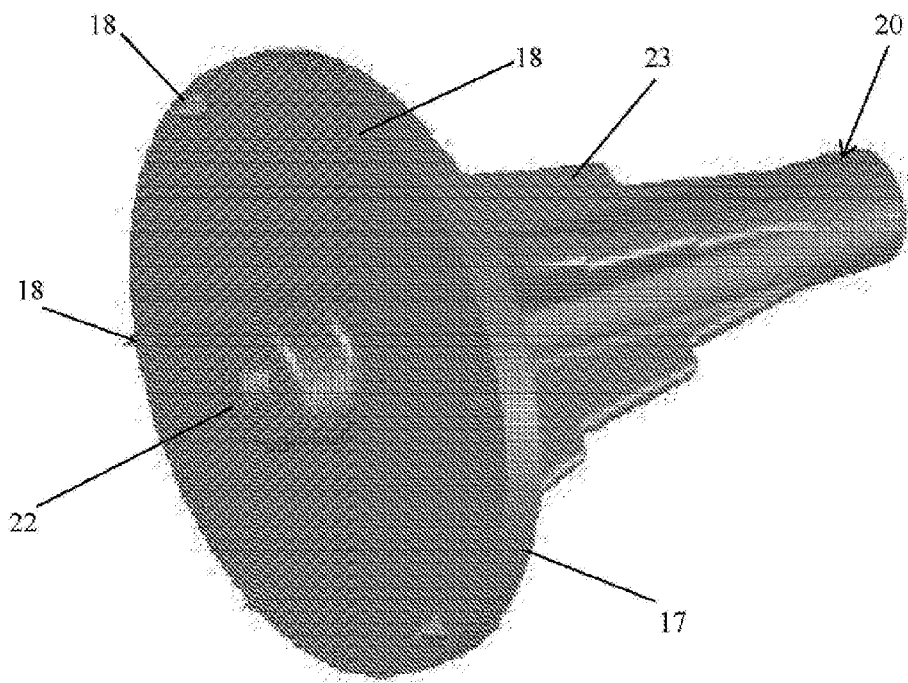


Figure 9

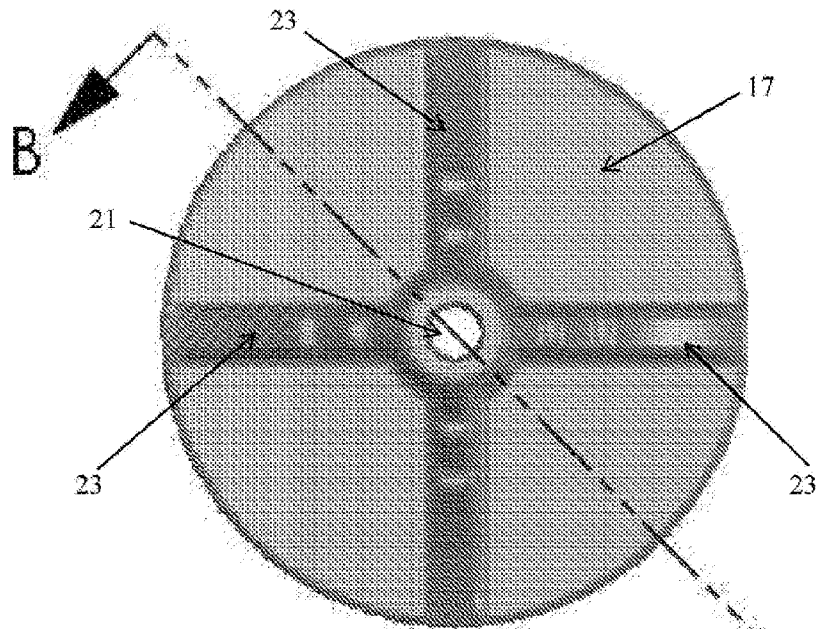


Figure 10

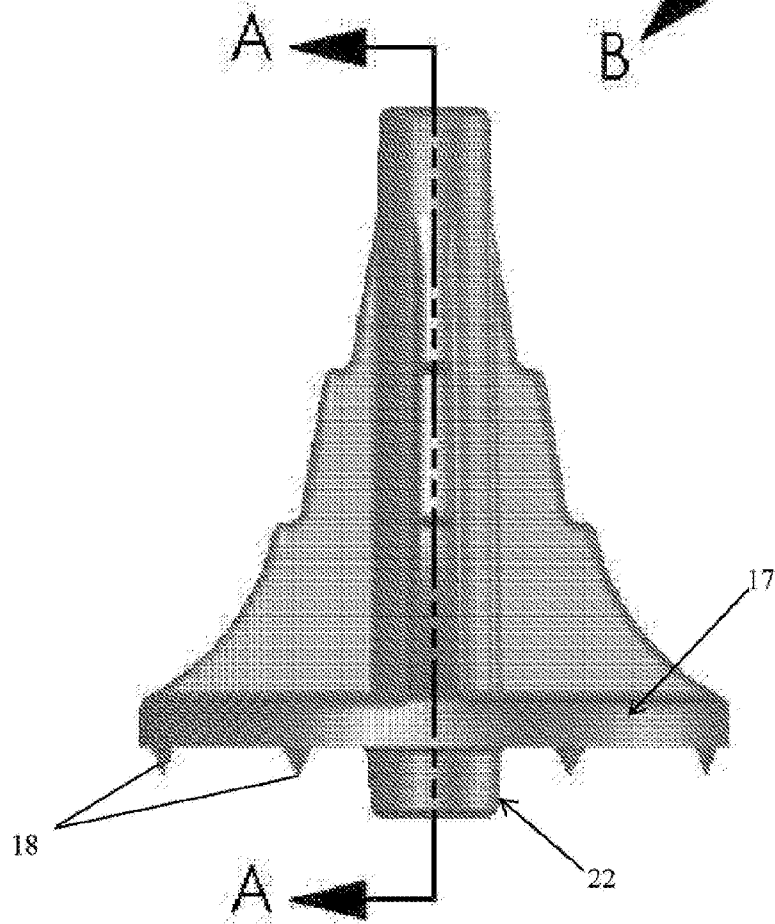


Figure 11

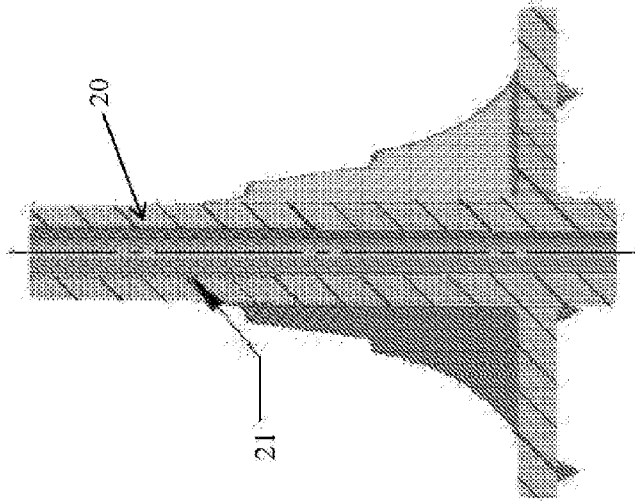


Figure 12

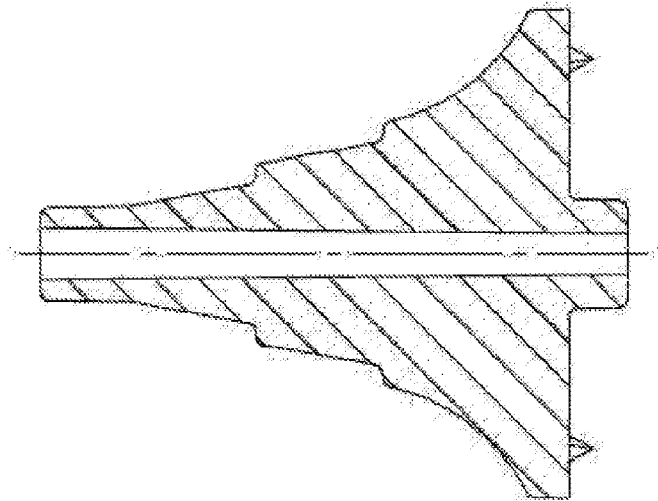


Figure 13

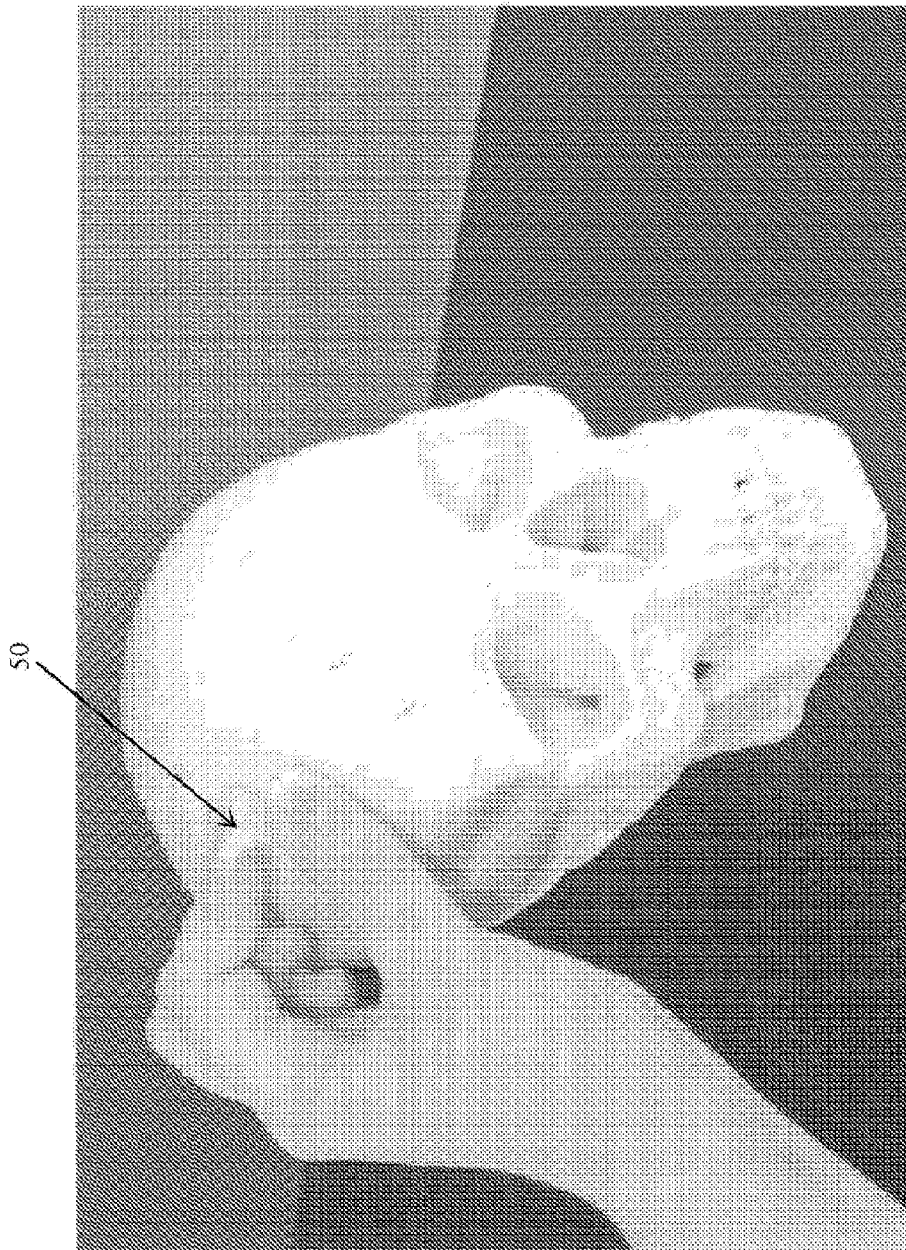


Figure 14

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2014/050167

## A. CLASSIFICATION OF SUBJECT MATTER

**A61M 25/01 (2006.01)**

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC; TXTE; IPC and/or CPC: A61B17/3415; A61M25/01/LOW; Y10S128/26/low &amp; keywords (catheter, guide, placement device, skull, brain, introduce, bore, channel, transparent, clear material, insert, implant, position, teeth, spike, anchor) &amp; like terms.

Google Patents: searched for applicant and inventor

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents:		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search  
24 December 2014Date of mailing of the international search report  
24 December 2014

## Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
Email address: pct@ipaustrialia.gov.au

## Authorised officer

Vijay Singh  
AUSTRALIAN PATENT OFFICE  
(ISO 9001 Quality Certified Service)  
Telephone No. 0262832665

**INTERNATIONAL SEARCH REPORT**

International application No.

C (Continuation).

DOCUMENTS CONSIDERED TO BE RELEVANT

**PCT/AU2014/050167**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6206885 B1 (GHAHREMANI et al.) 27 March 2001 Abstract; FIG. 1, 2, 6, 8	1 - 15
X	US 4821716 A (GHAJAR et al.) 18 April 1989 Abstract; FIG. 1, 2,7, 8; col. 4, line 56	1 - 15
A	WO 2010/085573 A1 (INNERSPACE, INC.) 29 July 2010 whole document	1 - 15
A	US 2013/0066410 A1 (FUNDERBURK) 14 March 2013 whole document	1 - 15
A	WO 2005/065337 A2 (HANKINS) 21 July 2005 whole document	1 - 15

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/AU2014/050167**

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

<b>Patent Document/s Cited in Search Report</b>		<b>Patent Family Member/s</b>	
<b>Publication Number</b>	<b>Publication Date</b>	<b>Publication Number</b>	<b>Publication Date</b>
US 6206885 B1	27 March 2001	US 2003028199 A1	06 Feb 2003
		US 7033367 B2	25 Apr 2006
US 4821716 A	18 April 1989	US 4931056 A	05 Jun 1990
WO 2010/085573 A1	29 July 2010	US 2012130377 A1	24 May 2012
US 2013/0066410 A1	14 March 2013	US 8812133 B2	19 Aug 2014
		AU 2012308504 A1	27 Mar 2014
		CA 2848528 A1	21 Mar 2013
		CN 103917270 A	09 Jul 2014
		EP 2755719 A2	23 Jul 2014
		US 2013066430 A1	14 Mar 2013
		US 2013066431 A1	14 Mar 2013
		US 2014324140 A1	30 Oct 2014
		WO 2013040243 A2	21 Mar 2013
WO 2005/065337 A2	21 July 2005	US 2005033315 A1	10 Feb 2005
		US 2007149878 A1	28 Jun 2007
		WO 2005011477 A2	10 Feb 2005

**End of Annex**

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)