



(51) International Patent Classification:

B41M 5/44 (2006.01) B41J 2/005 (2006.01)

B41M 5/025 (2006.01) B32B 25/20 (2006.01)

B41M 5/392 (2006.01) C09D 183/12 (2006.01)

(21) International Application Number:

PCT/IB2017/053167

(22) International Filing Date:

30 May 2017 (30.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1609463.3 30 May 2016 (30.05.2016) GB

62/343,108 30 May 2016 (30.05.2016) US

(71) Applicant: LANDA CORPORATION LTD. [IL/IL];

P.O. Box 2418, 7612301 Rehovot (IL).

(72) Inventors: LANDA, Benzion; 35 Itamar Ben-Avi Street,

7405135 Nes Ziona (IL). ABRAMOVICH, Sagi; 20 Halo-

tus Street, 4339320 Ra'anana (IL). LEVANON, Moshe;

28 Prof. Katzir Ephraim Street, 7608606 Rehovot (IL).

CHECHIK, Helena; 6 Berman Yakov Street, 7621312 Re-

hovot (IL). KURTSE, Tatiana; 10 Moshe Tavori Street,

4944484 Petach Tikva (IL).

(74) Agent: FOURTH DIMENSION IP; 7 Oppenheimer St.,

7670107 Rehovot (IL).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,

KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,

MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,

PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: INTERMEDIATE TRANSFER MEMBER

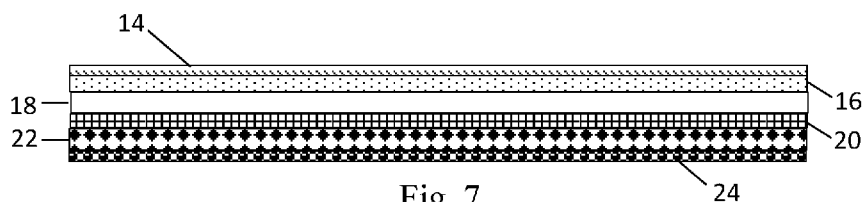


Fig. 7

(57) Abstract: An intermediate transfer member (ITM) for use with a printing system, the ITM having (a) a support layer; and (b) a release layer having an ink reception surface and a second surface opposing the ink reception surface, the second surface attached to the support layer, the release layer formed of an addition-cured, hydrophobic silicone material, wherein the release surface of the release layer has relatively hydrophilic properties with respect to the addition-cured, hydrophobic silicone material.



INTERMEDIATE TRANSFER MEMBER

This application draws priority from U.S. Provisional Patent Application Serial No. 62/343,108, and from GB1609463.3, both filed May 30, 2016, both of which are incorporated by reference for all purposes as if fully set forth herein.

5

FIELD OF THE DISCLOSURE

The invention relates to the field of printing and, more particularly, to intermediate transfer members of printing systems.

BACKGROUND

10 In the art of indirect printing it is known to apply an ink, in the form of a negative of a desired image, to an intermediate transfer member (ITM), and then to transfer the ink from the intermediate transfer component to a printing substrate such as paper, cloth or plastic, thereby printing the desired image on the substrate.

The ITM is typically a sleeve mounted on a drum or a looped blanket forming a flexible
15 belt on a conveyor system. The outermost layer of the ITM, to which the ink is applied and from which the ink is released to print the image on the substrate, is called the release layer.

Blankets suitable as intermediate transfer members require certain structural characteristics to make them suitable for the type of ink transfer envisioned and for the printing systems in which they are intended to operate. The desired properties of the blanket
20 are generally achieved by using multi-layered structures in which the release layer may be a silicone-based polymer having suitable ink attachment and release properties, and in which the blanket base includes at least one layer adapted to support the release layer.

A printing cycle, known in the art of indirect printing, may include the following steps:

(a) applying one or more inks, (each ink including a coloring agent in a liquid carrier)
25 as a plurality of ink droplets to form an ink image on the image transfer surface of a release layer of an intermediate transfer member;

(b) while the ink image is being transported by the intermediate transfer member, effecting at least partial evaporation of the carrier to leave an ink residue film including the coloring agents on the image transfer surfaces; and

30 (c) transferring the residue film from the image transfer surface to the printing substrate.

The inks may be applied to the image transfer surface by ink-jetting, typically at a printing station. The residue film obtained may be transferred from the image transfer surface to the substrate at an impression station, by engaging the intermediate transfer member with an impression cylinder.

5 For various reasons, it is desirable to use ink compositions including a water-based carrier rather than an organic carrier. ITM release layers having characteristically low surface energies are advantageous in that they may facilitate transfer of the dried ink image to the printing substrate. However, during the ink reception stage, the aqueous ink drops jetted onto such a low-energy, hydrophobic release layer tend to bead after the initial impact, thereby compromising image quality. Higher-energy, less hydrophobic release layers may
10 mitigate this effect, but are detrimental to image transfer quality. In addition, the process must contend with various issues pertaining to untransferred ink remaining on the release layer surface. In high-speed, high-throughput digital printing systems, these problems become even more acute.

15 As described in WO 2013/132418, the ITM may be required to have several specific physical properties that may be achieved by having a complex multi-layer structure. Generally, the ITM includes a support layer, typically including a fabric, the support layer having a very limited elasticity to avoid deformation of an image during transport to an impression station. The ITM may additionally have a highly compliant thin layer immediately
20 beneath the release later to enable the tacky film to closely follow the surface contour of the substrate. The ITM may include other layers to achieve the various desired frictional, thermal, and electrical properties of the ITM.

Due to a well-defined structure and shape, toughness and deformation-resistance, the support layer is used as the starting point when making an ITM. Specifically, manufacture of
25 an ITM is performed by providing a support layer to which additional desired layers are added to construct the desired multi-layer structure. Typically, the different layers of the ITM are applied as a curable fluid.

The release layer having the ink transfer surface of the ITM is the last and uppermost layer that is applied and formed. The inventors have observed that the topography, contour
30 and even surface finish of the ink transfer surface may be determined to a large extent by the contour of the surface of the penultimate layer to which the incipient release layer is applied. For this reason, it has proven difficult to manufacture an ITM having a defect-free ink transfer surface with a desired surface finish. The inventors have found that such defects may

appreciably detract, in various ways, from release layer performance, a problem particularly aggravated when significant length, width and surfaces of ITM are desired.

More significantly, the inventors have recognized the need for improved release layers that are better adapted to deal with the contradictory tasks pertaining to the aqueous ink reception stage, requiring hydrophilic properties, and the ink-film transfer stage, requiring hydrophobic properties.

SUMMARY

According to some aspects of the invention, there is provided an intermediate transfer member (ITM) for use with a printing system, the ITM including:

- (a) a support layer; and
- (b) a release layer having an ink reception surface for receiving an ink image, and a second surface opposing the ink reception surface, the second surface attached to the support layer, the release layer formed of an addition-cured silicone material, the release layer having a thickness of at most 500 micrometers (μm).

According to features in the described preferred embodiments, the ITM satisfies at least one, and as many as all, of the following structural properties:

- (1) a total surface energy of the ink reception surface is at least 2 J/m², at least 3 J/m², at least 4 J/m², at least 5 J/m², at least 6 J/m², at least 8 J/m², or at least 10 J/m² higher than a total surface energy of a modified ink reception surface produced by subjecting an ink reception surface of a corresponding release layer to a standard aging procedure;
- (2) a total surface energy of the ink reception surface is at least 4 J/m², at least 6 J/m², at least 8 J/m², at least 10 J/m², at least 12 J/m², at least 14 J/m², or at least 16 J/m² than a total surface energy of a hydrophobic ink reception surface of a corresponding release layer prepared by standard air curing of a silicone precursor of the cured silicone material;
- (3) a receding contact angle of a droplet of distilled water on the ink reception surface is at least 7°, at least 8°, at least 10°, at least 12°, at least 14°, at least 16°, at least 18°, or at least 20° lower than a receding contact angle of a droplet of distilled water on an ink reception surface of a corresponding release layer prepared by standard air curing of a silicone precursor of the cured silicone material;
- (4) a receding contact angle of a droplet of distilled water on the ink reception surface is at

least 5°, at least 6°, at least 7°, or at least 8° lower than a receding contact angle of a droplet of distilled water on an aged surface, produced by subjecting the ink reception surface to a standard aging procedure;

(5) a surface hydrophobicity of the ink reception surface is less than a bulk hydrophobicity of the cured silicone material within the release layer, the surface hydrophobicity being characterized by a receding contact angle of a droplet of distilled water on the ink reception surface, the bulk hydrophobicity being characterized by a receding contact angle of a droplet of distilled water disposed on an inner surface formed by exposing an area of the cured silicone material within the release layer to form an exposed area;

wherein the receding contact angle measured on the ink reception surface is at least 7°, at least 8°, at least 10°, at least 12°, at least 14°, at least 16°, at least 18°, or at least 20° lower than the receding contact angle measured on the exposed area;

(6) a receding contact angle of a droplet of distilled water on the ink reception surface is at most 60°, at most 58°, at most 56°, at most 54°, at most 52°, at most 50°, at most 48°, at most 46°, at most 44°, at most 42°, at most 40°, at most 38°, or at most 36°;

(7) the release layer is adapted such that polar groups of the ink reception surface have an orientation away from or opposite from the second surface;

(8) the release layer is adapted such that when the ITM is in an operative mode, with said ink reception surface exposed to an ambient environment, said polar groups of the ink reception surface have an orientation towards or facing said ambient environment;

(9) the ink reception surface is adapted whereby, for a droplet of distilled water deposited on the ink reception surface, a difference between a 70 second dynamic contact angle (DCA) and a 10 second DCA, is at least 6°, at least 7°, at least 8°, at least 10°, or at least 12°, optionally at most 25°, at most 22°, at most 20°, at most 18°, or at most 17°, and further optionally, within a range of 6 to 25°, 6 to 22°, 6 to 20°, 6 to 18°, 6 to 17°, 7 to 25°, 7 to 20°, 7 to 17°, 8 to 25°, 8 to 22°, 8 to 20°, 8 to 18°, 8 to 17°, 10 to 25°, 10 to 22°, 10 to 20°, 10 to 18°, or 10 to 17°;

(10) for a droplet of distilled water deposited on said ink reception surface, the 70 second DCA is at most 92°, at most 90°, at most 88°, at most 85°, at most 82°, at most 80°, at most 78°, at most 76°, at most 74°, or at most 72°, optionally at least 55°, at least 60°, at least 65°, or at least 68°, and further optionally, within a range of 55 to 92°, 55 to 90°, 55 to 85°, 55 to 80°, 65 to 92°, 65 to 90°, 65 to 85°, 65 to 80°, 68 to 85°, 68 to 80°, 70 to 92°, 70 to 90°, 70 to 85°, or

70 to 80°;

(11) for a droplet of distilled water deposited on said ink reception surface, the 10 second dynamic contact angle (DCA) is at most 108°, at most 106°, at most 103°, at most 100°, at most 96°, at most 92°, or at most 88°, optionally at least 60°, at least 65°, at least 70°, at least 75°, at least 78°, at least 80°, at least 82°, at least 84°, or at least 86°, and further optionally, within a range of 60 to 108°, 65 to 105°, 70 to 105°, 70 to 100°, 70 to 96°, 70 to 92°, 75 to 105°, 75 to 100°, 80 to 105°, 80 to 100°, 85 to 105°, or 85 to 100°.

According to further features in the described preferred embodiments, the addition-cured silicone material consisting essentially of an addition-cured silicone, or containing, by weight, at least 95%, at least 96%, at least 97%, at least 98%, or at least 99% of the addition-cured silicone.

5 According to still further features in the described preferred embodiments, functional groups make up at most 5%, at most 3%, at most 2%, or at most 1%, by weight, of the addition-cured silicone material, or the addition-cured silicone material is substantially devoid of the functional groups.

10 According to still further features in the described preferred embodiments, a polyether glycol functionalized polydimethyl siloxane is impregnated in the addition-cured silicone material.

According to still further features in the described preferred embodiments, a polyether glycol functionalized siloxane is impregnated in the addition-cured silicone material, but without forming a part of a covalent structure of the addition-cured silicone material.

15 According to still further features in the described preferred embodiments, the thickness of the release layer is at most 500μm, at most 200μm, at most 100μm, at most 50μm, at most 25μm, or at most 15μm, and optionally, within a range of 4 to 400μm, 5 to 250μm, 5 to 100μm, 5 to 60μm, 8-100μm, 10-100μm, or 10-80μm.

20 According to still further features in the described preferred embodiments, the thickness of the support layer is within a range of about 50 - 2700μm, 50 - 1500μm, 50 - 1000μm, 100 - 1000μm, 100 - 800μm, or 100 - 500μm.

According to still further features in the described preferred embodiments, the ITM satisfies structural property (1).

25 According to still further features in the described preferred embodiments, the ITM satisfies structural property (2).

According to still further features in the described preferred embodiments, the ITM satisfies structural property (3).

According to still further features in the described preferred embodiments, the ITM satisfies structural property (4).

5 According to still further features in the described preferred embodiments, the ITM satisfies structural property (5).

According to still further features in the described preferred embodiments, the ITM satisfies structural property (6).

10 According to still further features in the described preferred embodiments, the ITM satisfies structural property (7).

According to still further features in the described preferred embodiments, the ITM satisfies structural property (8).

According to still further features in the described preferred embodiments, the ITM satisfies structural property (9).

15 According to still further features in the described preferred embodiments, the ITM satisfies structural property (10).

According to still further features in the described preferred embodiments, the ITM satisfies structural property (11).

20 According to still further features in the described preferred embodiments, the ITM forms a component in a digital printing system.

According to still further features in the described preferred embodiments, the support layer includes an elastomeric compliance layer attached to the second surface of the release layer, the elastomeric compliance layer adapted to follow closely a surface contour of a printing substrate onto which the ink image is impressed.

25 According to still further features in the described preferred embodiments, the support layer includes a reinforcement layer attached to the compliance layer.

30 According to still further features in the described preferred embodiments, the release layer contains, within a silicone polymer matrix thereof, a total amount of at most 3%, at most 2%, at most 1%, at most 0.5%, at most 0.2%, or substantially 0% of the functional groups, by weight.

According to still further features in the described preferred embodiments, the release layer contains, within a silicone polymer matrix thereof, a total amount of at most 3%, at

most 2%, at most 1%, at most 0.5%, at most 0.2%, or substantially 0%, by weight, of functional groups selected from the group of moieties consisting of C=O, S=O, O-H, and COO.

According to still further features in the described preferred embodiments, the release
5 layer contains, within a silicone polymer matrix thereof, a total amount of at most 3%, at most 2%, at most 1%, at most 0.5%, at most 0.2%, or substantially 0%, by weight, of functional groups selected from the group consisting of silane, alkoxy, amido, and amido-alkoxy moieties.

According to still further features in the described preferred embodiments, the release
10 layer contains, within a silicone polymer matrix thereof, a total amount of at most 3%, at most 2%, at most 1%, at most 0.5%, at most 0.2%, or substantially 0%, by weight, of functional groups selected from the group consisting of amine, ammonium, aldehyde, SO₂, SO₃, SO₄, PO₃, PO₄, and C-O-C moieties.

According to still further features in the described preferred embodiments, the addition-
15 cured silicone material has a structure built from a vinyl-functional silicone.

According to still further features in the described preferred embodiments, the addition-cured silicone material includes polar groups of the “MQ” type.

According to still further features in the described preferred embodiments, the total
20 surface energy of the ink reception surface is evaluated using the Owens-Wendt Surface Energy Model.

According to still further features in the described preferred embodiments, the polar groups include O-Si-O groups.

According to still further features in the described preferred embodiments, the orientation away from the second surface, or towards the ambient environment, is at least
25 55%, at least 60%, at least 65%, at least 70%, at least 75%, or at least 80% of the polar groups, on a molar or weight basis.

According to still further features in the described preferred embodiments, the ITM has a length of up to 20 meters, and typically, within a range of 5-20, 5-15, 5-12, or 7-12 meters.

According to still further features in the described preferred embodiments, the ITM has
30 a width of up to 2.0 meters, and typically, within a range of 0.3-2.0, 0.75-2.0, 0.75-1.5, or 0.75-1.25 meters.

According to still further features in the described preferred embodiments, the ITM has a thickness of up to 3000 μ m, and typically, within a range of 200-3000, 200-1500, 300-1000, 300-800, 300-700, 100-3000, 50-3000, or 100-600 μ m.

Unless otherwise defined, all technical and scientific terms used herein have the same
5 meaning as commonly understood by one of ordinary skill in the art to which the invention pertains. In case of conflict, the specification, including definitions, will take precedence.

As used herein, the term “intermediate transfer member”, “image transfer member” or “transfer member” refers to the component of a printing system upon which the ink is initially applied by the printing heads, for instance by inkjet heads, and from which the jetted
10 image is subsequently transferred to another substrate or substrates, typically, the final printing substrates.

As used herein, the term “blanket” refers to a flexible transfer member that can be mounted within a printing device on a drum, or can be a belt-like structure supported by two or more rollers, at least one of which able to rotate and move the belt to travel around the
15 rollers.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed
20 that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of the invention in more detail than is necessary for a fundamental
25 understanding of the invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the invention may be embodied in practice. Throughout the drawings, like-referenced characters are used to designate like elements.

In the drawings:

Figure 1 schematically shows a section through a carrier;

30 Figures 2 to 6 schematically exhibit different stages in the manufacture of an ITM, according to the present method;

Figure 7 is a section through a finished ITM after installation in a printing system;

Figures 8A and 8B schematically illustrate a cross section through a release layer prepared according to the prior art;

Figure 8C schematically illustrates a cross section through a release layer prepared according to the present method;

5 Figures 9A to 9D schematically display an apparatus in which some embodiments of the present method can be implemented, different manufacturing stages being illustrated;

Figures 10A-10C are images of various ink patterns printed onto a release layer of an ITM of the present invention, in which the release layer was cured against a PET carrier surface; and

10 Figures 11A-11C are images of various ink patterns printed onto a release layer of an ITM of the prior art, in which the release layer was air cured.

DESCRIPTION

The principles and operation of the image transfer members according to the present
15 invention may be better understood with reference to the drawings and the accompanying description.

Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of the components set forth in the following description or illustrated in the
20 drawings. The invention is capable of other embodiments or of being practiced or carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein is for the purpose of description and should not be regarded as limiting.

The ITM may be manufactured in the inventive manner described by Figures 2-7 and in the description associated therewith. Such an ITM may be particularly suitable for the
25 Nanographic Printing™ technologies of Landa Corporation.

With reference now to **Figure 1**, Figure 1 schematically shows a section through a carrier **10**. In all the drawings, to distinguish it from the layers that form part of the finished article, the carrier **10** is shown as a solid black line. Carrier **10** has a carrier contact surface
12.

30 In some embodiments, carrier contact surface **12** may be a well-polished flat surface having a roughness (Ra) of at most about 50nm, at most 30nm, at most 20nm, at most 15nm, at most 12nm, or more typically, at most 10nm, at most 7nm, or at most 5nm. In some

embodiments, carrier contact surface **12** may be between 1 and 50nm, between 3 and 25nm, between 3 and 20nm, or between 5 nm and 20nm.

The hydrophilic properties of the carrier contact surface **12** are described hereinbelow.

In some embodiments, carrier **10** may be inflexible, being formed, for example, of a sheet of glass or thick sheet of metal.

In some embodiments, carrier **10** may advantageously be formed of a flexible foil, such as a flexible foil mainly consisting of, or including, aluminum, nickel, and/or chromium. In one embodiment, the foil is a sheet of aluminized PET (polyethylene terephthalate, a polyester), *e.g.*, PET coated with fumed aluminum metal. The top coating of aluminum may be protected by a polymeric coating, the sheet typically having a thickness of between 0.05 mm and 1.00 mm so as to remain flexible but difficult to bend through a small radius, so as to avert wrinkling.

In some embodiments, carrier **10** may advantageously be formed of an antistatic polymeric film, for example, a polyester film such as PET. The anti-static properties of the antistatic film may be achieved by various means known to those of skill in the art, including the addition of various additives (such as an ammonium salt) to the polymeric composition.

In a step of the present ITM manufacturing method, the results of which are shown in **Figure 2**, a fluid first curable composition (illustrated as **36** in Figure 9B) is provided and a layer **16** is formed therefrom on carrier contact surface **12**, layer **16** constituting an incipient release layer having an outer ink-transfer surface **14**.

The fluid first curable composition of layer **16** may include an elastomer, typically made of a silicone polymer, for example, a polydimethylsiloxane, such as a vinyl-terminated polydimethylsiloxane.

In some embodiments, the fluid first curable material includes a vinyl-functional silicone polymer, *e.g.*, a vinyl-silicone polymer including at least one lateral vinyl group in addition to the terminal vinyl groups, for example, a vinyl-functional polydimethyl siloxane.

In some exemplary embodiments, the fluid first curable material includes a vinyl-terminated polydimethylsiloxane, a vinyl-functional polydimethylsiloxane including at least one lateral vinyl group on the polysiloxane chain in addition to the terminal vinyl groups, a crosslinker, and an addition-cure catalyst, and optionally further includes a cure retardant.

As is known in the art, the curable adhesive composition may include any suitable amount of addition cure catalyst, typically at most 0.01% of the pre-polymer, on a per mole basis.

Exemplary formulations for the fluid first curable material are provided hereinbelow in the Examples.

Layer 16 of the fluid first curable composition is applied to carrier contact surface 12, and is subsequently cured. Layer 16 may be spread to the desired thickness using, for example, a doctor blade (a knife on a roll), without allowing the doctor blade to contact the surface that will ultimately act as the ink-transfer surface 14 of the ITM, such that imperfections in the doctor blade will not affect the quality of the finished product. After curing, "release" layer 16 may have a thickness of between about 2 micrometers and about 200 micrometers. An apparatus in which such step and method can be implemented is schematically illustrated in **Figures 9A and 9B**.

For example, the above-detailed release layer formulation may be uniformly applied upon a PET carrier, leveled to a thickness of 5-200 micrometers (μ), and cured for approximately 2-10 minutes at 120-130°C. Surprisingly, the hydrophobicity of the ink transfer surface of the release layer so prepared, as assessed by its receding contact angle (RCA) with a 0.5-5 microliter (μ l) droplet of distilled water, may be around 60°, whereas the other side of the same release layer (which served to approximate the hydrophobicity of a layer conventionally prepared with an air interface) may have an RCA that is significantly higher, typically around 90°. PET carriers used to produce ink-transfer surface 14 may typically display an RCA of around 40° or less. All contact angle measurements were performed with a Contact Angle analyzer - Krüss™ "Easy Drop" FM40Mk2 and/or a Dataphysics OCA15 Pro (Particle and Surface Sciences Pty. Ltd., Gosford, NSW, Australia).

In a subsequent step of the method, the results of which are shown in **Figure 3**, an additional layer 18, referred to as a compliance layer, is applied to layer 16, on the side opposite to ink-transfer surface 14. Compliance layer 18 is an elastomeric layer that allows layer 16 and its outermost surface 14 to follow closely the surface contour of a substrate onto which an ink image is impressed. The attachment of compliance layer 18 to the side opposite to ink-transfer surface 14 may involve the application of an adhesive or bonding composition in addition to the material of compliance layer 18. Generally, compliance layer 18 may typically have a thickness of between about 100 micrometers and about 300 micrometers or more.

While compliance layer **18** may have the same composition as that of release layer **16**, material and process economics may warrant the use of less expensive materials. Moreover, compliance layer **18** typically is selected to have mechanical properties (*e.g.*, greater resistance to tension) that differ from release layer **16**. Such desired differences in properties
5 may be achieved, by way of example, by utilizing a different composition with respect to release layer **16**, by varying the proportions between the ingredients used to prepare the formulation of release layer **16**, and/or by the addition of further ingredients to such formulation, and/or by the selection of different curing conditions. For instance, the addition of filler particles may favorably increase the mechanical strength of compliance layer **18**
10 relative to release layer **16**.

In some embodiments, compliance layer **18** may include various rubbers. Preferably such rubbers are stable at temperatures of at least 100°C, and may include rubbers such as alkyl acrylate copolymer rubbers (ACM), methyl vinyl silicone rubber (VMQ), ethylene propylene diene monomer rubber (EPDM), fluoroelastomer polymers, nitrile butadiene
15 rubber (NBR), ethylene acrylic elastomer (EAM), and hydrogenated nitrile butadiene rubber (HNBR).

As a non-limiting example, Silopren® LSR 2530 (Momentive Performance Materials Inc., Waterford NY), a two-component liquid silicone rubber, in which the two components are mixed at a 1:1 ratio, was applied to the cured release layer **16** previously described. The
20 silicone rubber mixture was metered / leveled with a knife blade to obtain an incipient compliance layer **18** having a thickness of about 250 micrometers, which was then cured for approximately 5 minutes at 150-160°C.

In a subsequent step of the method, the results of which are shown in **Figure 4**, a reinforcement layer or support layer **20** is constructed on compliance layer **18**. Support layer
25 **20** typically contains a fiber reinforcement, in the form of a web or a fabric, to provide support layer **20** with sufficient structural integrity to withstand stretching when the ITM is held in tension in the printing system. Support layer **20** is formed by coating the fiber reinforcement with a resin that is subsequently cured and remains flexible after curing.

Alternatively, support layer **20** may be separately formed as a reinforcement layer,
30 including such fibers embedded and/or impregnated within the independently cured resin. In this case, support layer **20** may be attached to compliance layer **18** via an adhesive layer, optionally eliminating the need to cure the support layer **20** *in situ*. Generally, support layer **20**, whether formed *in situ* on compliance layer **18** or separately, may have a thickness of

between about 100 micrometers and about 500 micrometers, part of which is attributed to the thickness of the fibers or the fabric, which thickness generally varies between about 50 micrometers and about 300 micrometers. However, the support layer thickness is not limiting. For heavy-duty applications, by way of example, the support layer may have a thickness of
5 more than 200 micrometers, more than 500 micrometers, or 1 mm or more.

For example, to the multi-layered ITM structure described herein, including a vinyl-functionalized release coating **16** and a two-component silicone rubber compliance layer **18**, was applied a support layer **20** including woven fabric of glass fibers. The glass fiber fabric, having a thickness of about 100 micrometers, was a plain weave fabric having 16 yarns/cm in
10 perpendicular directions. The glass fiber fabric was embedded into a curable fluid including a liquid silicone rubber Silopren® LSR 2530 corresponding to the compliance layer. Overall, the resulting support layer **20** had a thickness of about 200 micrometers and was cured at 150°C for approximately 2-5 minutes. Preferably, more dense weave fabrics (*e.g.*, having 24x23 yarns/cm) may be used.

Following the *in situ* formation, or attachment, of support layer **20**, additional layers may be built up on the reverse side thereof, as required. **Figure 5** shows an optional felt blanket **22** secured (*e.g.*, by a cured adhesive or resin) to the reverse side of support layer **20**, and **Figure 6** shows a high friction layer **24** coated onto the reverse side of blanket **22**. As will be appreciated by persons skilled in the art, various relatively soft rubbers may serve for
20 the preparation of a layer having high friction properties, silicone elastomers being but an example of such rubbers. In the absence of an intervening layer such as blanket **22**, high friction layer **24** may be attached directly to support layer **20**.

As mentioned, all layers (*e.g.*, **18**, **20**, **22**, **24**, or any intervening adhesive or priming layer and the like) added to the release layer of the ITM are the to jointly form the base of the
25 structure, as shown with respect to base **200** in **Figure 8C**.

Before the ITM is used, it is necessary to remove carrier **10** to expose ink-transfer surface **14** of release layer **16**, as illustrated in **Figure 7**. Typically, the finished product can simply be peeled away from carrier **10**.

If the carrier **10** is a flexible foil, it may be preferred to leave it in place on the ITM
30 until such time as the ITM is to be installed into a printing system. The foil will act to protect the ink-transfer surface **14** of the ITM during storage, transportation and installation. Additionally, carrier **10** can be replaced, following completion of the manufacturing process, by an alternative foil that is suitable as a protective film.

Figures 9A to 9D schematically illustrate an apparatus 90 in which the ITM may be manufactured. Figure 9A provides a schematic overview of such an apparatus 90 having an unwinding roller 40 and a winding roller 42 moving a flexible loop conveyor 100. Along the path followed by conveyor 100 can be positioned a dispensing station 52, able to dispense curable fluid compositions suitable for the desired ITMs, a leveling station 54, able to control the thickness of the curable layer as it moves downstream of the station, and a curing station 56, able to at least partially cure the layer enabling it to serve as incipient layer for a subsequent step, if any. The dispensing station 52, the leveling station 54 and the curing station 56 constitute a layer forming station 50a. As illustrated by 50b, apparatus 90 may optionally include more than one layer forming station. Furthermore, a forming station 50 may include additional sub-stations, illustrated by a dispensing roller 58 in station 50a.

In some embodiments, the need for loop conveyor 100 is obviated: carrier 10 is directly tensioned between rollers 40 and 42. Unprocessed carrier 10 is unwound from unwinding roller 40, and after passing through stations 50a and 50b, is rewound onto winding roller 42.

Though not illustrated in the figure, the apparatus may further include upstream of the dispensing station a “surface treatment” station facilitating the subsequent application of a curable composition, or its attachment to the carrier contact surface or incipient layer as the case may be. As mentioned in relation with the carrier, the optional surface treatment station (not shown) can be suitable for physical treatment (*e.g.*, corona treatment, plasma treatment, ozonation, *etc.*).

Figure 9B schematically illustrates how in a forming station 50 of apparatus 90, a carrier 10 placed on conveyor 100 can be coated. At dispensing station 52, the curable composition 36 of release layer 16 is applied to carrier contact surface 12. As carrier 10 is driven in the direction of the arrow, the curable composition 36 is leveled to a desired thickness at leveling station 54, for instance, by using a doctor blade. As the leveled layer proceeds downstream, it enters curing station 56, configured so as to at least partially cure curable composition 36, enabling the formation of incipient layer 16 at the exit side of the curing station. Such exemplary steps have been described in connection with Figures 1 and 2.

Figures 9C and 9D schematically illustrate how additional layers (forming the base) can be applied. In Figure 9C, a curable composition 38 is dispensed at dispensing station 52 (which can be same or different than the station having served to coat the carrier with the release layer 16, as illustrated in Figure 9B). Curable composition 38 is leveled to a desired thickness at leveling station 54, then enters curing station 56, and exits curing station 56

sufficiently cured to serve as incipient layer **18** for a subsequent step, and so on. Such an exemplary step has been described in connection with **Figure 3**. With reference now to **Figure 9C**, **Figure 9C** schematically depicts a curable composition **39** being applied at dispensing station **52**. The backbone of a support layer (*e.g.*, a fabric) can be delivered by dispensing roller **58**. The exemplary fabric can be submerged into the curable composition at a station **60** prior to their entry into curing station **56**. In such a manner, a support layer **20** can be formed at the exit side of the curing station.

Figures 8A and 8B schematically illustrate how defects would appear in a section of an outer layer **80** (*e.g.*, a release layer) prepared according to the above-described method of the art. **Figure 8A** illustrates different phenomena relating to air bubbles, which may be entrapped in any curable composition if the curing occurs before such bubbles can be eliminated (*e.g.*, by degassing). As can be seen in the figure, as tiny bubbles **82** migrate towards the air interface, the orientation of layer **80** during manufacturing over a body **800**, hence the direction of migration, being indicated by an arrow, they can merge into larger bubbles. The bubbles, independently of their size, may either remain entrapped within the bulk of the layer or on its surface, the upper part of the bubbles envelope forming protrusions **84**. When bubbles adjacent to the surface burst while the curing of the layer is advanced, craters **86** may remain, even if the segment of the envelope of the bubbles protruding from the surface has disappeared. These phenomena therefore typically provide a “gradient” of air bubbles, the upper sections being generally either populated by larger bubbles than the lower sections and/or having a higher density of bubbles per cross section area or per volume, lower and higher being relative to the orientation of the layer during its manufacturing. The impact of bubbles-derived defects on the surface is self-evident, the heterogeneity of the surface typically negatively affecting any subsequent interplay, for instance with an ink image. With time, such ITM being typically operated under tension and/or under pressure, craters may widen and merge to form more significant fissures. Thus, such phenomena may affect the structural integrity of the surface and any mechanical property such integrity would have conferred to the ITM.

Figure 8B schematically illustrates different phenomena relating to solid contaminants, such as dust. Though in the present illustration, the dust is represented as being in addition to air bubbles, this need not be necessarily the case, each such surface or layer defect able to occur independently. As can be seen in the figure, solid contaminants may remain upon the surface. If the settling of contaminants occurs after the outer layer **80** is cured, then such

contaminants **92** may even be removed by suitable cleaning of the outer surface. Still, such a phenomenon is undesirable, as it would require additional processing of such an ITM before being able to use it. If such contaminations occur while the layer is still uncured, then the contaminants can be either entrapped on the surface of layer **80**, (*e.g.*, contaminant **94**, which
5 appears to be “floating”), or can even be submerged within the release layer, (*e.g.*, contaminant **96**). As can be readily understood, larger/heavier contaminants may sink more deeply than smaller ones.

Unlike methods known in the art, the method disclosed herein includes forming a layer of a fluid first curable material with one side of the layer contacting a carrier contact surface,
10 the layer constituting an incipient release layer. The carrier contact surface functions to protect the incipient release layer, giving the ink transfer layer desired properties, while the carrier acts as a physically robust support structure onto which other layers are added to form the ITM, until the ITM is complete. As a result, many potential sources of defect are avoided. Moreover, the finish of the ink transfer surface is primarily, if not exclusively, determined by
15 the carrier contact surface.

Figures 8C schematically illustrates a section through an outer layer **16** (*e.g.*, a release layer) prepared according to the present method. For comparison with previous drawings, the section is shown without a carrier and in the same orientation as Figures 8A and 8B, though the manufacturing is performed in inversed orientation as shown by the arrow. The base **200**,
20 which, as shall be detailed hereinafter, is attached to the first outer layer **16** after the layer is at least partially cured, is therefore not equivalent to body **800** already serving as support during the manufacturing process. For the sole sake of illustration, layer **16** is represented as including an important number of bubbles **82**, but this need not be the case. However, if present, such bubbles would display a distinct pattern than those previously described. First,
25 as the now uppermost ink transfer surface **14** of layer **16** was previously in contact with a carrier, no protrusions can be observed, the release layer being therefore devoid of phenomena such as previously illustrated by surface protruding bubbles **84**. Likewise, craters previously illustrated as cavities **86** are very unlikely, as they would imply using an incompatible curable layer and carrier. As according to the present method, the curable
30 material due to form the outer layer is to suitably wet the carrier, it is believed that substantially no air bubbles can be entrapped between the carrier and the incipient layer formed thereon. Thus, if at all present, such bubbles would be disposed in the bulk of the layer. However, as the manufacturing is performed in inverted orientation as compared to

conventional methods, the gradient of bubbles would, for the same reason, be inverted. Thus, and as depicted in **Figure 8C**, tiny bubbles would be closer to the outer surface than larger bubbles, which would be closer to the base.

The inventive release layer structures of the present invention, produced from addition-cure formulations, may contain substantially no functional groups, or an insubstantial amount (e.g., an insubstantial amount of OH groups), covalently attached within the polymer matrix. Such functional groups may include moieties such as C=O, S=O, and OH, by way of example.

Because these release layer structures contain, at most, an insubstantial amount of such functional groups, it would be expected that the release layers thereof would be highly hydrophobic. The inventors have surprisingly found, however, that the release layer surfaces produced by the present method may actually be somewhat hydrophilic, and appreciably more hydrophilic than corresponding release layers, *i.e.*, release layers having the same composition, but manufactured using the conventional curing technique in which the release layer is exposed to air ("standard air curing"). Without wishing to be bound by theory, the inventors believe that the intimate contact between the carrier contact surface and the incipient release layer surface, the somewhat hydrophilic properties of the carrier contact surface are induced in the release layer surface.

As discussed hereinabove, ITM release layers having low surface energies may facilitate transfer of the dried ink image to the printing substrate. However, during the ink reception stage, the aqueous ink drops jetted onto such a low-energy, hydrophobic release layer tend to bead after the initial impact, thereby compromising image quality. Higher-energy, less hydrophobic release layers may mitigate this effect, but are detrimental to image transfer quality. The inventors have found that the release layer structures of the present invention typically have release surfaces of characteristically moderated hydrophobicity, as manifested by receding contact angles for distilled water of at most 80°, or at most 70°, typically, at most 60°, or at most 50°, and more typically, 30° - 60°, 35° - 60°, 30° - 55°, 30° - 50°, 30° - 45°, or 35° - 50°. Surprisingly, however, both the ink reception and the transfer of the dry, heated ink image may be of good quality. It must be emphasized that yet lower values of the receding contact angle (and the dynamic contact angle discussed hereinbelow) may be achieved by employing carrier surfaces having higher hydrophilicity (lower contact angles with respect to drops of distilled water), and/or by corona (or similar) treatment.

Without wishing to be bound by theory, the inventors believe that the above-described induced surface properties improve the interactions between polar groups (e.g., O-Si-O) on the release layer surface and corresponding polar moieties (e.g., OH groups in the water) in

- the aqueous liquids (*e.g.*, aqueous inkjet inks) deposited thereon, thereby contributing to the reception of the jetted ink drops. Subsequently, after drying the ink and heating of the ink film to transfer temperatures, these interactions are weakened, enabling complete transfer of the dry or substantially dry ink image. Thus, the performance of the inventive release layer structure -- at both the ink reception stage and the ink film transfer stage -- is appreciably better than would have been expected for a release layer having moderate hydrophobicity, but devoid of the special surface structure and properties induced by the carrier contact surface.

EXAMPLES

- Reference is now made to the following examples, which together with the above descriptions, illustrate the invention in a non-limiting fashion.

List of Materials Used:

Ingredient	Supplier	CAS Number	Description
DMS-V35 Resin	Gelest	68083-19-2	Vinyl terminated polydimethyl siloxane Viscosity 5,000 mPa.s MW ~49,500 Vinyl ~0.018-0.05 mmol/g
VQM-146 Resin	Gelest	68584-83-8	20-25% Vinyl resin in DMS V46 Viscosity 50,000-60,000 mPa.s Vinyl ~0.18-0.23 mmol/g
Inhibitor 600 Cure Retardant	Evonik	204-070-5	Mix of divinylpolydimethylsiloxane and 2-methylbut-3-yn-2-ol Viscosity 900 mPa.s Vinyl 0.11 mmol/g
SIP6831.2 Catalyst	Gelest	68478-92-2	Platinum divinyltetramethyldisiloxane Platinum 2.1-2.4%
Polymer RV 5000 (XPRV 5000) Resin	Evonik		Vinyl-functional polydimethyl siloxanes Viscosity 3000 mPa.s Vinyl 0.4 mmol/g
Crosslinker 100 Crosslinker	Evonik		Polydimethyl siloxanes including SiH groups in the polymer chain

Ingredient	Supplier	CAS Number	Description
			Hydride 7.8 mmol/g
HMS-301 Crosslinker	Gelest	68037-59-2	Poly(dimethylsiloxane- <i>co</i> -methyl-hydrosiloxane), trimethylsilyl terminated Hydride 4.2 mmol/g
Silsurf A010-D-UP Additive	Siltech	134180-76-0	polyether siloxane copolymer
SilGrip SR 545 Functional MQ resin	Momentive	56275-01-5	Silicone-based resin containing “MQ” groups Viscosity 11 mPa•s
Aluminized PET	Hanita Ltd.	NR	Aluminized polyester film
Skyroll SH 92	SKC Inc.	NR	Anti-static polyester film
Skyroll SH 76	SKC Inc.	NR	Untreated polyester film

The carriers used as substrates in the production of the release layer surface include (1) an anti-static polyester film (Examples 1 - 7); (2) an untreated polyester film *i.e.*, not anti-static (Example 11); and (3) an aluminized polyester film (Example 10).

5

EXAMPLE 1

The ITM release layer of Example 1 had the following composition (wt./wt.):

Name	Parts
DMS-V35	70
XPRV-5000	30
VQM-146	40
Inhibitor 600	5
SIP6831.2	0.1
Crosslinker HMS-301	12

The release layer was prepared substantially as described in the present blanket preparation procedure, provided below.

Blanket Preparation Procedure (for release layers cured against a carrier surface)

All components of the release layer formulation were thoroughly mixed together. The
5 desired thickness of the incipient release layer was coated on a PET sheet, using a rod/knife
(other coating methods may also be used), followed by curing for 3 minutes at 150°C.
Subsequently, Siloprene LSR 2530 was coated on top of the release layer, using a knife, to
achieve a desired thickness. Curing was then performed at 150°C for 3 minutes. An
additional layer of Siloprene LSR 2530 was then coated on top of the previous (cured)
10 silicone layer, and fiberglass fabric was incorporated into this wet, fresh layer such that wet
silicone penetrated into the fabric structure. Curing was then performed at 150°C for 3
minutes. A final layer of Siloprene LSR 2530 was then coated onto the fiberglass fabric and,
once again, curing was performed at 150°C for 3 minutes. The integral blanket structure was
then cooled to room temperature and the PET was removed.

15

EXAMPLE 2

The ITM release layer of Example 2 has the following composition:

Component Name	Parts
DMS-V35	70
XPRV-5000	30
VQM-146	40
Inhibitor 600	5
SIP6831.2	0.1
Crosslinker HMS-301	12
Silsurf A010-D-UP	5

The blanket was prepared substantially as described in Example 1.

20

EXAMPLE 3

The ITM release layer of Example 3 has the following composition:

Component Name	Parts
DMS-V35	70
XPRV-5000	30
VQM-146	40
Inhibitor 600	5
SIP6831.2	0.1
Crosslinker 100	6.5
Silsurf A010-D-UP	5

The blanket was prepared substantially as described in Example 1.

EXAMPLE 4

The ITM release layer of Example 4 has the following composition:

Component Name	Parts
DMS-V35	100
VQM-146	40
Inhibitor 600	3
SIP6831.2	0.1
Crosslinker HMS-301	5

5

The blanket was prepared substantially as described in Example 1.

EXAMPLE 5

The ITM release layer of Example 5 was prepared from Silopren® LSR 2530 (Momentive Performance Materials Inc., Waterford, NY), a two-component liquid silicone rubber, in which the two components are mixed at a 1:1 ratio. The blanket was prepared substantially as described in Example 1.

10

EXAMPLE 6

The ITM release layer of Example 6 has a composition that is substantially identical to that of Example 4, but includes SR545 (Momentive Performance Materials Inc., Waterford, NY), a commercially available silicone-based resin containing polar groups. The polar groups are of the "MQ" type, where "M" represents Me_3SiO and "Q" represents SiO_4 . The full composition is provided below:

Component Name	Parts
DMS-V35	100
VQM-146	40
SR545	5
Inhibitor 600	3
SIP6831.2	0.1
Crosslinker HMS-301	5

The blanket was prepared substantially as described in Example 1.

EXAMPLE 7

The ITM release layer of Example 7 has a composition that is substantially identical to that of Example 6, but includes polymer RV 5000, which includes vinyl-functional polydimethyl siloxanes having a high density of vinyl groups, as described hereinabove. The full composition is provided below:

Component Name	Parts
DMS-V35	70
RV 5000	30
VQM-146	40
Inhibitor 600	5
SIP6831.2	0.1
Crosslinker HMS-301	12
SR545	5

The blanket was prepared substantially as described in Example 1.

COMPARATIVE EXAMPLES 1A - 1F

ITM release layers were prepared as “corresponding release layers” or “reference release layers” to the compositions of Examples 1 – 6, such that the corresponding release layers (designated Comparative Examples 1A – 1F) had the identical compositions as Examples 1 – 6, respectively. However, during the curing of the release layer, the release layer surface (or “ink reception surface”) was exposed to air (“standard air curing”), according to a conventional preparation procedure, provided below.

10 Comparative Blanket Preparation Procedure (for release layers exposed to air during curing)

A first layer of Siloprene LSR 2530 was coated on a PET sheet, using a rod/knife, followed by curing for 3 min at 150°C, to achieve the desired thickness. An additional layer of Siloprene LSR 2530 was then coated on top of the previous (cured) silicone layer, and fiberglass fabric was incorporated into this wet, fresh layer such that wet silicone penetrated
15 into the fabric structure. Siloprene LSR 2530 was then coated on top of the fiberglass fabric, and curing ensued at 150°C for 3 minutes. Prior to forming the incipient release layer, all components of the release layer formulation were thoroughly mixed together. The release layer was coated on top of cured Siloprene LSR 2530 to achieve the desired thickness, and was subsequently cured at 150°C for 3 minutes, while the release layer surface was exposed
20 to air.

EXAMPLE 8

Contact angles of drops of distilled water on release layer surfaces were measured using a dedicated Dataphysics OCA15 Pro contact angle measuring device (Particle and Surface Sciences Pty. Ltd., Gosford, NSW, Australia). The procedure used for performing the
25 Receding Contact Angle (RCA) and Advancing Contact Angle (ACA) measurements is a conventional technique elaborated by Dr. Roger P. Woodward (“Contact Angle Measurements Using the Drop Shape Method”, *inter alia*, www.firsttenangstroms.com/pdfdocs/CAPaper.pdf).

The results for Examples 1 – 6 are provided below, along with the results for the release
30 layers produced according to Comparative Examples 1A – 1F.

In virtually all cases, the release surfaces produced against the carrier surfaces exhibited lower Receding Contact Angles than the identical formulation, cured in air. More typically,

the release surfaces produced against the carrier surfaces exhibited Receding Contact Angles that were lower by at least 5°, at least 7°, at least 10°, at least 12°, or at least 15°, or were lower within a range of 5° - 30°, 7° - 30°, 10° - 30°, 5° - 25°, 5° - 22°, 7° - 25°, or 10° - 25°.

5

EXAMPLE 9

The release surfaces produced in Examples 1 – 6 and the respective release surfaces produced in Comparative Examples 1A – 1F were aged at 160°C for 2 hours, to simulate the aging of the release layer under extended operating conditions. Receding Contact Angles were measured, and the results are provided below:

10

Release formulation	Release Surface vs. PET		Comparative release formulation	Release Surface vs. Air	
	RCA before aging	RCA after aging		RCA before aging	RCA after aging
Example 1	75°	80°	Comparative Example 1A	95°	95°
Example 2	45°	60°	Comparative Example 1B	65°	65°
Example 3	40°	50°	Comparative Example 1C	63°	65°
Example 4	65°	62°	Comparative Example 1D	79°	75°
Example 5	70°	74°	Comparative Example 1E	80°	80°
Example 6	56°	70°	Comparative Example 1F	74°	70°

With regard to the comparative examples, it is evident that the receding contact angle is substantially maintained after performing the aging process. With regard to inventive Examples 1 – 6, however, it is evident that the receding contact angle increases, typically by

4°-15°, after performing the aging process. Without wishing to be bound by theory, the inventors believe that the increase in contact angle in the inventive release layer structures may be attributed to a loss in hydrophilic behavior (or increased hydrophobic behavior) due to some change in the position of the polar groups (*e.g.*, Si-O-Si) at the release layer surface.

5

EXAMPLE 10

A blanket including a release layer of the composition of Example 2 was prepared substantially as described in Example 1, but against an aluminized PET carrier surface.

EXAMPLE 11

A release layer having the release layer composition of Example 2 was prepared substantially as described in Example 1, but against a commercially available PET carrier surface that was not subjected to an anti-static pre-treatment.

10

EXAMPLE 12

The release layers produced in Examples 2, 10, and 11, in accordance with the present invention, were subjected to contact angle measurements, to determine both the advancing contact angle and the receding contact angle. The results are provided below:

15

Release formulation	Carrier film	RCA vs. Carrier
Example 10	Aluminized PET	62°
Example 11	PET without anti-static treatment	62°
Example 2	PET with anti-static treatment	45°

Examples 10 and 11 exhibited receding contact angles that were about 30° less than the receding contact angle of the same composition cured with the release layer exposed to air. The release layer surface of Example 2, prepared against an anti-static PET carrier surface,

20

displayed a receding contact angles that was about 50° less than the receding contact angle of the same composition prepared while exposed to air.

EXAMPLE 13

- 5 The carrier surfaces utilized in Examples 2, 10, and 11 were subjected to contact angle measurements, to determine both the advancing contact angle and the receding contact angle. The results are provided below:

Carrier film	CA of carrier	
	ACA	RCA
Aluminized PET	80°	40°
PET without antistatic treatment	70°	40°
PET with antistatic treatment	40°	20°

- 10 It may be seen from the receding contact angles obtained that the three carrier surfaces exhibit hydrophilic behavior, and that the PET subjected to anti-static treatment exhibits the greatest degree of hydrophilic behavior (20° RCA vs. 40° RCA).

- Significantly, the hydrophilic behavior of the carrier surfaces has been at least partially induced in the respective release surfaces: the formulation cured while exposed to air has an RCA of 65°; the same formulation, prepared against an antistatic PET surface, has an RCA of 45°; the anti-static PET carrier used displays an RCA of 20°. Thus, the inventive release layer structure has a release surface whose hydrophilicity/hydrophobicity properties lie in between the properties of the same formulation, cured in air, and the carrier surface itself.

20

EXAMPLE 14

Release layer surface energies were calculated for ink reception surfaces of the following Examples: Example 1A, cured under exposure to air; Example 1, cured against an anti-static PET surface; and Example 1, cured against an anti-static PET surface and then

subjected to the standard aging procedure at 160°C, for 2 hours. The three Examples have the identical chemical formulation.

For each of these examples, the total surface energy was calculated using the classic “harmonic mean” method (also known as the Owens-Wendt Surface Energy Model, see, by way of example, KRUSS Technical Note TN306e). The results are provided below:

Release formulation	Total Surface Energy J/m ²
Example 1A -- Air Cured	20.9
Example 1 -- Aged	22.6
Example 1	26.1

In Example 1A, cured under exposure to air, the release layer surface is extremely hydrophobic, and the total surface energy of the surface is low, 20.9 J/m², as expected. This is fairly close to the literature value for surface energy, for polydimethylsiloxane (PDMS). Significantly, Example 1, which was cured against an anti-static PET surface, exhibited a total surface energy of about 26 J/m², which is moderately less hydrophobic than the “air-cured” sample. After this formulation was subjected to the standard aging procedure, the total surface energy decreased from about 26 J/m² to under 26 J/m². This result would appear to corroborate the RCA results obtained for the various aged and un-aged materials of this exemplary formulation.

EXAMPLE 15

Release layer surface energies were calculated for ink reception surfaces of the following Examples: Example 2A, cured under exposure to air; Example 2, cured against an anti-static PET surface; and Example 2, cured against an anti-static PET surface and then subjected to the standard aging procedure at 160°C, for 2 hours. The three Examples have the identical chemical formulation.

As in Example 14, the total surface energy was calculated using the classic “harmonic mean” method. The results are provided below:

Release formulation	Total Surface Energy (J/m ²)
Example 2A -- Air Cured	34.6
Example 2 -- Aged	39.9
Example 2	49.1

In Example 2A, cured under exposure to air, the release layer surface is less hydrophobic than the release layer of Example 1A, the total surface energy of the surface being about 35 J/m². Example 2, cured against an anti-static PET surface, exhibited a total surface energy of about 49 J/m², which is significantly less hydrophobic than the “air-cured” sample. After this formulation was subjected to the standard aging procedure, the total surface energy decreased from about 49 J/m² to about 40 J/m². This result would appear to corroborate the RCA results obtained for the various aged and un-aged materials of this exemplary formulation.

EXAMPLE 16

The temperature on the blanket surface is maintained at 75°C. The image (typically a color gradient of 10-100%) is printed at a speed of 1.7 m/sec on the blanket, at a resolution of 1200 dpi. An uncoated paper (A4 Xerox Premium Copier Paper, 80 gsm) is set between the pressure roller and the blanket and the roller is pressed onto blanket, while the pressure is set to 3 bar. The roller moves on the paper, applying pressure on the contact line between blanket and paper and promoting the transfer process. In some cases, incomplete transfer may be observed, with an ink residue remaining on the blanket surface. In order to evaluate the extent of that ink residue, glossy paper (A4 Burgo glossy paper 130 gsm) is applied on the blanket similarly to the uncoated paper and the transfer process is again performed. Any ink that remained on blanket and was not transferred to the uncoated paper will be transferred to the glossy paper. Thus, the glossy paper may be evaluated for ink residue, according to the following scale (% of image surface area):

A – no visible residue

B – 1-5% visible residue

C – more than 5% visible residue

Results of the evaluation are provided below:

Release formulation	Transfer grade
Example 4	B
Example 1	B
Example 2	A
Example 3	A
Example 6	C

EXAMPLE 17

- 5 Example 16 was repeated for the release surfaces of Examples 2 and 3, but at a printing speed of 3.4 m/sec on the blanket. Both release surfaces retained a transfer grade of A.

EXAMPLE 18

- The ITM release layer compositions of Examples 2 and 3 were cured against a PET substrate according to the procedure provided in Example 1. The ITM release layer
 10 compositions of Examples 2 and 3 were cured against air, according to the procedure provided in Comparative Examples 1B and 1C. The samples were then subjected to dynamic contact angle (DCA) measurements at 10 seconds and subsequently at 70 seconds, according to the following procedure:

- The drop is placed onto a smooth PTFE film surface with as little drop falling as possible,
 15 so that kinetic energy does not spread the drop. A pendant drop is then formed. Subsequently, the specimen is raised until it touches the bottom of the drop. If the drop is large enough, the adhesion to the surface will pull it off the tip of the needle. The needle tip is positioned above the surface at such a height that the growing pendant drop will touch the surface and detach before it falls free due to its own weight.

- 20 The dynamic contact angle is then measured at 10 seconds and at 70 seconds. The results are provided below:

	Dynamic contact angle			
	Cured against PET		Cured against Air	
Example	after 10 sec	after 70 sec	after 10 sec	after 70 sec
Ex 2	105°	97°	114°	103°
Ex 3	87°	70°	113°	94°

It is observed that the initial measurement of the dynamic contact angle, at 10 seconds, provides a strong indication of the hydrophilicity of the release layer surface. The subsequent measurement at 70 seconds provides an indication of the extent to which any liquid (such as a polyether glycol functionalized polydimethyl siloxane) disposed within the release layer has been incorporated into the drop. Such incorporation may further reduce the measured DCA.

Thus, the samples cured against PET exhibit substantially lower (more hydrophilic) initial DCA measurements (105°, 87°) relative to the hydrophilic initial DCA measurements (114°, 113°) of the respective samples cured against air. In addition to displayed hydrophilicity, the samples cured against PET exhibited a drop in DCA of 8 to 17° between the first and second measurements.

Figures 10A-10C provide images of various ink patterns printed onto a release layer of an ITM of the present invention, in which the release layer of Example 2 was cured against the PET carrier surface. Figures 11A-11C are images of the same ink patterns printed onto a release layer of Example 2, but in which the release layer was cured against air. Comparing between Figs. 10A and 11A, it is manifest that the release layer of the inventive ITM exhibits a higher optical density, and more accurately reflects the ink image pattern. A comparison between Figs. 10C and 11C yields the identical conclusion. Comparing now between Figs. 10B and 11B, it is evident that each ink dot in Fig. 10B is appreciably larger than the respective ink dots in Fig. 11B.

As used herein in the specification and in the claims section that follows, the term "receding contact angle" or "RCA", refers to a receding contact angle as measured using a Dataphysics OCA15 Pro Contact Angle measuring device, or a comparable Video-Based Optical Contact Angle Measuring System, using the above-described Drop Shape Method, at ambient temperatures. The analogous "advancing contact angle", or "ACA", refers to an advancing contact angle measured substantially in the same fashion.

As used herein in the specification and in the claims section that follows, the term "dynamic contact angle" or "DCA", refers to a dynamic contact angle as measured using a Dataphysics OCA15 Pro Contact Angle measuring device, or a comparable Video-Based Optical Contact Angle Measuring System, using the method elaborated by Dr. Roger P. Woodward in the above-referenced "Contact Angle Measurements Using the Drop Shape Method", at ambient temperatures, and as elaborated hereinabove in Example 17.

As used herein in the specification and in the claims section that follows, the term "standard aging procedure" refers to an accelerated aging protocol performed on each tested release layer at 160°C, for 2 hours, in a standard convection oven.

As used herein in the specification and in the claims section that follows, the term "standard air curing" refers to a conventional curing process for curing the release layer, described with respect to Comparative Examples 1A – 1F, in which, during the curing of the release layer, the release layer surface (or "ink reception surface") is exposed to air.

As used herein in the specification and in the claims section that follows, the term "bulk hydrophobicity" is characterized by a receding contact angle of a droplet of distilled water disposed on an inner surface of the release layer, the inner surface formed by exposing an area of the cured silicone material within the release layer.

As used herein in the specification and in the claims section that follows, the terms "hydrophobicity" and "hydrophilicity" and the like, may be used in a relative sense, and not necessarily in an absolute sense.

As used herein in the specification and in the claims section that follows, the term "functional group" refers to a group or moiety attached to the polymer structure of the release layer, and having a higher polarity than the O-Si-O group of conventional addition-cured silicones. Various examples are provided herein. The inventors observe that pure addition cure polydimethyl siloxane polymer contains O-Si-O, SiO₄, Si-CH₃ and C-C groups, and that most other functional groups will have a higher dipole, such that they may be considered "functional". It will be appreciated by those of skill in the art that such functional groups, may have a tendency or strong tendency to react with components typically present in aqueous inks utilized in indirect inkjet printing, at process temperatures of up to 120°C.

As used herein in the specification and in the claims section that follows, the term "%" refers to percent by weight, unless specifically indicated otherwise.

Similarly, the term "ratio", as used herein in the specification and in the claims section that follows, refers to a weight ratio, unless specifically indicated otherwise.

It will be appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any
5 suitable subcombination or as suitable in any other described embodiment of the invention. Certain features described in the context of various embodiments are not to be considered essential features of those embodiments, unless the embodiment is inoperative without those elements.

Although the present invention has been described with respect to various specific
10 embodiments presented thereof for the sake of illustration only, such specifically disclosed embodiments should not be considered limiting. Many other alternatives, modifications and variations of such embodiments will occur to those skilled in the art based upon Applicant's disclosure herein. Accordingly, it is intended to embrace all such alternatives, modifications and variations and to be bound only by the spirit and scope of the invention as defined in the
15 appended claims and any deviations falling within their range of equivalency.

To the extent necessary to understand or complete the disclosure of the present invention, all publications, patents, and patent applications mentioned in this specification, including WO 2013/132418, are expressly incorporated in their entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application
20 was specifically and individually indicated to be incorporated herein by reference.

Citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the invention.

Certain marks referenced herein may be common law or registered trademarks of third parties. Use of these marks is by way of example and shall not be construed as descriptive or
25 limit the scope of this invention to material associated only with such marks.

WHAT IS CLAIMED IS:

1. An intermediate transfer member (ITM) for use with a printing system, the ITM comprising:

- (a) a support layer; and
- (b) a release layer having an ink reception surface for receiving an ink image, and a second surface opposing said ink reception surface, said second surface attached to said support layer, said release layer formed of an addition-cured silicone material, said release layer having a thickness of at most 500 micrometers (μm);

said ink reception surface is adapted to satisfy at least one of the following structural properties:

- (i) a receding contact angle of a droplet of distilled water on said ink reception surface is at most 60° ;
- (ii) for a droplet of distilled water deposited on said ink reception surface, a 10 second dynamic contact angle (DCA) is at most 108° ;

and wherein said release layer has at least one of the following structural properties:

- (1) said addition-cured silicone material consisting essentially of an addition-cured silicone, or containing, by weight, at least 95% of said addition-cured silicone;
- (2) functional groups make up at most 3%, by weight, of said addition-cured silicone material.

2. The ITM of claim 1, wherein said receding contact angle is at most 58° , at most 56° , at most 54° , at most 52° , at most 50° , at most 48° , at most 46° , at most 44° , at most 42° , at most 40° , at most 38° , or at most 37° .

3. The ITM of claim 1 or claim 2, wherein said functional groups make up at most 2%, at most 1%, at most 0.5%, at most 0.2%, or at most 0.1%, by weight, of said addition-cured silicone material, or wherein said addition-cured silicone material is substantially devoid of said functional groups.

4. The ITM of any one of claims 1 to 3, wherein a polyether glycol functionalized polydimethyl siloxane is impregnated in said addition-cured silicone material.

5. The ITM of any one of claims 1 to 4, wherein a polyether glycol functionalized siloxane is impregnated in said addition-cured silicone material, but without forming a part of a covalent structure of said addition-cured silicone material.
6. The ITM of any one of claims 1 to 5, wherein said thickness of said release layer is at most 500 μm , at most 100 μm , at most 50 μm , at most 25 μm , or at most 15 μm .
7. The ITM of any one of claims 1 to 6, wherein said thickness of said release layer is within a range of 1-100 μm , 5-100 μm , 8-100 μm , 10-100 μm , or 10-80 μm .
8. The ITM of any one of claims 1 to 7, wherein a thickness of said support layer is within a range of about 50 - 1000 micrometers (μ), 100 - 1000 μ , 100 - 800 μ , or 100 - 500 μ .
9. The ITM of any one of claims 1 to 8, wherein a total surface energy of the ink reception surface is at least 2 J/m², at least 3 J/m², at least 4 J/m², at least 5 J/m², at least 6 J/m², at least 8 J/m², or at least 10 J/m² higher than a total surface energy of a modified ink reception surface produced by subjecting an ink reception surface of a corresponding release layer to a standard aging procedure.
10. The ITM of any one of claims 1 to 9, wherein a total surface energy of the ink reception surface is at least 4 J/m², at least 6 J/m², at least 8 J/m², at least 10 J/m², at least 12 J/m², at least 14 J/m², or at least 16 J/m² more than a total surface energy of a hydrophobic ink reception surface of a corresponding release layer prepared by standard air curing of a silicone precursor of the cured silicone material.
11. The ITM of any one of claims 1 to 10, wherein a receding contact angle of a droplet of distilled water on the ink reception surface is at least 7°, at least 8°, at least 10°, at least 12°, at least 15°, at least 18°, or at least 20° lower than a receding contact angle of a droplet of distilled water on an ink reception surface of a corresponding release layer prepared by standard air curing of a silicone precursor of the cured silicone material.
12. The ITM of any one of claims 1 to 11, wherein a receding contact angle of a droplet of distilled water on the ink reception surface is at least 5°, at least 6°, at least 7°, or at least 8° lower than a receding contact angle of a droplet of distilled water on an aged surface, produced by subjecting the ink reception surface to a standard aging procedure.

13. The ITM of any one of claims 1 to 12, wherein a surface hydrophobicity of the ink reception surface is less than a bulk hydrophobicity of the cured silicone material within the release layer, the surface hydrophobicity being characterized by a receding contact angle of a droplet of distilled water on the ink reception surface, the bulk hydrophobicity being characterized by a receding contact angle of a droplet of distilled water disposed on an inner surface formed by exposing an area of the cured silicone material within the release layer to form an exposed area.

14. The ITM of any one of claims 1 to 13, wherein the receding contact angle measured on the ink reception surface is at least 7°, at least 8°, at least 10°, at least 12°, at least 14°, at least 16°, at least 18°, or at least 20° lower than the receding contact angle measured on the exposed area.

15. The ITM of any one of claims 1 to 14, wherein said receding contact angle of said droplet of distilled water on the ink reception surface is at least 25°, at least 28°, at least 30°, at least 32°, at least 34°, or at least 36°, and further optionally, within a range of 25° to 60°, 28° to 60°, 30° to 60°, 30° to 60°, 30° to 55°, 30° to 50°, 32° to 60°, 32° to 55°, 32° to 44°, 35° to 60°, 35° to 55°, 36° to 44°, or 38° to 50°.

16. The ITM of any one of claims 1 to 15, wherein the release layer is adapted such that polar groups of the ink reception surface have an orientation away from or opposite from the second surface.

17. The ITM of any one of claims 1 to 16, wherein the release layer is adapted such that when the ITM is in an operative mode, with said ink reception surface exposed to an ambient environment, said polar groups of the ink reception surface have an orientation towards or facing said ambient environment.

18. The ITM of any one of claims 1 to 17, the ITM forming a component in a digital printing system.

19. The ITM of any one of claims 1 to 18, said support layer including an elastomeric compliance layer attached to said second surface of said release layer, said elastomeric compliance layer adapted to follow closely a surface contour of a printing substrate onto which said ink image is impressed.

20. The ITM of any one of claims 1 to 19, wherein said support layer includes a reinforcement layer attached to said compliance layer.
21. The ITM of any one of claims 1 to 20, wherein said release layer contains, within a silicone polymer matrix thereof, a total amount of at most 3%, at most 2%, at most 1%, at most 0.5%, at most 0.2%, or substantially 0% of functional groups, by weight.
22. The ITM of any one of claims 1 to 20, wherein said release layer contains, within a silicone polymer matrix thereof, a total amount of at most 3%, at most 2%, at most 1%, at most 0.5%, at most 0.2%, or substantially 0%, by weight, of functional groups selected from the group of moieties consisting of C=O, S=O, O-H, and COO.
23. The ITM of any one of claims 1 to 22, wherein said release layer contains, within a silicone polymer matrix thereof, a total amount of at most 3%, at most 2%, at most 1%, at most 0.5%, at most 0.2%, or substantially 0%, by weight, of functional groups selected from the group consisting of silane, alkoxy, amido, and amido-alkoxy moieties.
24. The ITM of any one of claims 1 to 23, wherein said release layer contains, within a silicone polymer matrix thereof, a total amount of at most 3%, at most 2%, at most 1%, at most 0.5%, at most 0.2%, or substantially 0%, by weight, of functional groups selected from the group consisting of amine, ammonium, aldehyde, SO₂, SO₃, SO₄, PO₃, PO₄, and C-O-C.
25. The ITM of any one of claims 1 to 24, wherein said addition-cured silicone material has a structure built from a vinyl-functional silicone.
26. The ITM of any one of claims 1 to 25, wherein said addition-cured silicone material includes polar groups of the "MQ" type.
27. The ITM of any one of claims 9 to 26, wherein said total surface energy of said ink reception surface is evaluated using the Owens-Wendt Surface Energy Model.

28. The ITM of any one of claims 1 to 27, wherein said 10 second DCA is at most 108°, at most 106°, at most 103°, at most 100°, at most 96°, at most 92°, or at most 88°, optionally at least 60°, at least 65°, at least 70°, at least 75°, at least 78°, at least 80°, at least 82°, at least 84°, or at least 86°, and further optionally, within a range of 60 to 108°, 65 to 105°, 70 to 105°, 70 to 100°, 70 to 96°, 70 to 92°, 75 to 105°, 75 to 100°, 80 to 105°, 80 to 100°, 85 to 105°, or 85 to 100°.

29. The ITM of any one of claims 1 to 28, wherein said ink reception surface is adapted whereby, for said droplet of distilled water deposited on said ink reception surface, said difference between said 70 second dynamic contact angle (DCA) and said 10 second DCA, is at least 7°, at least 8°, at least 10°, or at least 12°, optionally at most 25°, at most 22°, at most 20°, at most 18°, or at most 17°, and further optionally, within a range of 6 to 25°, 6 to 22°, 6 to 20°, 6 to 18°, 6 to 17°, 7 to 25°, 7 to 20°, 7 to 17°, 8 to 25°, 8 to 22°, 8 to 20°, 8 to 18°, 8 to 17°, 10 to 25°, 10 to 22°, 10 to 20°, 10 to 18°, or 10 to 17°.

30. The ITM of any one of claims 1 to 29, wherein said ink reception surface is adapted whereby, for said droplet of distilled water deposited on said ink reception surface, said 70 second DCA is at most 92°, at most 90°, at most 88°, at most 85°, at most 82°, at most 80°, at most 78°, at most 76°, at most 74°, or at most 72°, optionally at least 55°, at least 60°, at least 65°, or at least 68°, and further optionally, within a range of 55 to 92°, 55 to 90°, 55 to 85°, 55 to 80°, 65 to 92°, 65 to 90°, 65 to 85°, 65 to 80°, 68 to 85°, 68 to 80°, 70 to 92°, 70 to 90°, 70 to 85°, or 70 to 80°.



Fig. 1

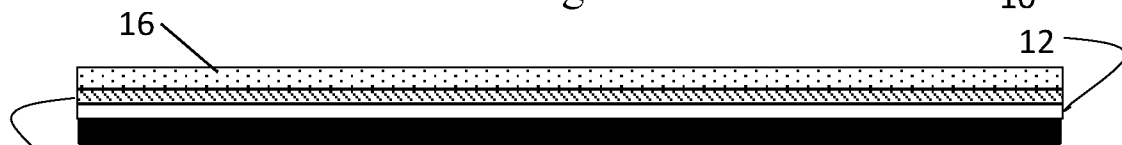


Fig. 2

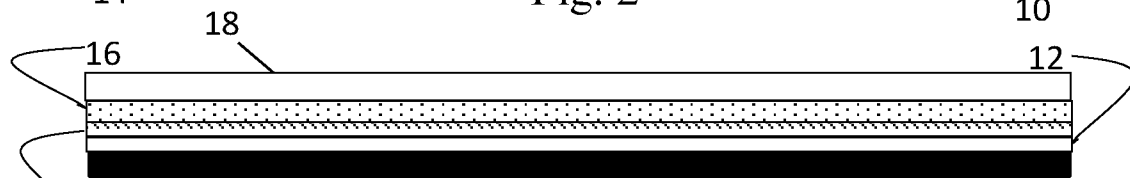


Fig. 3

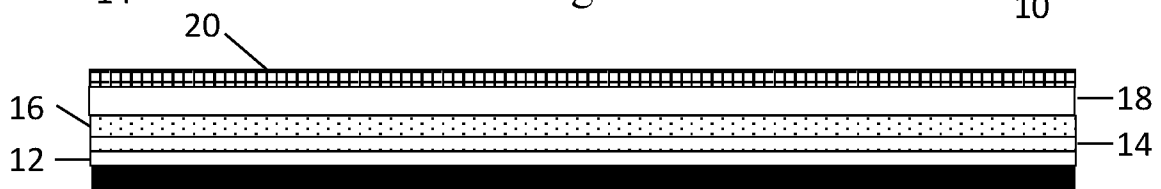


Fig. 4

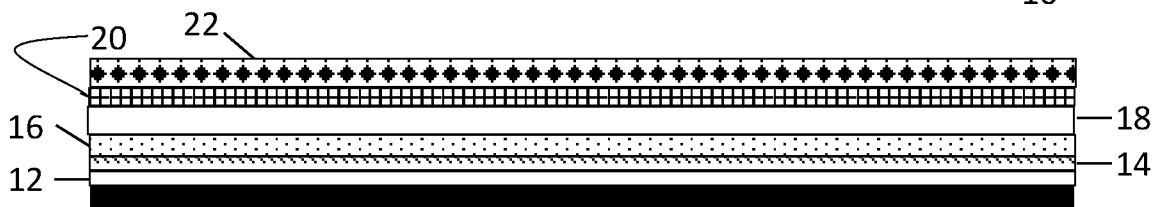


Fig. 5

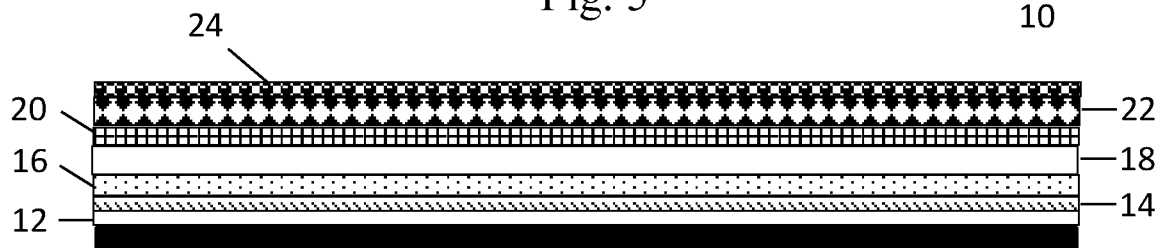


Fig. 6

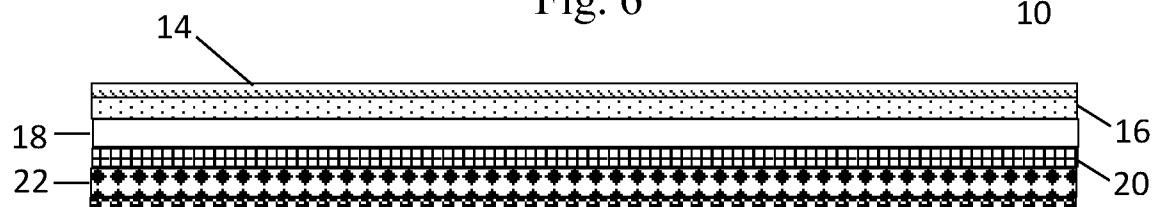
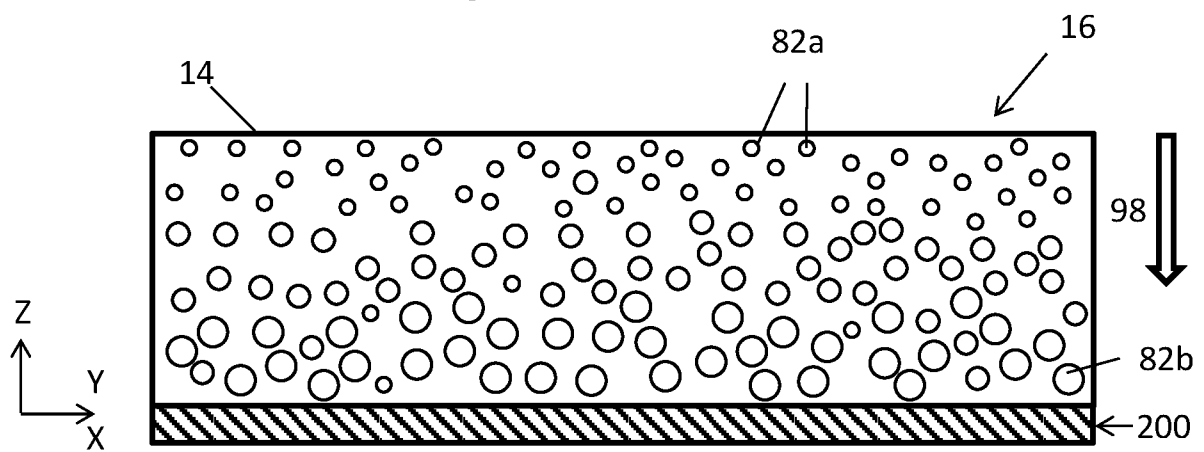
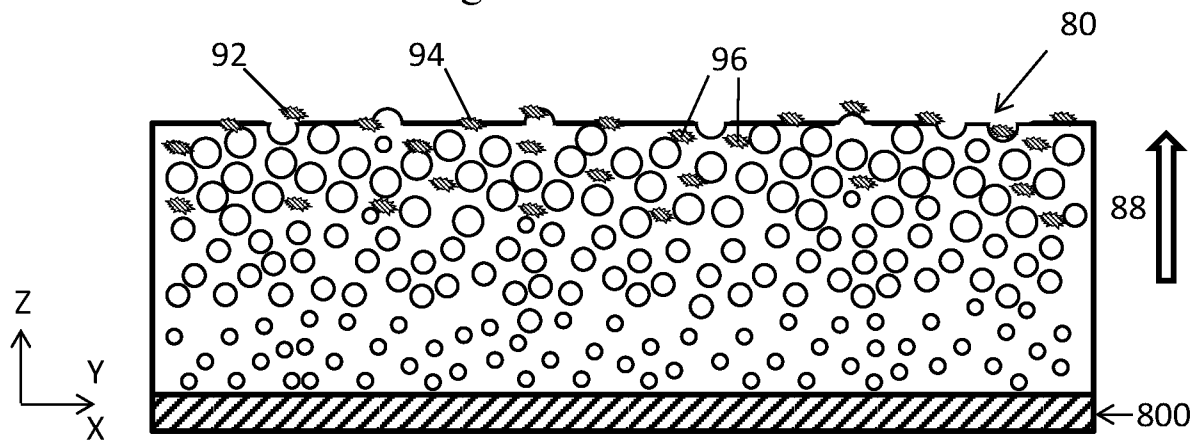
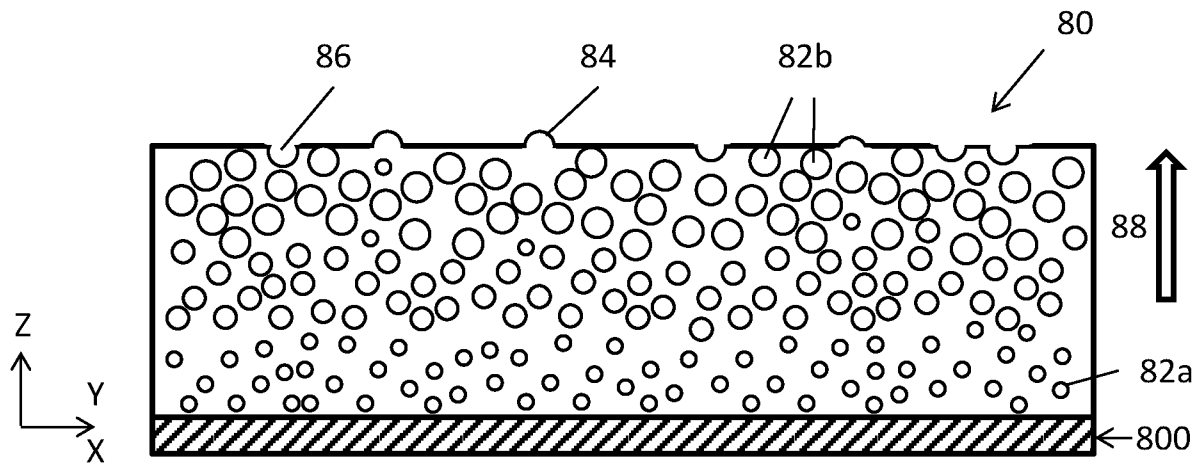


Fig. 7



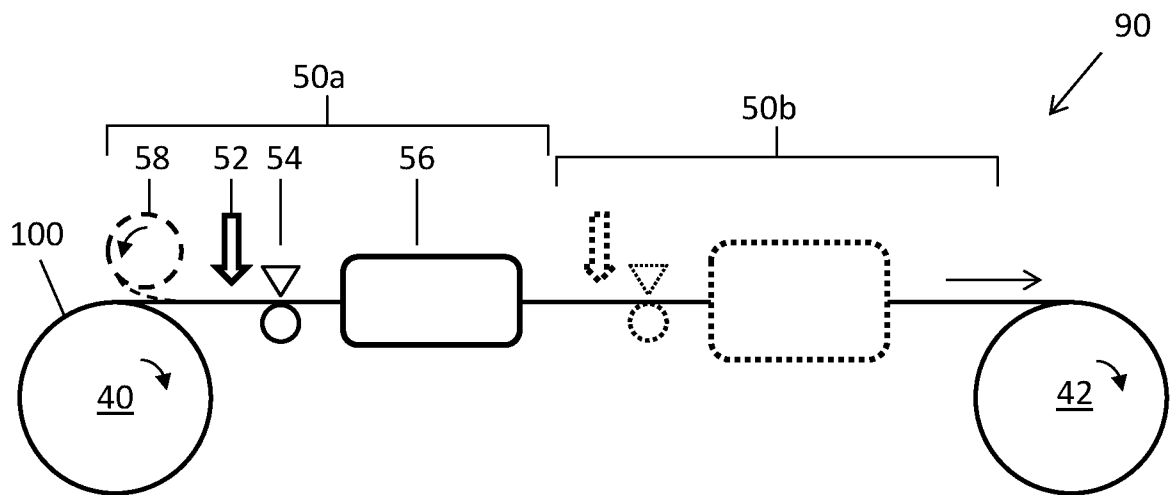


Fig. 9A

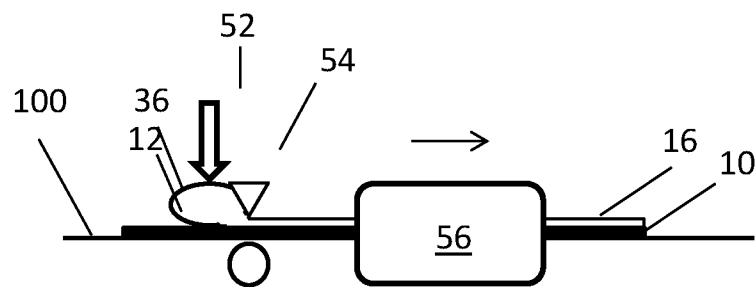


Fig. 9B

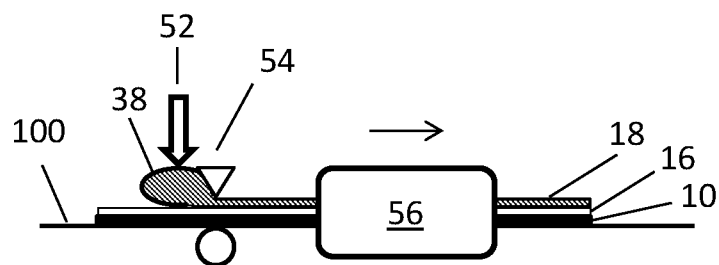


Fig. 9C

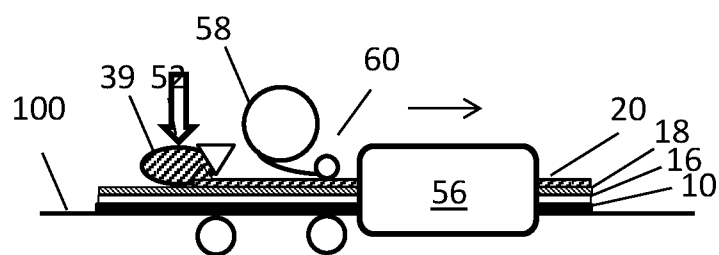


Fig. 9D

Fig.10A

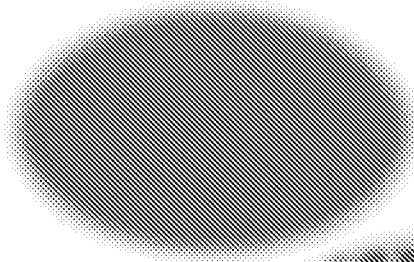


Fig. 10B

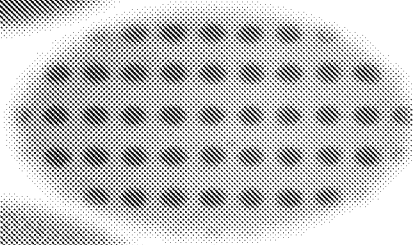


Fig. 10C

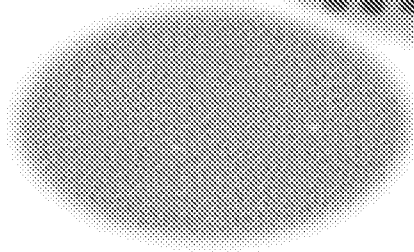


Fig. 11A

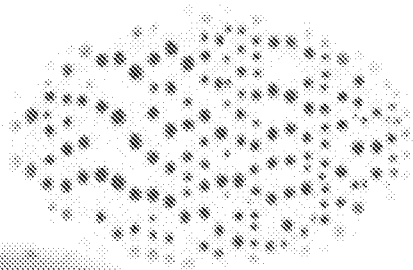


Fig.11B


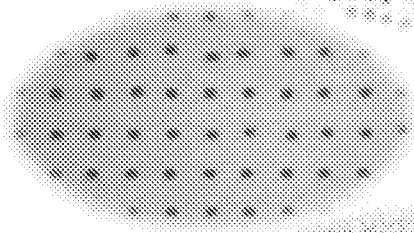


Fig. 11C

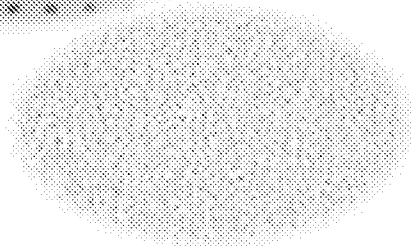

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2017/053167

A. CLASSIFICATION OF SUBJECT MATTER IPC (2017.01) B41M 5/44, B41M 5/025, B41M 5/392, B41J 2/005, B32B 25/20, C09D 183/12 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC (2017.01) B41M, B41J, B32B, C09D Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Databases consulted: Google Patents, PatBase		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2015036864 A1 (LANDA CORPORATION LTD.) 19 Mar 2015 (2015/03/19) The whole document	1-30
A	WO 2013132432 A1 (LANDA CORPORATION LTD.) 12 Sep 2013 (2013/09/12) The whole document	1-30
A	WO 2004113082 A1 (CANON KABUSHIKI KAISHA et al) 29 Dec 2004 (2004/12/29) The whole document	1-30
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 25 Sep 2017		Date of mailing of the international search report 25 Sep 2017
Name and mailing address of the ISA: Israel Patent Office Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel Facsimile No. 972-2-5651616		Authorized officer ZAKHARIA Imad Telephone No. 972-2-5651686

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2017/053167

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2013001081 A (KAO CORP) 07 Jan 2013 (2013/01/07) Translation retrieved from Espacenet [Description: http://translationportal.epo.org/emtp/translate/?ACTION=description-retrieval&COUNTRY=JP&ENGINE=google&FORMAT=docdb&KIND=A&LOCALE=en_EP&NUMBER=2013001081&OPS=ops.epo.org/3.2&SRCLANG=ja&TRGLANG=en ; Claims: http://translationportal.epo.org/emtp/translate/?ACTION=claims-retrieval&COUNTRY=JP&ENGINE=google&FORMAT=docdb&KIND=A&LOCALE=en_EP&NUMBER=2013001081&OPS=ops.epo.org/3.2&SRCLANG=ja&TRGLANG=en] The whole document	1-30
A	US 2008167185 A1 (DAI NIPPON PRINTING CO., LTD.) 10 Jul 2008 (2008/07/10) The whole document	1-30

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2017/053167

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
WO 2015036864 A1	19 Mar 2015	WO 2015036864 A1	19 Mar 2015
		WO 2015036864 A8	12 Nov 2015
		EP 3044011 A1	20 Jul 2016
		US 2016207306 A1	21 Jul 2016
		US 9566780 B2	14 Feb 2017
WO 2013132432 A1	12 Sep 2013	WO 2013132432 A1	12 Sep 2013
		WO 2013132432 A9	31 Oct 2013
		AU 2013229050 A1	11 Sep 2014
		AU 2013229137 A1	11 Sep 2014
		AU 2013229140 A1	11 Sep 2014
		AU 2013229140 B2	02 Feb 2017
		AU 2013229142 A1	11 Sep 2014
		AU 2013229142 B2	02 Feb 2017
		AU 2017200978 A1	02 Mar 2017
		CA 2866085 A1	12 Sep 2013
		CA 2866200 A1	12 Sep 2013
		CA 2866204 A1	12 Sep 2013
		CA 2866209 A1	12 Sep 2013
		CN 104220539 A	17 Dec 2014
		CN 104220539 B	01 Jun 2016
		CN 104220934 A	17 Dec 2014
		CN 104220935 A	17 Dec 2014
		CN 104245340 A	24 Dec 2014
		CN 104245340 B	23 Nov 2016
		CN 104271356 A	07 Jan 2015
		CN 104271356 B	19 Oct 2016
		CN 104271686 A	07 Jan 2015
		CN 104271687 A	07 Jan 2015
		CN 104271687 B	02 Nov 2016
		CN 104284850 A	14 Jan 2015

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2017/053167

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
	CN	104395415 A	04 Mar 2015
	CN	104395415 B	31 Aug 2016
	CN	105517804 A	20 Apr 2016
	CN	105517804 B	03 May 2017
	CN	106084986 A	09 Nov 2016
	EP	2822776 A1	14 Jan 2015
	EP	2822776 A4	16 Dec 2015
	EP	2822778 A2	14 Jan 2015
	EP	2822778 A4	23 Dec 2015
	EP	2822779 A2	14 Jan 2015
	EP	2822779 A4	09 Dec 2015
	EP	2822780 A1	14 Jan 2015
	EP	2822780 A4	31 Aug 2016
	EP	2823003 A1	14 Jan 2015
	EP	2823003 A4	23 Dec 2015
	EP	2823004 A1	14 Jan 2015
	EP	2823004 A4	22 Apr 2015
	EP	2823005 A1	14 Jan 2015
	EP	2823005 A4	25 Nov 2015
	EP	2823006 A1	14 Jan 2015
	EP	2823006 A4	23 Dec 2015
	EP	2823362 A1	14 Jan 2015
	EP	2823362 A4	09 Nov 2016
	EP	2823363 A1	14 Jan 2015
	EP	2823363 A4	21 Jun 2017
	EP	2825486 A1	21 Jan 2015
	EP	2825486 A4	28 Sep 2016
	EP	2864120 A1	29 Apr 2015
	EP	2864120 B1	01 Mar 2017
	GB	201415768 D0	22 Oct 2014
	GB	2513816 A	05 Nov 2014

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2017/053167

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
	GB	201417436 D0	19 Nov 2014
	GB	2514977 A	10 Dec 2014
	GB	201316203 D0	23 Oct 2013
	GB	2518169 A	18 Mar 2015
	GB	2518169 B	30 Dec 2015
	GB	201504719 D0	06 May 2015
	HK	1204639 A1	27 Nov 2015
	HK	1204640 A1	27 Nov 2015
	HK	1204641 A1	27 Nov 2015
	HK	1204642 A1	27 Nov 2015
	HK	1222611 A1	07 Jul 2017
	JP	2015511984 A	23 Apr 2015
	JP	6185938 B2	23 Aug 2017
	JP	2015510848 A	13 Apr 2015
	JP	2015514605 A	21 May 2015
	JP	2015514606 A	21 May 2015
	JP	2015514821 A	21 May 2015
	JP	2015515394 A	28 May 2015
	JP	2015516315 A	11 Jun 2015
	JP	2015516473 A	11 Jun 2015
	JP	2015517928 A	25 Jun 2015
	JP	2016539830 A	22 Dec 2016
	KR	20140131989 A	14 Nov 2014
	KR	20140132755 A	18 Nov 2014
	KR	20140134313 A	21 Nov 2014
	KR	20140143379 A	16 Dec 2014
	MX	2014010680 A	13 Apr 2015
	MX	2014010681 A	17 Oct 2014
	MX	2014010682 A	17 Oct 2014
	MX	2014010683 A	17 Oct 2014
	US	2013081431 A1	04 Apr 2013

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2017/053167

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
	US 8490439	B2	23 Jul 2013
	US 2015042736	A1	12 Feb 2015
	US 9186884	B2	17 Nov 2015
	US 2015054865	A1	26 Feb 2015
	US 9229664	B2	05 Jan 2016
	US 2015022602	A1	22 Jan 2015
	US 9290016	B2	22 Mar 2016
	US 2015024180	A1	22 Jan 2015
	US 9327496	B2	03 May 2016
	US 2015044437	A1	12 Feb 2015
	US 9353273	B2	31 May 2016
	US 2015015650	A1	15 Jan 2015
	US 9381736	B2	05 Jul 2016
	US 2016075130	A1	17 Mar 2016
	US 9498946	B2	22 Nov 2016
	US 2016200097	A1	14 Jul 2016
	US 9505208	B2	29 Nov 2016
	US 2015165759	A1	18 Jun 2015
	US 9517618	B2	13 Dec 2016
	US 2015049134	A1	19 Feb 2015
	US 9568862	B2	14 Feb 2017
	US 2015044431	A1	12 Feb 2015
	US 9643400	B2	09 May 2017
	US 2016167363	A1	16 Jun 2016
	US 9643403	B2	09 May 2017
	US 2015024648	A1	22 Jan 2015
	US 2015025179	A1	22 Jan 2015
	US 2015072090	A1	12 Mar 2015
	US 2015118503	A1	30 Apr 2015
	US 2016297190	A1	13 Oct 2016
	US 2016297978	A1	13 Oct 2016

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2017/053167

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
	US	2016369119 A1	22 Dec 2016
	US	2017008272 A1	12 Jan 2017
	US	2017080705 A1	23 Mar 2017
	US	2017080706 A1	23 Mar 2017
	US	2017113455 A1	27 Apr 2017
	US	2017192374 A1	06 Jul 2017
	US	2017239969 A1	24 Aug 2017
	WO	2013132339 A1	12 Sep 2013
	WO	2013132339 A9	07 Nov 2013
	WO	2013132340 A1	12 Sep 2013
	WO	2013132340 A9	20 Mar 2014
	WO	2013132343 A1	12 Sep 2013
	WO	2013132343 A9	31 Oct 2013
	WO	2013132345 A1	12 Sep 2013
	WO	2013132345 A9	07 Nov 2013
	WO	2013132356 A1	12 Sep 2013
	WO	2013132356 A9	07 Nov 2013
	WO	2013132418 A2	12 Sep 2013
	WO	2013132418 A3	07 Nov 2013
	WO	2013132418 A9	20 Feb 2014
	WO	2013132419 A1	12 Sep 2013
	WO	2013132419 A9	31 Oct 2013
	WO	2013132420 A1	12 Sep 2013
	WO	2013132420 A9	07 Nov 2013
	WO	2013132424 A1	12 Sep 2013
	WO	2013132424 A9	07 Nov 2013
	WO	2013132438 A2	12 Sep 2013
	WO	2013132438 A8	14 Nov 2013
	WO	2013132438 A9	20 Feb 2014
	WO	2013132438 A3	10 Apr 2014
	WO	2013132439 A1	12 Sep 2013

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IB2017/053167

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		WO 2013132439 A9	07 Nov 2013
		WO 2013136220 A1	19 Sep 2013
		WO 2013136220 A9	07 Nov 2013
		WO 2015036906 A1	19 Mar 2015
WO 2004113082 A1	29 Dec 2004	WO 2004113082 A1	29 Dec 2004
		CN 1809460 A	26 Jul 2006
		CN 100462230 C	18 Feb 2009
		CN 101503021 A	12 Aug 2009
		CN 101503021 B	22 Aug 2012
		DE 602004028370 D1	09 Sep 2010
		EP 1638775 A1	29 Mar 2006
		EP 1638775 B1	28 Jul 2010
		JP 2005014255 A	20 Jan 2005
		JP 4054721 B2	05 Mar 2008
		JP 2005014256 A	20 Jan 2005
		JP 4054722 B2	05 Mar 2008
		KR 20060029234 A	05 Apr 2006
		KR 100867045 B1	04 Nov 2008
		KR 20080069279 A	25 Jul 2008
		KR 100867067 B1	04 Nov 2008
		US 2006152566 A1	13 Jul 2006
		US 7997717 B2	16 Aug 2011
JP 2013001081 A	07 Jan 2013	JP 2013001081 A	07 Jan 2013
US 2008167185 A1	10 Jul 2008	US 2008167185 A1	10 Jul 2008
		US 7550409 B2	23 Jun 2009
		DE 602005013992 D1	28 May 2009
		EP 1800887 A1	27 Jun 2007
		EP 1800887 A4	19 Mar 2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2017/053167

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		EP 1800887 B1	15 Apr 2009
		JP 2006123533 A	18 May 2006
		JP 4700463 B2	15 Jun 2011
		WO 2006035805 A1	06 Apr 2006