



(51) International Patent Classification:

H01L 21/687 (2006.01) *H01L 21/68* (2006.01)
H01L 21/683 (2006.01) *H01L 21/304* (2006.01)

(21) International Application Number:

PCT/IB2011/051475

(22) International Filing Date:

6 April 2011 (06.04.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/761,713 16 April 2010 (16.04.2010) US

(71) Applicant (for all designated States except US): **LAM RESEARCH AG** [AT/AT]; SEZ-Strasse 1, A-9500 Villach (AT).

(71) Applicant (for BZ only): **LAM RESEARCH CORPORATION** [US/US]; 4650 Cushing Parkway, Fremont, California CA-94538 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BRUGGER, Michael** [AT/AT]; Dellach 18, A-9872 Millstatt (AT).

LACH, Otto [AT/AT]; Eichholzstrasse 28, A-9521 Trefen (AT).

(74) Agent: **KONTRUS, Gerhard**; SEZ-Strasse 1, A-9500 Villach (AT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: GROUNDED CHUCK

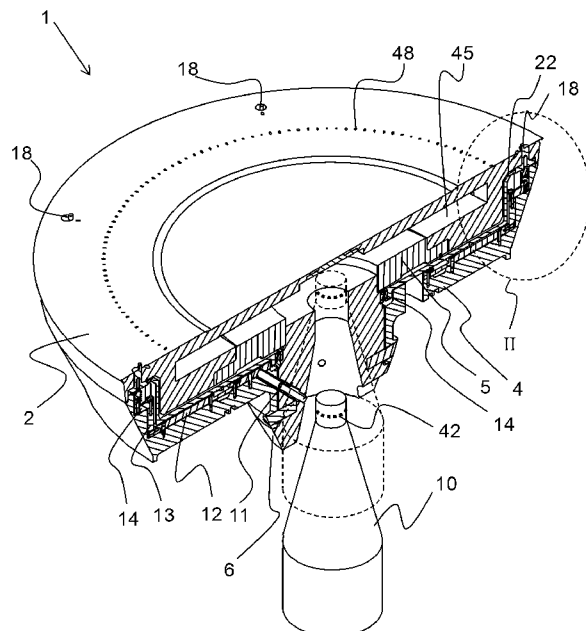


Fig. 1

(57) Abstract: Improved reduction of static charge in spin chucks is achieved by providing one or more pin assemblies which are formed from chemically inert material and which include an electrically conductive inlay.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

Description

Title of Invention: GROUNDED CHUCK

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The invention relates to methods and apparatus for treating surfaces of articles, such as semiconductor wafers, adapted to reduce buildup of electrostatic charge.

2. Description of Related Art

[0002] Semiconductor wafers undergo a variety of wet processing stages during manufacture of integrated circuits. To accommodate such processes, a single wafer may be supported in relation to one or more treatment fluid nozzles by a chuck associated with a rotatable or non-rotatable carrier. Wafer-supporting chucks are described for example in U.S. Patent Nos. 4,903,717, 5,513,668, 6,435,200 and 6,536,454.

[0003] It is known that semiconductor wafer processing can result in unwanted buildup of static charge on the wafer surface. For example, in European Patent Application No. 1,077,473 it is described that buildup of static charge may be reduced by introducing carbon dioxide to a deionized water processing fluid so as to render the processing fluid electrically conductive. That method does not directly address the potential for static charge buildup in wafer-handling components that are not contacted by the electrically conductive processing fluid and, in any event, it precludes the use of relatively non-conductive processing fluids such as deionized water and 2-propanol. U.S. Patent 7,335,090 relates to a spin chuck having holding pins which are formed of conductive resin and associated with a stainless steel shaft, which in turn is supported by radial metal bearings. However, the presence of a steel shaft creates a risk that a semiconductor wafer may be contaminated with iron, which should be avoided. Also, the connection between the stainless steel shaft and the resin pins is not specified, and connections through radial bearings likely are unreliable electrical contacts due, e.g., to the presence of bearing lubricants.

SUMMARY OF THE INVENTION

[0004] The present inventors have discovered that existing techniques for limiting static charge buildup in wafer-processing equipment are not fully satisfactory. For example, when equipment components include relatively non-conductive materials such as polyvinylidene fluoride (PVDF), polyetheretherketone (PEEK) or polytetrafluoroethylene (PTFE), static charge may build up on those components, as well as on the wafer itself. The use of relatively non-conductive processing fluids such as deionized water or 2-propanol may also contribute to a buildup of static charge.

- [0005] Static charge buildup can lead to an undesired accumulation of particulates and airborne contaminants. In some cases, electrostatic discharge may result at or near the wafer, which can damage or destroy components of an integrated circuit on the wafer.
- [0006] As described in greater detail below, it has been discovered that unwanted static charge can be reduced or essentially eliminated by providing an electrically conductive pathway through the chuck, and in particular through the pin assemblies which support a wafer during processing, such that the chuck and wafer will be grounded.
- [0007] The methods and apparatus of the invention are not limited to use on processing equipment for semiconductor wafers, and have application as well to equipment for treating surfaces of other materials, for example glass masters and mother panels used in manufacturing optical disks and LCD display panels, as well as for cleaning surfaces of processing chambers used during processing of the above-described substrates.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0008] Other objects, features and advantages of the invention will become more apparent after reading the following detailed description of preferred embodiments of the invention, given with reference to the accompanying drawings, in which:
- [0009] Figure 1 is a view in perspective and partly in section illustrating a grounded chuck according to an embodiment of the invention;
- [0010] Figure 2 is an enlarged detail view of area II of Figure 1;
- [0011] Figure 3 is an enlarged view in perspective and partly in section of a pin assembly according to an embodiment of the invention;
- [0012] Figure 4 is a perspective view of a pin assembly according to another embodiment of the invention; and
- [0013] Figure 5 is a view in perspective and partly in section of the pin assembly of Figure 4.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

- [0014] In Figure 1, a chuck (1), intended for holding a wafer-shaped article, especially during treatment with a processing fluid, is mounted on a spindle (10). The spindle (10) preferably is rotatable such that the chuck (1) can be set into rotation by the spindle (10). Such a rotatable chuck ("spin chuck") may be surrounded by a process chamber for single wafer wet processing of semiconductor wafers.
- [0015] In this embodiment, the chuck (1) comprises a chuck body including a generally cup-shaped base body (4), a circular cover (2) and a nave (6).
- [0016] The base body (4) includes a central aperture in which the nave (6) is seated. The nave (6) also includes a central aperture, the shape of which is selected to operatively

engage the spindle (10). In the embodiment shown in Figure 1, a frustoconical central aperture of the nave (6) corresponds with a complementary frustoconical spindle (10).

[0017] The cover (2) is seated via an annular rib at its outer periphery on the outer rim of the base body (4) such that an internal gap is provided between an upper surface of the base body (4) and a lower surface of the cover (2).

[0018] The cover (2) is generally C-shaped in its cross-section, such that it includes an essentially continuous upper part and an annular lower part. The upper and lower parts of the cover (2) are separated from one another so as to form an internal gas distribution chamber (45).

[0019] The annular lower part of the cover (2) mechanically engages a peripheral region at one end of the nave (6) via a rotary disc (5). Thus, when the chuck (1) is seated on the spindle (10), a distal end of the spindle (10) extends through the central aperture of the nave (6) and into the gas distribution chamber (45).

[0020] The spindle (10) preferably is hollow and includes a plurality of radially directed through-holes (42) at its distal end. Thus, pressurized gas delivered through the hollow spindle (10) may be directed via these through-holes (42) into the gas distribution chamber (45).

[0021] The cover (2) further includes an annularly arranged plurality of holes (48) extending from the gas distribution chamber to the upper surface of the cover (2). Accordingly, gas may be delivered through the hollow spindle (10), through-holes (42), gas distribution chamber (45) and holes (48) such that a wafer, when present, may be floated on a gas cushion during processing. Such gas may also be used to aid in securing a wafer to the chuck (1) operating on the Bernoulli principle.

[0022] A gear rim (22) is accommodated in the gap formed between the upper surface of the base body (4) and the lower surface of the cover (2). This gear rim (22) is coupled with the nave (6) and meshes via its radially outwardly extending peripheral teeth with a gear wheel (20) of each of a plurality of pin assemblies (18).

[0023] As shown for example in Figure 2, each pin assembly (18) further includes a shaft extending from the gear wheel (20), which shaft is received rotatably in bores in the cover (2) and which carries a gripping pin (19) arranged eccentrically to the axis of rotation of the shaft. Each pin assembly (18) is urged upwardly toward cover (2) by a needle bearing (16) and associated helical spring (15), each of which is located within a recess formed within the outer upwardly extending peripheral edge of base body (4).

[0024] By turning the shafts of the pin assemblies (18) with the aid of the gear rim (22), the radial distance of the gripping pins (19) from the axis of rotation of the chuck (1) can be varied. Mechanisms for providing relative movement of a gear rim and a chuck body so as to rotate eccentrically located pins are known as described for example in U.S. Patent Nos. 4,903,717 and 5,513,668. The gripping pins (19) serve as stops for

the lateral retention of a wafer-shaped article (e.g. a semiconductor wafer, not shown) held on the chuck (1).

[0025] It is known to form chuck components, such as wafer-supporting pins, from material that is relatively inert to highly corrosive chemicals that are sometimes used in wafer processing. Such materials include polyvinylidene fluoride (PVDF), polyetheretherketone (PEEK) and polytetra-fluoroethylene (PTFE), among others. As noted, these non-conductive materials can result in an unwanted buildup of static charge, leading to risk of accumulation of contaminants or damage to electronic elements of an integrated circuit on the wafer due to electrostatic discharge.

[0026] In accordance with the present invention, one or more of the pin assemblies (18) are formed from static dissipative or electrically conductive material, such as conductive plastic. Consequently, static charge is dissipated through the conductive pin assemblies (18).

[0027] It will be appreciated that any relatively conductive plastic material having sufficiently conductive properties may be used. For example, suitable conductive plastic materials include polyvinylidene fluoride incorporating conductivity carbon, such as that which is marketed under the tradename SIMONA PVDF-EL which is reported to exhibit volume and surface resistivities of $\leq 10^6$ ohm*cm and $\leq 10^6$ ohm, respectively, under test method DIN IEC 60093. Other relatively conductive plastics include carbon filled ethylene tetrafluoroethylene as, for example, is marketed under the tradename Fluon LM-ETFE AH-3000, and carbon fiber filled perfluoroalkoxy as, for example, is marketed by Dupont under the tradename VESPEL CR-6110 which comprises a composite of carbon fiber sheets and polymer layers and is believed to exhibit volume and surface resistivities of about 10^{-1} ohm*cm and 10^{-1} ohm, respectively, in the direction of the layers and about 10^0 ohm*cm and 10^1 ohm, respectively, normal to the layers.

[0028] As is best shown in Figure 2, an electrically conductive path is provided, extending from pin assemblies (18) through chuck (1) and to spindle (10).

[0029] Referring to Figure 2, a conductive spring seat (14) is located below and in electrical contact with the helical spring (15). The helical spring (15) and needle bearing also are formed from electrically conductive material.

[0030] A conducting ring (13) is electrically connected (e.g., by metallic screws) to the spring seat (14). Also, one or more radially extending conductors (12) are joined to the upper surface of the base body (4) and are electrically connected (e.g., by metallic screws) to the conducting ring (13). As can be seen from Figure 2, the spring seat (14), conducting ring (13) and radially extending conductors (12) are all located within the internal gap which is formed between the upper surface of the base body (4) and the lower surface of the cover (2).

- [0031] A conducting member (11), preferably formed of metal, extends from the radially extending conductors (12) through the base body (4) and nave (6). The conducting member (11) preferably comprises a metal spring such that the above-described conductive pathway of the chuck (1) is electrically connected to the spindle, which also is conductive, when the chuck (1) is seated on the spindle (10).
- [0032] Thus, chuck (1) provides an electrically conductive pathway leading through the pin assemblies (18), needle bearing (16), helical spring (15), spring seat (14), conducting ring (13), radial conductors (12) and conducting member (11). When seated on the spindle (10), the above-described conductive pathway continues via conducting member (11) to the spindle (10), which in turn may be electrically grounded, for example, by electrical connection to associated tool framing or other suitable electrically conductive sink.
- [0033] The pin assemblies (18) also include an electrically conductive inlay (17), preferably formed of metal, located within a central bore of the pin assembly (18) and extending to the lower end thereof so as to physically and electrically contact the needle bearing (16), as shown in Figure 3. The inlay (17) also includes a needle bearing seat (17s) for receiving the needle bearing (16) and thereby further enhancing the electrical contact between the pin assembly (18) and the needle bearing (16).
- [0034] In an alternative embodiment, pin assemblies (218) can be provided as shown in Figures 4 and 5. Pin assemblies (218) are essentially similar to what is shown in Figure 3, including a gear wheel (220) and conductive inlay (217), except that the gripping pins (219) include a curved and reduced diameter waist. It will be appreciated that gripping pins (219) can provide both lateral and vertical support to a wafer, as is useful in conjunction with chucks that do not provide a gas cushion operating on the Bernoulli principle.
- [0035] The above-described features of the present invention provide the surprising and heretofore unknown advantage of establishing an electrical pathway for dissipating static charge without requiring undue tightening of moving parts, such as gears, which would otherwise be required to establish a secure electrical contact and which would result in significantly increased friction and wear.
- [0036] While the present invention has been described in connection with various illustrative embodiments thereof, it is to be understood that those embodiments should not be used as a pretext to limit the scope of protection conferred by the true scope and spirit of the appended claims.

Claims

- [Claim 0001] Device for processing wafer-shaped articles, comprising a chuck adapted to maintain a wafer-shaped article in a predetermined orientation during a processing operation to be performed on the article, said chuck comprising a chuck body and a plurality of pin assemblies adapted and positioned relative to the chuck body so as to support a wafer-shaped article to be processed, wherein at least one of said pin assemblies is formed from a chemically inert material and includes an electrically conductive inlay at one end, said inlay being adapted to physically and electrically engage a bearing element.
- [Claim 0002] The device according to claim 1, wherein the chuck is a spin chuck surrounded by a process chamber for single wafer wet processing of semiconductor wafers.
- [Claim 0003] The device according to claim 1, wherein said bearing element is an electrically conductive needle bearing.
- [Claim 0004] The device according to claim 1, wherein said chuck is adapted to engage and be supported by a spindle, said chuck further comprising an electrically conductive pathway leading from said at least one pin assembly through said bearing element to said spindle.
- [Claim 0005] The device according to claim 4, wherein said chuck body comprises an upper part joined to a lower part so as to form an internal gap therebetween, said electrically conductive pathway being provided within said internal gap.
- [Claim 0006] The device according to claim 5, wherein the electrically conductive pathway comprises one or more conductive elements located within said internal gap.
- [Claim 0007] The device according to claim 1, wherein said pin assemblies are positioned in a circular series about an area where a wafer-shaped article is to be positioned on the chuck, each of said pin assemblies being formed from a chemically inert material and including an electrically conductive inlay at one end, each said inlay being adapted to physically and electrically engage a bearing element.
- [Claim 0008] The device according to claim 7, wherein said chuck is adapted to engage and be supported by a spindle, said chuck further comprising an electrically conductive pathway leading from said pin assemblies through said bearing elements to said spindle.
- [Claim 0009] The device according to claim 8, wherein said electrically conductive

pathway comprises an electrically conductive seat electrically connected to said bearing element, a radial conductor electrically connected to said seat, and a conducting member electrically connected to said radial conductor and adapted to be electrically connected to said spindle when said chuck engages said spindle.

- [Claim 0010] A structure for use in devices for processing wafer-shaped articles, comprising a pin assembly, wherein said pin assembly is formed from a chemically inert material and includes an electrically conductive inlay at one end.
- [Claim 0011] The structure according to claim 10, wherein said inlay is adapted to physically and electrically engage a bearing element.
- [Claim 0012] The structure according to claim 11, wherein said bearing element is an electrically conductive needle bearing.
- [Claim 0013] The structure according to claim 10, wherein said pin assembly comprises a gripping pin eccentrically arranged at one end of a shaft.
- [Claim 0014] The structure according to claim 13, wherein said pin assembly further comprises a gear ring located at an end opposite to said gripping pin.
- [Claim 0015] Pin assembly for use in a device for processing wafer-shaped articles, wherein said pin assembly is formed from a chemically inert conductive polymer material and includes an electrically conductive inlay at one end.

[Fig.]

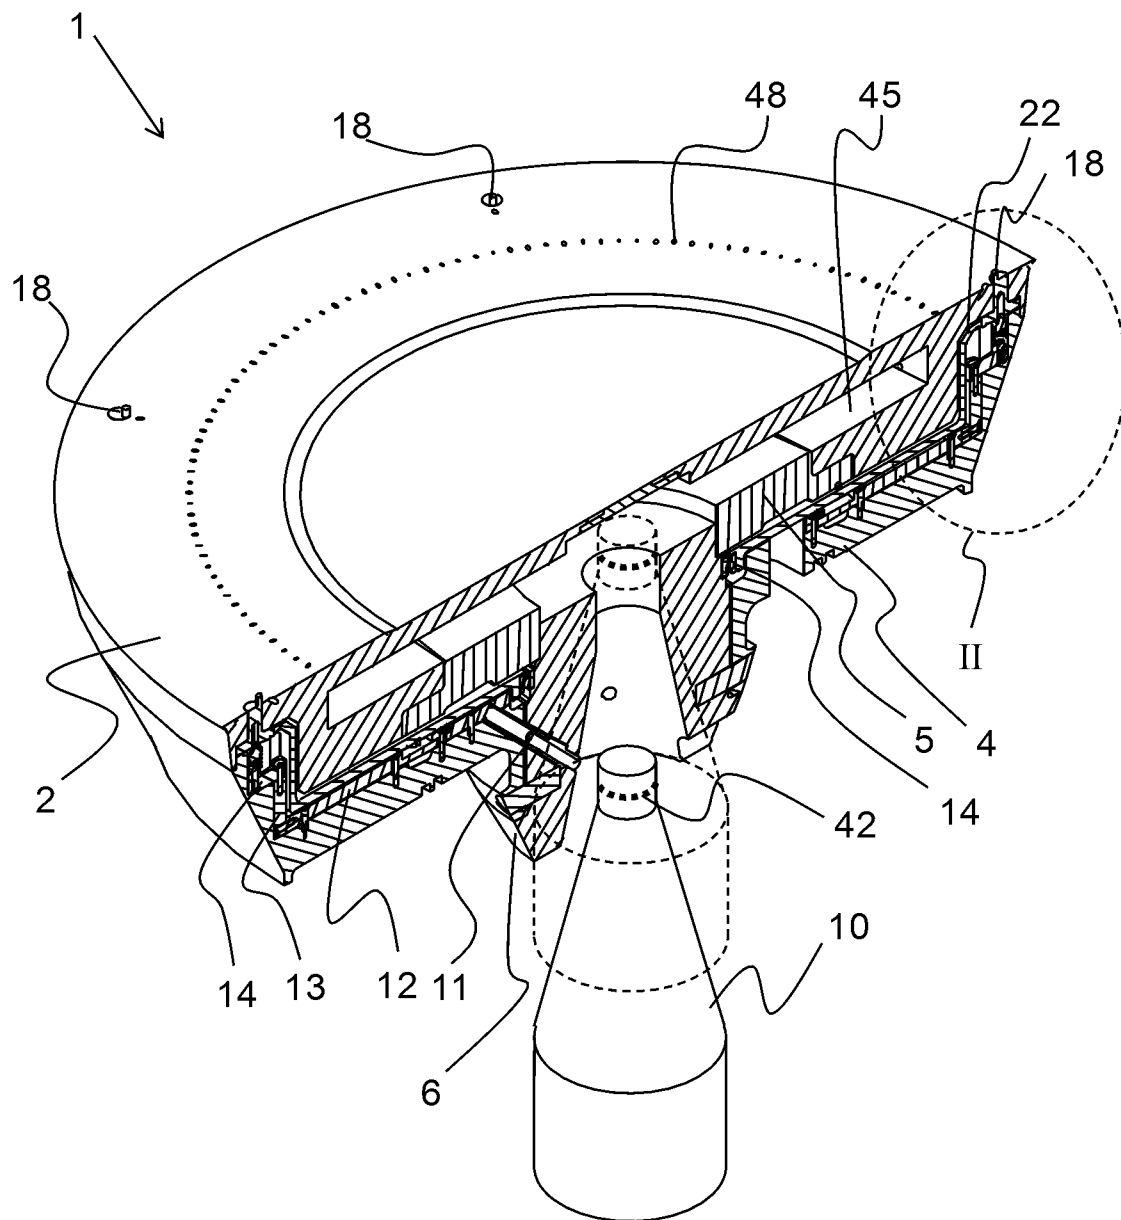


Fig. 1

[Fig.]

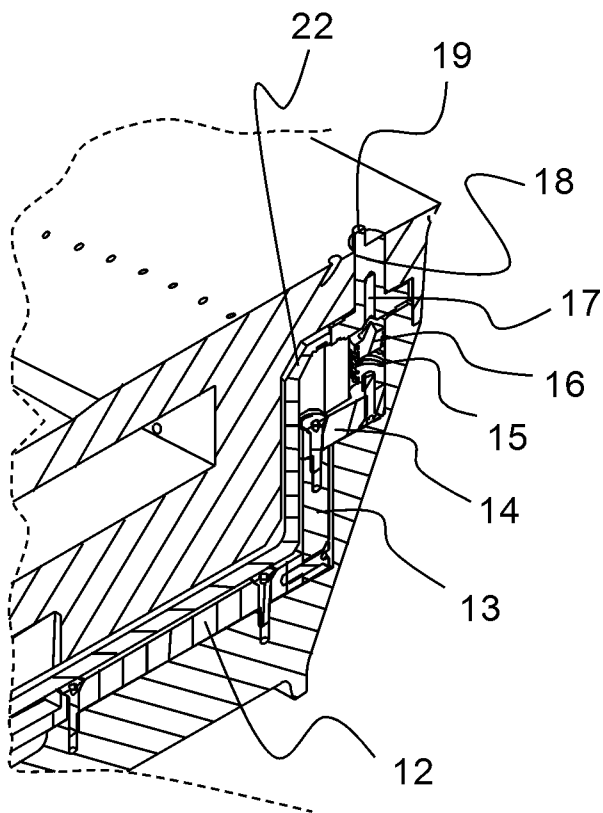


Fig. 2

[Fig.]

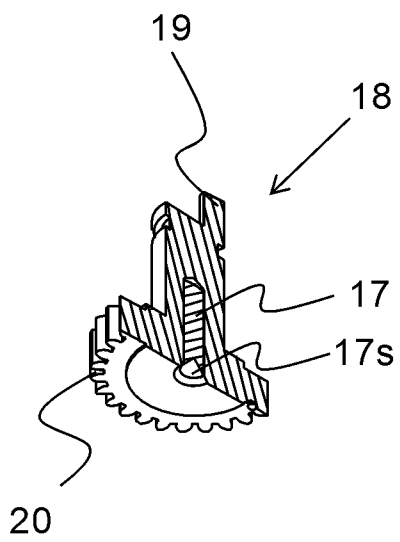


Fig. 3

[Fig.]

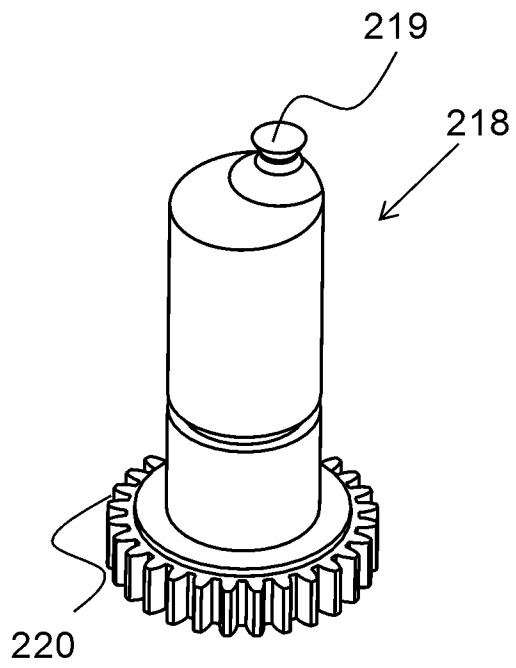


Fig. 4

[Fig.]

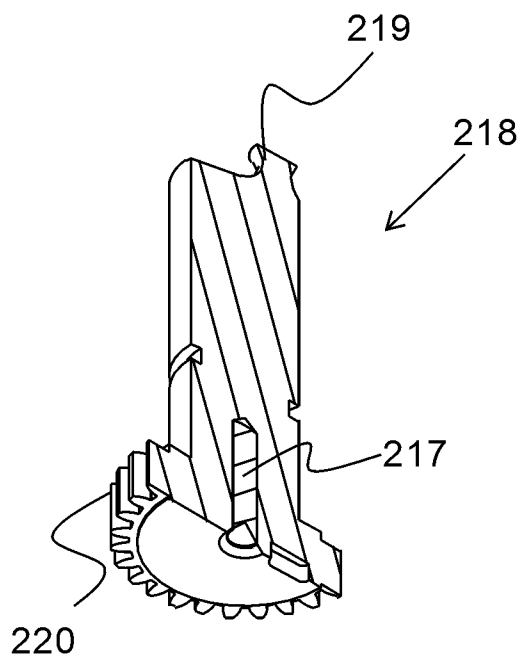


Fig. 5