



(51) International Patent Classification:

<i>B32B 15/01</i> (2006.01)	<i>C22C 38/06</i> (2006.01)
<i>C21D 6/00</i> (2006.01)	<i>C22C 38/12</i> (2006.01)
<i>C21D 8/02</i> (2006.01)	<i>C22C 38/14</i> (2006.01)
<i>C23C 2/02</i> (2006.01)	<i>C23C 28/02</i> (2006.01)
<i>C23C 2/06</i> (2006.01)	<i>C22C 38/00</i> (2006.01)
<i>C21D 9/46</i> (2006.01)	<i>C22C 38/08</i> (2006.01)
<i>C21D 1/18</i> (2006.01)	<i>C22C 38/16</i> (2006.01)
<i>C21D 1/25</i> (2006.01)	<i>C22C 38/18</i> (2006.01)
<i>C21D 1/26</i> (2006.01)	<i>C22C 38/40</i> (2006.01)
<i>C22C 38/02</i> (2006.01)	<i>C22C 38/54</i> (2006.01)
<i>C22C 38/04</i> (2006.01)	

(30) Priority Data:

62/334,189	10 May 2016 (10.05.2016)	US
62/396,602	19 September 2016 (19.09.2016)	US

(71) Applicant: UNITED STATES STEEL CORPORATION [US/US]; 600 Grant Street, Pittsburgh, Pennsylvania 15219 (US).

(72) Inventors: HOYDICK, David Paul; 1740 Malor Drive, Pittsburgh, Pennsylvania 15227 (US). SILVA, Eduardo Augusto; 3977 Murry Highlands Circle, Murrysville, Pennsylvania 15668 (US). MCCOSBY, Matthew Michael; 463 Swamp Road, New Castle, Pennsylvania 16101 (US).

(21) International Application Number:

PCT/US2017/031938

(74) Agent: TOWNER, Alan G. et al.; Leech Tishman Fuscaldò & Lampl, 525 William Penn Place, 28th Floor, Pittsburgh, Pennsylvania 15219 (US).

(22) International Filing Date:

10 May 2017 (10.05.2017)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

(25) Filing Language:

English

(26) Publication Language:

English

(54) Title: HIGH STRENGTH STEEL PRODUCTS AND ANNEALING PROCESSES FOR MAKING THE SAME

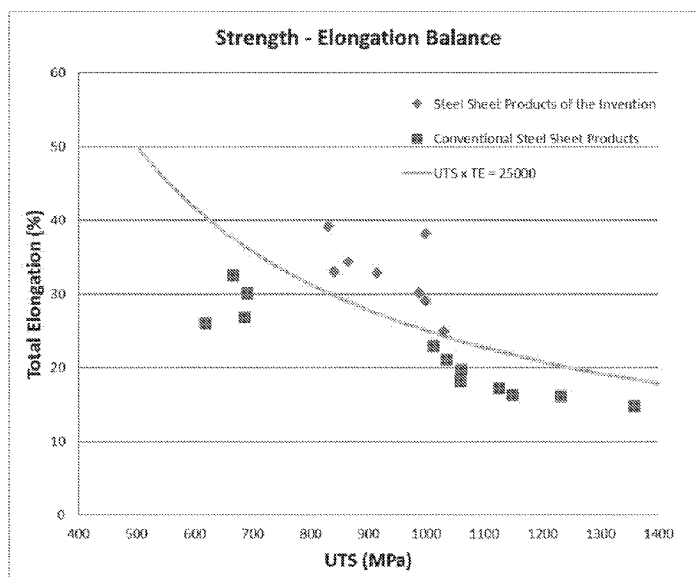


FIG. 15

(57) Abstract: The present invention provides steel sheet products having controlled compositions that are subjected to two-step annealing processes to produce sheet products having desirable microstructures and favorable mechanical properties such as high strength and ultra-high formability. Steels processed in accordance with the present invention exhibit combined ultimate tensile strength and total elongation (UTS • TE) properties of greater than 25,000 MPa-%. Steels with these properties fall into the category of Generation 3 advanced high strength steels, and are highly desired by various industries including automobile manufacturers.



HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

**HIGH STRENGTH STEEL PRODUCTS AND
ANNEALING PROCESSES FOR MAKING THE SAME**

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application No. 62/334,189 filed May 10, 2016, and U.S. Provisional Application No. 62/396,602 filed September 19, 2016, both of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to high strength steel products having favorable properties, and to annealing processes for making such products.

BACKGROUND INFORMATION

[0003] Over past several years, the worldwide steel industry has focused on development of a third generation of advanced high strength steel (AHSS) for the automotive market. These Generation 3 steels have a favorable balance of tensile strength and elongation, typically in a UTS xTE range of about 20,000 MPa-% or greater. However, the steel industry has had a difficult time commercializing Generation 3 AHSS as the majority of approaches require high alloy content, e.g., typically greater than 4 weight percent manganese, which results in difficulties when manufacturing such steels with conventional steel production equipment. Additionally, currently available AHSS has been difficult to weld by techniques such as spot welding, have been difficult to coat with zinc-based galvanic coatings, have been difficult to manufacture into the thin gauge sheet needed for wide scale application.

SUMMARY OF THE INVENTION

[0004] The present invention provides steel sheet products having controlled compositions that are subjected to two-step annealing processes to produce sheet products having desirable microstructures and favorable mechanical properties such as high strength and ultra-high formability. Steels processed in accordance with the present invention exhibit combined ultimate tensile strength and total elongation (UTS · TE) properties of greater than 25,000 MPa-% when tested using standard subsized ASTM or full size JIS tensile testing procedures. In addition, steels produced in accordance with the present invention exhibit favorable combinations of TE and hole expansion, i.e., both global formability and local formability are

good. Steels with these properties fall into the category of Generation 3 advanced high strength steels, and are highly desired by various industries including automobile manufacturers.

[0005] An aspect of the present invention is to provide a high strength cold rolled steel sheet product comprising from 0.12 to 0.5 weight percent C, from 1 to 3 weight percent Mn, and from 0.8 to 3 weight percent of a combination of Si and Al, wherein the steel sheet product has been subjected to a two-step annealing process, comprises ferrite and substantially equiaxed retained austenite grains having an average aspect ratio of less than 3:1, and has a combination of ultimate tensile strength and total elongation UTS·TE of greater than 25,000 MPa%.

[0006] Another aspect of the present invention is to provide a method of producing a high strength cold rolled steel sheet product comprising from 0.12 to 0.5 weight percent C, from 1 to 3 weight percent manganese, and from 0.8 to 3 weight percent of a combination of Si and Al. The method comprises subjecting the steel sheet product to a first step annealing process to achieve a predominantly martensitic microstructure, and subjecting the steel sheet product to a second step process comprising soaking the sheet product in an intercritical regime at a temperature of from 720 to 850°C, followed by holding the sheet product at a temperature of from 370 to 430°C.

[0007] These and other aspects of the present invention will be more apparent from the following description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Fig. 1 includes plots of temperature versus time illustrating a two-step annealing process in accordance with an embodiment of the present invention.

[0009] Fig. 2 includes plots of temperature versus time illustrating a two-step annealing process in accordance with another embodiment of the present invention.

[0010] Fig. 3 is a plot of temperature versus time illustrating a two-step annealing process that combines the two step thermal process with an optional zinc-based hot-dipped coating operation in a single production facility.

[0011] Fig. 4 is a plot of temperature versus time for a second step of an annealing process defining soaking and holding zones in the thermal cycle in accordance with an embodiment of the invention.

[0012] Figs. 5 and 6 are electron backscatter diffraction (EBSD) photomicrographs illustrating the microstructure of a high strength steel sheet product in accordance with an embodiment of the invention.

[0013] Fig. 7 is an optical photomicrograph of a steel sheet product subjected to the thermal process shown in Fig. 1, showing darker ferrite grains and lighter austenite grains.

[0014] Fig. 8 is a bar graph illustrating aspect ratios of the austenite grains shown in Fig. 7.

[0015] Figs. 9 and 10 are graphs for a high strength steel sheet product showing austenite and ferrite grain size distributions in accordance with an embodiment of the invention.

[0016] Figs. 11 is EBSD photomicrograph illustrating the microstructure of a high strength steel sheet product processed as shown in Fig. 1.

[0017] Figs. 12 and 13 are EBSD photomicrographs showing steel sheet products processed as shown in Fig. 2.

[0018] Fig. 14 is an EBSD photomicrograph of a steel sheet product processed as shown in Fig. 3.

[0019] Fig. 15 is a graph of total elongation vs. ultimate tensile strength for high strength steel sheet products of the present invention in comparison with other steel sheet products processed outside the scope of the present invention.

[0020] Fig. 16 is a graph of total elongation vs. ultimate tensile strength for high strength steel products produced in mill trials in accordance with embodiments of the present invention.

DETAILED DESCRIPTION

[0021] The high strength steel sheet products of the present invention have controlled compositions that, in combination with controlled annealing processes, produce desirable microstructures and favorable mechanical properties including high strengths and ultra-high formabilities. In certain embodiments, the steel composition may include carbon, manganese and silicon, along with any other suitable alloying additions known to those skilled in the art. Examples of steel compositions including ranges of C, Mn, Si, Al, Ti, and Nb are listed in Table 1 below.

Table 1
Steel Compositions (wt. %)

Example	C	Mn	Si	Al	Si + Al	Ti	Nb
A	0.12-0.5	1-3	0-2	0-2	0.8-3	0-0.05	0-0.05
B	0.15-0.4	1.3-2.5	0.2-1.8	0-1.5	0.9-2.5	0-0.03	0-0.03
C	0.17-0.35	1.5-2.3	0.4-1.5	0-1	1-2	0-0.02	0-0.02

[0022] In addition to the amounts of C, Mn, Si, Al, Ti and Nb listed in Table 1, the steel compositions may include minor or impurity amounts of other elements, such as 0.015 max S, 0.03 max P, 0.2 max Cu, 0.02 max Ni, 0.2 max Cr, 0.2 max Mo, 0.1 max Sn, 0.015 max N, 0.1 max V, and 0.004 max B. As used herein the term “substantially free”, when referring to the composition of the steel sheet product, means that a particular element or material is not purposefully added to the composition, and is only present as an impurity or in trace amounts.

[0023] In the steel sheet products of the present invention, C provides increased strength and promotes the formation of retained austenite. Mn provides hardening and acts as a solid solution strengthener. Si inhibits iron carbide precipitation during heat treatment, and increases austenite retention. Al inhibits iron carbide precipitation during heat treatment, and increases austenite retention. Ti and Nb may act as a strength-enhancing grain refiners.

[0024] In certain embodiments, Al may be present in an amount of at least 0.1 weight percent or at least 0.2 weight percent. For example, Al may be present in an amount of from 0.5 to 1.2 weight percent, or from 0.7 to 1.1 weight percent, in certain embodiments. Alternatively the steel sheet product may be substantially free of Al.

[0025] Steel sheet products having compositions as described above are subjected to a two-stage annealing process, as more fully described below. The resultant sheet products have been found to possess favorable mechanical properties including desirable ultimate tensile strengths, high elongations, high lambda values, high bendability and high yield ratios (YS/UTS).

[0026] In certain embodiments, the ultimate tensile strength (UTS) of the steel sheet products range from 700 to 1,100 MPa or more. In certain embodiments, the steel sheet product has an ultimate tensile strength of greater than 700 MPa, for example, from 720 to 1,100 MPa, or from 750 to 1,050 MPa.

[0027] In certain embodiments, the steel sheet products have a total elongation (TE) typically greater than 22 percent, for example, greater than 27 percent, or greater than 33 percent. For example, the steel sheet product may have a total elongation of at least 20%, e.g., from 22 to 45%, or from 25 to 40%.

[0028] The steel sheet products may possess lambda (λ) values as measured by a standard hole expansion test typically greater than 20 percent, for example, greater than 25 percent, or greater than 30 percent, or greater than 35 percent. The whole expansion ratio or lambda may be greater than 20%, for example, from 22 to 80%, or from 25 to 60%.

[0029] In certain embodiments, increased values of both total elongation (TE) and hole expansion (λ) result in steel sheet products exhibiting good global formability and local formability.

[0030] Strength elongation balances (UTS·TE) of greater than 25,000 are observed for the present steel sheet products, making them fall into the category of Generation 3 steels highly desired by industries such as the auto industry. In certain embodiments UTS·TE values may be greater than 30,000, or greater than 35,000.

[0031] In accordance with certain embodiments of the invention, the final microstructure of the steel sheet products may primarily comprise ferrite, e.g., at least 50% up to 80% or higher, with lesser amounts of retained austenite, e.g., from 5 to 25%, and minor amounts of fresh martensite, e.g., from 0 to 10% or 15%. The amounts of ferrite, austenite and martensite may be determined by standard EBSD techniques. Alternatively, retained austenite content may be determined by magnetic saturation methods. Unless otherwise specified herein, the volume percent of retained austenite is determined by the EBSD technique.

[0032] In certain embodiments, the retained austenite comprises from 1 to 25 volume percent, for example, from 5 to 20 volume percent. The amount of fresh martensite may comprise less than 15 volume percent, or less than 10 volume percent, or less than 5 volume percent. In certain embodiments, the steel sheet product is substantially free of fresh martensite. It has been found that when fresh martensite amounts are greater than 15%, hole expansion values decrease significantly, e.g., local formability is significantly decreased.

[0033] At least a portion of the ferrite may be formed during the heating section, as described below, by recrystallization and/or tempering of martensite, or during the cooling and holding section of the second annealing process by austenite decomposition. Some of the ferrite

may be considered bainitic ferrite. The ferrite, austenite and martensite phases are fine grained, e.g., having average grain sizes of less than 10 microns, for example, less than 5 microns, or less than 3 microns. For example, ferrite grain size may range from less than 10 microns, for example, less than 8 microns, or less than 6 microns. Average austenite grain size may range from less than 2 microns, for example, less than 1 micron, or less than 0.5 micron. Martensite grain size, when present, may range from less than 10 microns, for example, less than 8 microns, or less than 6 microns.

[0034] The austenite grains may be substantially equiaxed, e.g., having average aspect ratios less than 3:1 or less than 2:1, for example, about 1:1. It has been found that amounts of retained austenite below about 5% results in significantly decreased total elongations (TE). It has further been found that amounts of retained austenite above 25% can only be obtained at very high carbon levels, which results in poor weldability.

[0035] In certain embodiments of the invention, a two-step annealing process is used to produce advanced high strength steel products with favorable mechanical properties, such as those described above. Within each of the first and second annealing steps, multiple methodologies for undertaking the heat treatment may be used. Examples of two-step annealing processes are shown in Figs. 1-3 and described below. Fig. 1 represents a continuous annealing line (CAL) followed by a continuous annealing line (CAL) production route. Fig. 2 represents a CAL plus continuous galvanizing line (CGL) production route. Fig. 3 represents a specially designed line allowing for both CAL + CAL or CAL + CGL steps to take place in a single facility. While a direct-fired furnace (DFF) followed by a radiant tube (RT) furnace embodiment is shown in Fig. 3, other embodiments such as all radiant tube, electric radiant heating, and the like may be used to achieve the desired thermal cycles.

Step 1

[0036] The goal of the first step of the annealing process is to achieve a martensitic microstructure. In the first annealing stage of the first step, an annealing temperature above the A_3 temperature may typically be used, for example, an annealing temperature of at least 820°C may be used. In certain embodiments, the first stage annealing temperature may typically range from 830 to 980°C, for example, from 830 to 940°C, or from 840 to 930°C, or from 860 to 925°C. In certain embodiments, the peak annealing temperature may be typically held for at

least 20 seconds, for example, from 20 to 500 seconds, or from 30 to 200 seconds. Heating may be accomplished by conventional techniques such as a non-oxidizing or oxidizing direct-fired furnace (DFF), oxygen-enriched DFI, induction, gas radiant tube heating, electric radiant heating, and the like. Examples of heating systems that may be adapted for use in the processes of the present invention are disclosed in U.S. Patent Nos. 5,798,007; 7,368,689; 8,425,225; and 8,845,324, U.S. Patent Application No. 2009/0158975, and Published PCT Application No. WO/2015083047, assigned to Fives Stein. Additional examples of heating systems that may be adapted for use in the processes of the present invention include U.S. Patent No. 7,384,489 assigned to Drever International, and U.S. Patent No. 9,096,918 assigned to Nippon Steel and Sumitomo Metal Corporation. Any other suitable known types of heating systems and processes may be adapted for use in Step 1 and Step 2.

[0037] In the first stage, after the peak annealing temperature is reached and held for the desired period of time, the steel is quenched to room temperature, or to a controlled temperature above room temperature, as more fully described below. The quench temperature may not necessarily be room temperature but should be below the martensite start temperature (M_s), and preferably below the martensite finish temperature (M_f), to form a microstructure of predominantly martensite. In certain embodiments, between the first step process and the second step process, the steel sheet product may be cooled to a temperature below 300°C, for example, below 200°C.

[0038] Quenching may be accomplished by conventional techniques such as water quenching, submerged knife/nozzle water quenching, gas cooling, rapid cooling using a combination of cold, warm or hot water and gas, water solution cooling, other liquid or gas fluid cooling, chilled roll quench, water mist spray, wet flash cooling, non-oxidizing wet flash cooling, and the like. A quench rate of from 30 to 2,000°C/sec may typically be used.

[0039] Various types of cooling and quenching systems and processes known to those skilled in the art may be adapted for use in the processes of the present invention. Suitable cooling/quenching systems and processes conventionally used on a commercial basis may include water quench, water mist cooling, dry flash and wet flash, oxidizing and non-oxidizing cooling, alkane fluid to gas phase change cooling, hot water quenching, including two-step water quenching, roll quenching, high percentage hydrogen or helium gas jet cooling, and the like. For example, dry flash and/or wet flash oxidizing and non-oxidizing cooling/quenching such as

disclosed in published PCT Application No. WO2015/083047 to Fives Stein may be used. Other Fives Stein patent documents describing cooling/quenching systems and processes that may be adapted for use in the processes of the present invention include U.S. Patent Nos. 6,464,808B2; 6,547,898B2; and 8,918,199B2, and U.S. Patent Application Publication Nos. US2009/0158975A1; US2009/0315228A1; and US2011/0266725A1. Other examples of cooling/quenching systems and processes that may be adapted for use in the processes of the present invention include those disclosed in U.S. Patent Nos. 8,359,894B2; 8,844,462B2; and 7,384,489B2, and U.S. Patent Application Publication Nos. 2002/0017747A1 and 2014/0083572A1.

[0040] In certain embodiments, after the first-stage peak annealing temperature is reached and the steel is quenched to form martensite, the martensite can be optionally tempered to soften the steel somewhat to make further processing more feasible. Tempering takes place by raising the temperature of the steel in the range of room temperature to about 500°C and holding for up to 600 seconds. If tempering is utilized, the tempering temperature may be held constant, or may be varied within this preferred range.

[0041] After tempering, the temperature is ramped down to room temperature. The rate of such ramp-down may typically range from 1 to 40°C/sec, for example, from 2 to 20°C/sec. In the case of a single pass facility furnace, as in Fig. 3, tempering may not be necessary.

Step 2

[0042] The second step of the annealing process may include a first stage that is conducted at relatively high annealing temperature, and a second stage that is conducted at relatively low temperature. These stages are defined as the “soaking” and “holding” zones of the second anneal, as described in Fig. 4. The temperatures are controlled in order to promote the formation of the desired microstructure in the final product.

[0043] In the first annealing stage of the second step, a soaking zone temperature between A_1 and A_3 may be used, for example, an annealing temperature of at least 720°C may be used. In certain embodiments, the soaking zone temperature may typically range from 720 to 850°C, for example, from 760 to 825°C. In certain embodiments, the peak annealing temperature may be typically held for at least 15 seconds, for example, from 20 to 300 seconds, or from 30 to 150 seconds.

[0044] During the first stage of the second step, the soaking zone temperature may be achieved by heating the steel from a relatively low temperature below M_s , e.g., room temperature, at an average rate of from 0.5 to 50°C/sec, for example, from about 2 to 20°C/sec. In certain embodiments, the ramp-up may take from 25 to 800 seconds, for example, from 100 to 500 seconds. The first stage heating of the second step may be accomplished by any suitable heating system or process, such as using radiant heating, induction heating, direct fired furnace heating and the like.

[0045] After the soaking zone temperature is reached and held for the desired period of time, the steel may be cooled to a controlled temperature above room temperature to the holding zone. In certain embodiments, the steel sheet product is maintained at a temperature above 300°C between the second step soaking process and the second step holding process. Cooling from the soaking to holding zone may be accomplished by conventional techniques such as water cooling, gas cooling and the like. An average cooling rate of from 5 to 400°C/sec may typically be used. Any suitable types of cooling and quenching systems may be adapted for use in cooling from the soaking temperature to the holding temperature, including those described above.

[0046] In accordance with embodiments of the invention, the holding zone step is carried out at a typical temperature of from 360 to 440°C, for example, from 370 to 430°C. The holding zone may be held for up to 800 seconds, for example, from 30 to 600 seconds.

[0047] The holding zone temperature may be held constant, or may be varied somewhat within the preferred temperature range. After holding, the steel may be reheated, such as by induction or other heating method, to enter a hot-dip coating pot at the proper temperature for good coating results, if the steel is to be hot-dip coated.

[0048] In certain embodiments, after the holding zone temperature has been maintained for a desired period of time, the temperature may be ramped down to room temperature. Such a ramp-down may typically take from 10 to 1,000 seconds, for example, from about 20 to 500 seconds. The rate of such ramp-down may typically range from 1 to 1,000°C/sec, for example, from 2 to 20°C/sec.

[0049] In accordance with certain embodiments, one or both of the first-step and second-step annealing processes may be performed on a continuous annealing line (CAL). After going through a CAL+CAL process, the steel may be electrogalvanized to produce a zinc based coated product.

[0050] In certain embodiments, the annealed steel sheet is hot-dip galvanized at the end of the holding zone. Galvanizing temperatures may typically range from 440 to 480°C, for example, from 450 to 470°C. In certain embodiments, the galvanizing step may be performed as part of the second-step annealing process on a continuous galvanizing line (CGL), e.g., as shown in Fig. 2. This CAL + CGL process can be used to produce both a zinc-based or zinc alloy-based hot-dip galvanized product or reheated after coating to produce an iron-zinc galvanneal type coated product. An optional nickel-based coating step can take place between the CAL and CGL steps in the process to improve zinc coating properties. The use of a continuous galvanizing line in the second step increases the production efficiency of producing a coated GEN3 product versus using a CAL+CAL +EG route.

[0051] A galvanized product or zinc-based alloy hot-dip coated product can also be made on a specially designed CGL in which the two-step annealing can take place in a single line, as shown in Fig. 3. Galvannealing can also be an option in this case. Furthermore, a single production facility can also be specially designed and built to combine the two step thermal process to produce uncoated Generation 3 steels as defined in the invention.

[0052] The following examples are intended to illustrate various aspects of the present invention, and are not intended to limit the scope of the invention.

Example 1

[0053] A cold rolled steel sheet having a composition as listed in Table 2, Sample No. 1, was subjected to a two-step annealing process as illustrated in Fig. 1. The microstructure of the resultant product is shown in Figs. 5 and 6. EBSD techniques using commercial EDAX orientation imaging microscopy software show the dark ferrite grains and light austenite grains in Fig. 5.

Example 2

[0054] A cold rolled steel sheet having a composition as listed in Table 2, Sample No. 2, was subjected to a two-step annealing process as illustrated in Fig. 1. The microstructure of the resultant product is shown in Fig. 11. Mechanical properties of Sample No. 2 are listed in Table 2. Grain size distributions of ferrite and austenite are shown in Figs. 9 and 10, respectively. The

average austenite grain size is less than 1 micron and the average ferrite grain size is less than 10 microns.

[0055] The microstructure includes about 80 volume percent ferrite with an average grain size of about 5 microns, about 10 volume percent retained austenite having substantially equiaxed grains and an average grain size of about 0.5 micron, and about 10 volume percent fresh martensite with an average grain size of about 5 microns. Mechanical properties of Sample No. 1 are listed in Table 2 below.

Example 3

[0056] A cold rolled steel sheet having a composition as listed in Table 2, Sample No. 3, was subjected to a two-step annealing process as illustrated in Fig. 2. The microstructure of the resultant product is shown in Figs. 12 and 13. In Fig. 13, austenite is light in color and ferrite is dark in color. Mechanical properties of Sample No. 3 are listed in Table 2.

Example 4

[0057] A cold rolled steel sheet having a composition as listed in Table 2, Sample No. 4, was subjected to a two-step annealing process as illustrated in Fig. 3. The microstructure of the resultant product is shown in Figure 14. In Fig. 14, austenite is light in color and ferrite is dark in color. Mechanical properties of Sample No. 4 are listed in Table 2.

Example 5

[0058] A cold rolled steel sheet having a composition as listed in Table 2, Sample No. 5, was subjected to a two-step annealing process as illustrated in Fig. 1. Mechanical properties of Sample No. 5 are listed in Table 2.

Example 6

[0059] A cold rolled steel sheet having a composition as listed in Table 2, Sample No. 6, was subjected to a two-step annealing process as illustrated in Fig. 1. Mechanical properties of Sample No. 6 are listed in Table 2. Fig. 7 is an optical image showing the microstructure of the steel shown in Fig. 2, Sample No. 6, which was subjected to the two-step annealing process shown in Fig. 1. In Fig. 7, the dark regions of the photomicrograph are ferrite grains, while the light regions are austenite grains. Fig. 8 is a graph illustrating the aspect ratios of the austenite

grains shown in Fig. 7. The optical image of Fig. 7 was used to determine the aspect ratios of the austenite grains using image analysis with commercially available software. Fig. 7 shows that the average aspect ratio is less than 3:1 for the austenite grains.

Example 7

[0060] A cold rolled steel sheet having a composition as listed in Table 2, Sample No. 7, was subjected to a two-step annealing process as illustrated in Fig. 2. Mechanical properties of Sample No. 7 are listed in Table 2.

Example 8

[0061] A cold rolled steel sheet having a composition as listed in Table 2, Sample No. 8, was subjected to a two-step annealing process as illustrated in Fig. 3. Mechanical properties of Sample No. 8 are listed in Table 2.

[0062] The steels in Examples 1-8 exhibited UTS levels in the range of 700 to 1,100 MPa.

Comparative Examples 1-4

[0063] Cold rolled steel sheets having compositions as listed in Table 2, Sample Nos. C1-C4, were subjected to a two-step annealing process as illustrated in Fig. 1. Mechanical properties of Sample Nos. C1-C4 are listed in Table 2. The steels in Comparative Examples 1-4 exhibited UTS levels less than 700 MPa.

Comparative Examples 5-8

[0064] Cold rolled steel sheets having compositions as listed in Table 2, Sample Nos. C5-C8, were subjected to a two-step annealing process as illustrated in Fig. 1. Mechanical properties of Sample Nos. C5-C8 are listed in Table 2. The steels in Comparative Examples 5-8 exhibited UTS levels greater than 1,100 MPa.

Comparative Examples 9-11

[0065] Cold rolled steel sheets having compositions as listed in Table 2, Sample Nos. C9-C11, were subjected to a two-step annealing process similar to that illustrated in Fig. 1,

except the soaking or holding temperature in the second anneal were outside the preferred ranges of the invention. Mechanical properties of Sample Nos. C9-C11 are listed in Table 2.

Comparative Example 12

[0066] A cold rolled sheet having a composition listed in Table 2, Sample No. C12, was subjected to a two-step annealing process similar to that illustrated in Fig. 2, except the holding zone temperature in the second anneal was outside the preferred range of the invention. Mechanical properties of Sample No. C12 are listed in Table 2.

Table 2

Sample No.	Product Type	Process	C	Mn	Si	Other	YS (MPa)	UTS (MPa)	TE (%)	UTS*TE	Lambda
1	CR 780 GEN3 super elongation	CAL + CAL	0.22	1.5	1.5		657	831	39.2	32575	44
2	CR 980 GEN3	CAL + CAL	0.185	2.2	1.4		630	1030	25	25750	30
3	Hot-dipped 980 GEN3	CAL + CGL	0.22	2.25	0.45	0.8 Al, 0.02 Ti, 0.02Nb	576	988	30.2	29838	20
4	Hot-dipped 980 GEN3	Single process in newly designed CGL	0.185	2.2	1.4		580	998	29.1	29042	
5	CR 980 GEN3 Super elongation	CAL + CAL	0.35	1.5	1.5		685	999	38.2	38161	25
6	CR 780 GEN3	CAL + CAL	0.175	1.8	1.5		630	840	33	27720	45
7	Hot-dipped 780 GEN3	CAL + CGL	0.2	2.3	0.4	1.0 Al	533	915	32.8	30012	30
8	Hot-dipped 780 GEN3	Single process in newly designed CGL	0.2	2.3	0.4	1.0 Al	589	865	34.4	29756	

Table 2 (continued)

Sample No.	Product Type	Process	C	Mn	Si	Other	YS (MPa)	UTS (MPa)	TE (%)	UTS*TE	Lambda
C1	Alloy 1	CAL + CAL	0.105	1.55	1.2		512	666	32.6	21712	67
C2	Alloy 2	CAL + CAL	0.14	1.5	1.3		556	690	30.2	20838	59
C3	Alloy 3	CAL + CAL	0.17	1.1	1.1		560	686	26.9	18453	53
C4	Alloy 4	CAL + CAL	0.13	0.9	0.9		533	618	26.0	16068	81
C5	Alloy 1	CAL + CAL	0.21	2.15	1.5	0.003 B	597	1125	17.2	19350	25
C6	Alloy 2	CAL + CAL	0.2	2.2	1.5	0.2 Mo	585	1148	16.3	18712	13
C7	Alloy 3	CAL + CAL	0.23	2.4	1.5	0.003 B	683	1231	16.2	19942	6.7
C8	Alloy 4	CAL + CAL	0.19	2.64	2.0		635	1359	14.8	20113	3.4
C9	Alloy 1 – High Soak (849 C)	CAL + CAL	0.18	2.2	1.34		693	1058	18.2	19256	25
C10	Alloy 2 – Low Hold (350 C)	CAL + CAL	0.18	2.2	1.34		602	1035	21.2	21942	30
C11	Alloy 3 – High Hold (450 C)	CAL + CAL	0.18	2.2	1.34		477	1059	19.7	20862	19
C12	Alloy 4 – High Hold (471 C)	CAL + CGL	0.22	2.4	0.4	0.8 Al	465	1012	23.0	23276	16.5

[0067] Fig. 15 plots the total elongation (TE) and ultimate tensile strength (UTS) of Samples 1-8 of Examples 1-8, as well as Samples C1-C12 of Comparative Examples C1-C12. A line corresponding to UTS·TE of 25,000 is roughly drawn in Fig. 15. As can be seen, the high strength steel sheet samples produced in accordance with the present invention possess superior combinations of strength and elongation versus the comparative samples, i.e., high total elongation properties at high UTS levels are observed for the inventive examples. The Sample 1 through Sample 8 steels fall into the category of Generation 3 advanced high strength steels, which are highly desirable for automotive and other industries.

Example 9

[0068] Mill trials were conducted for samples labeled M1-M5 in Table 3 below using either the CAL+CAL or CAL+CGL process. For Samples M1, M2 and M5, the CAL+CAL processing times and temperatures shown in Fig. 1 were used. For Samples M3 and M4, the CAL+CGL processing times and temperatures shown in Fig. 2 were used.

Table 3

Mill Trial Results

Mill Trial No.	Process	C	Mn	Si	Other	Coat	YS (MPa)	UTS (MPa)	TE (%)	UTS*TE	Lambda
M1	CAL + CAL	0.22	1.4	1.4		None	627	810	38.6	31266	61
M2	CAL + CAL	0.185	2.2	1.4		None	624	1009	25	25255	38
M3	CAL + CGL	0.23	2.4	0.4	0.8 Al, 0.02 Ti, 0.02Nb	HDGI	567	989	26.4	26110	24
M4	CAL + CGL	0.22	2.3	0.4	0.8 Al, 0.02 Ti, 0.02Nb	HDGI	655	941	30.9	29077	33
M5	CAL + CAL	0.19	2.25	1.5		None	635	1048	25.3	26514	29

[0069] Fig. 16 shows the strength-elongation balance of the mill trial materials, all meeting a minimum UTS·TE of 25,000. The trial materials exhibited lambda values greater than 20%.

[0070] As used herein, “including,” “containing” and like terms are understood in the context of this application to be synonymous with “comprising” and are therefore open-ended and do not exclude the presence of additional undescribed or unrecited elements, materials, phases or method steps. As used herein, “consisting of” is understood in the context of this application to exclude the presence of any unspecified element, material, phase or method step. As used herein, “consisting essentially of” is understood in the context of this application to include the specified elements, materials, phases, or method steps, where applicable, and to also include any unspecified elements, materials, phases, or method steps that do not materially affect the basic or novel characteristics of the invention.

[0071] Notwithstanding that the numerical ranges and parameters setting forth the broad scope of the invention are approximations, the numerical values set forth in the specific examples are reported as precisely as possible. Any numerical value, however, inherently contains certain errors necessarily resulting from the standard variation found in their respective testing measurements.

[0072] Also, it should be understood that any numerical range recited herein is intended to include all sub-ranges subsumed therein. For example, a range of “1 to 10” is intended to include all sub-ranges between (and including) the recited minimum value of 1 and the recited maximum value of 10, that is, having a minimum value equal to or greater than 1 and a maximum value of equal to or less than 10.

[0073] In this application, the use of the singular includes the plural and plural encompasses singular, unless specifically stated otherwise. In addition, in this application, the use of “or” means “and/or” unless specifically stated otherwise, even though “and/or” may be explicitly used in certain instances. In this application and the appended claims, the articles “a,” “an,” and “the” include plural referents unless expressly and unequivocally limited to one referent.

[0074] Whereas particular embodiments of this invention have been described above for purposes of illustration, it will be evident to those skilled in the art that numerous variations of the details of the present invention may be made without departing from the invention.

WHAT IS CLAIMED IS:

1. A high strength cold rolled steel sheet product comprising from 0.12 to 0.5 weight percent C, from 1 to 3 weight percent Mn, and from 0.8 to 3 weight percent of a combination of Si and Al, wherein the steel sheet product has been subjected to a two-step annealing process, comprises ferrite and substantially equiaxed retained austenite grains having an average aspect ratio of less than 3:1, and has a combination of ultimate tensile strength and total elongation UTS·TE of greater than 25,000 MPa%.
2. The high strength cold rolled steel sheet product of Claim 1, wherein the Si comprises up to 2 weight percent, the Al comprises up to 2 weight percent, and the further steel sheet product further comprises up to 0.05 weight percent Ti, and up to 0.05 weight percent Nb.
3. The high strength cold rolled steel sheet product of Claim 2, wherein the C comprises from 0.15 to 0.4 weight percent, the Mn comprises from 1.3 to 2.5 weight percent, the Si comprises from 0.2 to 1.8 weight percent, the Al comprises up to 1.5 weight percent, the Ti comprises up to 0.03 weight percent, and the Nb comprises up to 0.03 weight percent.
4. The high strength cold rolled steel sheet product of Claim 2, wherein the C comprises from 0.17 to 0.35 weight percent, the Mn comprises from 1.5 to 2.3 weight percent, the Si comprises from 0.4 to 1.5 weight percent, the Al comprises up to 1 weight percent, the Ti comprises up to 0.02 weight percent and the Nb comprises up to 0.02 weight percent.
5. The high strength cold rolled steel sheet product of Claim 1, wherein the ferrite comprises at least 50 volume percent, the retained austenite comprises from 5 to 25 volume percent, and the average aspect ratio of the retained austenite grains is less than 2:1.
6. The high strength cold rolled steel sheet product of Claim 1, wherein the retained austenite has an average grain size of less than 10 microns.

7. The high strength cold rolled steel sheet product of Claim 6, wherein the retained austenite has an average grain size of less than 1 micron.
8. The high strength cold rolled steel sheet product of Claim 6, wherein the steel sheet product comprises less than 15 volume percent of fresh martensite.
9. The high strength cold rolled steel sheet product of Claim 1, wherein the steel sheet product has an ultimate tensile strength of from 720 to 1,100 MPa and has a total elongation of at least 20 percent.
10. The high strength cold rolled steel sheet product of Claim 1, wherein the steel sheet product has a hole expansion ratio of greater than 20 percent.
11. The high strength cold rolled steel sheet product of Claim 1, wherein the UTS·TE is at least 30,000 MPa%.
12. The high strength cold rolled steel sheet product of Claim 1, further comprising a zinc-based coating on the steel sheet product.
13. A method of producing a high strength cold rolled steel sheet product comprising from 0.12 to 0.5 weight percent C, from 1 to 3 weight percent manganese, and from 0.8 to 3 weight percent of a combination of Si and Al, the method comprising:
 - subjecting the steel sheet product to a first step annealing process to achieve a predominantly martensitic microstructure; and
 - subjecting the steel sheet product to a second step process comprising soaking the sheet product in an intercritical regime at a temperature of from 720 to 850°C, followed by holding the sheet product at a temperature of from 370 to 430°C.
14. The method of Claim 13, wherein the first step annealing process is performed at a temperature above 820°C.

15. The method of Claim 13, wherein the first step annealing process is performed at a temperature of from 830 to 940°C.
16. The method of Claim 13, wherein the second step soaking process is performed at a temperature of from 720 to 850°C, and the second step holding process is performed at a temperature of from 360 to 440°C.
17. The method of Claim 13, wherein the steel sheet product is cooled to a temperature below 300°C between the first step process and the second step process.
18. The method of Claim 13, wherein the steel sheet product is maintained at a temperature above 300°C between the second step soaking process and the second step holding process.
19. The method of Claim 13, wherein the first step annealing process is performed on a continuous annealing line, and the second step process is performed on a continuous annealing line.
20. The method of claim 19, wherein the same continuous annealing line is used for both the first step annealing process and the second step process.
21. The method of claim 19, wherein separate continuous annealing lines are used for the first step annealing process and the second step process.
22. The method of Claim 13, wherein the first step annealing process is performed on a continuous annealing line, and the second step process is performed on a continuous galvanizing line.
23. The method of Claim 13, further comprising electrolytically coating the steel sheet product with a zinc-based coating.

24. The method of Claim 13, wherein the steel sheet product comprises ferrite and substantially equiaxed retained austenite grains having an average aspect ratio of less than 3:1, and has a combination of ultimate tensile strength and total elongation UTS·TE of greater than 25,000 MPa%.
25. The method of Claim 13, wherein the Si comprises up to 2 weight percent, the Al comprises up to 2 weight percent, and the steel sheet product further comprises up to 0.05 weight percent Ti, and up to 0.05 weight percent Nb.
26. The method of Claim 25, wherein the C comprises from 0.15 to 0.4 weight percent, the Mn comprises from 1.3 to 2.5 weight percent, the Si comprises from 0.2 to 1.8 weight percent, the Al comprises up to 1.5 weight percent, the Ti comprises up to 0.03 weight percent, and the Nb comprises up to 0.03 weight percent.
27. The method of Claim 25, where the high strength cold rolled steel sheet product of Claim 2, wherein the C comprises from 0.17 to 0.35 weight percent, the Mn comprises from 1.5 to 2.3 weight percent, the Si comprises from 0.4 to 1.5 weight percent, the Al comprises up to 1 weight percent, the Ti comprises up to 0.02 weight percent and the Nb comprises up to 0.02 weight percent.
28. The method of Claim 13, wherein the ferrite comprises at least 50 volume percent, the retained austenite comprises from 5 to 25 volume percent, and the average aspect ratio of the retained austenite grains is less than 2:1.
29. The method of Claim 13, wherein the retained austenite has an average grain size of less than 10 microns.
30. The method of Claim 29, wherein the retained austenite has an average grain size of less than 1 micron.

31. The method of Claim 13, wherein the steel sheet product comprises less than 15 volume percent of fresh martensite.
32. The method of Claim 13, wherein the steel sheet product has an ultimate tensile strength of from 720 to 1,100 MPa and has a total elongation of at least 20 percent.
33. The method of Claim 13, wherein the steel sheet product has a hole expansion ratio of greater than 20 percent.
34. The method of Claim 13, further comprising applying a zinc-based coating on the steel sheet product.

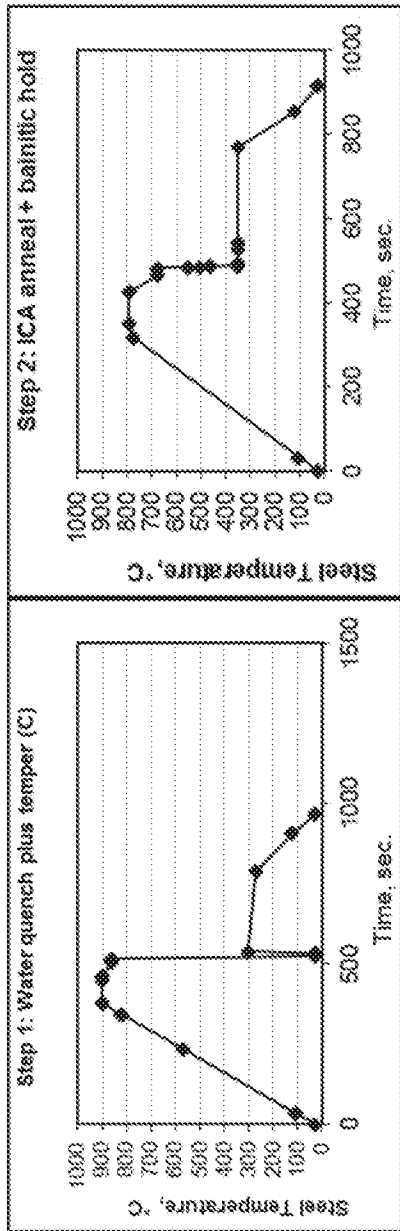


FIG. 1

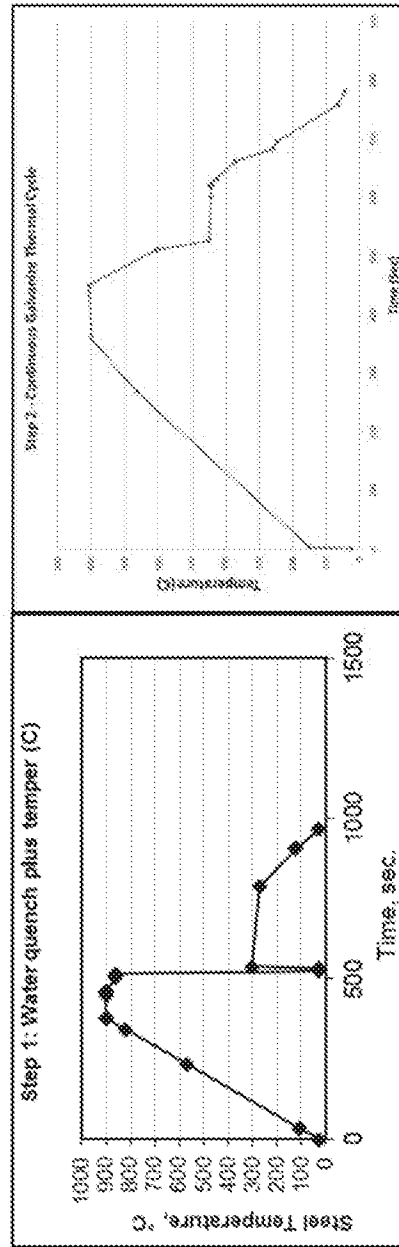


FIG. 2

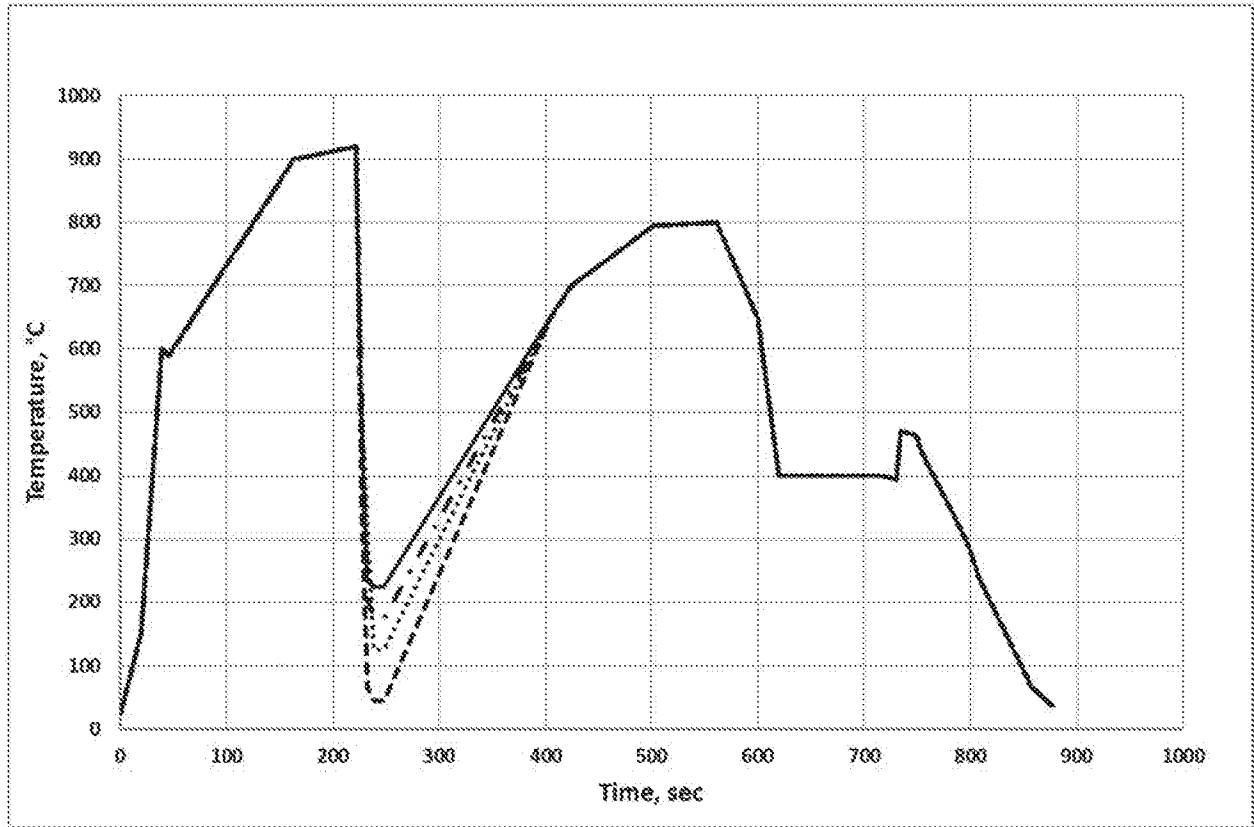


FIG. 3

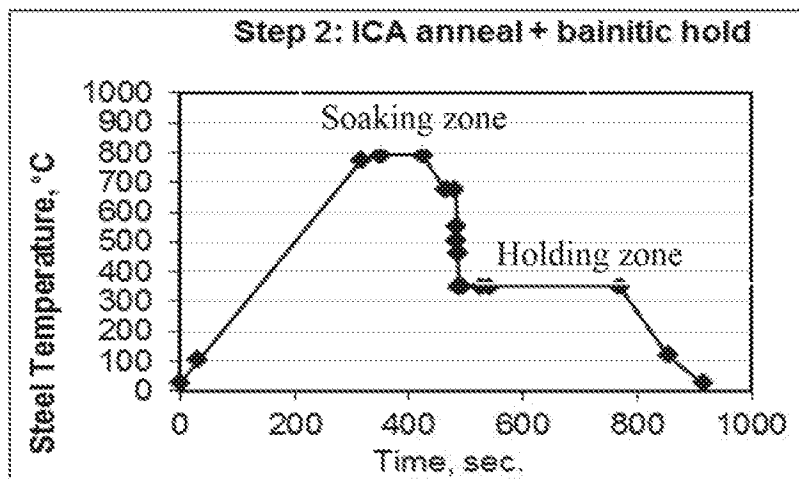


FIG. 4

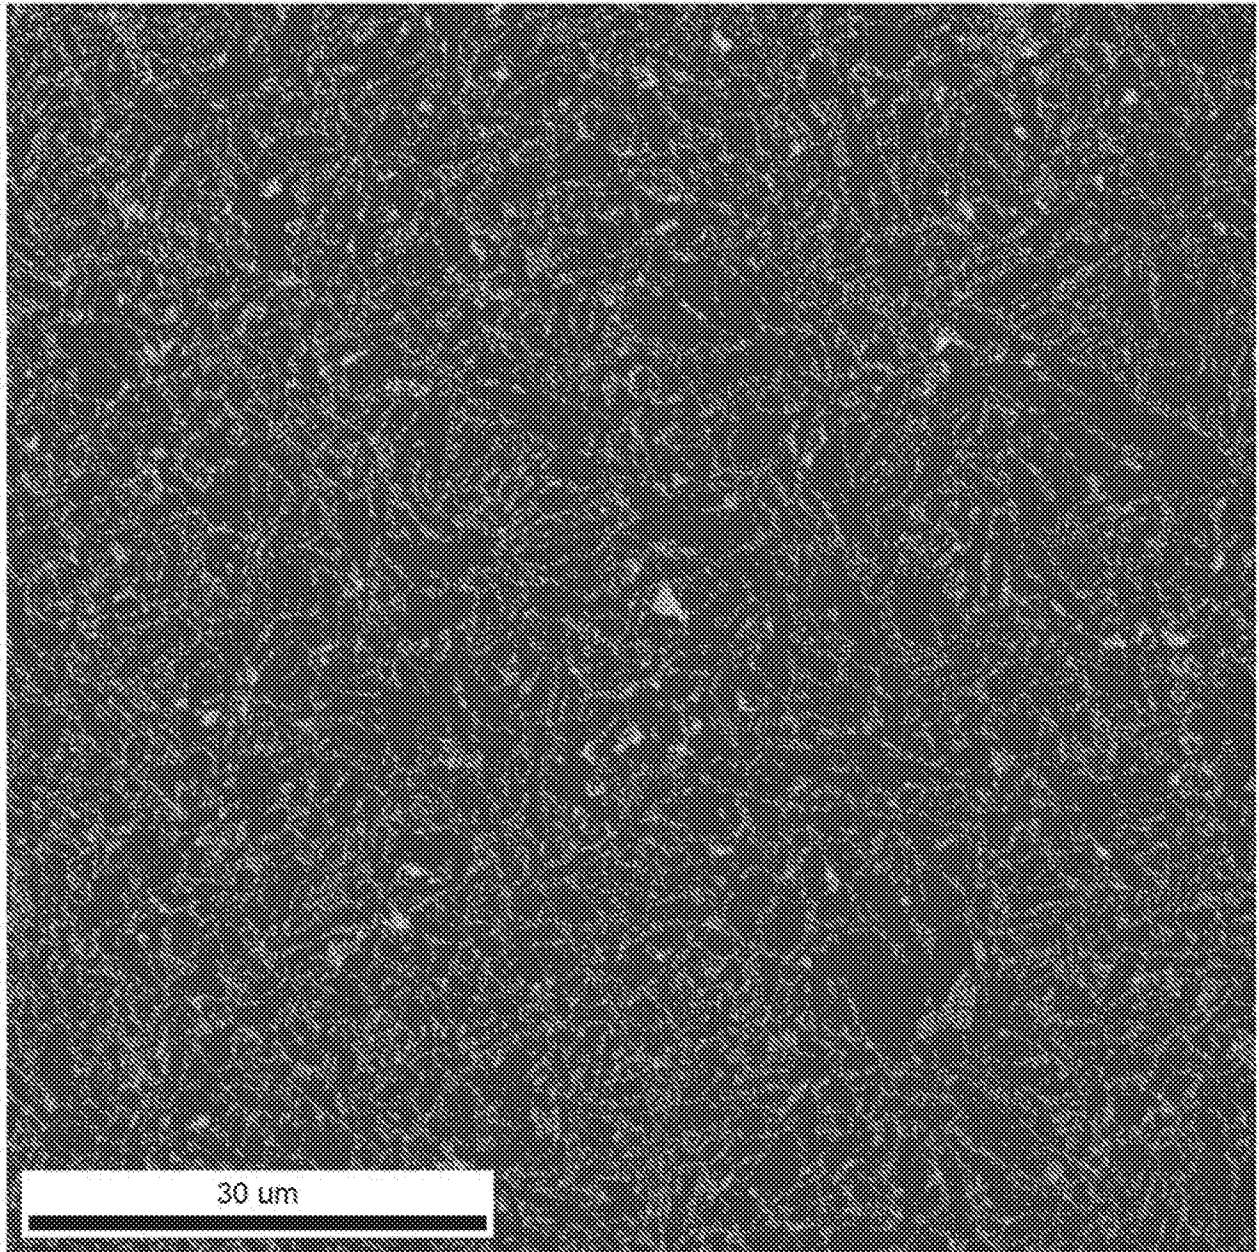


FIG. 5

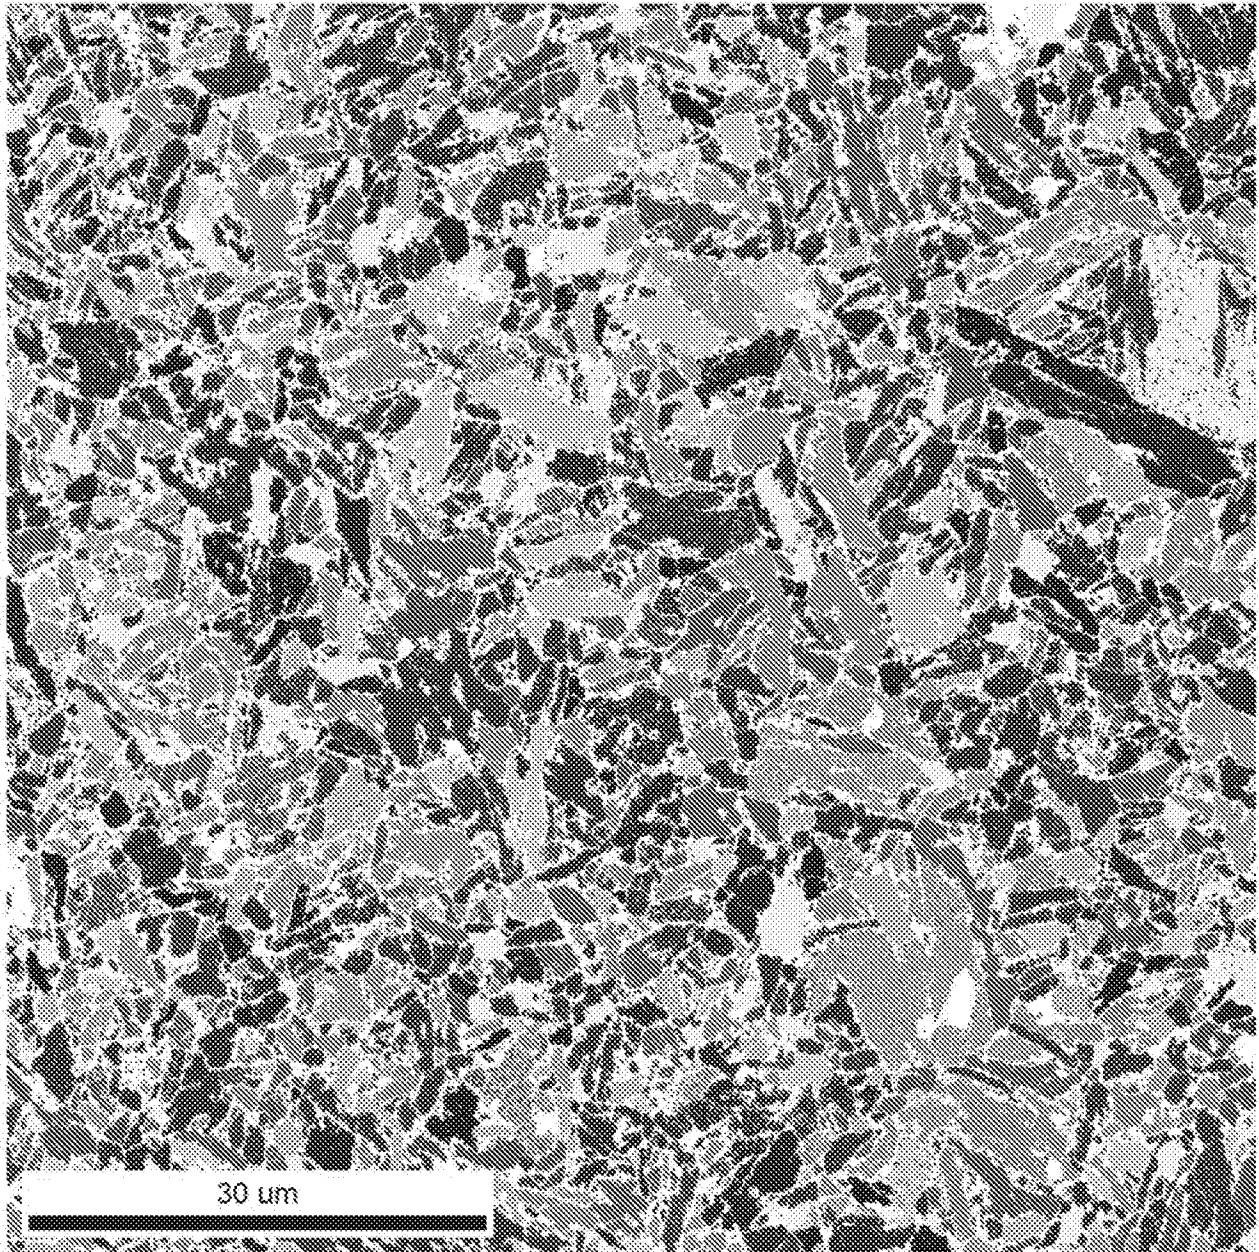


FIG. 6

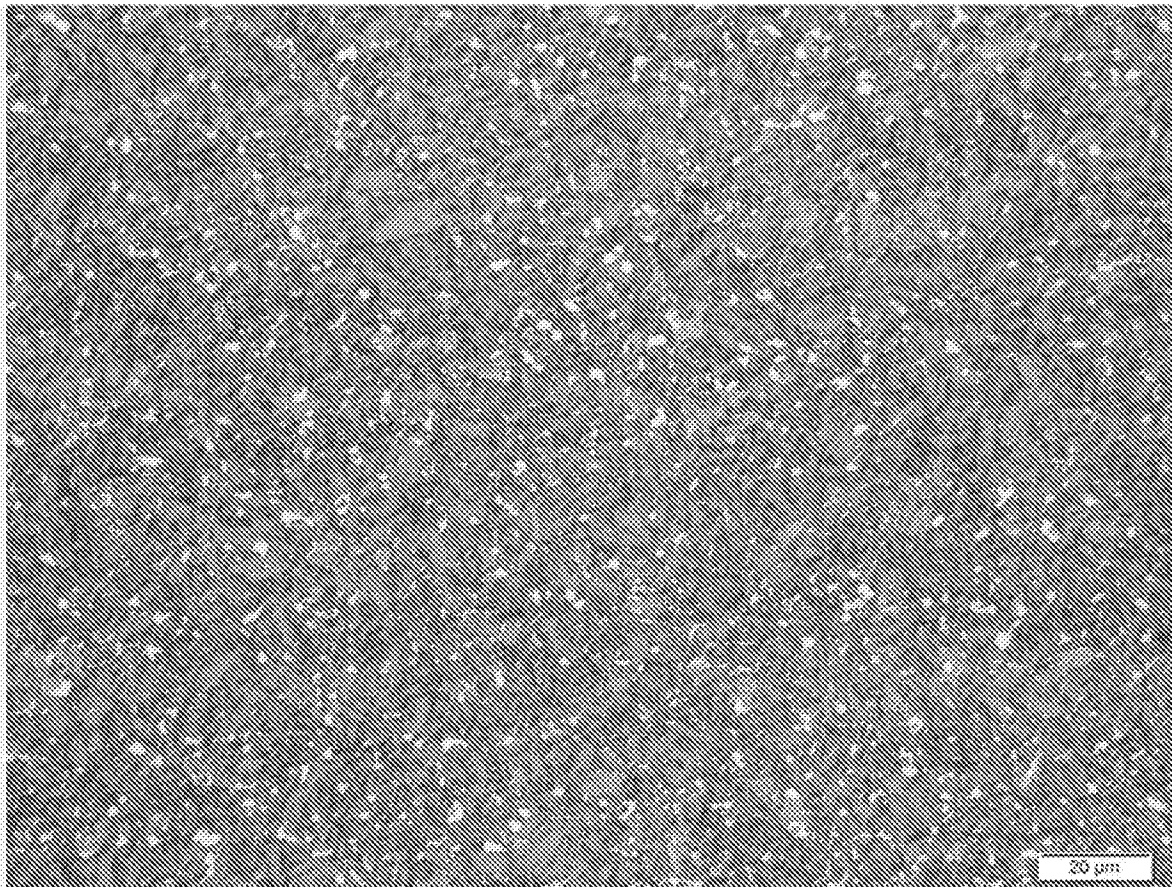


FIG. 7

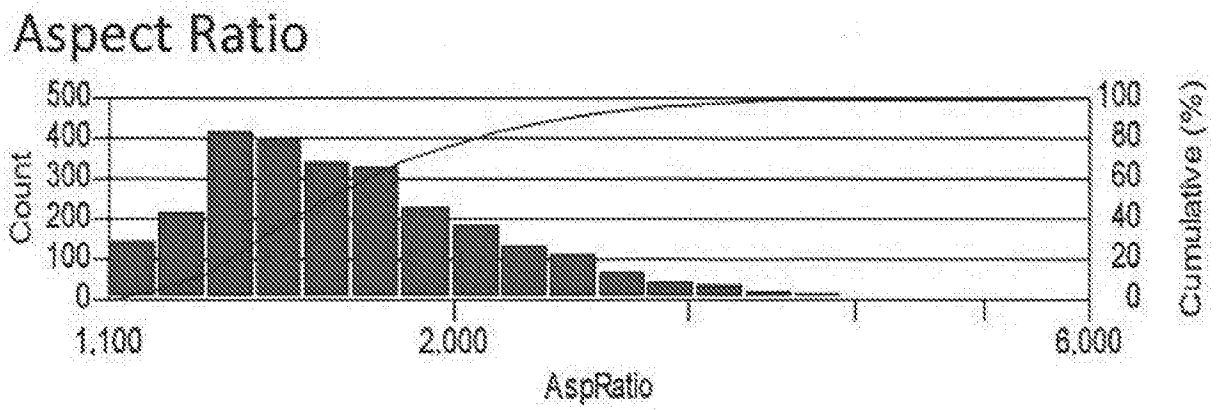


FIG. 8

Austenite size distribution:

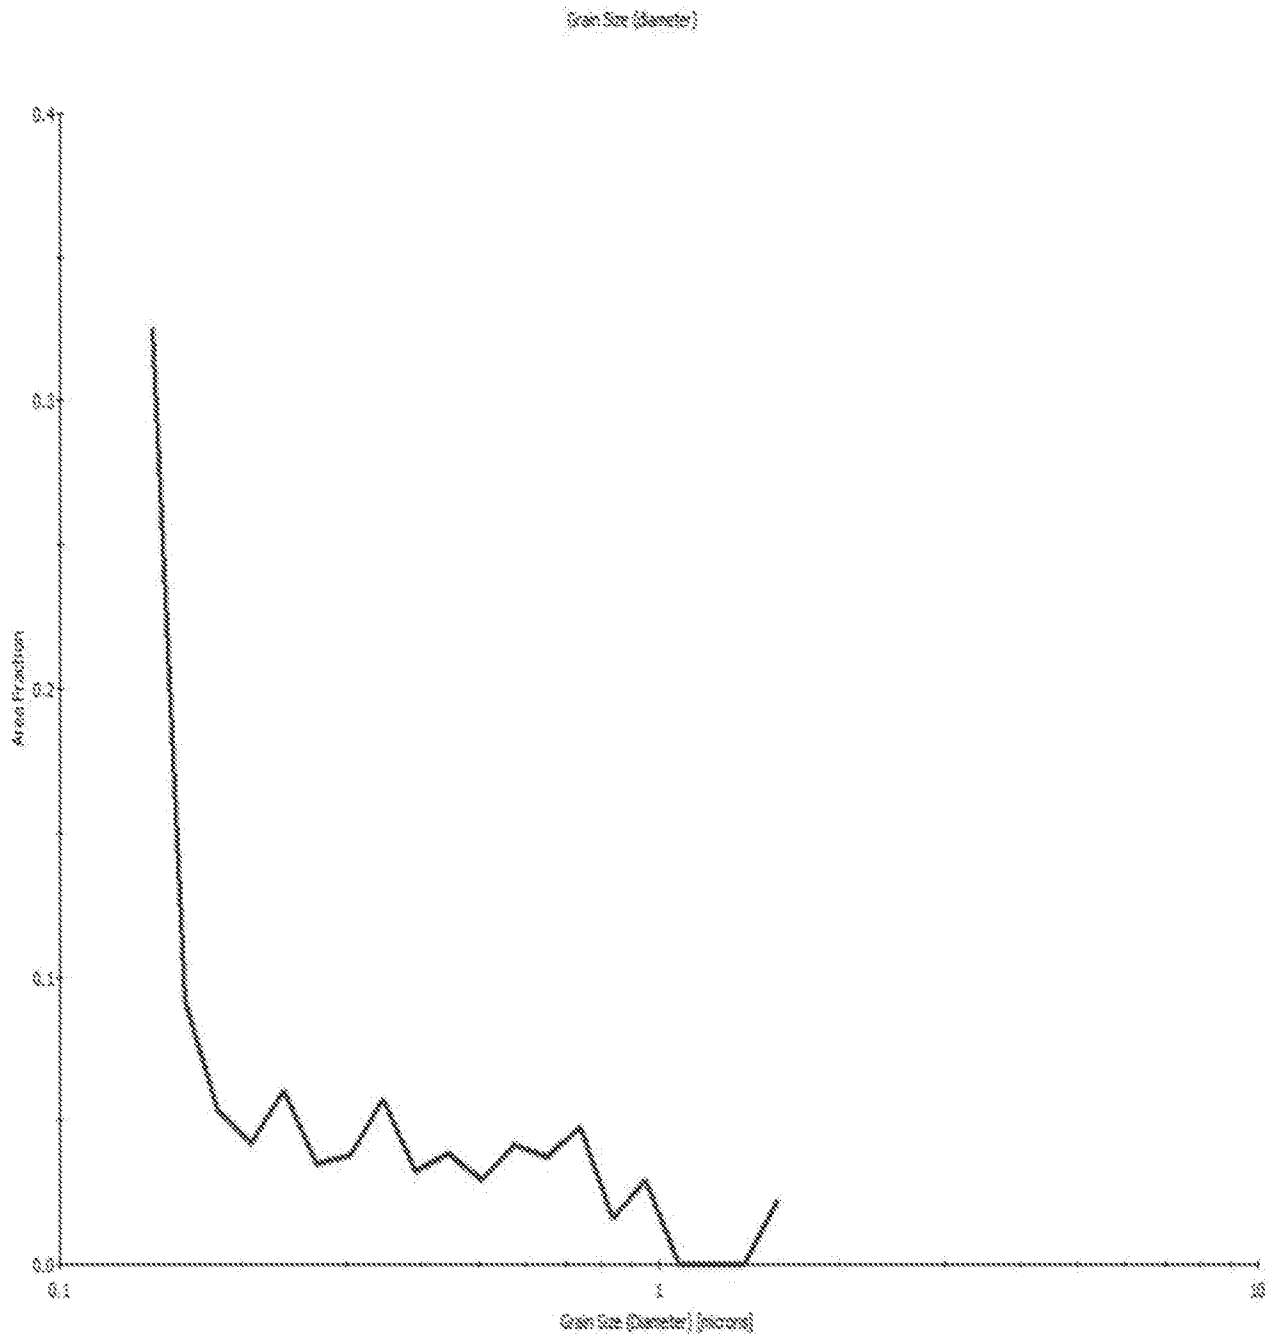


FIG. 9

Ferrite size distribution:

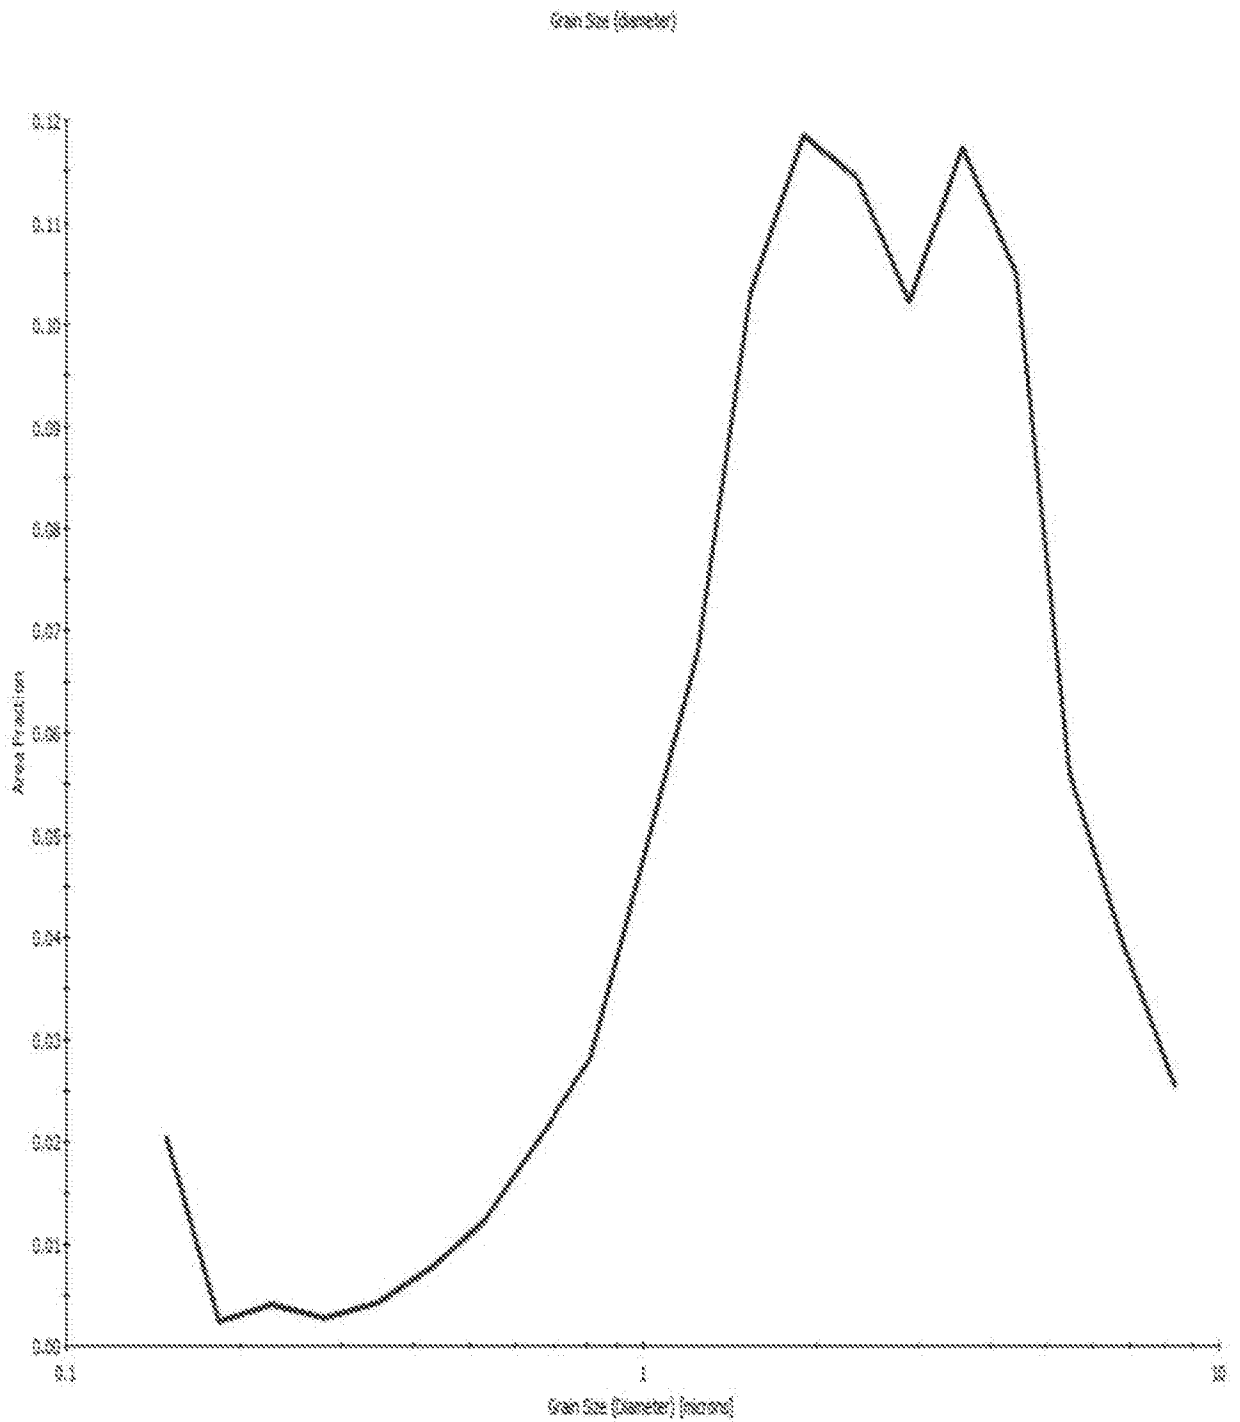


FIG. 10

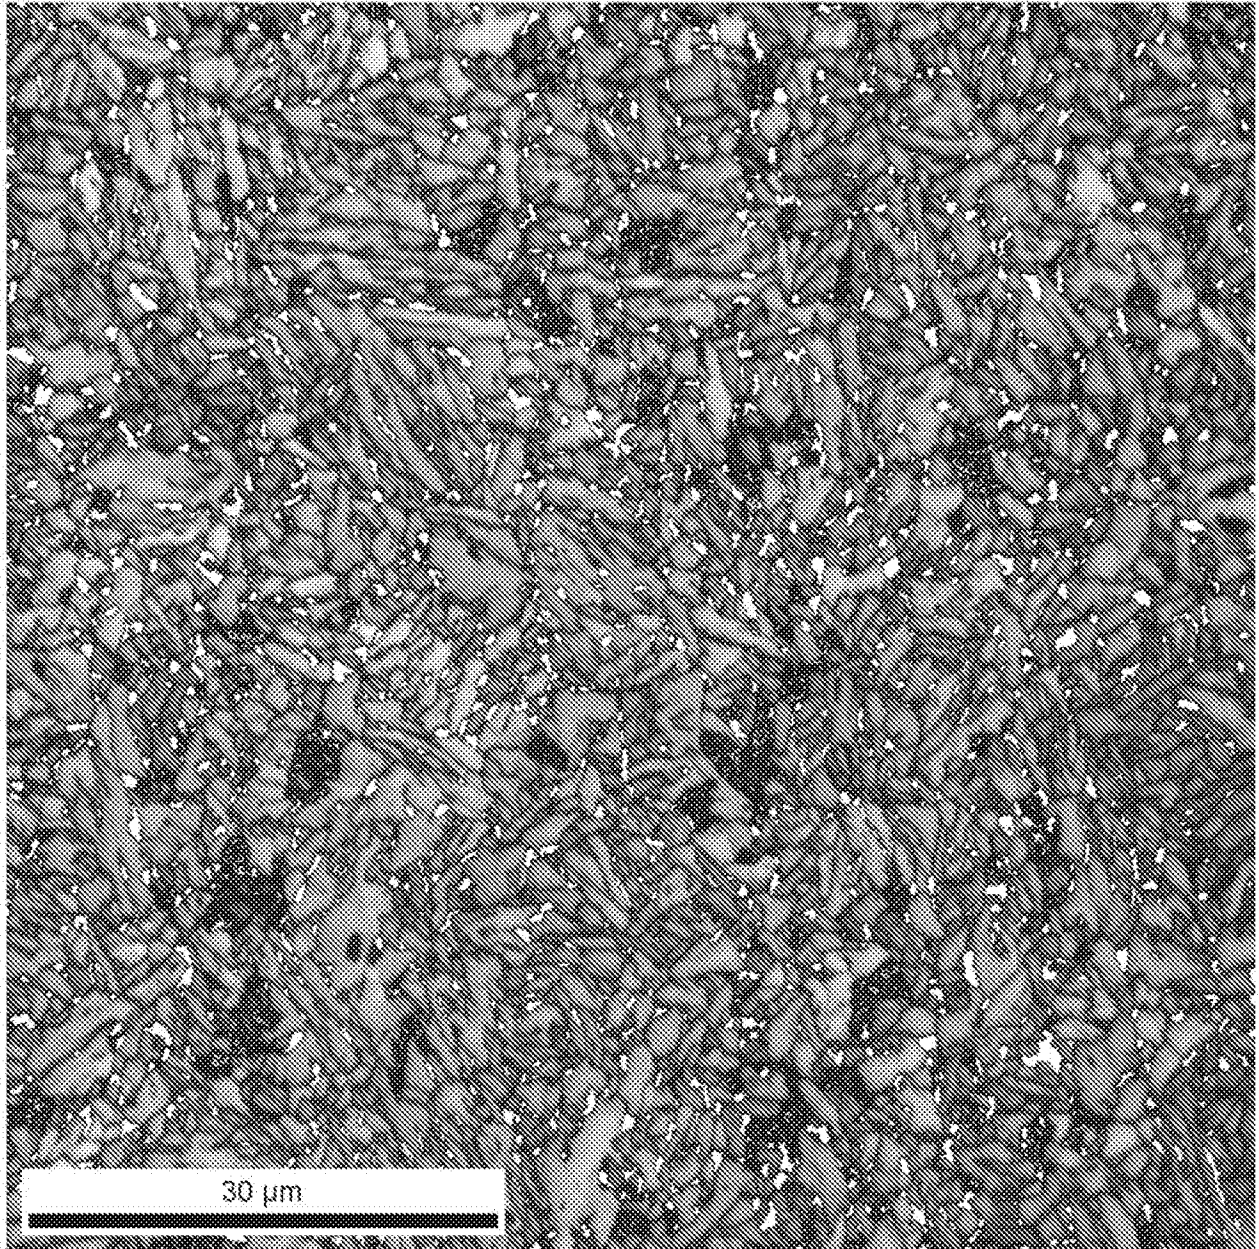


FIG. 11

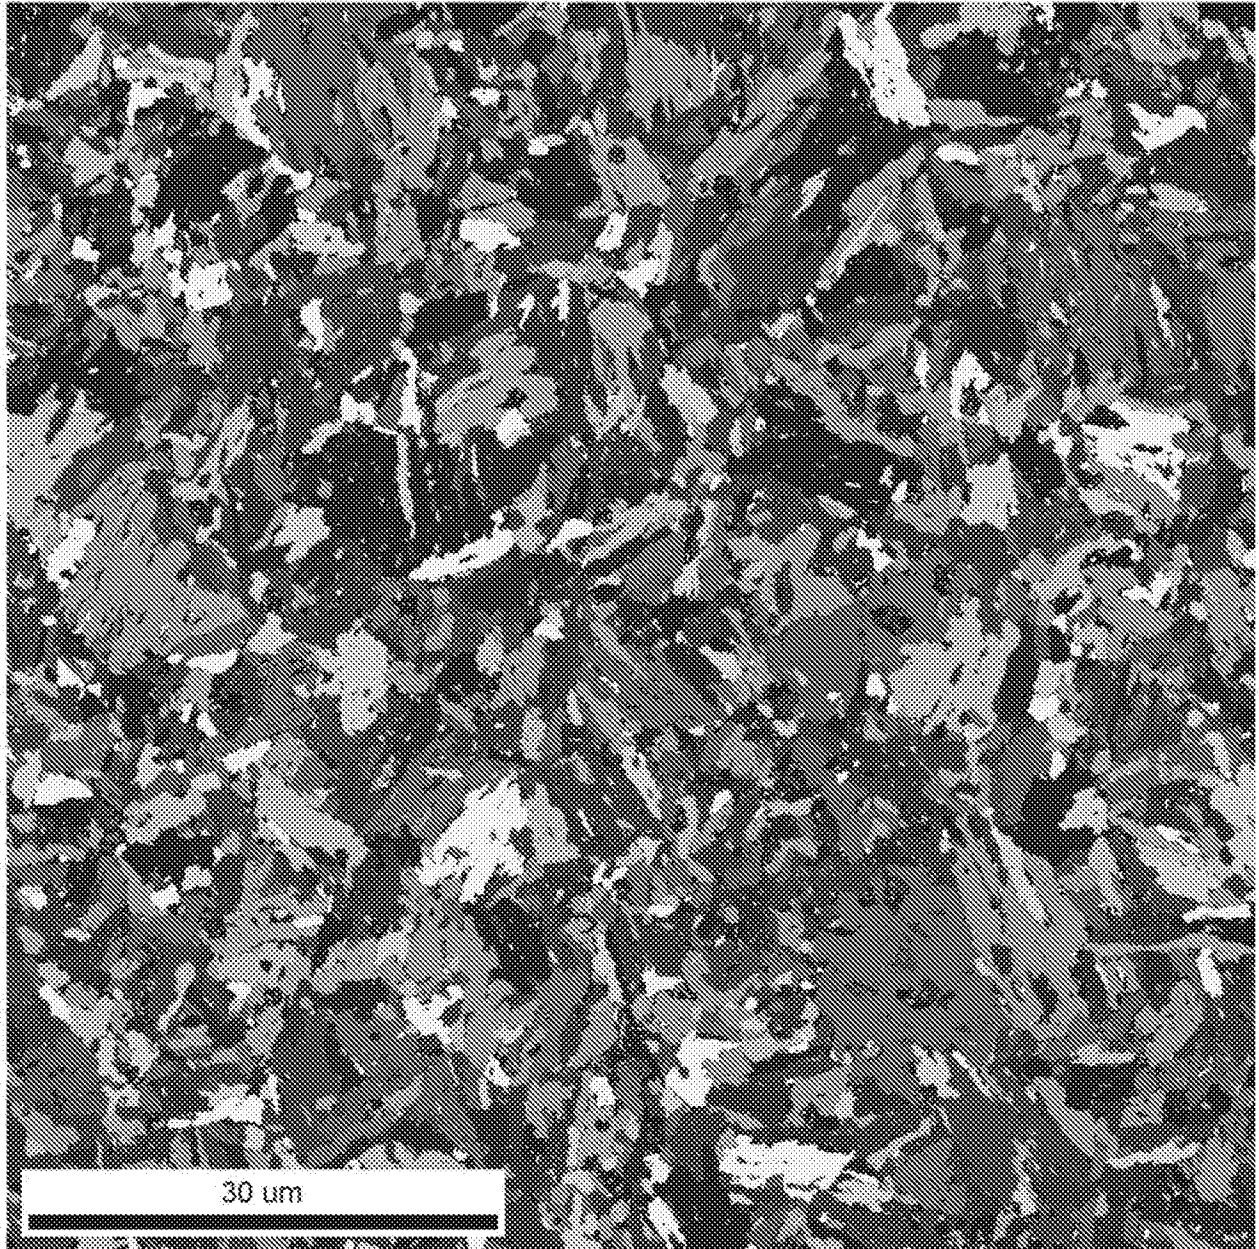


FIG. 12

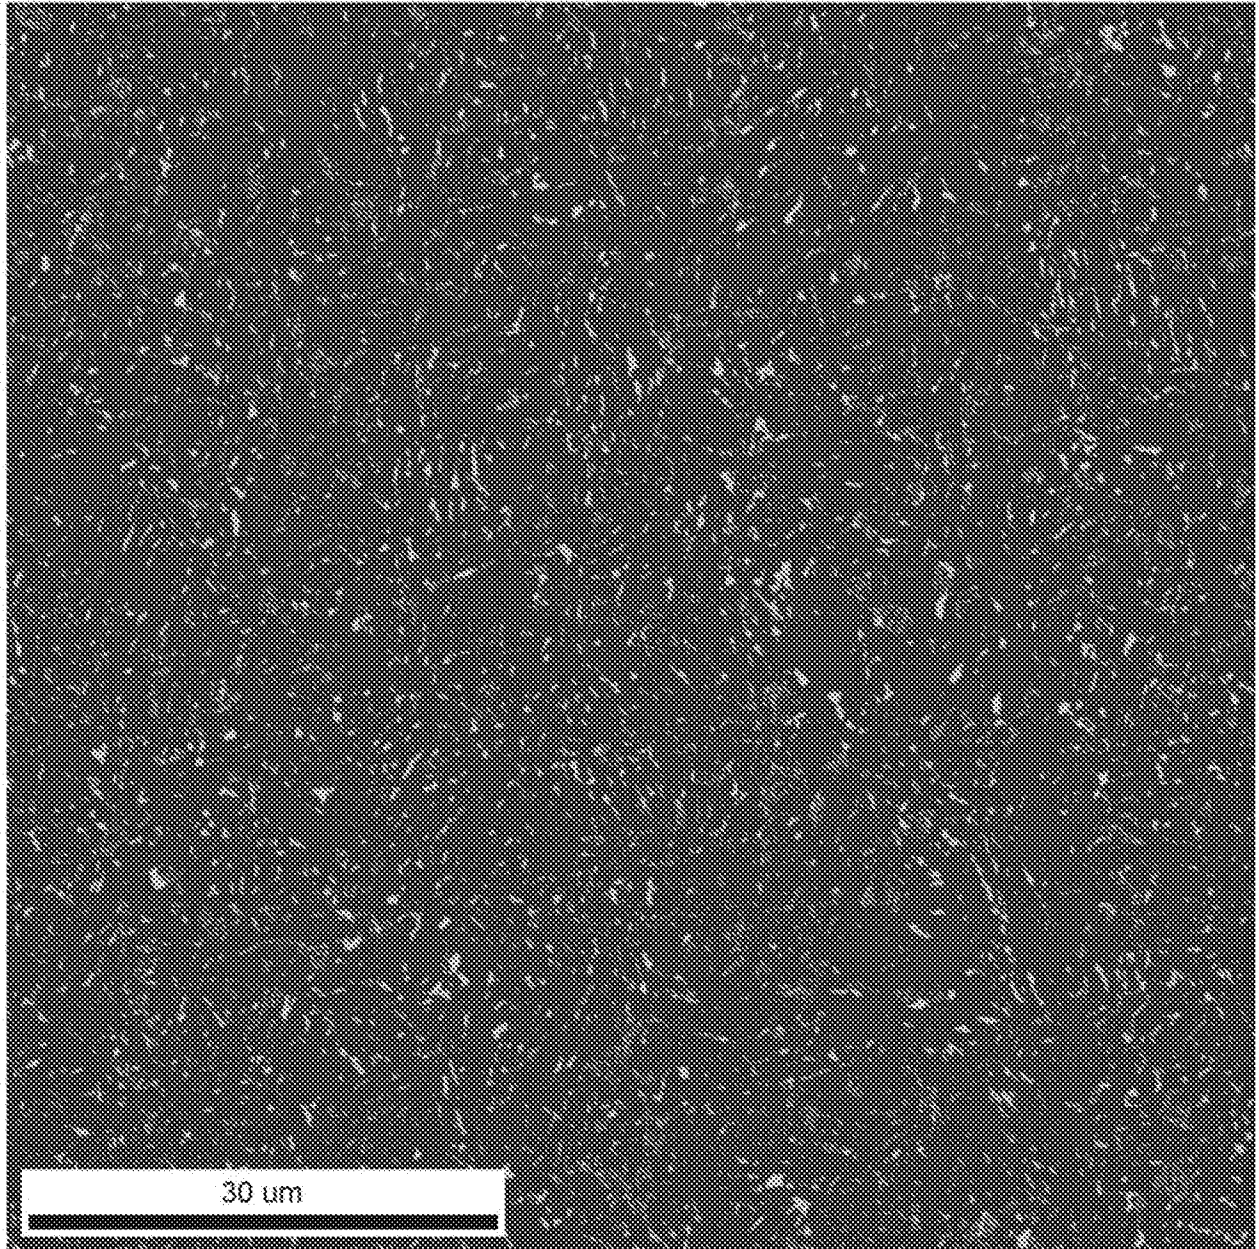


FIG. 13

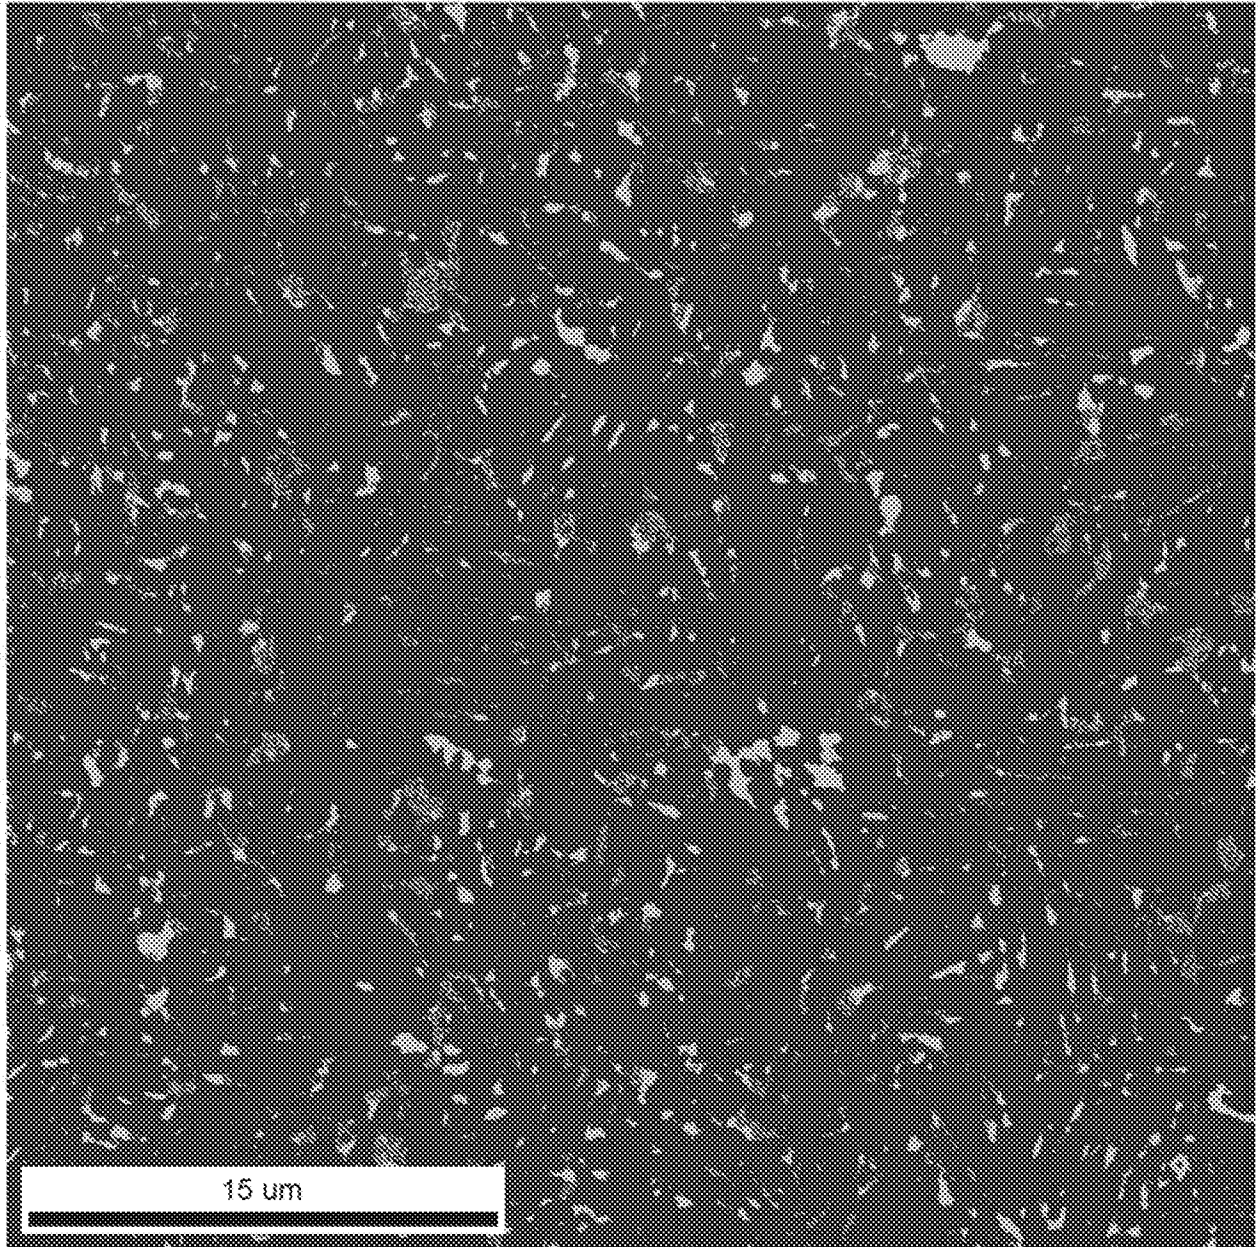


FIG. 14

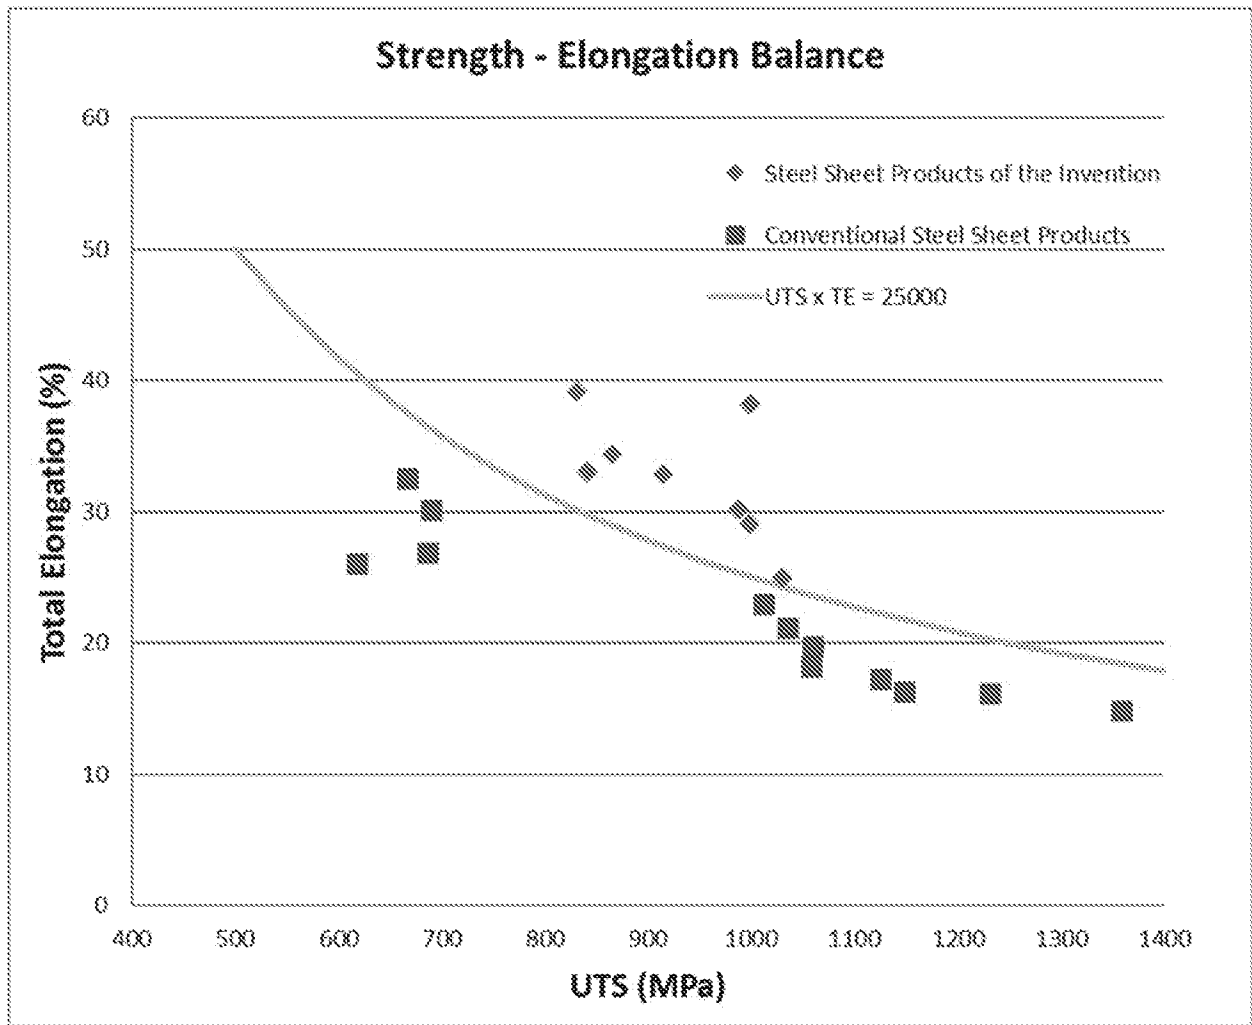


FIG. 15

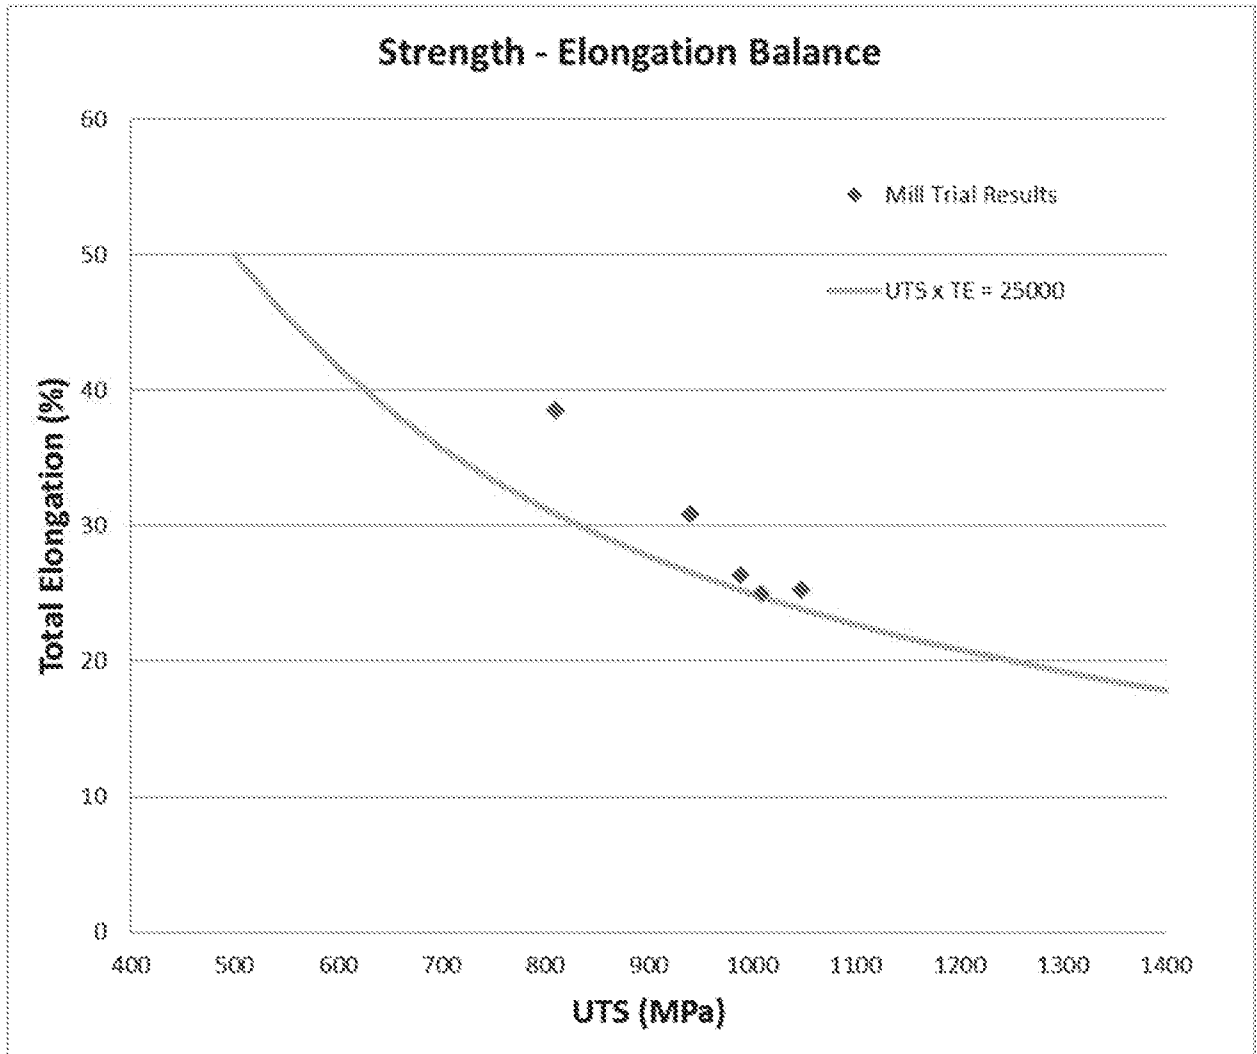


FIG. 16

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/031938

A. CLASSIFICATION OF SUBJECT MATTER					
INV.	B32B15/01	C21D6/00	C21D8/02	C23C2/02	C23C2/06
	C21D9/46	C21D1/18	C21D1/25	C21D1/26	C22C38/02
	C22C38/04	C22C38/06	C22C38/12	C22C38/14	C23C28/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols) B32B C21D C23C C22C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data
--

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 365 037 A1 (KOBE STEEL LTD [JP]) 26 November 2003 (2003-11-26) abstract paragraphs [0092] - [0097], [0497] - [0508]; claims 1,5,7-10,15,16; examples 4 of table 25-28; tables 25-40,43-50 -----	1-34
X	JP 2012 153957 A (JFE STEEL CORP) 16 August 2012 (2012-08-16)	1,2,5-8, 13-18, 24,25, 28-31
A	abstract paragraphs [0025] - [0033], [0040]; claims 1,2; examples 7,11,13; tables 1-3 ----- -/--	3,10,26, 33

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 3 August 2017	Date of mailing of the international search report 11/08/2017
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Rausch, Elisabeth
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/031938

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2002 129241 A (KAWASAKI STEEL CO) 9 May 2002 (2002-05-09) abstract paragraphs [0035], [0037], [0043], [0044], [0047], [0048]; claims 1, 2; example A; tables 1-4	1,2,5-8, 10, 12-19, 21,22, 24,25, 28-31, 33,34
X	EP 1 865 085 A1 (KOBE STEEL LTD [JP]) 12 December 2007 (2007-12-12)	1,2, 5-10, 13-21, 24,25, 28-33
A	paragraphs [0001], [0064], [0082] - [0089]; claims 1,2,5,8; examples 22, 122; tables 1, 4, 5	3,4
X	US 2014/120371 A1 (MBACKE PAPA AMADOU MACTAR [FR] ET AL) 1 May 2014 (2014-05-01)	1-3, 5-10,12
A	paragraphs [0078] - [0085], [0116]; claims 18,24-32; figure 3; examples R1, 16; tables 1,3,5	4,13-34
X	EP 3 009 527 A1 (JFE STEEL CORP [JP]) 20 April 2016 (2016-04-20) abstract claims 1,6; tables 1,2	13-19
X	WO 2015/115059 A1 (JFE STEEL CORP [JP]) 6 August 2015 (2015-08-06) abstract paragraph [0075]; claim 5; tables 1,2	13, 16-21,23
X,P	WO 2016/132680 A1 (JFE STEEL CORP [JP]) 25 August 2016 (2016-08-25) abstract claims 1-6; tables 1-13	1-34
X,P	WO 2016/194272 A1 (JFE STEEL CORP [JP]) 8 December 2016 (2016-12-08) abstract claims 1-7; tables 1-3	13-16, 19-23, 32,34
X,P	WO 2016/135794 A1 (JFE STEEL CORP [JP]) 1 September 2016 (2016-09-01) abstract; claims 1-5; tables 1-3	13-34

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/031938

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 1365037	A1	26-11-2003	EP 1365037 A1 WO 02061161 A1	26-11-2003 08-08-2002
JP 2012153957	A	16-08-2012	JP 5321605 B2 JP 2012153957 A	23-10-2013 16-08-2012
JP 2002129241	A	09-05-2002	JP 3820868 B2 JP 2002129241 A	13-09-2006 09-05-2002
EP 1865085	A1	12-12-2007	CN 101120114 A CN 102534359 A EP 1865085 A1 EP 2671960 A1 EP 2671961 A1 EP 2679699 A2 KR 20070107179 A KR 20090122405 A US 2009053096 A1 WO 2006109489 A1	06-02-2008 04-07-2012 12-12-2007 11-12-2013 11-12-2013 01-01-2014 06-11-2007 27-11-2009 26-02-2009 19-10-2006
US 2014120371	A1	01-05-2014	BR 112013031500 A2 CA 2838665 A1 CN 103649343 A EP 2718469 A1 ES 2613618 T3 JP 5824146 B2 JP 2014523478 A KR 20140026601 A MA 35170 B1 RU 2013157350 A UA 112871 C2 US 2014120371 A1 WO 2012168564 A1 WO 2012168567 A1 ZA 201309330 B	13-12-2016 13-12-2012 19-03-2014 16-04-2014 24-05-2017 25-11-2015 11-09-2014 05-03-2014 02-06-2014 20-07-2015 10-11-2016 01-05-2014 13-12-2012 13-12-2012 27-08-2014
EP 3009527	A1	20-04-2016	CN 105492643 A EP 3009527 A1 JP 5821912 B2 JP 2015034327 A KR 20160012205 A US 2016177414 A1 WO 2015019558 A1	13-04-2016 20-04-2016 24-11-2015 19-02-2015 02-02-2016 23-06-2016 12-02-2015
WO 2015115059	A1	06-08-2015	CN 105940134 A EP 3101147 A1 JP WO2015115059 A1 KR 20160114660 A US 2016369369 A1 WO 2015115059 A1	14-09-2016 07-12-2016 23-03-2017 05-10-2016 22-12-2016 06-08-2015
WO 2016132680	A1	25-08-2016	JP WO2016132680 A1 WO 2016132680 A1	27-04-2017 25-08-2016
WO 2016194272	A1	08-12-2016	JP WO2016194272 A1 WO 2016194272 A1	15-06-2017 08-12-2016
WO 2016135794	A1	01-09-2016	JP 6048620 B1	21-12-2016

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/031938

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP W02016135794 A1	27-04-2017
		WO 2016135794 A1	01-09-2016
