



(86) Date de dépôt PCT/PCT Filing Date: 1994/12/13
(87) Date publication PCT/PCT Publication Date: 1995/06/22
(45) Date de délivrance/Issue Date: 2004/10/26
(85) Entrée phase nationale/National Entry: 1996/06/12
(86) N° demande PCT/PCT Application No.: JP 1994/002086
(87) N° publication PCT/PCT Publication No.: 1995/016895
(30) Priorité/Priority: 1993/12/13 (P05-341886) JP


(51) Cl.Int.⁶/Int.Cl.⁶ G01C 11/00, G01C 11/02

(72) Inventeurs/Inventors:
MURAI, SHUNJI, JP;
MATSUMOTO, YOSHITAKA, JP

(73) Propriétaire/Owner:
STARLABO CORPORATION, JP


(74) Agent: OGILVY RENAULT

(54) Titre : APPAREIL AERIEN DE PHOTOGRAPHIE
(54) Title: AIRBORNE PHOTOGRAPHING APPARATUS

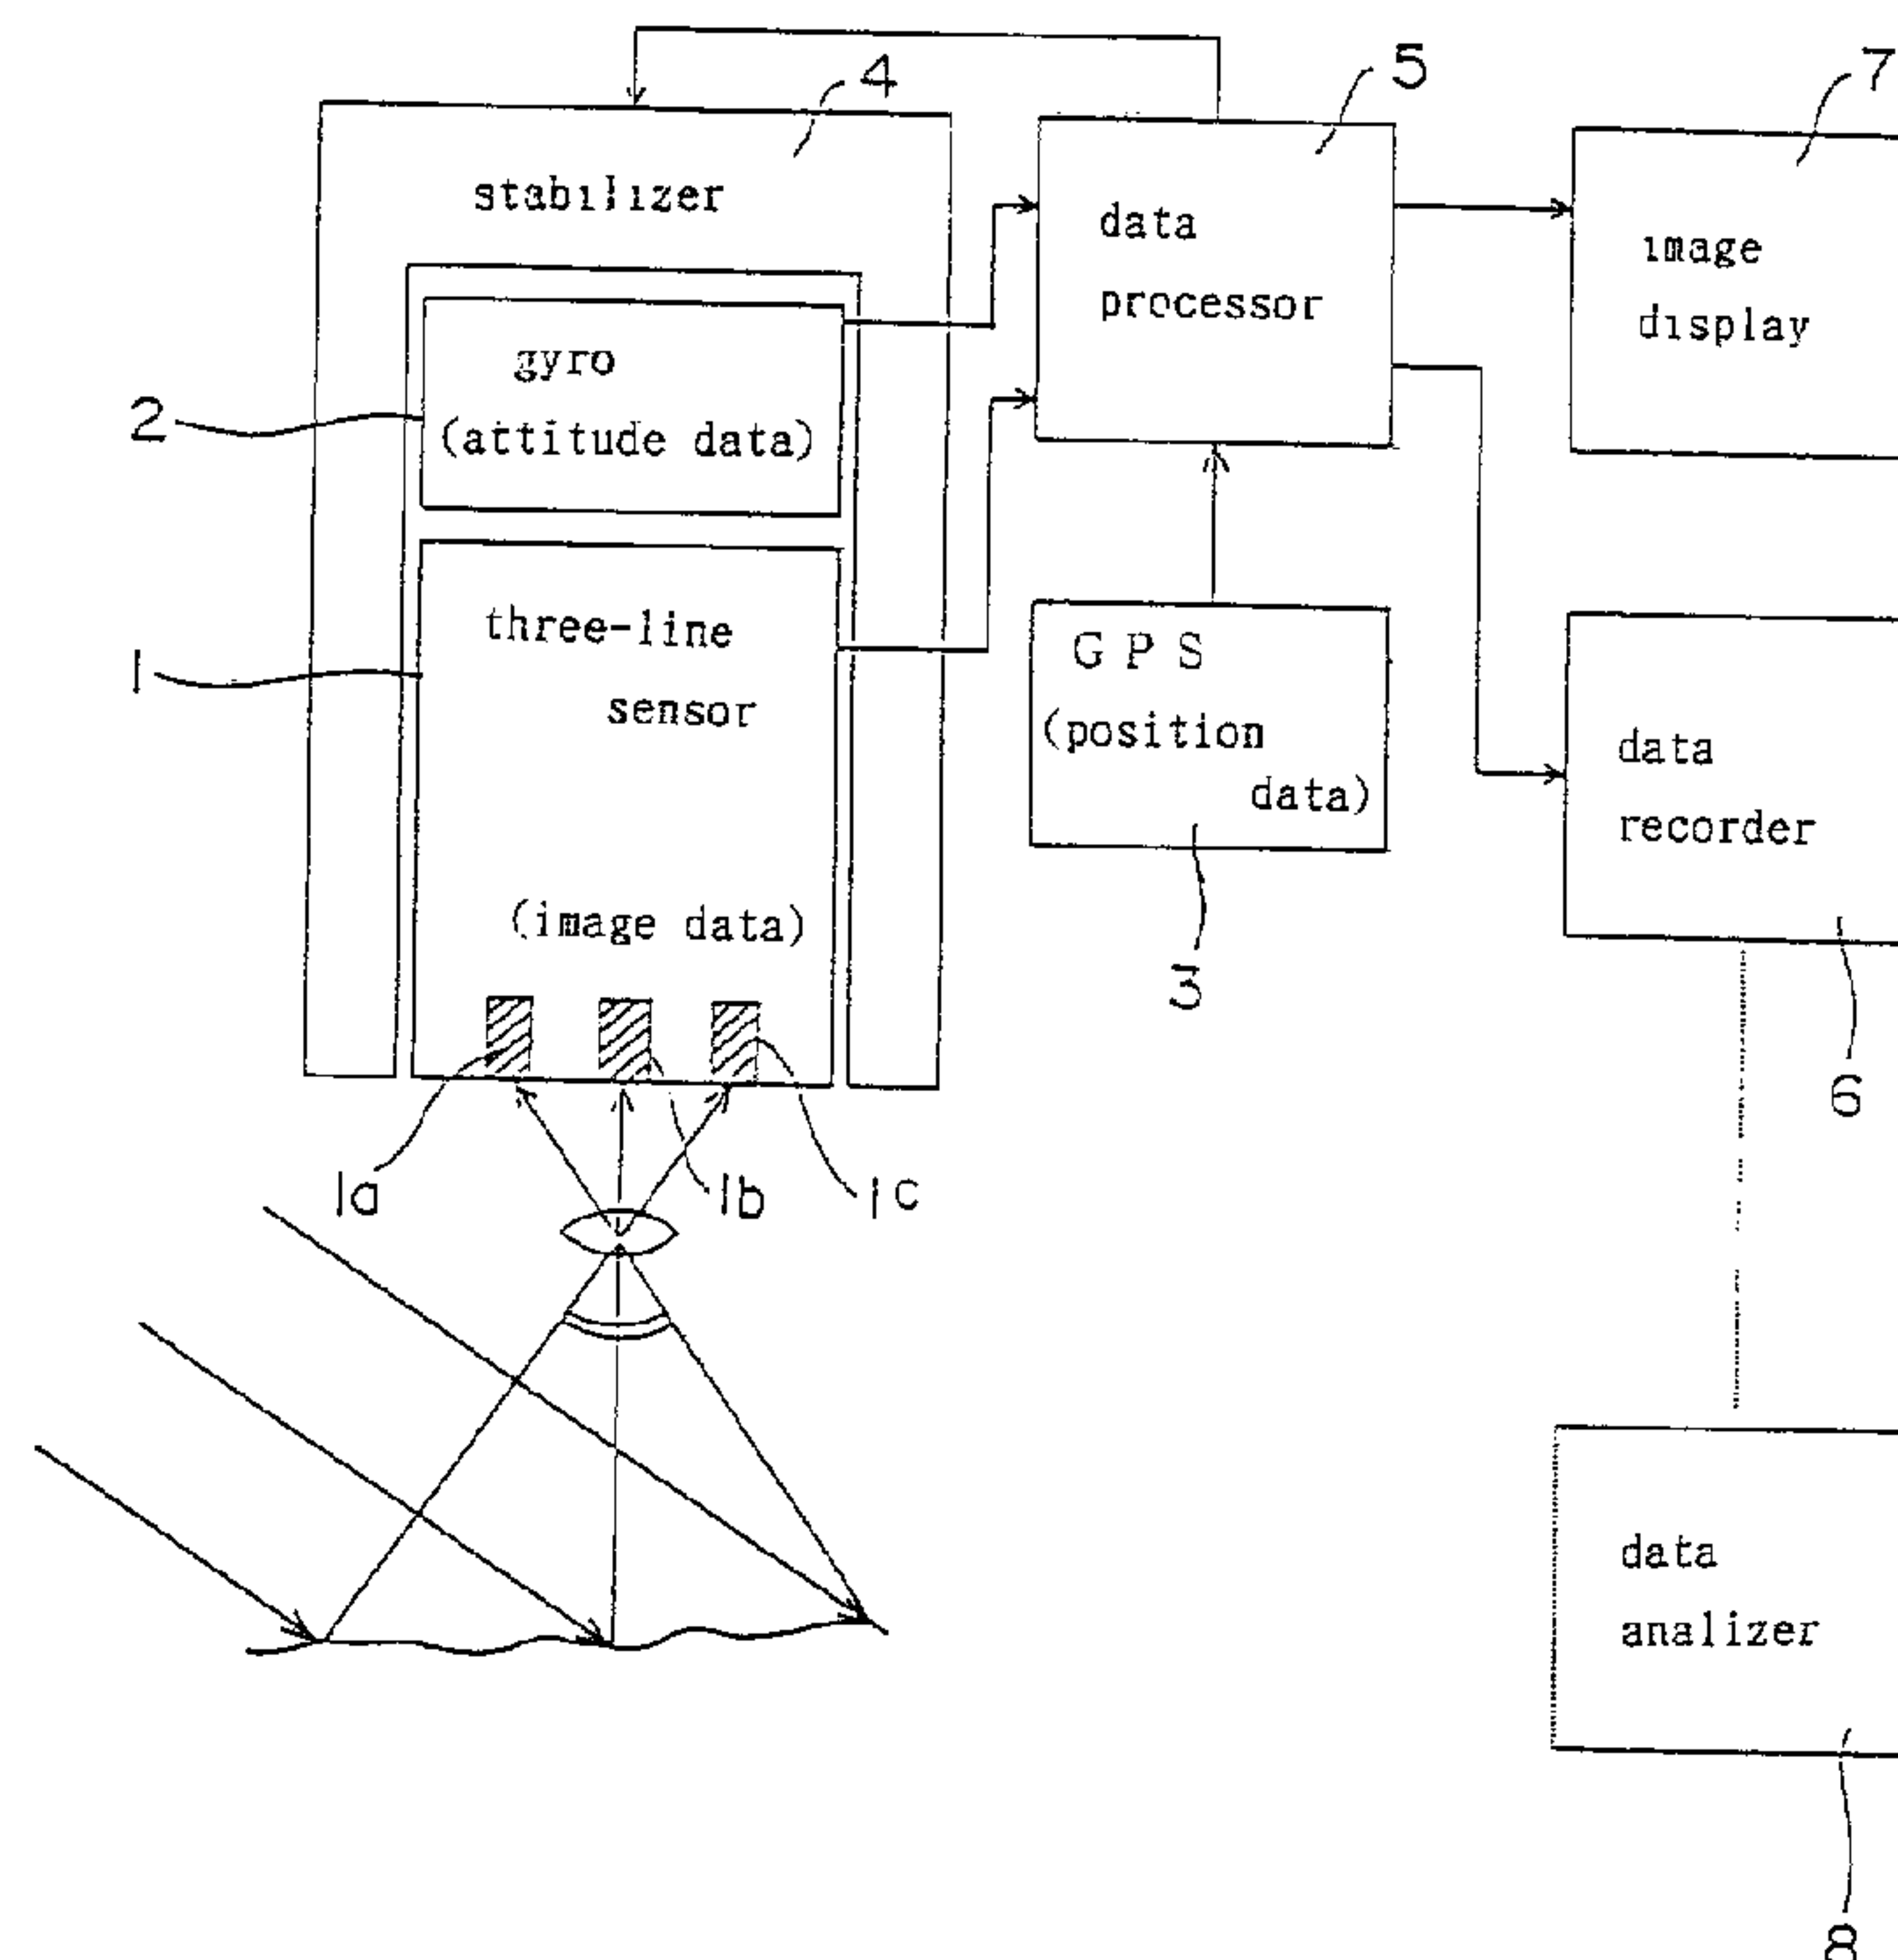

(57) Abrégé/Abstract:

Disclosed is an apparatus for photographing the ground continuously from an airplane, and for recording the so photographed images in digital form on real time. A three-line sensor camera comprising a forward-oblique line sensor, a vertical line sensor and a backward-oblique line sensor is on board. The three-line sensor camera has a gyro integrally connected thereto. Data of camera's attitude available from the gyro, data of digital land images available from the camera and data of airplane's position available from an airborne GPS are recorded and reproduced. The camera is controlled with the aid of the gyro so that its optical axis may be held in a vertical direction at all times.

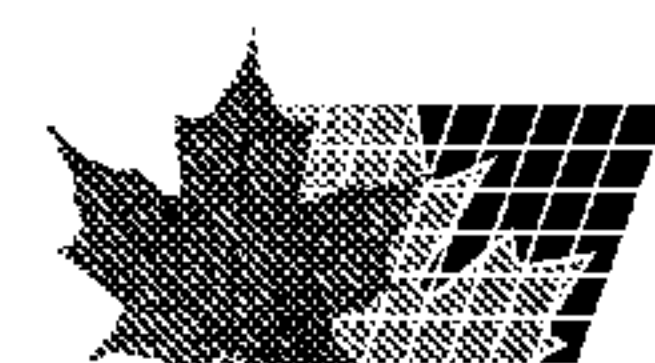

2179039

ABSTRACT OF THE DISCLOSURE

Disclosed is an apparatus for photographing the ground continuously from an airplane, and for recording the so photographed images in digital form on real time.

A three-line sensor camera comprising a forward-oblique line sensor, a vertical line sensor and a backward-oblique line sensor is on board. The three-line sensor camera has a gyro integrally connected thereto. Data of camera's attitude available from the gyro, data of digital land images available from the camera and data of airplane's position available from an airborne GPS are recorded and reproduced.

The camera is controlled with the aid of the gyro so that its optical axis may be held in a vertical direction at all times.

AIRBORNE PHOTOGRAPHING APPARATUS

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates to an airborne apparatus for photographing a selected piece of ground surface to provide data of ground image for determining the shape and height of the land.

Description of the Prior Art:

Airphotographs have been widely used for determining the shape and height of a selected piece of land. In general, airphotographs are taken of overlapping area sections of a selected piece of land, thereby providing a series of latent images taken at regular intervals on a film. The film is developed, and the developed images are printed.

Alternatively, an airborne scanner-and-line sensor is used to provide required land images in the form of digital data.

Each of the series of the so taken pictures, however, is made up by collection of image fractions recorded by beams of

light reflected in different directions, and therefore such collection of image fractions is not continuous. In addition to this problem the image quality varies with the photosensitivity of the film, developing and printing conditions and other factors.

Nobody could tell what image is like before developing, and therefore, if pictures are found to be defective or useless after developing, same pictures have to be taken again.

To determine the shape and height of a selected piece of land from airphotographs three coordinate points X_0 , Y_0 and Z_0 of the instantaneous position of the airborne camera and three inclinations about three coordinate axes ω , ϕ and u must be determined analytically by using known points (reference points) in the coordinate system. A lot of work is required for finding the reference points in the coordinate system.

To automatize such airphotographing-and-analyzing work it is necessary to analogue-to-digital convert the developed film for digitization.

The present invention aims at photographing continuously a selected piece of land by an airborne three-line sensor camera, and at making a record of the data of land image in the form of digital data directly from the so taken airphotographs. Also, the present invention aims at effecting feedback control of the attitude of the airborne camera by using attitude data provided by a gyro associated with the three-line sensor camera, thereby setting the camera so that its optical axis may be vertical at all times, thus assuring that distortion-free images may be provided. Finally, the present invention aims at making a record each of the attitude data provided by the gyro and the instantaneous position data provided by a GPS in addition to the record of land image data recorded in the form of digital data, thereby permitting a required correction to be made later by using appropriate softwares.

SUMMARY OF THE INVENTION

An airborne photographing apparatus according to the present invention comprises: an airborne three-line sensor camera taking pictures of a selected piece of land in three directions, that is, forward obliquely, vertically and backward obliquely; a gyro mounted in a housing of the three-line sensor camera for determining attitude data of the camera while photographing; a GPS for providing instantaneous position data of the camera in a three-dimensional space; a stabiliser for controlling the attitude of the camera to set its optical axis to be vertical at all times, and at the same time for absorbing the vibration of an aeroplane; a data processing unit for processing the attitude data from the gyro and the position data from the GPS and outputting signals for controlling the stabilizer; a data recorder for recording first land image data from the camera, the attitude data from the gyro and the position data from the GPS; an image display for showing the first land image data from the camera; and a data analyzer for converting the first land image data from the camera into second land image data given in terms of fixed coordinates on the basis of the first land image data, attitude data and position data all recorded by the data recorder, and for outputting the second land image data.

The airborne three-line sensor camera is used in taking pictures of a selected piece of land.

The gyro is mounted in the housing of the three-line sensor camera, and is used in providing data of the attitude of the camera while photographing.

The GPS is used in determining the instantaneous position data of the camera while photographing in the three-dimensional space.

The stabilizer functions to control the attitude of the camera to set its optical axis to be vertical at all times, and at the same time, absorb the vibration of the aeroplane.

The data processing unit is used in processing the attitude data from the gyro and the position data from the GPS and outputting signals for controlling the stabilizer.

- 5 The data recorder is used in recording the land image data from the camera, the attitude data from the gyro and the position data from the GPS all together.

The image display is used in showing the land image data from the camera.

- 10 The data analyzer is used in converting the land image data from the camera into the land image data given in terms of fixed coordinates on the basis of the land image data, attitude data and position data all recorded by the data recorder, and for outputting the so converted
15 land image data.

- With this arrangement the instantaneous position of the three-line sensor camera (X_0 , Y_0 and Z_0) and the inclinations of the camera about three coordinate axes (ω , ϕ and u) can be determined for each minute time, that
20 is, as a function of time, thus making the reference point-finding work unnecessary, or reducing such work to possible minimum. Also, the stereomatching can be performed by using a computer. These can provide technical innovations.

- 25 The conventional stereomatching determines a three dimensional coordinate on a selected piece of land by determining the crossing of two beams of light projected at different angles. In contrast, the three-line sensor system adopted by the present invention uses three
30 different beams of light projected vertically, forward-obliquely and backward-obliquely respectively, and therefore, it has a redundancy enough to permit a required error checking, and accordingly the accuracy with which the shape and height of a piece of land can be
35 determined is improved.

Therefore in accordance with the present invention, there is provided an airborne photographing apparatus comprising:

an airborne three-line sensor camera taking pictures
5 of a selected piece of land in three directions, that is, forward obliquely, vertically, and backward obliquely;

a gyro for determining attitude data of the camera while photographing;

a GPS for providing instantaneous position data of
10 the camera in a three-dimensional space;

a data recorder for recording first land image data from the camera, the attitude data from the gyro, and the position data from the GPS;

and a data analyzer for converting the first land
15 image data from the camera into second land image data given in terms of fixed coordinates on the basis of the first land image data, attitude data, and position data all recorded by the data recorder, and for outputting the second land image data.

20 Also in accordance with the present invention, there is provided an airborne photographing method comprising:

taking pictures of a selected piece of land by an
airborne three-line sensor camera in three directions,
that is, forward obliquely, vertically, and backward
25 obliquely;

recording first land image data from the camera,
instantaneous attitude and position data;

and converting the first land image data from the
camera into second land image data given in terms of
30 fixed coordinates on the basis of the first land image data, attitude data and position data, and outputting the second land image data.

Further in accordance with the present invention,
there is provided an airborne photographing apparatus
35 comprising:

an airborne three-line sensor camera taking pictures of a selected piece of land in three directions, that is, forward obliquely, vertically, and backward obliquely;

5 a gyro mounted in a housing of the three-line sensor camera for determining attitude data of the camera while photographing;

a GPS for providing instantaneous position data of the camera in a three-dimensional space;

10 a stabilizer for controlling the attitude of the camera to set its optical axis to be vertical at all times, and at the same time for absorbing the vibration of an aeroplane;

a data processing unit for processing the attitude data from the gyro and the position data from the GPS and
15 outputting signals for controlling the stabilizer;

a data recorder for recording first land image data from the camera, the attitude data from the gyro, and the position data from the GPS;

20 and a data analyser for converting the first land image data from the camera into second land image data given in terms of fixed coordinates on the basis of the first land image data, attitude data, and position data all recorded by the data recorder, and for outputting the second land image data.

25 Still further in accordance with the present invention, there is provided a stabilizer for controlling the attitude of an airborne three-line sensor camera to set its optical axis to be vertical at all times, for use in an airborne photographing apparatus that comprises:

30 an airborne three-line sensor camera taking pictures of a selected piece of land in three directions, that is, forward obliquely, vertically, and backward obliquely;

a gyro for determining attitude data of the camera while photographing;

a GPS for providing instantaneous position data of the camera in a three-dimensional space;

a data recorder for recording first land image data from the camera, the attitude data from the gyro, and the
5 position data from the GPS;

and a data analyser for converting the first land image data from the camera into second land image data given in terms of fixed coordinates on the basis of the first land image data, attitude data, and position data
10 all recorded by the data recorder, and for outputting the second land image data.

BRIEF DESCRIPTION OF THE DRAWING

Other objects and advantages of the present invention may be understood from the following description of a

preferred embodiment which is shown in the accompanying drawings:

Fig.1 is a block diagram of an airborne photographing apparatus according to one embodiment of the present invention;

Fig.2 shows how the airborne three-line sensor camera works;

Fig.3 shows how the GPS determines the instantaneous position of the airplane;

Fig.4 shows the stabilizer and associated control;

Fig.5 shows how the three-line sensor camera takes a picture of a selected piece of land when the airplane is on the proper course with its attitude retained ideally;

Fig.6 shows how the three-line sensor camera takes a picture of a selected piece of land when the airplane is rolling;

Fig.7 shows how the three-line sensor camera takes a picture of a selected piece of land when the airplane is pitching;

Fig.8 shows how the three-line sensor camera takes a picture of a selected piece of land when the airplane is yawing; and

Fig.9 is a flow chart according to which the data processing unit effects the processing of data.

BEST MODE OF REDUCING THE INVENTION IN PRACTICE

Referring to the accompanying drawings, an airborne photographing apparatus according to one embodiment of the present invention is described as follows. Referring particularly to Fig.1, it uses a three-line sensor camera 1, which comprises three CCD line sensors 1a, 1b and 1c arranged in parallel, each taking a picture of a selected piece of land at a different angle, and analogue-to-digital converting the so taken land image for sending the digital land image data to an associated data processing unit 5.

A gyro 2 is fixed to the housing of the three-line sensor camera 1, thus determining the attitude of the camera in terms of the inclinations about three coordinate axes (roll angle ω , pitch angle ϕ and yaw angle u).

A global positioning system (abbreviated as "GPS") 3 is responsive to electromagnetic waves from selected artificial satellites for determining the instantaneous position of the receiving object (airplane or ship) in the three dimensional space.

In the present invention an airborne GPS is used for determining the instantaneous position of the three-line sensor camera 1 (X_0, Y_0, Z_0) while photographing in the three-dimensional space.

Fig.2 illustrates how the three-line sensor system used in the present invention works.

As seen from Fig.2, three different corresponding points (x_i, y_i : $i=1, 2$ or 3) are formed on three digital land images respectively.

The instantaneous sensor position is given by (X_{0i}, Y_{0i}, Z_{0i}), and the different inclinations are given by (ω_i, ϕ_i and u_i).

One of the corresponding points (x, y) is given by the following equations:

$$x = -f \frac{a_1 (X - X_0) + a_2 (Y - Y_0) + a_3 (Z - Z_0)}{a_7 (X - X_0) + a_8 (Y - Y_0) + a_9 (Z - Z_0)}$$

$$y = -f \frac{a_4 (X - X_0) + a_5 (Y - Y_0) + a_6 (Z - Z_0)}{a_7 (X - X_0) + a_8 (Y - Y_0) + a_9 (Z - Z_0)}$$

, where f stands for focal length.

These equations can be converted as follows:

$$\begin{cases} X - uZ = x_0 - uz_0 \\ Y - vZ = y_0 - vz_0 \end{cases}$$

$$\text{, where } u = \frac{a_1 x + a_4 y - a_7 f}{a_3 x + a_6 y - a_9 f}, \text{ and } v = \frac{a_2 x + a_5 y - a_8 f}{a_3 x + a_6 y - a_9 f}$$

$a_1, \dots, a_9$ are given by the following rotational matrixes.

$$\begin{bmatrix} a_1 & a_2 & a_3 \\ a_4 & a_5 & a_6 \\ a_7 & a_8 & a_9 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \omega & -\sin \omega \\ 0 & \sin \omega & \cos \omega \end{bmatrix} \begin{bmatrix} \cos \phi & 0 & \sin \phi \\ 0 & 1 & 0 \\ -\sin \phi & 0 & \cos \phi \end{bmatrix} \begin{bmatrix} \cos u & -\sin u & 0 \\ \sin u & \cos u & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$\text{, where } u = \begin{cases} +d & \text{distance from the center to the backward-oblique sensor} \\ 0 & \text{distance from the center to the vertical sensor} \\ -d & \text{distance from the center to the forward-oblique sensor} \end{cases}$$

d : distance from the center of the arranged sensor

The above two equations are held for each corresponding point, and the three-dimensional coordinates (X, Y, Z) in the land surface can be determined from six equations in total according to the method of least squares.

Fig.3 shows how the GPS works in determining the instantaneous position of the camera.

As seen from Fig.3, the airplane or ship A bearing a GPS receives signals from four artificial satellites S selected

among those flying in the space, determining the distance to each artificial satellite. The instantaneous position of each artificial satellite is determined at the time of photographing by using the presumable orbit data of the artificial satellite S available from the stationary station P on the ground, and then, the receiving station (airplane A) is located on the surface of each sphere having a radius of the so determined distance from the stationary station P to the airplane A with its center on the artificial satellite. Such calculations are performed on four or more artificial satellites, and the receiving station (airplane A) is located continuously in the kinematic or differential mode.

A stabilizer 4 absorbs the vibration of the airplane, and at the same time it controls the attitude of the airborne camera.

Fig.4 shows the controlling mechanism of the stabilizer. As shown in this drawing, the three-line sensor camera 1 has a gyro 2 integrally connected thereto, and the gyro 2 provides voltage signals to control the motors (M1, M2, M3) of the three-axis attitude control mechanism, thereby putting the camera in alignment with a given fixed direction.

Figs.5 to 8 show how the three-line sensor camera 1 photographs a piece of land.

Referring to Fig.5, the airplane A is flying on a given course at a predetermined height and in a predetermined direction. In this ideal case the airborne three-line sensor camera 1 is directed vertically all the time, thus providing complete land images, which are free of distortions, losing no fraction of data.

It is, however, actually impossible that the airplane flies always on the ideal course, and it is liable to deviate from the proper course when being adversely affected by wind and other weather factors. Fig.6 illustrates how the piece of land is swept when the airplane is rolling; Fig.7 illustrates how the piece of land is swept when the airplane is pitching; and finally Fig.8 illustrates how the piece of

land is swept when the airplane is yawing.

It is, therefore, necessary that the three-axis attitude control mechanism be controlled on real time so as to hold the attitude of the airborne camera vertically at a fixed height, thus putting its sensors in condition in which they may traverse the proper flight course.

Assume that the attitude of the airplane is recorded while photographing in place of controlling the attitude of the airplane, thus allowing the airborne camera to scan out of the land-sweeping range when the airplane inclines to follow the correct flight course. In this case the reproduced land image will be incomplete, losing some fractions of land image data. Even though the airplane is on the correct flight course, the airborne camera when inclining about any of the three coordinate axes as shown in Figs.6 to 8, will fail to scan across the selected strip of land completely, and the reproduced image cannot be interpolated or extrapolated for providing a complete land image. Such interpolation or extrapolation if possible, will take much time involved for computer processing.

Fig.9 is a flowchart showing the processing of data carried out by an associated data processor.

As shown in Fig.9, the data processor 5 effects the processing of attitude data from the gyro 2 and the instantaneous position data from the GPS 3 for outputting signals to control the stabilizer 4.

A decision as to whether or not the airplane is flying straight on the proper flight course can be made from the instantaneous position data from the GPS 3. Also, a decision as to whether or not the airplane has a turn to the side can be made from the data of yaw angle available from the gyro 2 (particularly such turn caused by traversing wind). Accordingly a required correction can be made for directing the airborne camera to be transverse to the proper flight course (or making the airborne camera to scan transversely across the strip of land), which correction is called "drift-

angle correction" or "yaw correction".

The data processor 5 transfers data of land image from the camera 1, data of the attitude of the airplane from the gyro 2, and data of the instantaneous position of the airplane from the GPS 3 to the data recorder 6. From these data produced are signals to control the motors of the stabilizer for setting the optical axis of the airborne camera 1 to be vertical.

The data recorder 6 is a digital recorder which is capable of recording digital data at an increased rate, thus permitting the real-time recording of the land image data, which is transferred from the camera 1 to the data processor 5. At the same time, data of the attitude available from the gyro 2, and data of the instantaneous position available from the GPS 3 are recorded synchronously with each scanning line of the land image data.

The image display 7 shows the land image taken by the airborne camera 1 on real time, thereby permitting a decision as to whether or not the airplane is now on the proper flight course to be made.

The data analyzer 8 on the ground makes required corrections of the lens aberration, CCD characteristics and other proper factors on the basis of land image data, the attitude data and the position data all recorded on the data recorder 6 to provide land image data in terms of fixed coordinates for each pixel. The land image data thus provided can be used in driving the software pertaining to the digital photogrammetry.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

As may be understood from the above, a three-line sensor camera photographs a selected piece of land continuously to provide land image data taken at three different angles, thereby permitting the analyzing of the land in terms of shape and height on real time. Also, attitude data is

available from the gyro integrally connected to the camera, and the feed-back controlling of the camera is effected on the basis of the attitude data so as to direct the optical axis of the camera in the vertical direction all the time, and at the same time to direct the line sensors to be transverse to the flying course, thus assuring that the land image data is free of distortion. Thanks to this art line sensors which have been hitherto thought to be used only in stable artificial satellites can be on board for making records of digital land images.

In addition to land image data recorded in the digital form the attitude data available from the gyro and the position data available from the GPS are recorded together.

Advantageously all these recorded data are used for processing photographs, thereby permitting the digital photomapping with precision at an increased efficiency, and no reference-point finding work is unnecessary.

CLAIMS:

1. An airborne photographing apparatus comprising: an airborne three-line sensor camera taking pictures of a selected piece of land in three directions, that is, forward obliquely, vertically and backward obliquely; a gyro mounted in a housing of the three-line sensor camera for determining attitude data of the camera while photographing; a GPS for providing instantaneous position data of the camera in a three-dimensional space; a stabiliser for controlling the attitude of the camera to set its optical axis to be vertical at all times, and at the same time for absorbing the vibration of an aeroplane; a data processing unit for processing the attitude data from the gyro and the position data from the GPS and outputting signals for controlling the stabilizer; a data recorder for recording first land image data from the camera, the attitude data from the gyro and the position data from the GPS; an image display for showing the first land image data from the camera; and a data analyzer for converting the first land image data from the camera into second land image data given in terms of fixed coordinates on the basis of the first land image data, attitude data and position data all recorded by the data recorder, and for outputting the second land image data.

2. An airborne photographing apparatus comprising:

- an airborne three-line sensor camera taking pictures of a selected piece of land in three directions, that is, forward obliquely, vertically, and backward obliquely;
- a gyro for determining attitude data of the camera while photographing;
- a stabilizer for controlling the attitude of the three line sensor camera to set its optical axis to be vertical at all times;
- a GPS for providing instantaneous position data of the camera in a three-dimensional space;
- a data recorder for recording first land image data from the camera, the attitude data from the gyro, and the position data from the GPS;
- and a data analyzer for converting the first land image data from the camera into second land image data given in terms of fixed coordinates on the

basis of the first land image data, attitude data, and position data all recorded by the data recorder, and for outputting the second land image data.

3. An airborne photographing method comprising:

taking pictures of a selected piece of land by an airborne three-line sensor camera in three directions, that is, forward obliquely, vertically, and backward obliquely;

stabilizing the camera for controlling the attitude of the camera in order to set its optical axis to the vertical at all times;

recording first land image data from the camera, instantaneous attitude and position data;

and converting the first land image data from the camera into second land image data given in terms of fixed coordinates on the basis of the first land image data, attitude data and position data, and outputting the second land image data.

4. An airborne photographing apparatus comprising:

an airborne three-line sensor camera taking pictures of a selected piece of land in three directions, that is, forward obliquely, vertically, and backward obliquely;

a gyro mounted in a housing of the three-line sensor camera for determining attitude data of the camera while photographing;

a GPS for providing instantaneous position data of the camera in a three-dimensional space;

a stabilizer for controlling the attitude of the camera to set its optical axis to be vertical at all times, and at the same time for absorbing the vibration of an aeroplane;

a data processing unit for processing the attitude data from the gyro and the position data from the GPS and outputting signals for controlling the stabilizer;

a data recorder for recording first land image data from the camera, the attitude data from the gyro, and the position data from the GPS;

and a data analyser for converting the first land image data from the camera into second land image data given in terms of fixed coordinates on the basis of the first land image data, attitude data, and position data all recorded by the data recorder, and for outputting the second land image data.

5. A stabilizer for controlling the attitude of an airborne three-line sensor camera to set its optical axis to be vertical at all times, for use in an airborne photographing apparatus, that comprises:

- an airborne three-line sensor camera taking pictures of a selected piece of land in three directions, that is, forward obliquely, vertically, and backward obliquely;

- a gyro for determining attitude data of the camera while photographing;


- a GPS for providing instantaneous position data of the camera in a three-dimensional space;

- a motorized structure in which the camera is fixed, that can rotate, on demand, simultaneously and independently around three orthogonal axes, wherein one of the orthogonal axes is collinear with the optical axis of the camera;

- three motors controlled by a data processor unit to rotate the structure to a desired attitude data value;

- said data processing unit to receive and process said attitude data and said position data, and generating output signals to control the three motors so that the structure is oriented at the desired attitude value and the optical axis of the camera is maintained vertical.


Fig. 1

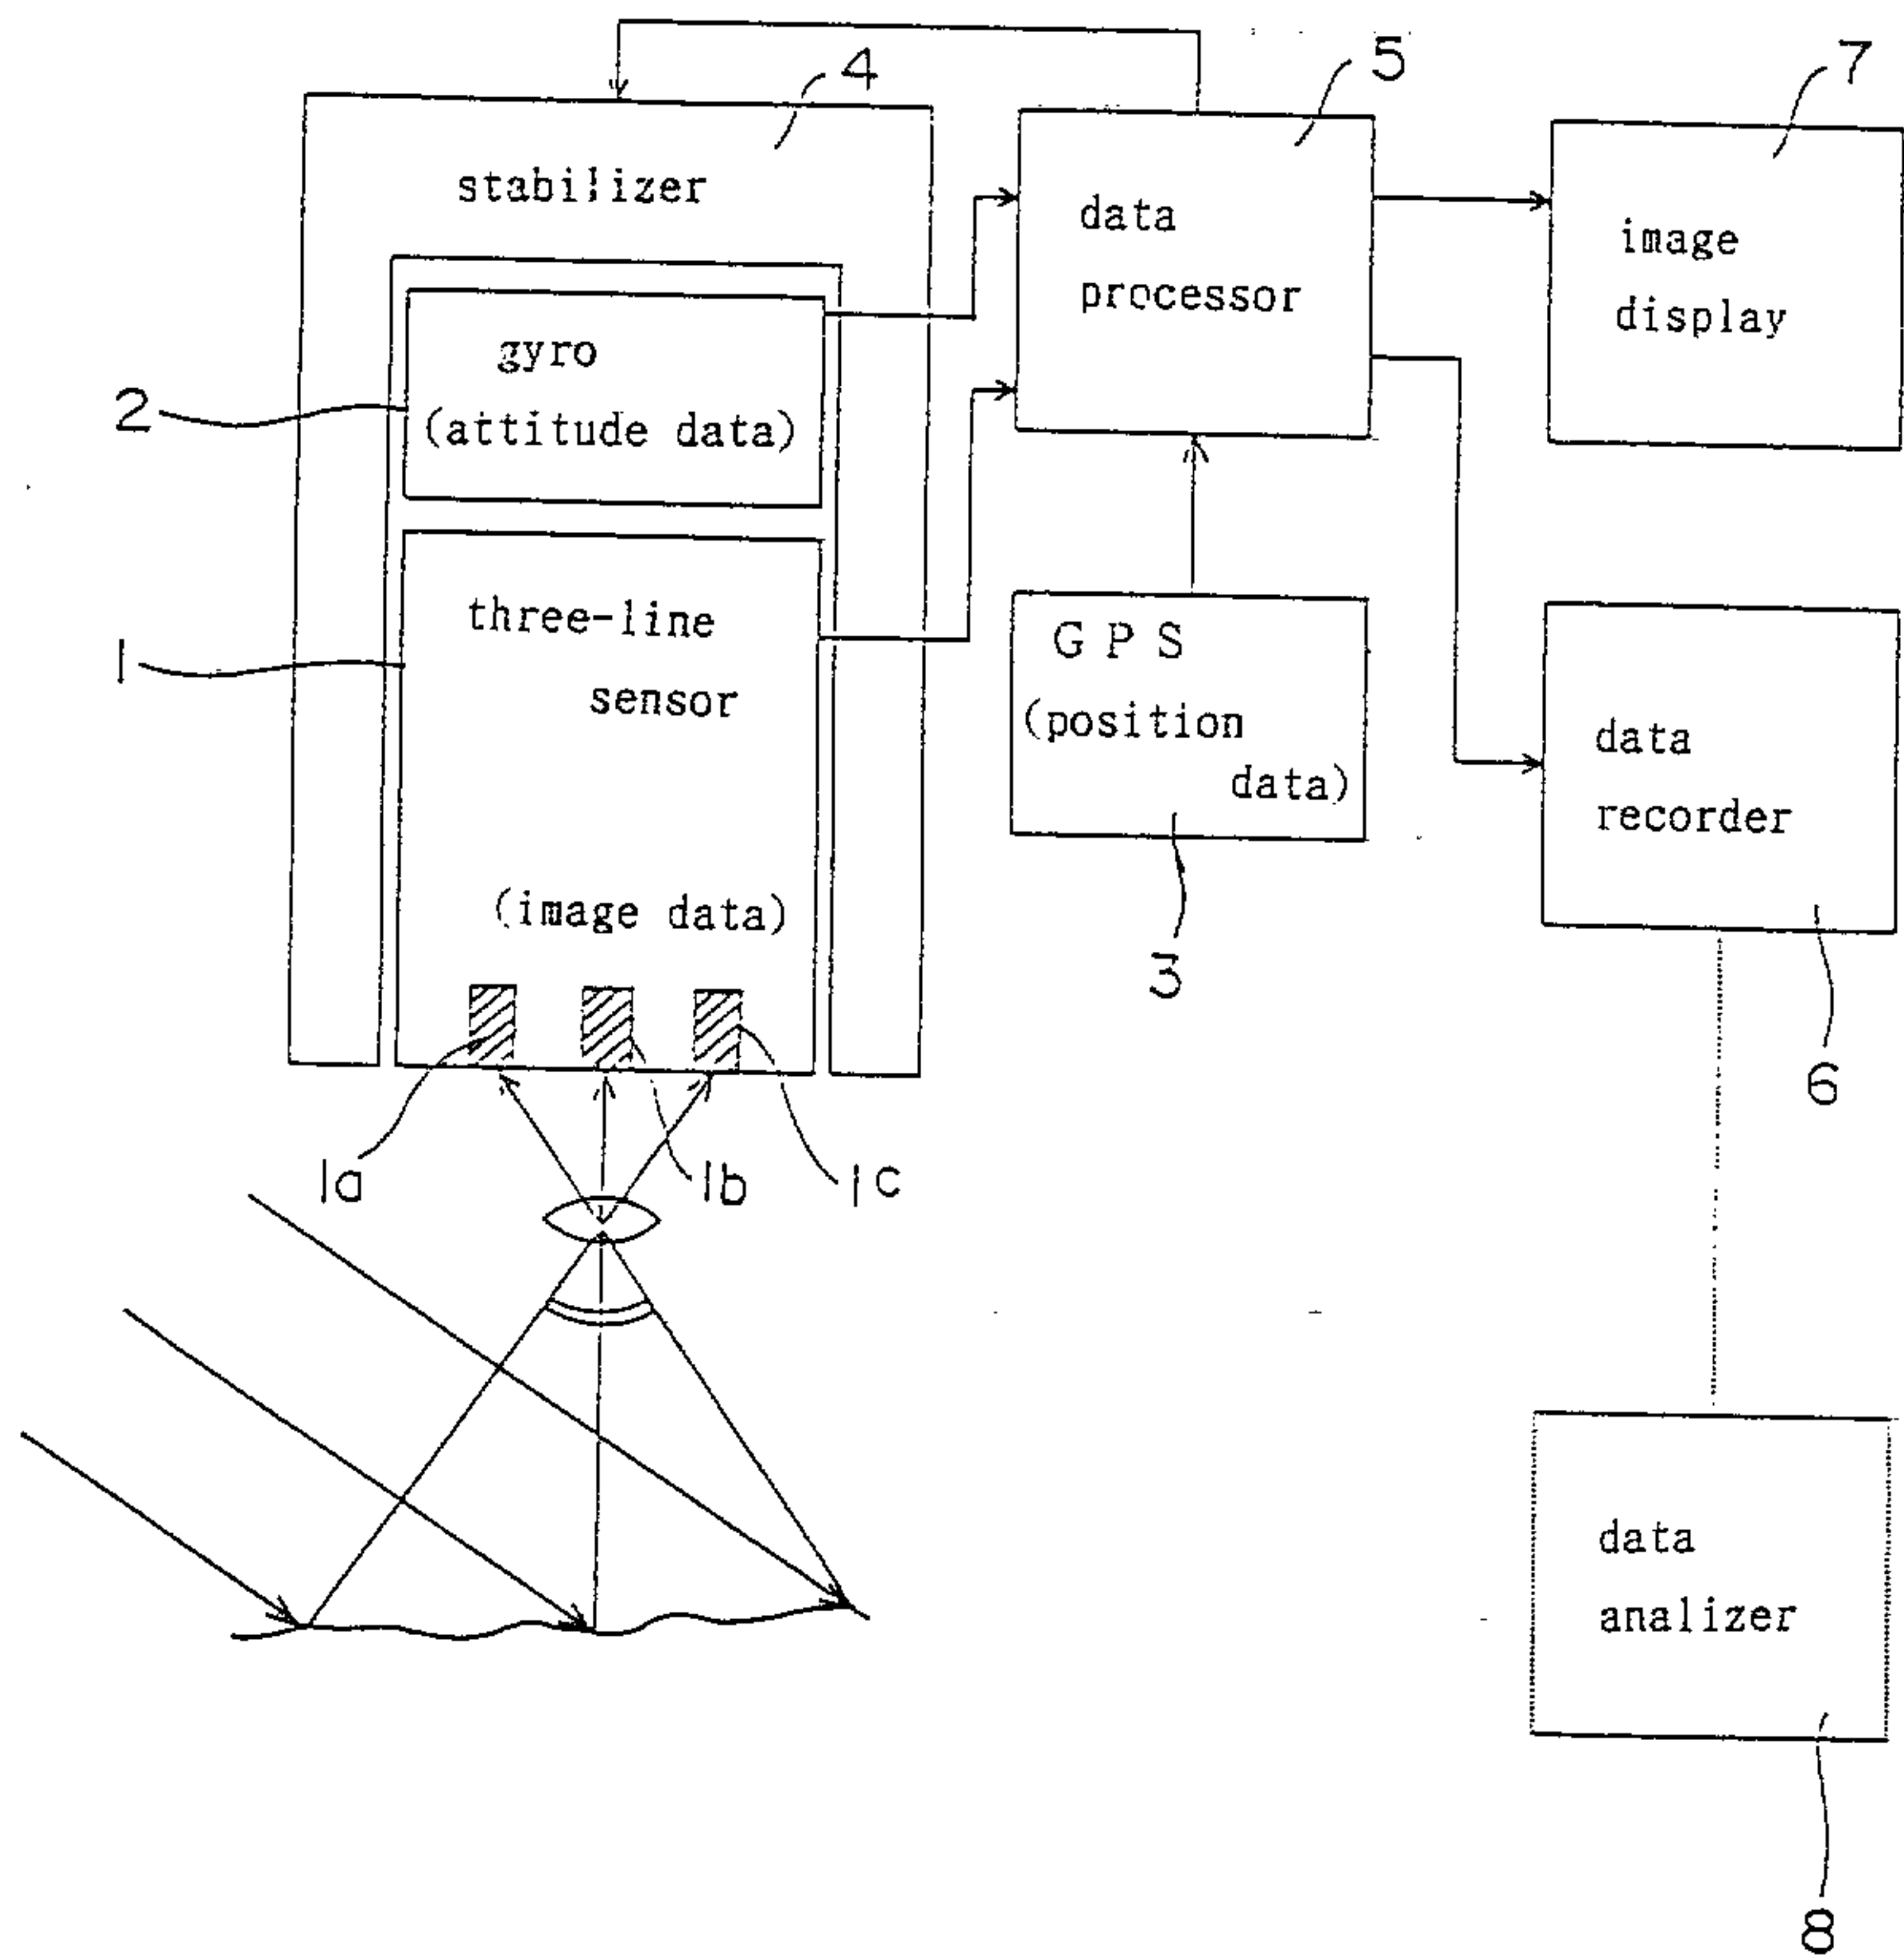

AGENTS DE BREVETS


Awakey Ogilvy Renault

Fig. 2

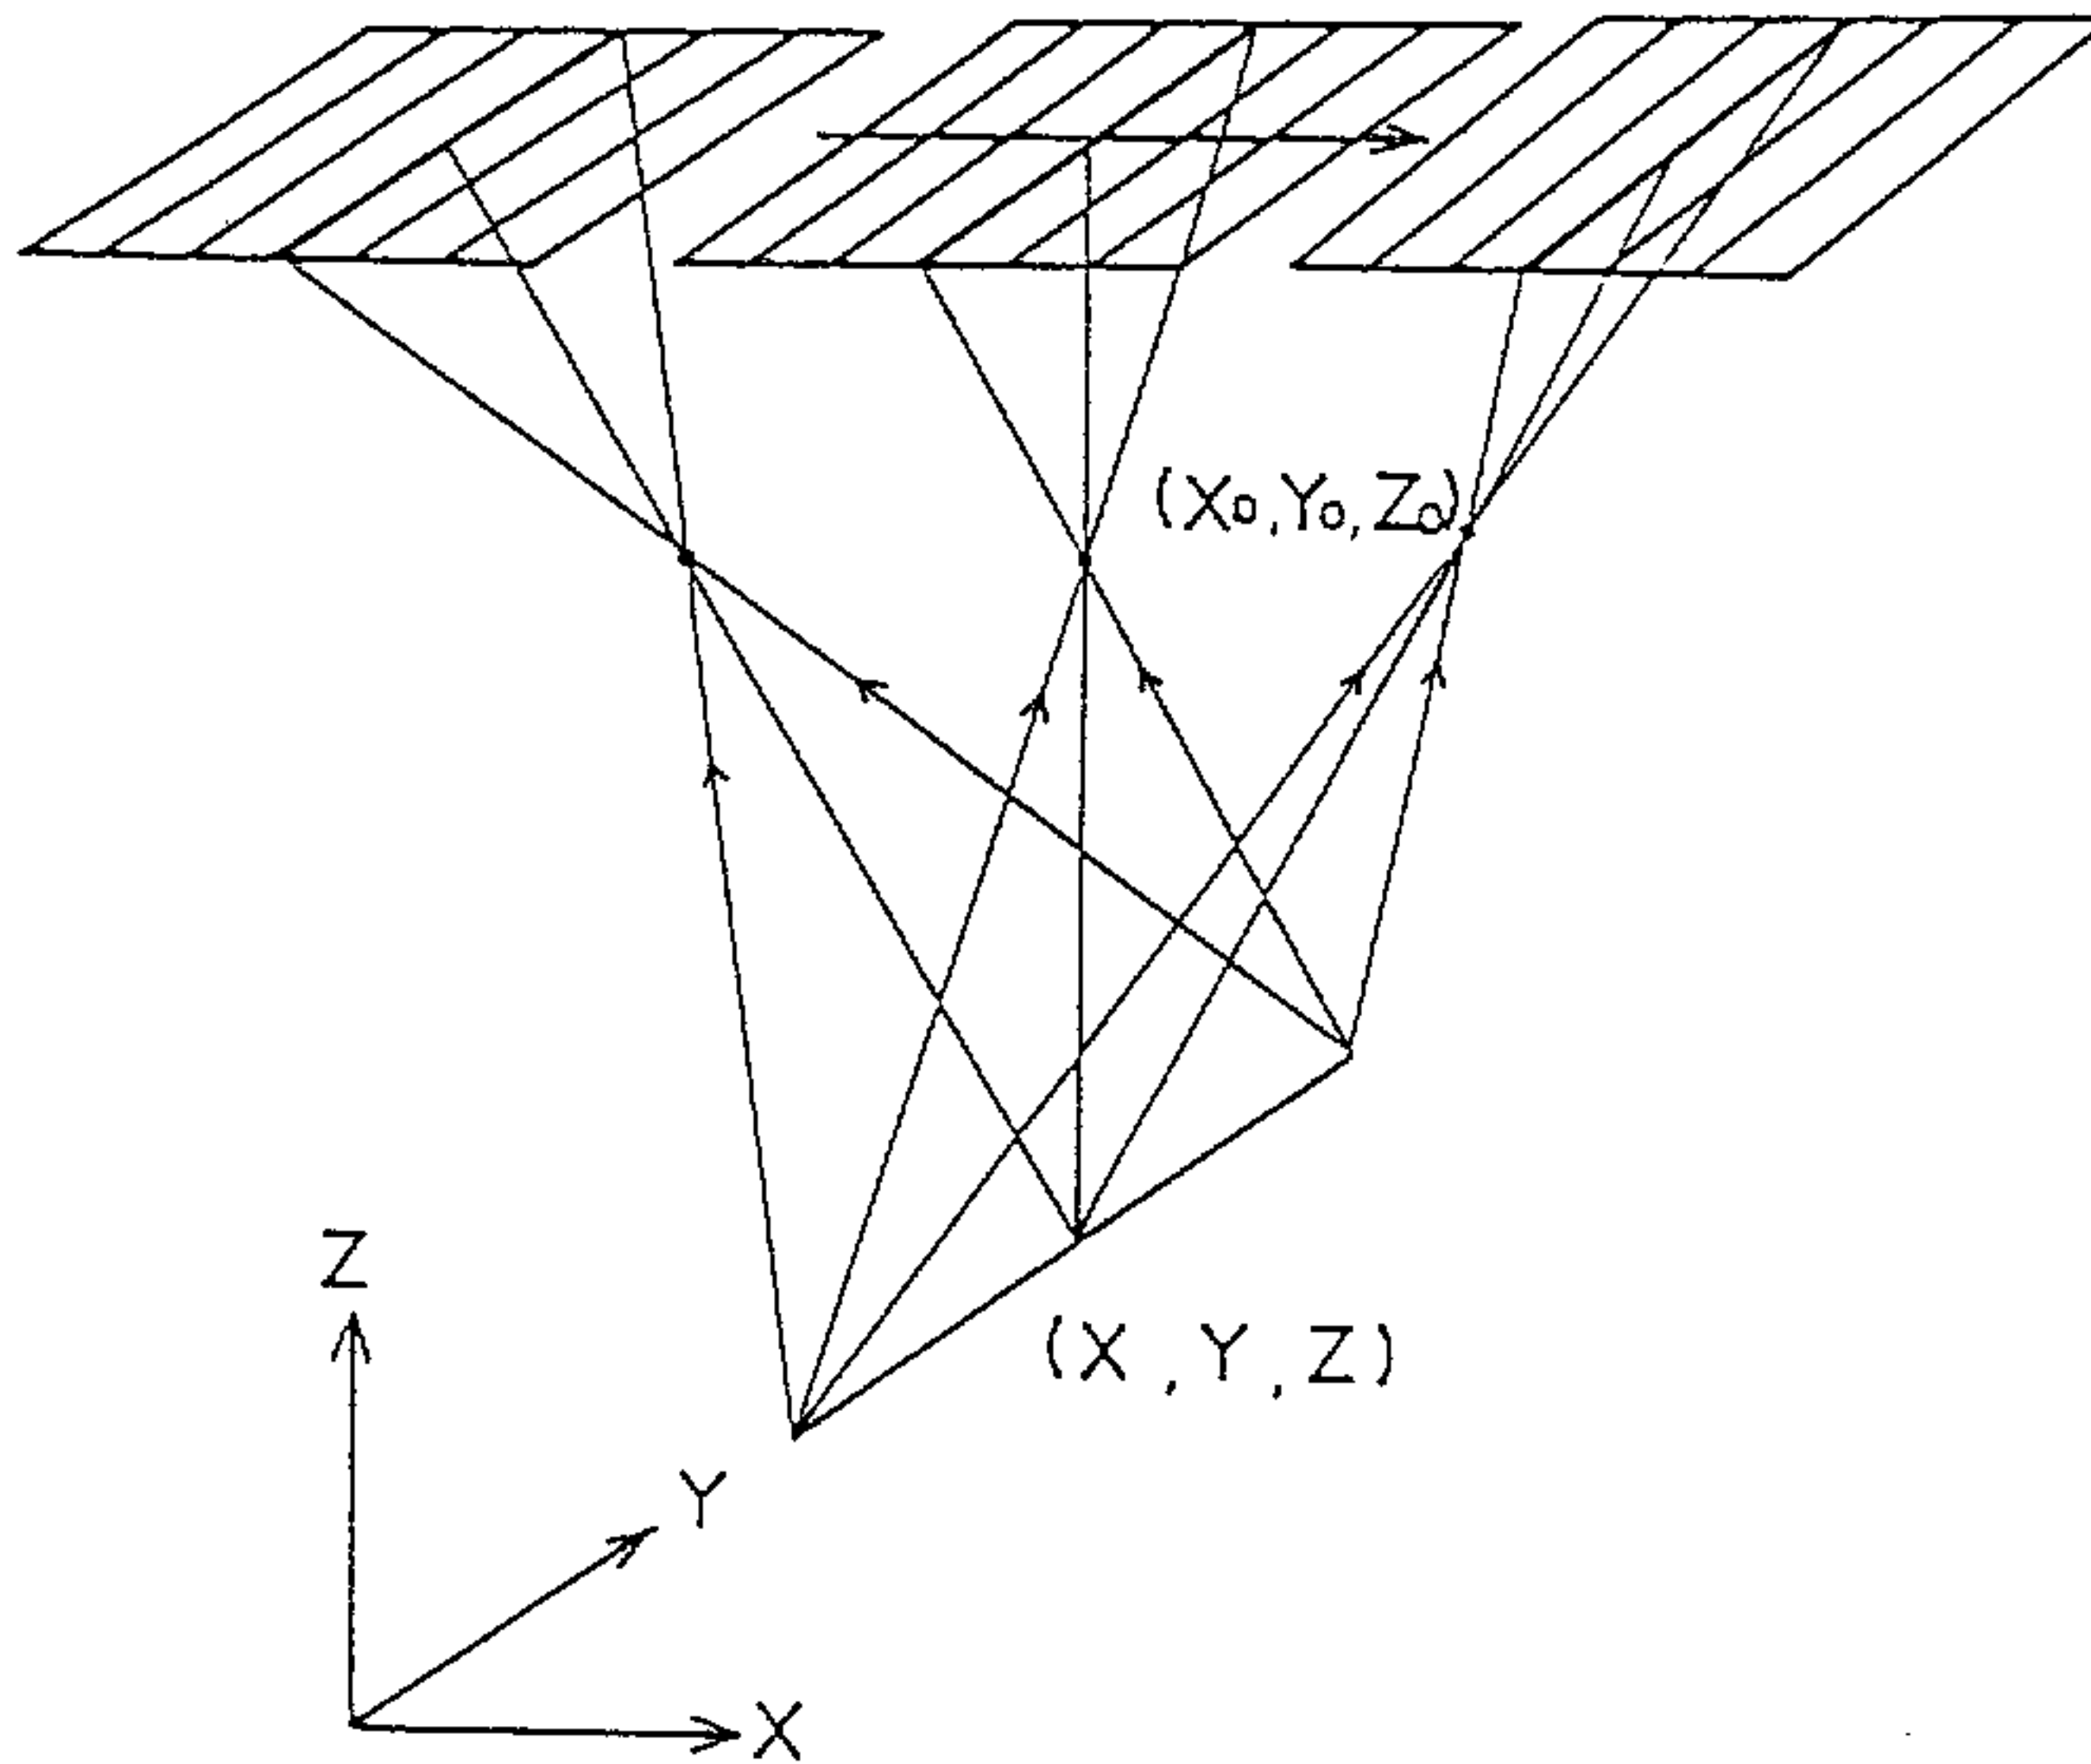

Arvalley Ogilvy Renault


Fig. 3

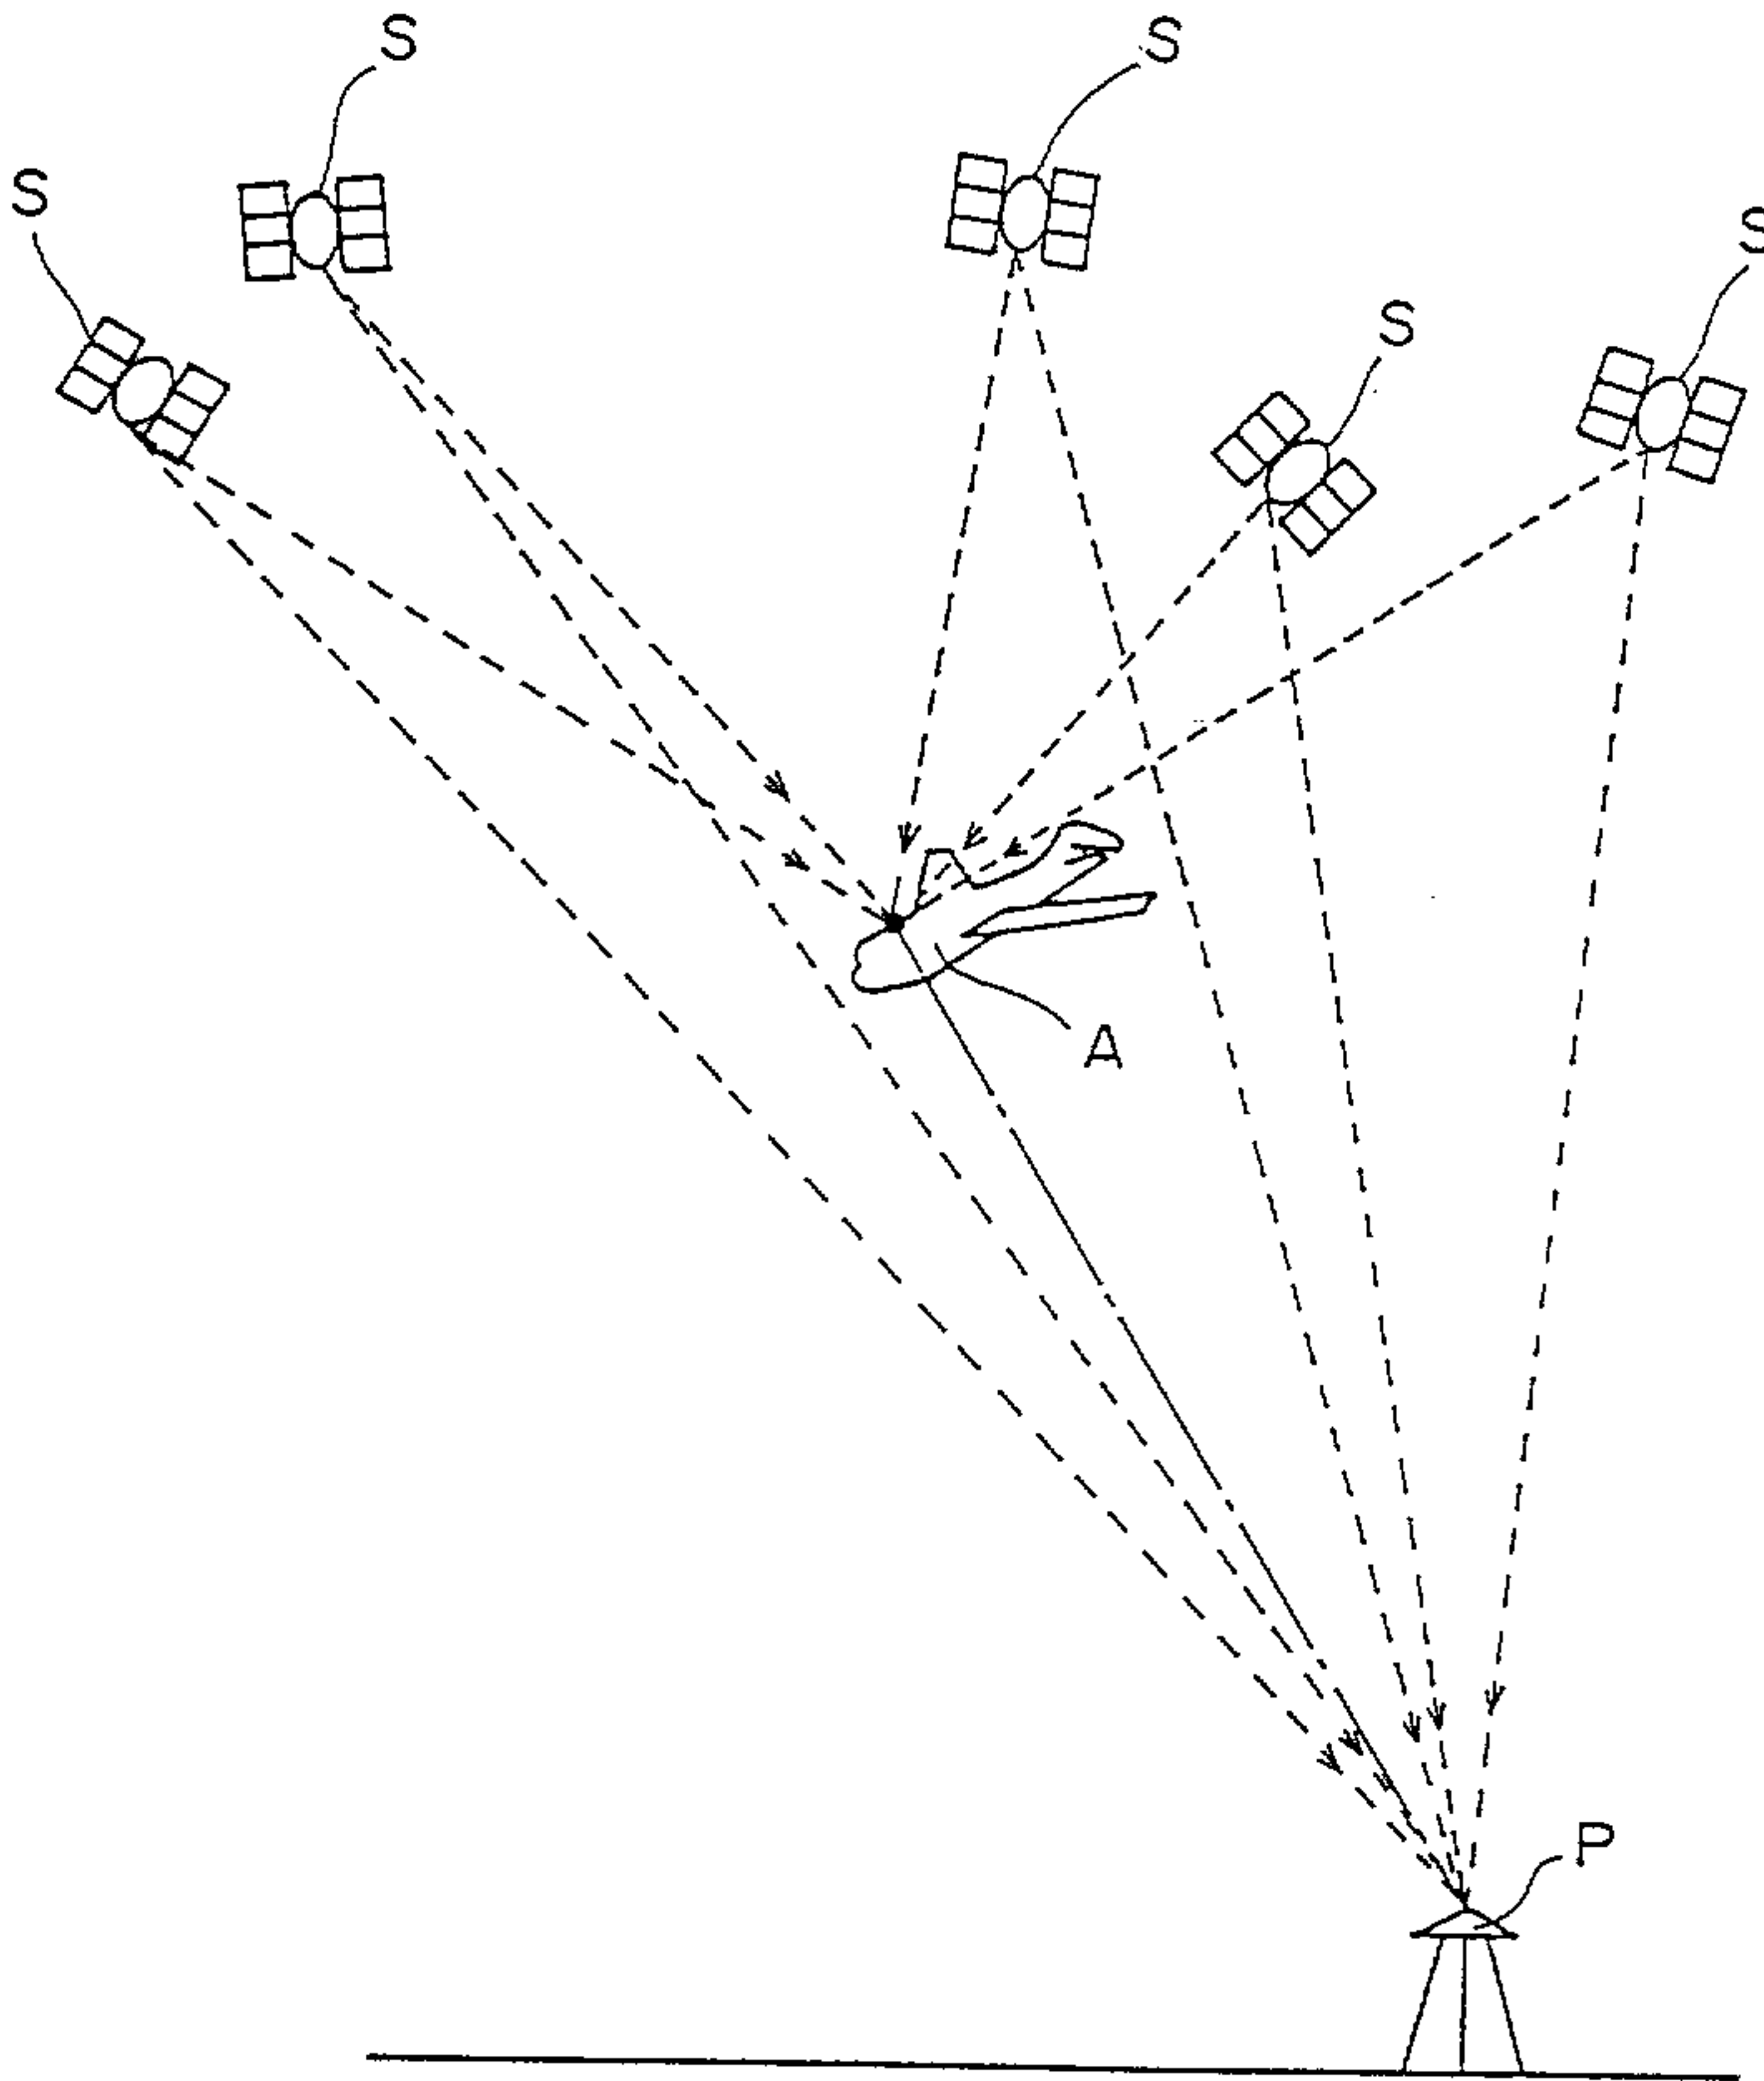

AGENTS DE BREVETS

Awakey Ogilvy Renault

Fig. 4

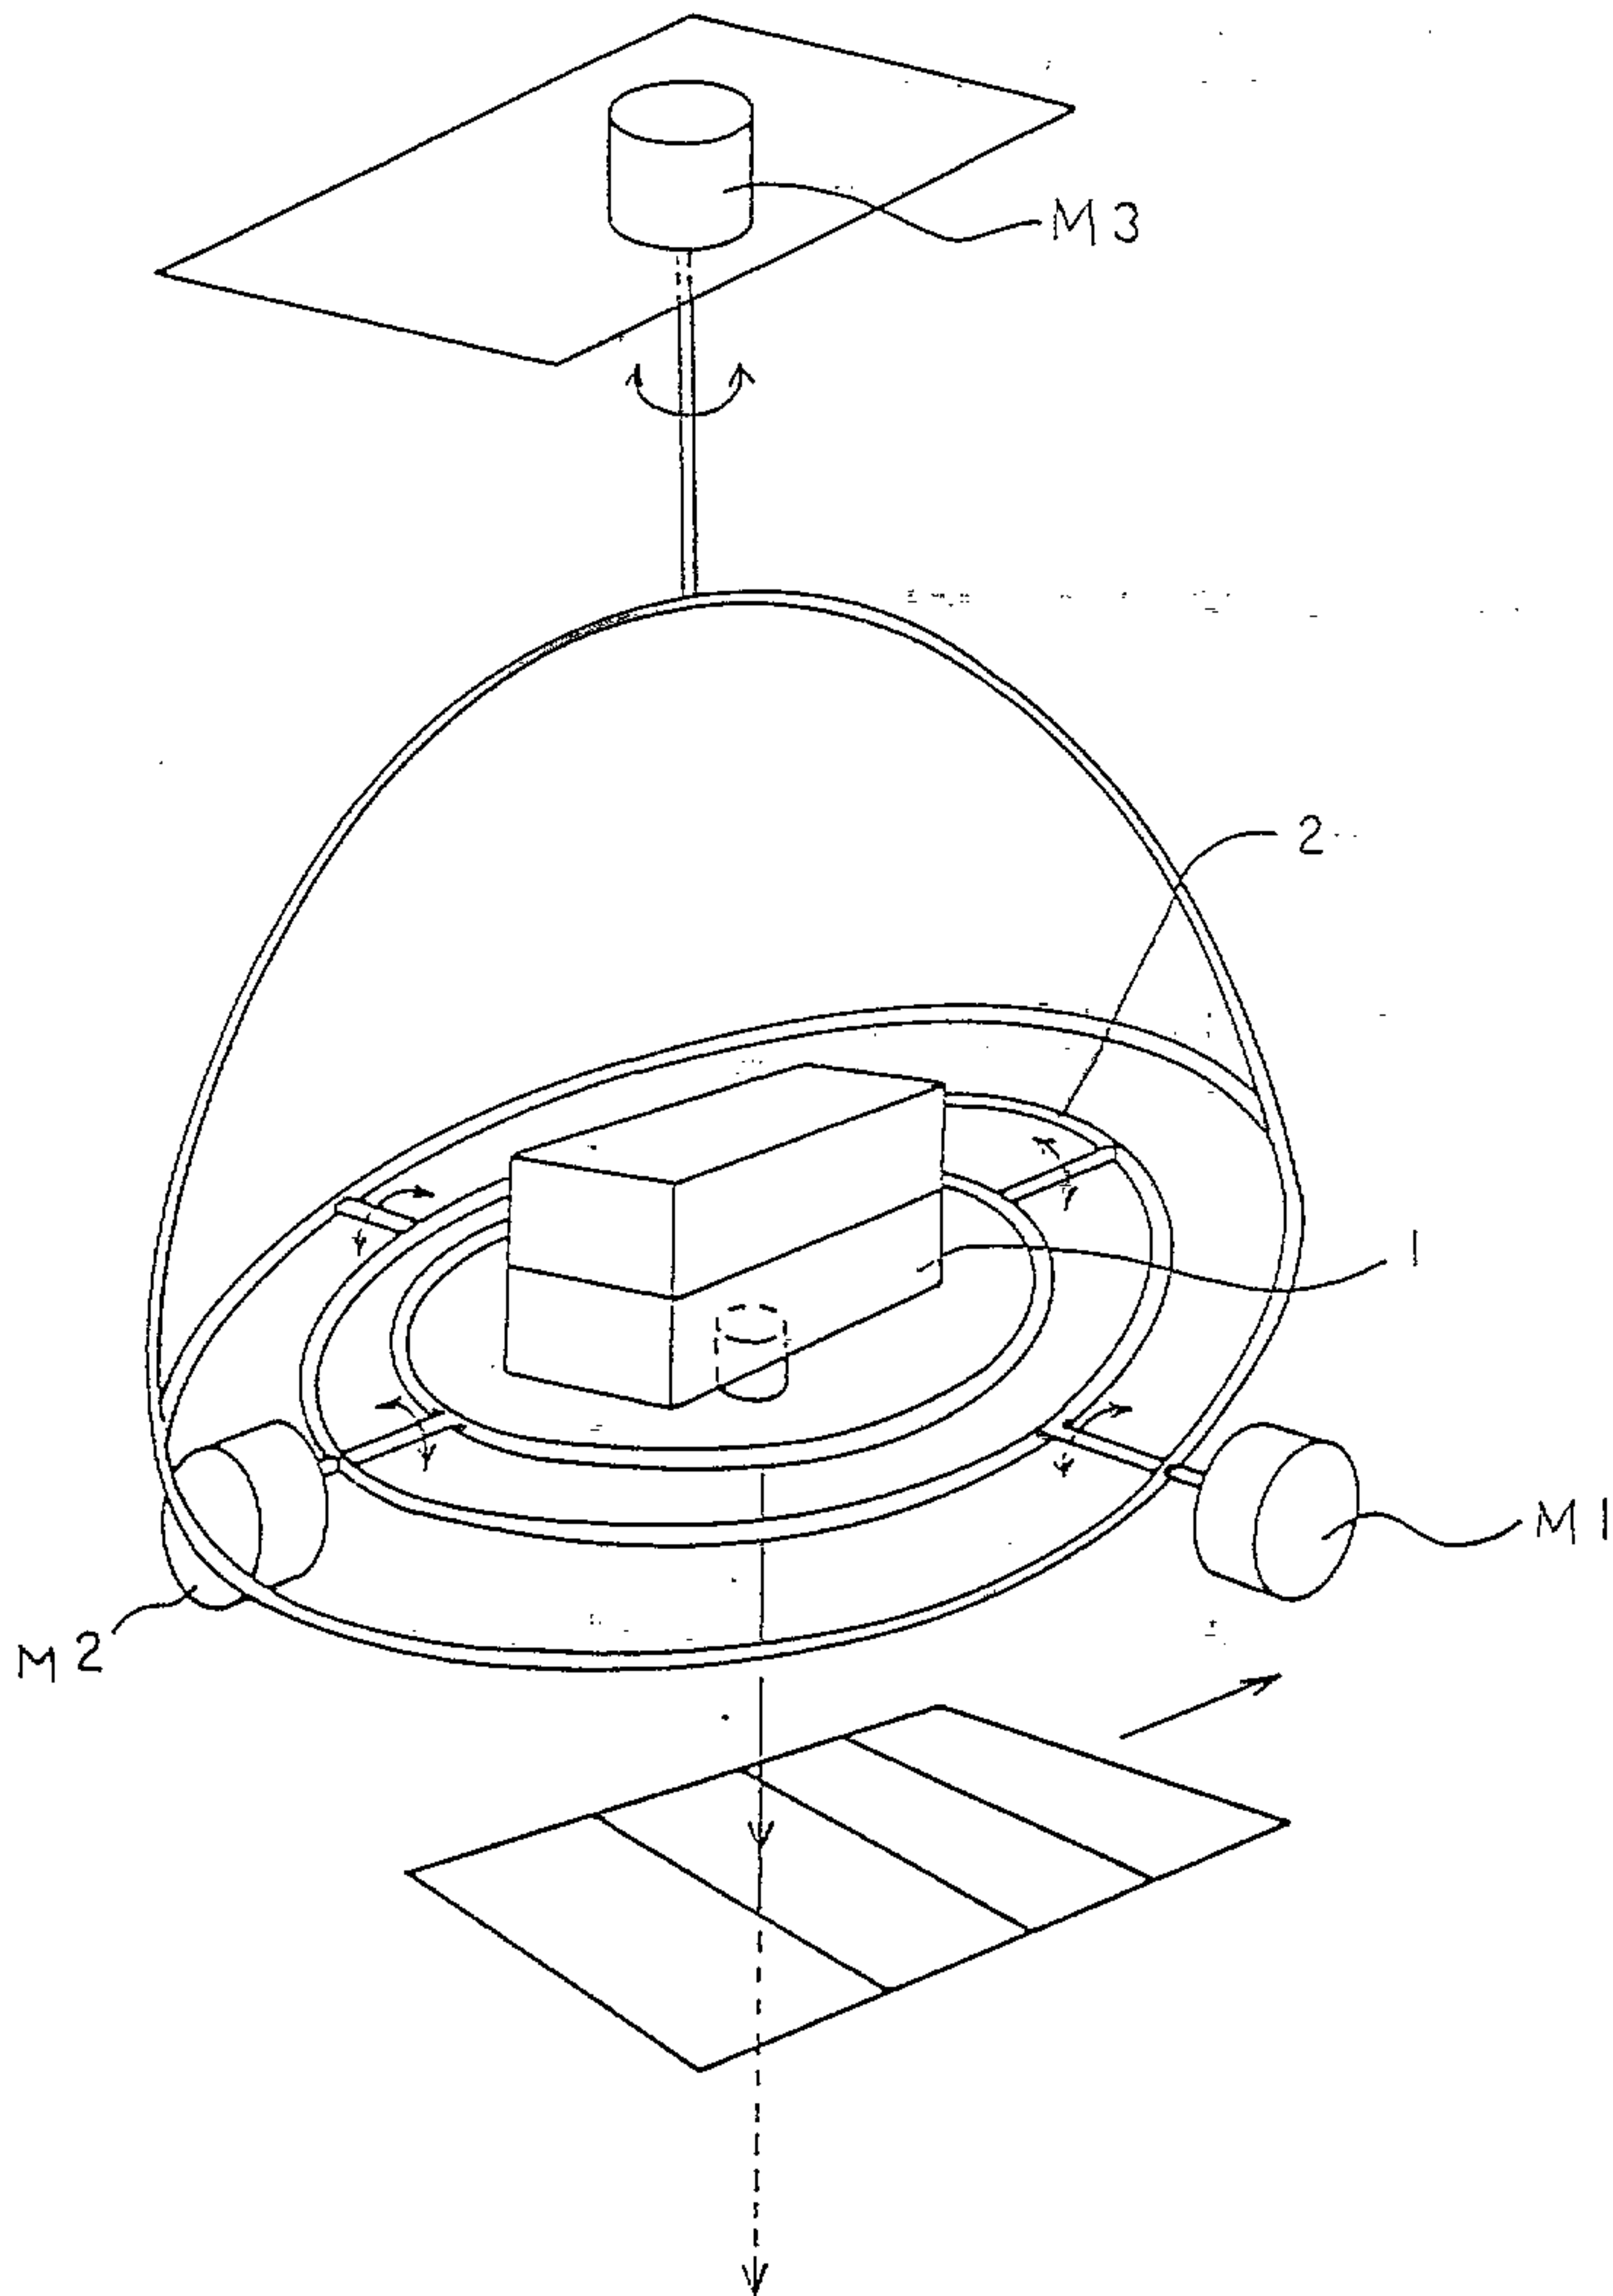

AG 654 DE BREVET

Swabey Ogilvy Renault

Fig. 5

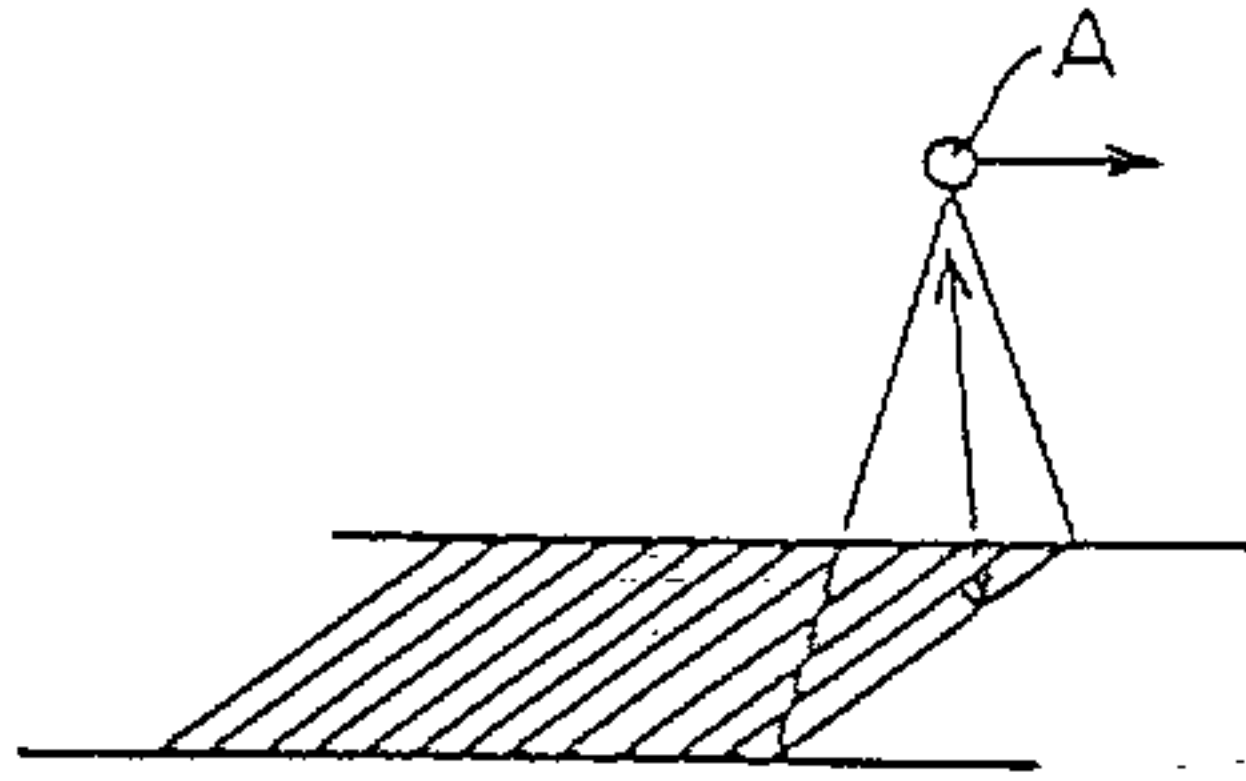


Fig. 6

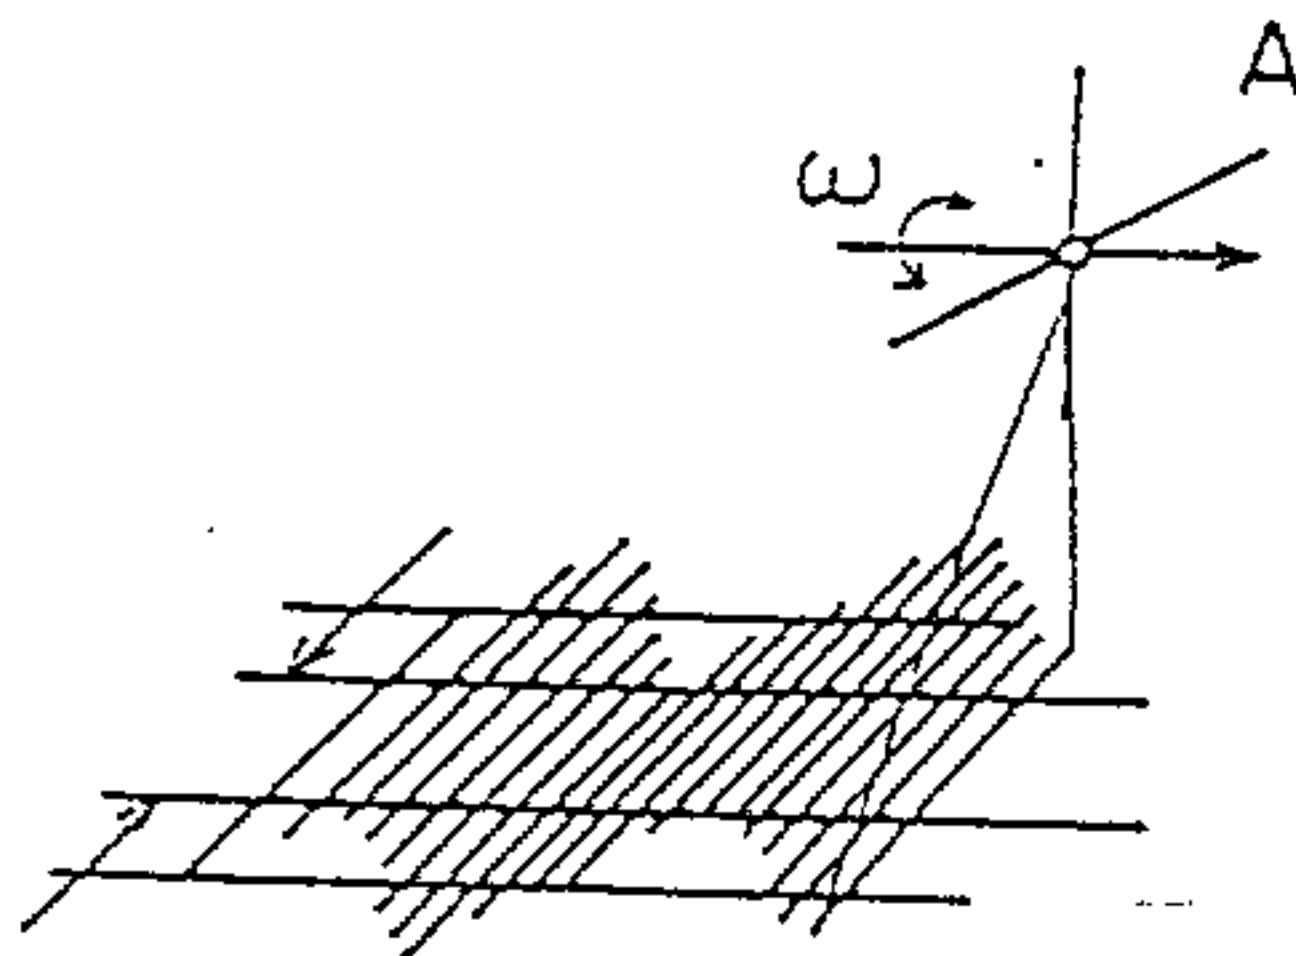


Fig. 7


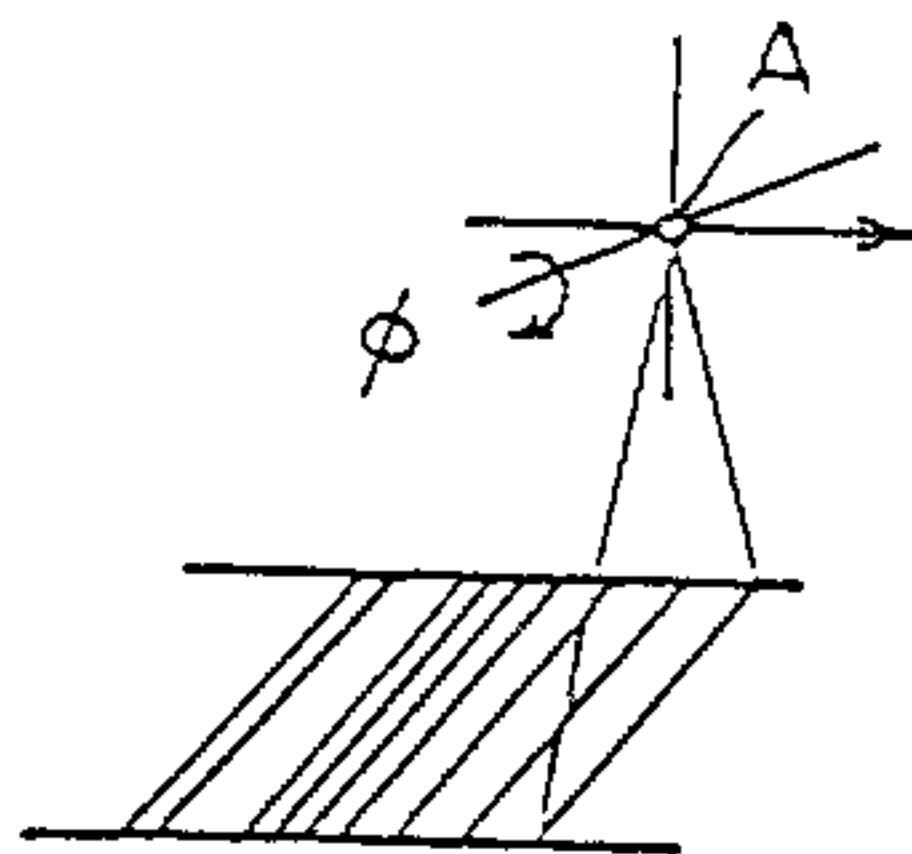



Fig. 8

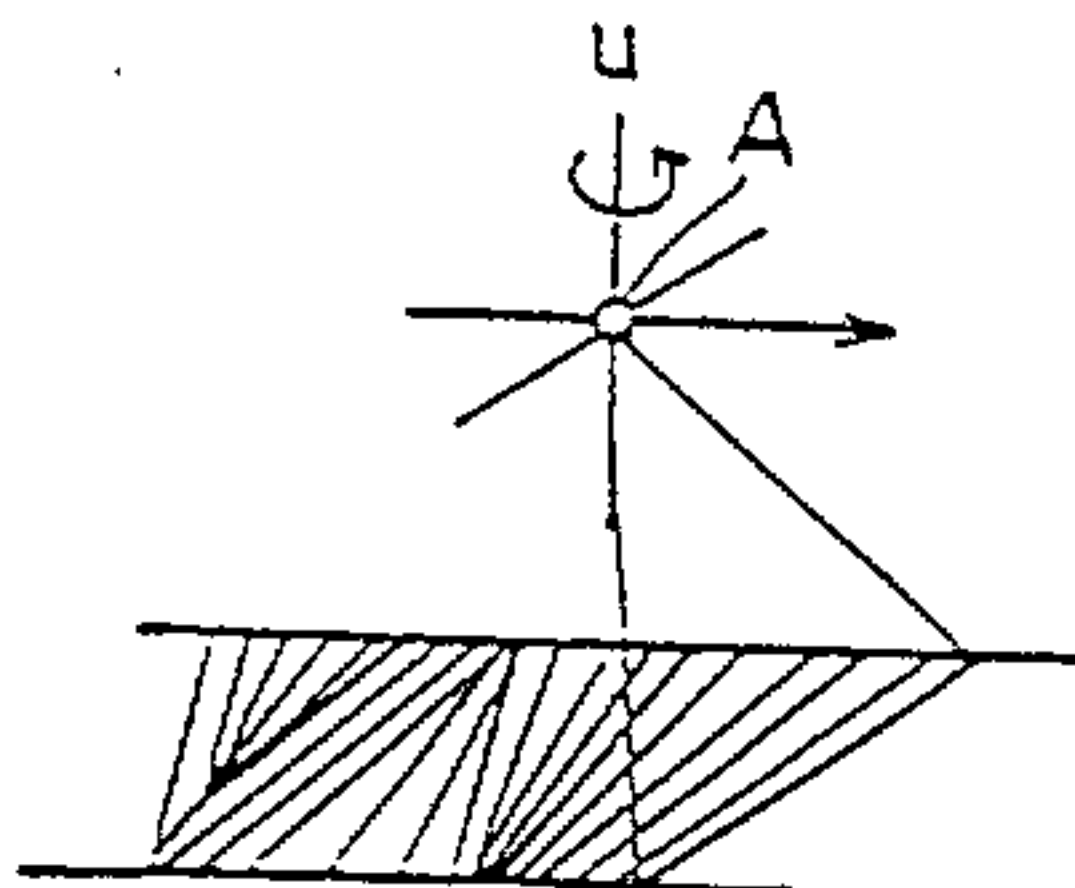

BREVET DE BREVETS

Swabey Ogilvy Renault

Fig. 9

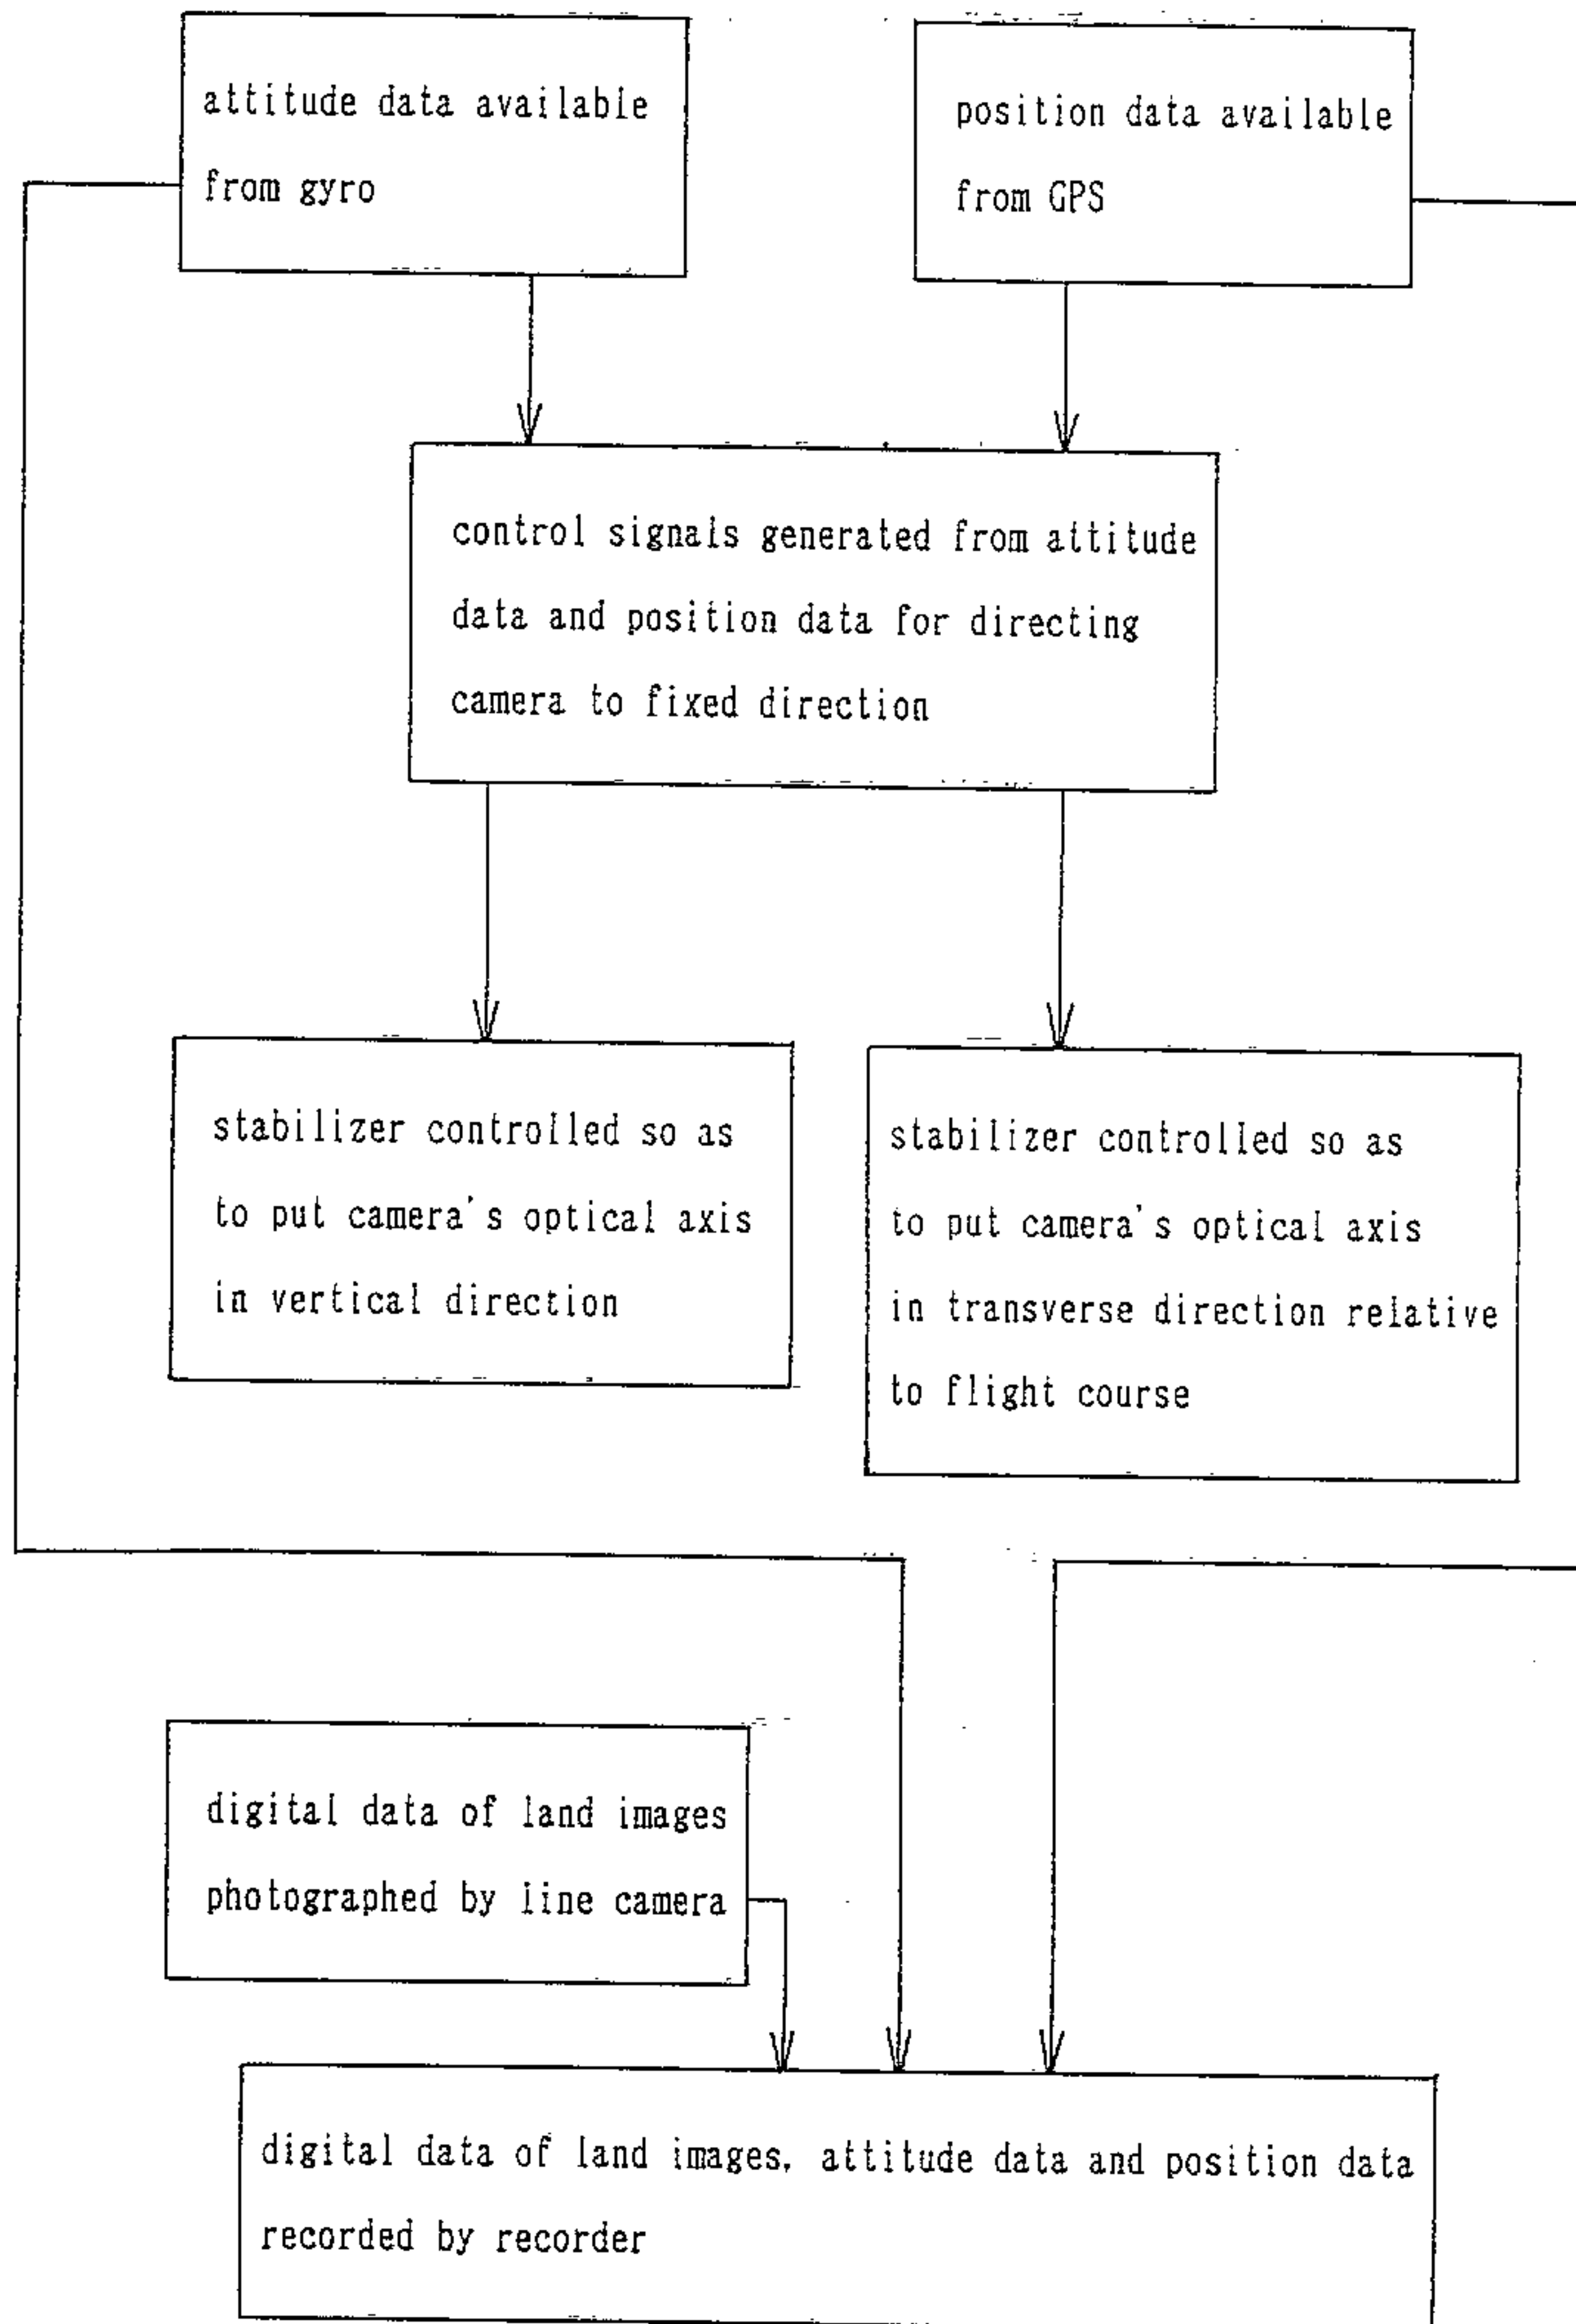

AGENTS DE BREVETS

Rwabez Ogilvy Renault

