

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 July 2010 (15.07.2010)

(10) International Publication Number
WO 2010/080917 A1

(51) International Patent Classification:
G06F 3/02 (2006.01) *G06F 3/01* (2006.01)
H01H 13/85 (2006.01) *G06F 3/033* (2006.01)

(74) Agent: SADLER, Lance, R.; Sadler Breen Morasch & Colby, PS, 422 W. Riverside Avenue, Suite 424, Spokane, WA 99201 (US).

(21) International Application Number:
PCT/US2010/020380

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
7 January 2010 (07.01.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/143,203 8 January 2009 (08.01.2009) US
61/171,646 22 April 2009 (22.04.2009) US
12/580,002 15 October 2009 (15.10.2009) US

(71) Applicant (for all designated States except US):
PACINIAN CORPORATION [US/US]; 665 N. Riverpoint Blvd., Suite 344, Spokane, WA 99202 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PETERSON, Cody, George** [US/US]; 2937 North 7th Street, Coeur D'alene, ID 83815 (US). **KRUMPELMAN, Douglas, M.** [US/US]; 10845 North Danielle Road, Hayden, ID 83835 (US). **HUSKA, Andrew, P.** [US/US]; 2521 Partridge Loop, Post Falls, ID 83854 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims and statement (Art. 19(1))

(54) Title: TACTILE SURFACE

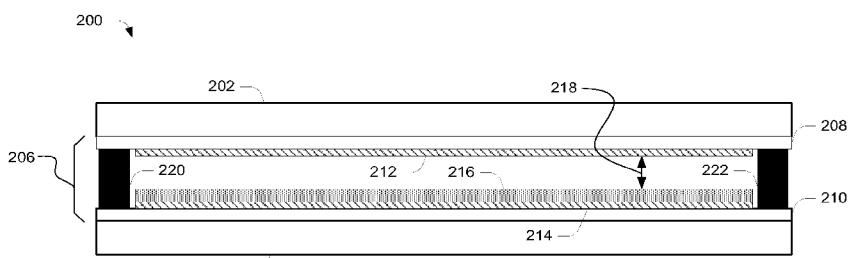


Fig. 2

(57) Abstract: In one or more embodiments, a device includes a surface and an actuator mechanism (206) operably associated with the surface (202). The actuator mechanism is configured to provide tactile feedback to a user responsive to an electrical signal. In at least some embodiments, the actuator mechanism comprises a pair of spaced-apart substrates (208, 210) each of which supports a conductive layer of material (212, 214). A dielectric material (216) and an adjacent air gap (218) may be interposed between the substrates. Drive circuitry is operably connected to the spaced-apart substrates and is configured to drive the conductive layers of material with an electrical signal. This signal may be responsive to sensing a touch input on the surface or other appropriate event.

WO 2010/080917 A1

TACTILE SURFACE

Related Applications

[0001] This application claims priority to U.S. Provisional Application No. 61/143,203 filed on January 8, 2009, and to U.S. Provisional Application No. 61/171,646 filed on April 22, 2009, the disclosures of which are incorporated by reference herein.

Background

[0002] Today there are a limited number of options that allow touch pads or touch screens to possess and provide tactile feedback to their users. Some of these options include using electromechanical linear or rotary motors which consume a significant amount of power, have a slow response time, and do not provide “point of touch” or localized tactile feedback. That is, they typically vibrate the entire device. Other options include using piezo elements, which are generally fragile and expensive and provide very little movement back to the user; or, using large electro-magnetic solenoid type actuators that consume a significant amount of power and require complex mechanical assembly.

Summary

[0003] This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope of the claimed subject matter.

[0004] In one or more embodiments, two conductive surfaces are utilized and suitably driven to provide movement of at least one of the surfaces through attractive and/or

repellant forces. The movement of the surfaces can be harnessed or utilized to provide a variety of functionality.

[0005] In one or more embodiments, a device includes a surface and an actuator mechanism operably associated with the surface. The actuator mechanism is configured to provide tactile feedback to a user in contact with the surface. In at least some embodiments, the actuator mechanism comprises a pair of spaced-apart substrates each of which supports a conductive layer of material. In at least some embodiments, a dielectric material and an adjacent air gap are interposed between the substrates. The device also includes drive circuitry operably connected to the spaced-apart substrates. The drive circuitry is configured to drive the conductive layers of material with an electrical signal. Driving the conductive layers with the electrical signal causes one or more of the corresponding substrates to be moved either or both of towards one another or away from one another. In some embodiments, the drive circuitry can use different drive profiles to drive the conductive layers to provide various tactile or audio feedback to the user.

[0006] In other embodiments, a device includes an actuator mechanism that is configured to provide tactile or audio feedback to a user. In at least some embodiments, the actuator mechanism comprises a pair of spaced-apart substrates each of which supports a conductive layer of material. At least one of the substrates supports, either directly or indirectly, or is otherwise in operative contact with a user input mechanism by which a user can provide input to the device. In at least some embodiments, a dielectric material and an adjacent air gap are interposed between the substrates. The device also includes drive circuitry operably connected to the spaced-apart substrates. The drive circuitry is configured to drive the conductive layers of material with an electrical signal. Driving the conductive layers with an electrical signal causes movement of one or both of the substrates. In some embodiments, the drive circuitry can use different drive profiles

to drive the conductive layers to provide various tactile feedback to the user through the user input mechanism.

[0007] In at least some embodiments, the electrical signal that drives the conductive layers can be generated responsive to: user input or interaction, software events, and/or external triggers such as interaction with others, alerts, messages, reminders and the like. With respect to user interaction, such can occur through, for example, a touch screen, touch pad, keyboard, key pad, discrete switches (mechanical or digital), linear or rotary motion sensing, proximity , interactive content, invalid entry, limits and the like.

Brief Description of the Drawings

[0008] The same numbers are used throughout the drawings to reference like features.

[0009] Fig. 1 illustrates an example device in accordance with one or more embodiments.

[0010] Fig. 2 illustrates a side sectional view of an example material assembly in accordance with one or more embodiments.

[0011] Fig. 3 illustrates some example components in accordance with one or more embodiments.

[0012] Fig. 4a illustrates a high-level block diagram of example system in accordance with one or more embodiments.

[0013] Fig. 4b illustrates an example voltage regulator in accordance with one or more embodiments.

[0014] Fig. 4c illustrates a USB interface that can allow real-time changes of haptic profiles in accordance with one or more embodiments.

[0015] Fig. 4d illustrates an electronic circuit in accordance with one or more embodiments.

[0016] Fig. 4e illustrates an electronic circuit in accordance with one or more embodiments.

[0017] Fig. 4f illustrates an electronic circuit in accordance with one or more embodiments.

[0018] Fig. 5a illustrates a side sectional view of an example material assembly in accordance with one or more embodiments.

[0019] Fig. 5b illustrates a side sectional view of an example material assembly in accordance with one or more embodiments.

[0020] Fig. 6 is a flow diagram that describes steps in a method in accordance with one or more embodiments.

[0021] Fig. 7 illustrates a side sectional view of an example material assembly in accordance with one or more embodiments.

[0022] Fig. 8 illustrates a side sectional view of the Fig. 7 material assembly in accordance with one or more embodiments.

[0023] Fig. 9 is a flow diagram that describes steps in a method in accordance with one or more embodiments.

[0024] Fig. 10 illustrates the device of Fig. 1 in accordance with another embodiment.

Detailed Description

Overview

[0025] In one or more embodiments, two conductive surfaces are utilized and suitably driven to provide movement of at least one of the surfaces through attractive and/or repellent forces. The movement of the surfaces can be harnessed or utilized to provide a variety of functionality. Any suitable type of material can be used for the conductive surfaces. For example, the conductive surfaces can be formed as part of a transparent

substrate. Alternately or additionally, the conductive surfaces can be formed from material that is not transparent, e.g., a metal material.

[0026] In one or more embodiments, a device includes a surface and an actuator mechanism operably associated with the surface. The actuator mechanism is configured to provide tactile feedback to a user in contact with the surface. In at least some embodiments, the actuator mechanism comprises a pair of spaced-apart substrates each of which supports a conductive layer of material. In at least some embodiments, a dielectric material and an adjacent air gap are interposed between the substrates. The device also includes drive circuitry operably connected to the spaced-apart substrates. The drive circuitry is configured to drive the conductive layers of material with an electrical signal. Driving the conductive layers with the electrical signal causes one or more of the corresponding substrates to be moved either or both of towards one another or away from one another. In some embodiments, the drive circuitry can use different drive profiles to drive the conductive layers to provide various tactile or audio feedback to the user.

[0027] In other embodiments, a device includes an actuator mechanism that is configured to provide tactile or audio feedback to a user. In at least some embodiments, the actuator mechanism comprises a pair of spaced-apart substrates each of which supports a conductive layer of material. At least one of the substrates supports, either directly or indirectly, or is otherwise in operative contact with a user input mechanism by which a user can provide input to the device. In at least some embodiments, a dielectric material and an adjacent air gap are interposed between the substrates. The device also includes drive circuitry operably connected to the spaced-apart substrates. The drive circuitry is configured to drive the conductive layers of material with an electrical signal. Driving the conductive layers with an electrical signal causes movement of one or both of the substrates. In some embodiments, the drive circuitry can use different drive profiles

to drive the conductive layers to provide various tactile feedback to the user through the user input mechanism.

[0028] In at least some embodiments, the electrical signal that drives the conductive layers can be generated responsive to: user input or interaction, software events, and/or external triggers such as interaction with others, alerts, messages, reminders and the like. With respect to user interaction, such can occur through, for example, a touch screen, touch pad, keyboard, key pad, discrete switches (mechanical or digital), linear or rotary motion sensing, proximity, interactive content, invalid entry, limits and the like.

In the discussion that follows, a section entitled “Example Device” is provided and gives but one example of a device that can utilize the inventive principles described herein.

After this, a section entitled “Example Material Assembly” describes a material assembly, including an actuator mechanism, in accordance with one or more embodiments.

Following this, a section entitled “Example Components” describes example components in accordance with one or more embodiments. Next, a section entitled “Embodiment with User Input Mechanism” describes an alternate embodiment. Following this, a section entitled “Example Method” describes a method in accordance with one or more embodiments. Next, a section entitled “Varying Feedback Based upon User Interface Element” describes embodiments in which feedback is varied based upon the type of user interface element engaged by user.

Example Device

[0029] Fig. 1 illustrates an example device in accordance with one or more embodiments generally at 100. Device 100 includes a housing 102 and a surface 104 supported by the housing. Surface 104 can comprise any suitable type of surface. In this particular example, surface 104 comprises a touch surface that is configured to receive

user input via touch. It is to be appreciated and understood, however, that surfaces other than touch surfaces can be utilized in connection with the principles described herein.

[0030] Touch surface 104 can comprise any suitable type of touch surface that can be physically engaged or touched by a user. In this particular example, touch surface 104 is embodied as a touch screen on a hand-held device. The touch screen can be formed from any suitable type of material such as glass or plastic and can be any suitable size. For example, a suitable touch screen may form part of a larger display device, such as a desktop monitor. Alternately or additionally, the touch screen may form part of a device on a vehicle such as, by way of example and not limitation, a user interface associated with a vehicle radio, climate control, navigation system, and/or a navigation instrumentality such as a GPS-supported navigation aid, and the like.

[0031] Alternately or additionally, in at least some other embodiments, the touch surface 104 can be embodied as a touch pad, such as one would find on a laptop computer, keyboard or button panel.

[0032] Having considered an example device, consider now an example material assembly that can provide the actuator mechanism described above and below.

Example Material Assembly

[0033] Fig. 2 illustrates a side sectional view of an example material assembly in accordance with one or more embodiments generally at 200. In this example, material assembly 200 includes a surface in the form of a screen 202 and a display 204 such as, for example, a liquid crystal display. Any suitable type of display can, however, be used.

[0034] Material assembly 200 also includes an actuator mechanism 206 operably associated with the screen 202. The actuator mechanism is configured to provide tactile feedback to a user responsive to a user touching or otherwise engaging the screen 202. In

at least some embodiments, the actuator mechanism 206 comprises a pair of spaced-apart substrates 208, 210 each of which supports a conductive layer of material 212, 214 respectively. It is to be appreciated and understood, however, that substrates 208, 210 may individually be comprised of conductive material.

[0035] Display 204 is disposed operably adjacent substrate 210. In at least some embodiments, a dielectric material 216 and an adjacent air gap 218 are interposed between the substrates 208, 210. In addition, actuator mechanism 206 may also include a spring mechanism 220, 222. Any suitable type of spring mechanism can be utilized such as various types of mechanical springs, rubberized springs, rubberized stoppers, elastomeric material, resilient gasket material, and the like. Examples of suitable types of springs and spring mechanisms are described in U.S. Provisional Application No. 61/143,203 incorporated by reference above.

[0036] Any suitable type of materials can be utilized to provide components of the material assembly 200.

[0037] For example, in at least some embodiments, substrates 208, 210 can be formed from a clear material such as plastic or glass. Additionally, the conductive layers of material 212, 214 can comprise any suitable type of conductive material. Alternately or additionally, the substrates may comprise material with conductive properties. For example, in at least some embodiments, at least one of the substrates can be formed from a conductive material such as sheet metal. Other materials can, of course, be utilized without departing from the spirit and scope of the claimed subject matter.

[0038] In at least some embodiments, the conductive material is a clear conductive material. Alternately or additionally, in at least some embodiments, the conductive material is a spray-on material or film that is applied, coated or otherwise deposited (as through any of a variety of deposition techniques such as, by way of example and not

limitation, CVD, PECVD, and the like) onto the surfaces of substrates 208, 210.

Alternately or additionally, in at least some embodiments, the conductive material can comprise indium tin oxide, silver, copper, or any other suitable type of conductive material.

[0039] Dielectric material 216 can comprise any suitable type of dielectric material such as, by way of example and not limitation, air, glass, plastic, elastomeric material, gels and/or other fluidic or non-fluidic materials.

[0040] In one or more embodiments, various parameters associated with the material assembly 200 can be selected in order to provide desired operating characteristics. For example, parameters associated with the dimension of air gap 218 and the dielectric constant of dielectric material 216 can be selected in order to provide desired operating characteristics. In at least some embodiments, the following parameter values can be used:

| Parameter | Value |
|---------------------|----------------------------|
| Air gap dimension | 0.1 to 1.0 mm |
| Dielectric constant | Greater than or equal to 1 |

[0041] Having considered an example material assembly, consider now example components that can be used in connection with the material assembly to provide a user with tactile feedback.

Example Components

[0042] Fig. 3 illustrates some example components in accordance with one or more embodiments generally at 300. Components 300 include a touch sense module 302, a drive module 304, and an actuator mechanism 306. Actuator mechanism 306 corresponds, in this example, to actuator mechanism 206 in Fig. 2. Any suitable hardware, software, and/or firmware can be used to implement touch sense module 302 and drive module 304.

[0043] With respect to touch sense module 302, any suitable type of technology can be utilized to implement the touch sense module such that it is capable of sensing when a user has touched or otherwise engaged the touch screen. Examples of suitable, known technologies include, by way of example and not limitation, capacitive field technology, resistive technology, optical, field effect, force/pressure, inductive, Hall effect, and the like.

[0044] Drive module 304 includes drive circuitry operably connected to the spaced-apart substrates of actuator mechanism 306. The drive circuitry is configured to drive the conductive layers of material with an electrical signal responsive to an input such as, by way of example and not limitation, sensing a touch input, software events, and/or other triggers or occurrences such as those mentioned above. Driving the conductive layers causes one or more of the corresponding substrates to be moved either or both of towards one another or away from one another. In some embodiments, the drive circuitry can use different drive profiles to drive the conductive layers to, in at least some embodiments, provide various tactile feedback to the user. The drive profiles can include, by way of example and not limitation, a series of voltage pulses having various frequencies,

[0045] As an example of suitable drive circuitry, consider Figs. 4a-4f.

[0046] Fig. 4a illustrates a high-level block diagram of an example system, generally at 600, that can be incorporated into a keyboard or similar device and utilized to implement the functionality described above and below. In the illustrated and described example, system 600 includes a microcontroller 602 which, in turn, includes a haptics customizing engine 604, a computer-readable storage media in the form of an EEPROM 606, a keyboard component 608, a key scanning component 610, and a haptics engine 612. In addition, system 600 includes an adjustable DC/DC converter 614, high side switches 616, 618, low side switches 620, 622, and an actuator 624.

[0047] In addition, a switch is illustrated generally at 630 and represents aspects of a touch surface that is configured to detect a user's engagement. Detection of a user's engagement can occur using any suitable type of sensor or detection apparatus. For example, in at least some embodiments, a mechanical switch, membrane switch, a capacitive-type sensor or a projected field-type sensor, surface acoustic wave, infrared display, optical /imaging resolution, and/or image sensing can be employed to sense a user's engagement. The operating principles of these types of sensors are generally known and, for the sake of brevity, are not described in detail here other than the explanation that appears just below.

[0048] In at least some embodiments, the detection apparatus establishes a sensory field that overlays a portion or all of a touch surface effective to define a sensor layer. The sensor layer can be considered as a region in which the presence and/or movement of a user, such as a user's finger, can be detected by the sensor layer. When the user's presence and/or movement is sensed by the sensor layer, an electrical signal can be sent to the drive electronics to effectively drive the substrates to cause the touch surface to move in a desired fashion.

[0049] As shown, haptics customizing engine 604 is connected to the adjustable DC/DC converter 614 which, in turn, is connected to high side and low side switches 616, 618 and 620, 622 respectively. Actuator 624 is operably connected to the high side and low side switches as shown. The switches, both high side and low side are connected to haptics engine 612.

[0050] In operation, in one or more embodiments, haptics customizing engine 604 is configured to load predefined haptic profiles from EEPROM 606 or modify parameters of existing profiles, either upon user/host request or by request from a self-adapting haptic hardware/software system. In addition, in one or more embodiments, haptics customizing engine 604 is configured to load new profiles to the haptics engine 612 or save new profiles to the EEPROM 606 as defined by a user or hardware/software developer. EEPROM 606 is configured to store haptic profile information for use in the haptic engine 612. This information can be predefined at production time, as well as updated or supplemented at runtime by users, host system, developers, or an adaptive module of the haptic system.

[0051] HID keyboard components 608 is configured to provide Human Interface Device functionality to the host system (if necessary) in order to allow the haptic system to act in the same manner as a keypad, keyboard, touchpad, mouse, and also to provide haptic information to the host for display, modification, or other use.

[0052] Key scanning component 610 is configured to provide a mechanism for the haptic system to know when it should trigger playback of a haptic profile. The haptic system does not need to directly scan keys itself. Rather, the haptic system can alternatively take key/switch/input state information from another device, such as a keyboard controller, touch screen controller, or other user input device.

[0053] Haptics engine 612 is configured to control the input signals to the haptic actuator based on profile data supplied by the EEPROM 606, haptics customization engine 604, and/or whatever other sources of data exist.

[0054] The adjustable DC/DC converter is configured to supply the actuator operating voltage. The output voltage may or may not be regulated, may or may not be adjustable on the fly, or may or may not be adjustable at all. The DC/DC converter may or may not have any common or uncommon features of typical power supplies, such as over current protection, under voltage protection, sleep mode, off mode, voltage feedback, etc. On the fly adjustment allows the output voltage to be adjustable such that the host or haptics customization engine 604 can modify the output voltage.

[0055] In operation, in one or more embodiments, the high side and low side switches are configured to drive the voltage of an actuator phase to the actuator's maximum positive operating voltage, maximum negative operating voltage, or any voltage in between, including ground or a high impedance (floating) potential.

[0056] Having described an example electronic device, consider now a discussion of example circuitry that can be utilized to implement the embodiments described above.

[0057] Fig. 4b illustrates an example voltage regulator in accordance with one or more embodiments. In this example, the adjustable, low voltage regulator feeds a high voltage DC/DC converter, such as converter 614 in Fig. 4a, to allow a real-time adjustable high voltage level. In this example, a linear regulator with resistor-adjusted output voltage is used to drive a DC/DC converter whose output voltage is proportional to its input voltage. Additionally, the resistor path that controls the output voltage of the linear regulator contains an electrically-controlled potentiometer with a serial interface. This allows a microcontroller to serially set the resistance of the feedback branch and control the output of the linear regulator which in turn drives the DC/DC converter and

controls the actuator drive voltage. It is to be appreciated there are many other ways to use regulated and unregulated supplies to provide the necessary operating voltage, and also that an adjustable high voltage rail is not necessary for every implementation, although if adjustability is required there are additionally many ways of providing adjustability.

[0058] Fig. 4c along with Fig. 4e illustrate a USB device that can allow real-time changes of haptic profiles and can act as an HID compliant keyboard. This circuit is an example implementation of one way to provide the system user with a means to interact with the haptic device. A USB device is provided which defines two interfaces. One is a standard HID keyboard, the other is a generic HID device functioning as a haptic customization engine. The standard keyboard interface allows the key presses on the haptic device to register on the host as keypresses of a keyboard. In a similar fashion, the device could register the inputs as mouse commands, touch screen or touch pad input, or switch closures. The haptic customization engine interface allows host software to send a variety of commands to define, redefine, modify, select or read haptic profile information that is stored/used in the haptic device.

[0059] Fig. 4d illustrates an example schematic, combined with Fig. 4f, of the high-side and low-side switches used to drive the actuator. The components, including the optoisolators, constitute but one implementation. Accordingly, other implementations can be utilized without departing from the spirit and scope of the claimed subject matter.

[0060] Fig. 4e illustrates an example schematic of a microcontroller and supporting hardware used to implement the haptic customization engine, the haptic engine, the USB interface, the key scan circuitry, and the EEPROM. Other circuitry can be used without departing from the spirit and scope of the claimed subject matter.

[0061] Fig. 4f illustrates the details of Fig. 4d. This schematic is an example implementation of a solid state switch stacking scheme that allows inexpensive, low voltage parts to be used together in order to switch high voltage. This particular stacking scheme utilizes capacitor coupled MOSFET gates and is uniquely designed for this switching application to be very power efficient during idle and active state due to the elimination of resistors while providing reliable switching function to capacitive loads which include many electrically-deformable devices such as, by way of example and not limitation, electroactive polymers, piezo materials, and electrostatic actuators. It is to be appreciated and understood that capacitive coupling is not the only way to stack switches for increased voltage handling, nor are stacked switches the only way to handle switching of high voltage.

Embodiment with User Input Mechanism

[0062] In other embodiments, a device includes an actuator mechanism that is configured to provide tactile feedback to a user. In at least some embodiments, the actuator mechanism comprises a pair of spaced-apart substrates each of which supports a conductive layer of material. At least one of the substrates supports or otherwise is in operative contact with a user input mechanism by which a user can provide input to the device. In at least some embodiments, a dielectric material and an adjacent air gap are interposed between the substrates. In some instances, the dielectric material can comprise air itself. The device also includes drive circuitry operably connected to the spaced-apart substrates. The drive circuitry is configured to drive the conductive layers of material with an electrical signal responsive to the device receiving input via the user input mechanism. Driving the conductive layers causes movement of one or both of the

substrates. In some embodiments, the drive circuitry can use different drive profiles to drive the conductive layers to provide various tactile feedback to the user through the user input mechanism.

[0063] As an example, consider Fig. 5a which illustrates a side sectional view of an example material assembly in accordance with one or more embodiments generally at 500. In this example, material assembly 500 includes a user input mechanism in the form of a knob 502. The knob can comprise any suitable type of knob which is engageable by a user. Additionally, any suitable type of user input mechanism can be used. In at least some embodiments, the user input mechanisms can be either virtual or non-virtual. For example, a virtual user input mechanism can include, by way of example and not limitation, sliders, buttons, and the like. The knob 502 is connected via a shaft to a bearing 503.

[0064] Material assembly 500 also includes an actuator mechanism 506 operably associated with the knob 502. The actuator mechanism is configured to provide tactile feedback to a user responsive to a user touching or otherwise engaging the knob 502. In at least some embodiments, the actuator mechanism 506 comprises a pair of spaced-apart substrates 508, 510 each of which is conductive or supports a conductive layer of material. In at least some embodiments, a dielectric material 516 and an adjacent air gap are interposed between the substrates 508, 510. In addition, actuator mechanism 506 also includes a spring mechanism to 520, 522. Any suitable type of spring mechanism can be utilized such as various types of mechanical springs, rubberized springs, rubberized stoppers, elastomeric material, resilient gasket material, and the like. Examples of suitable types of springs and spring mechanisms are described in U.S. Provisional Application No. 61/143,203 incorporated by reference above.

[0065] Any suitable type of materials can be utilized to provide components of the material assembly 500.

[0066] For example, in at least some embodiments, substrates 508, 510 can be formed from a clear material such as plastic or glass. Additionally, the conductive layers of material can comprise any suitable type of conductive material. In at least some embodiments, the conductive material is a clear conductive material. Alternately or additionally, in at least some embodiments, the conductive material is a spray-on material or film that is coated onto the surfaces of substrates 508, 510 as described above. Alternately or additionally, in at least some embodiments, the conductive material can comprise indium tin oxide, silver, copper, or any other suitable type of conductive material.

[0067] Dielectric material 516 can comprise any suitable type of dielectric material such as, by way of example and not limitation, air, glass, plastic, elastomeric material, gels and/or other fluidic or non-fluidic materials.

[0068] In one or more embodiments, various parameters associated with the material assembly 500 can be selected in order to provide desired operating characteristics. For example, parameters associated with the dimension of air gap, the thickness of dielectric material 516, and the dielectric constant of dielectric material 516 can be selected in order to provide desired operating characteristics. Example parameters have been given above.

[0069] The material assembly 500 can have other components associated with it, such as those components illustrated and described in connection with Fig. 3. As such, the drive circuitry that can be utilized in connection with material assembly 500 can provide tactile feedback to a user when the user, for example, turns the knob. For example, a particular signal or voltage profile can be selected and applied, as described above, to provide tactile feedback in the form of repeated clicks when the knob is turned by the

user. It is to be appreciated and understood, however, that other profiles can be used depending on the type of user input mechanism.

[0070] As another example, consider Fig. 5b which illustrates a side sectional view of an example material assembly in accordance with one or more embodiments generally at 500b. In this example, material assembly 500b includes a user input mechanism in the form of a key 502b such as one would find on a computer keyboard.

[0071] Material assembly 500b includes an actuator mechanism 506b operably connected to key 502b and comprising a pair of spaced apart substrates 508b, 510b each of which has conductive properties. In the present example, substrate 508b can comprise any suitable type of substrate examples of which are provided above. In this particular example, substrate 510b comprises a metal backer material such as sheet metal. Of course, any suitable type of material can be utilized. Actuator mechanism 506b also includes spring mechanisms 520b, 522b, 524b, and 526b. Spring mechanisms 520b and 524b are connected between substrate 510b and key 502b. Spring mechanisms 522b and 526b are connected between substrate 510b and substrate 508b.

[0072] Further, actuator mechanism 506b includes a membrane switch layer 528b and a detent 530b connected to the underside of key 502b. When key 502 is depressed, detent 530b comes into contact with membrane switch layer 528b closing a switch. When the switch is closed, drive electronics can apply an electronic signal to substrate 508b and/or substrate 510b thus causing substrate 508b to be attracted to substrate 510b. This can provide haptic feedback to a user. In at least some embodiments, 40 to 50 g of pressure can be utilized as a key spring force to press down the key to the membrane switch layer. Further, the membrane switch layer can achieve switch closure with about 10 to 20 g of pressure.

[0073] Having considered various embodiments, consider now an example method that can be implemented by the embodiments described herein.

Example Method

[0074] Fig. 6 is a flow diagram that describes steps in a method in accordance with one or more embodiments. The method can be implemented in connection with any suitable hardware, software, firmware, or combination thereof. In at least some embodiments, the method can be implemented in connection with systems such as those that are described above.

[0075] Step 600 senses user input. This step can be performed in any suitable way. For example, in at least some embodiments, a user's input can be sensed responsive to the user touching a touch surface such as a touch screen or touch pad. In yet other embodiments, a user's input can be sensed relative to a user input mechanism. Examples of user input mechanisms have been provided above. In addition, examples of various technologies that can be utilized to sense a user's input have been provided above.

[0076] As an example, consider Fig. 7 which illustrates the Fig. 2 embodiment. In this example, a finger 700 has touched touch screen 202.

[0077] Responsive to sensing the user's input, step 602 applies an electrical signal, such as a voltage or a voltage profile to conductive layers that are supported by substrates, such as those conductive layers and substrates that are described above. Any suitable type of electrical signal can be applied including those that are defined by voltage profiles such as the profiles that are described above. Applying voltage to the conductive layers provides tactile feedback to user as described above.

[0078] As an example, consider Fig. 8 which continues the Fig. 7 example. There, a voltage has been applied to the conductive layers of material 212, 214 thus causing an

attractive force between the layers and hence, the substrates 208, 210 respectively, on which they reside. Responsive to the applied voltage, in this example, substrate 208 moves towards substrate 210 thus compressing spring mechanism 220, 222. As can be seen by a comparison of Figs. 7 and 8, air gap 218 and hence, the distance between substrates 208 and 210 has been reduced.

[0079] When the voltage is removed from the conductive layers of material, the resiliency of spring mechanism 220, 222 causes substrates 208, 210 to return to what can be considered as an unbiased disposition relative to one another. The movement of the substrates as just described provides tactile feedback to the user which can simulate a button click or, depending on the voltage profile, any other suitable type of tactile feedback such as a buzz or vibration and the like.

[0080] It is to be appreciated and understood, however, that audio signals can be used to drive the conductive layers.

Varying Feedback Based Upon User Interface Element

[0081] In one or more embodiments, tactile feedback can be varied based upon the type of user interface element that is engaged by the user. For example, some types of user interface elements such as virtual buttons lend themselves to tactile feedback in the form of a click. This click can be provided by selecting and applying an appropriate electronic signal profile responsive to sensing the user input relative to the virtual button. Ultimately, other types of user interface elements such as sliders and the like lend themselves to tactile feedback of a different nature. For example, perhaps a device designer would like to have their slider elements provide tactile feedback in the form of multiple clicks in rapid succession as the slider is moved along its track. In this case,

selection and application of the appropriate electronic signal profile can provide the desired tactile feedback.

[0082] As an example, consider Fig. 9 which is a flow diagram that describes steps in a method in accordance with one or more embodiments. The method can be implemented in connection with any suitable hardware, software, firmware, or combination thereof. In at least some embodiments, the method can be implemented utilizing a system such as the systems described above.

[0083] Step 900 senses user input. This step can be performed in any suitable way. For example, in at least some embodiments, a user's input can be sensed responsive to the user touching a touch surface such as a touch screen or touch pad. In yet other embodiments, a user's input can be sensed relative to a user input mechanism. Examples of user input mechanisms have been provided above. In addition, examples of various technologies that can be utilized to sense a user's input have been provided above.

[0084] Step 902 ascertains an input location associated with the user's input. As an example, consider Fig. 10. There, the device of Fig. 1 is shown generally at 1000. Like numerals from the Fig. 1 embodiment have been utilized to depict like components. In this example, three user interface elements are shown at 1002, 1004, and 1006. User interface elements 1002 and 1004 are icons that represent buttons, and user interface element 1006 is a slider. In this particular example, a user has selected user interface element 1004 and, responsive, the method ascertains the input location associated with the user's input.

[0085] Step 904 ascertains a user interface element associated with the input location. In this particular example, the method ascertains that user interface element 1004 corresponds to and is associated with the input location touched by or otherwise engaged by the user. Step 906 selects an electronic signal profile associated with the user interface

element ascertained in step 904. Any suitable electronic signal profile can be used. In this particular example, an electronic signal profile associated with providing tactile feedback in the form of a click can be selected. In an event the user had selected user interface element 1006, a different electronic signal profile would have been selected, e.g., a signal profile associated with providing tactile feedback in the form of multiple clicks at a rapid frequency.

[0086] Having selected an appropriate electronic signal profile in step 906, step 908 applies the selected electronic signal profile to conductive layers associated with substrates supporting the conductive layers, such as those substrates described above. Doing so provides tactile feedback to the user in accordance with the selected voltage profile.

Conclusion

[0087] In one or more embodiments, two conductive surfaces are utilized and suitably driven to provide movement of at least one of the surfaces through attractive and/or repellent forces. The movement of the surfaces can be harnessed or utilized to provide a variety of functionality. Any suitable type of material can be used for the conductive surfaces. For example, the conductive surfaces can be formed as part of a transparent substrate. Alternately or additionally, the conductive surfaces can be formed from material that is not transparent, e.g., a metal material.

[0088] In one or more embodiments, a device includes a surface and an actuator mechanism operably associated with the surface. The actuator mechanism is configured to provide tactile feedback to a user in contact with the surface. In at least some embodiments, the actuator mechanism comprises a pair of spaced-apart substrates each of which supports a conductive layer of material. In at least some embodiments, a dielectric

material and an adjacent air gap are interposed between the substrates. The device also includes drive circuitry operably connected to the spaced-apart substrates. The drive circuitry is configured to drive the conductive layers of material with an electrical signal. Driving the conductive layers with the electrical signal causes one or more of the corresponding substrates to be moved either or both of towards one another or away from one another. In some embodiments, the drive circuitry can use different drive profiles to drive the conductive layers to provide various tactile or audio feedback to the user.

[0089] In other embodiments, a device includes an actuator mechanism that is configured to provide tactile or audio feedback to a user. In at least some embodiments, the actuator mechanism comprises a pair of spaced-apart substrates each of which supports a conductive layer of material. At least one of the substrates supports, either directly or indirectly, or is otherwise in operative contact with a user input mechanism by which a user can provide input to the device. In at least some embodiments, a dielectric material and an adjacent air gap are interposed between the substrates. The device also includes drive circuitry operably connected to the spaced-apart substrates. The drive circuitry is configured to drive the conductive layers of material with an electrical signal. Driving the conductive layers with an electrical signal causes movement of one or both of the substrates. In some embodiments, the drive circuitry can use different drive profiles to drive the conductive layers to provide various tactile feedback to the user through the user input mechanism.

[0090] In at least some embodiments, the electrical signal that drives the conductive layers can be generated responsive to: user input or interaction, software events, and/or external triggers such as interaction with others, alerts, messages, reminders and the like. With respect to user interaction, such can occur through, for example, a touch screen,

touch pad, keyboard, key pad, discrete switches (mechanical or digital), linear or rotary motion sensing, proximity , interactive content, invalid entry, limits and the like.

[0091] Although the subject matter has been described in language specific to structural features and/or methodological acts, it is to be understood that the subject matter defined in the appended claims is not necessarily limited to the specific features or acts described above. Rather, the specific features and acts described above are disclosed as example forms of implementing the claims.

Claims

What is claimed is:

1. A device comprising:
 - a housing configured to support a surface;
 - a surface supported by the housing;
 - an actuator mechanism operably associated with the surface, the actuator mechanism comprising a pair of spaced-apart substrates with conductive properties; and
 - drive circuitry operably connected to the spaced-apart substrates and configured to drive the substrates with an electrical signal to cause movement of at least one of the substrates relative to the other of the substrates effective to provide tactile feedback to a user.
2. The device of claim 1, further comprising a dielectric material interposed between the pair of spaced-apart substrates.
3. The device of claim 1, wherein the surface comprises a touch sensitive surface.
4. The device of claim 1, wherein the surface comprises a touch screen.
5. The device of claim 1, wherein the surface comprises a touch pad.
6. The device of claim 1, wherein the surface comprises a keyboard.
7. The device of claim 1, wherein the surface comprises a touch sensitive control panel.

8. The device of claim 1, further comprising a display operably adjacent one of the spaced-apart substrates.
9. The device of claim 1, wherein the device comprises a hand-held device.
10. The device of claim 1, wherein the device is configured for use in a vehicle.
11. The device of claim 1, wherein the actuator mechanism comprises a spring mechanism operably connected to at least one of the spaced-apart substrates.
12. The device of claim 1, wherein the spaced-apart substrates are formed from a clear material.
13. The device of claim 1, wherein at least one substrate is composed of a non-conductive material coated with a conductive layer.
14. The device of claim 1, wherein each substrate is coated with a conductive layer of material comprising indium tin oxide.
15. The device of claim 2, wherein the dielectric material comprises glass or plastic.
16. The device of claim 1, wherein the drive circuitry is configured to utilize different drive profiles.

17. A material assembly comprising:
 - a first substrate with conductive properties;
 - a second substrate with conductive properties operably associated with the first substrate;

wherein at least one of the first or second substrates is configured to be driven with an electrical signal to cause movement of the first substrate relative to the second substrate effective to provide tactile feedback to a user.
18. The material assembly of claim 17, further comprising a dielectric material interposed between the first and second substrates.
19. The material assembly of claim 17, wherein the material assembly is configured to form part of a hand-held device.
20. The material assembly of claim 17, wherein the first and second substrates comprise a clear material.
21. The material assembly of claim 17 further comprising a spring mechanism interposed between the first and second substrates.
22. The material assembly of claim 17, wherein at least one substrate is composed of a non-conductive material coated with a conductive layer of material.

23. The material assembly of claim 22, wherein the conductive layer of material comprises a clear conductive material.
24. The material assembly of claim 22, wherein the conductive layer of material comprises indium tin oxide.
25. The material assembly of claim 18, wherein the dielectric material comprises glass or plastic.
26. The material assembly of claim 17 further comprising a housing supporting the material assembly.
27. The material assembly of claim 17 further comprising a housing supporting the material assembly, wherein the housing defines a hand-held device.
28. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate.
29. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a touch screen.
30. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a touchpad.

31. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a key on a keyboard.

32. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a touch sensitive control panel.

33. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a knob.

34. A method comprising:

sensing a user input;
responsive to sensing the user input, applying an electrical signal to at least a substrate with conductive properties effective to move the substrate to provide tactile feedback responsive to said sensing.

35. The method of claim 34 further comprising after said sensing and before said applying, ascertaining an input location associated with the user input.

36. The method of claim 34 further comprising:

after said sensing and before said applying, ascertaining an input location associated with the user input; and

ascertaining a user interface element associated with the input location.

37. The method of claim 34 further comprising:

after said sensing and before said applying, ascertaining an input location associated with the user input;
ascertaining a user interface element associated with the input location; and
responsive to ascertaining the user interface element, selecting an electrical signal profile associated with the user interface element, wherein applying the electrical signal comprises applying the electrical signal profile.

38. The method of claim 34, wherein the device comprises a hand-held device.

AMENDED CLAIMS
received by the International Bureau on 11 June 2010 (11.06.2010)

What is claimed is:

1. A device comprising:
 - a housing (102) configured to support a surface;
 - a surface (104) supported by the housing;
 - an actuator mechanism (206) operably associated with the surface, the actuator mechanism comprising a pair of spaced-apart substrates (208, 210) with conductive properties; and
 - drive circuitry (304) operably connected to the spaced-apart substrates and configured to drive the substrates with an electrical signal to cause movement of at least one of the substrates relative to the other of the substrates effective to provide tactile feedback to a user.
2. The device of claim 1, further comprising a dielectric material interposed between the pair of spaced-apart substrates.
3. The device of claim 1, wherein the surface comprises a touch sensitive surface.
4. The device of claim 1, wherein the surface comprises a touch screen.
5. The device of claim 1, wherein the surface comprises a touch pad.
6. The device of claim 1, wherein the surface comprises a keyboard.

7. The device of claim 1, wherein the surface comprises a touch sensitive control panel.
8. The device of claim 1, further comprising a display operably adjacent one of the spaced-apart substrates.
9. The device of claim 1, wherein the device comprises a hand-held device.
10. The device of claim 1, wherein the device is configured for use in a vehicle.
11. The device of claim 1, wherein the actuator mechanism comprises a spring mechanism operably connected to at least one of the spaced-apart substrates.
12. The device of claim 1, wherein the spaced-apart substrates are formed from a clear material.
13. The device of claim 1, wherein at least one substrate is composed of a non-conductive material coated with a conductive layer.
14. The device of claim 1, wherein each substrate is coated with a conductive layer of material comprising indium tin oxide.
15. The device of claim 2, wherein the dielectric material comprises glass or plastic.

16. The device of claim 1, wherein the drive circuitry is configured to utilize different drive profiles.
17. A material assembly comprising:
 - a first substrate (208) with conductive properties;
 - a second substrate (210) with conductive properties operably associated with the first substrate;
 - wherein at least one of the first or second substrates is configured to be driven with an electrical signal to cause movement of the first substrate relative to the second substrate effective to provide tactile feedback to a user.
18. The material assembly of claim 17, further comprising a dielectric material interposed between the first and second substrates.
19. The material assembly of claim 17, wherein the material assembly is configured to form part of a hand-held device.
20. The material assembly of claim 17, wherein the first and second substrates comprise a clear material.
21. The material assembly of claim 17 further comprising a spring mechanism interposed between the first and second substrates.
22. The material assembly of claim 17, wherein at least one substrate is composed of a non-conductive material coated with a conductive layer of material.

23. The material assembly of claim 22, wherein the conductive layer of material comprises a clear conductive material.
24. The material assembly of claim 22, wherein the conductive layer of material comprises indium tin oxide.
25. The material assembly of claim 18, wherein the dielectric material comprises glass or plastic.
26. The material assembly of claim 17 further comprising a housing supporting the material assembly.
27. The material assembly of claim 17 further comprising a housing supporting the material assembly, wherein the housing defines a hand-held device.
28. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate.
29. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a touch screen.

30. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a touchpad.
31. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a key on a keyboard.
32. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a touch sensitive control panel.
33. The material assembly of claim 17 further comprising a user input mechanism operably connected to the first substrate, wherein the user input mechanism comprises a knob.
34. A method comprising:
sensing (600) a user input;
responsive to sensing the user input, applying (602) an electrical signal to at least a substrate with conductive properties effective to move the substrate to provide tactile feedback responsive to said sensing.
35. The method of claim 34 further comprising after said sensing and before said applying, ascertaining an input location associated with the user input.

36. The method of claim 34 further comprising:

after said sensing and before said applying, ascertaining an input location associated with the user input; and ascertaining a user interface element associated with the input location.

37. The method of claim 34 further comprising:

after said sensing and before said applying, ascertaining an input location associated with the user input; ascertaining a user interface element associated with the input location; and responsive to ascertaining the user interface element, selecting an electrical signal profile associated with the user interface element, wherein applying the electrical signal comprises applying the electrical signal profile.

38. The method of claim 34, wherein the device comprises a hand-held device.

STATEMENT UNDER ARTICLE 19 (1)

Independent claims 1, 17, and 34 are amended to provide features of the claims with reference signs placed in parentheses to comply with rule 6.2(b) PCT.

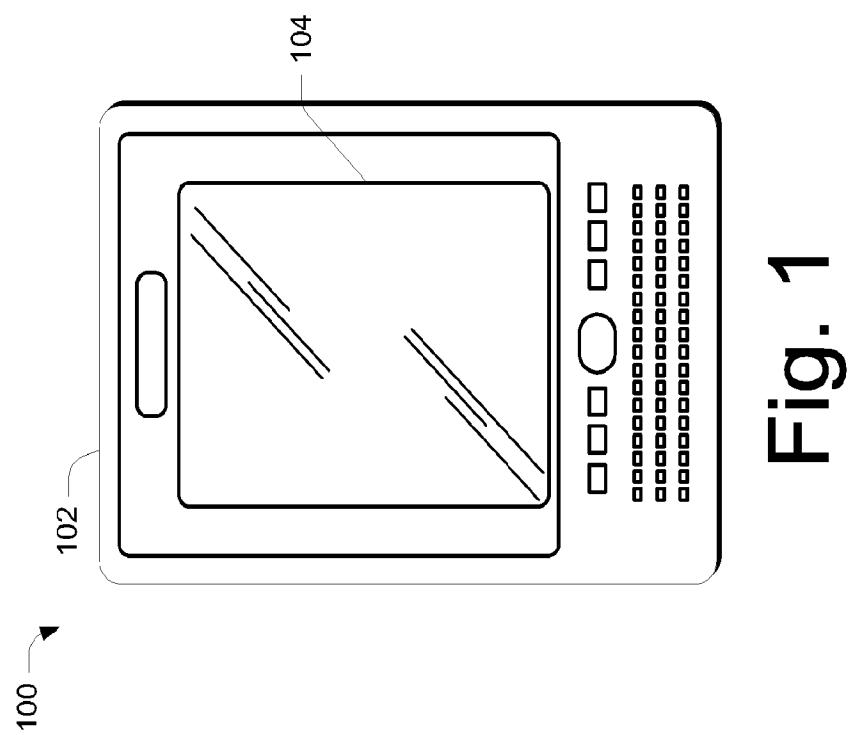


Fig. 1

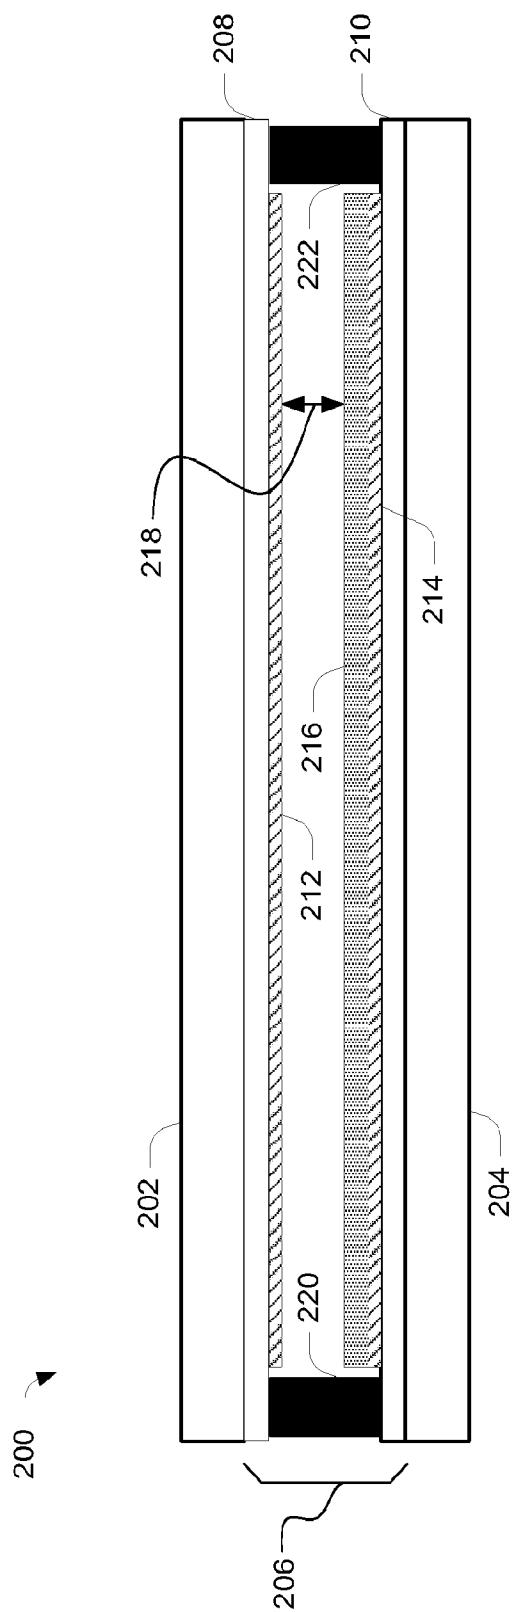


Fig. 2

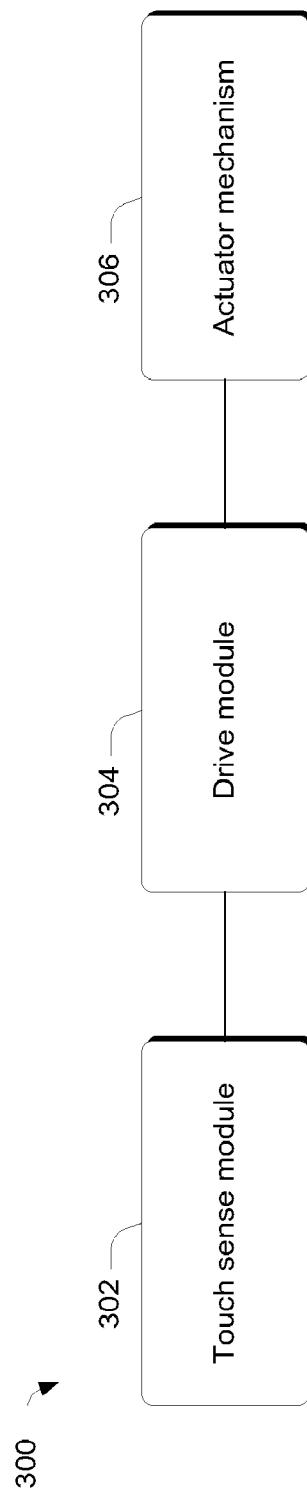


Fig. 3



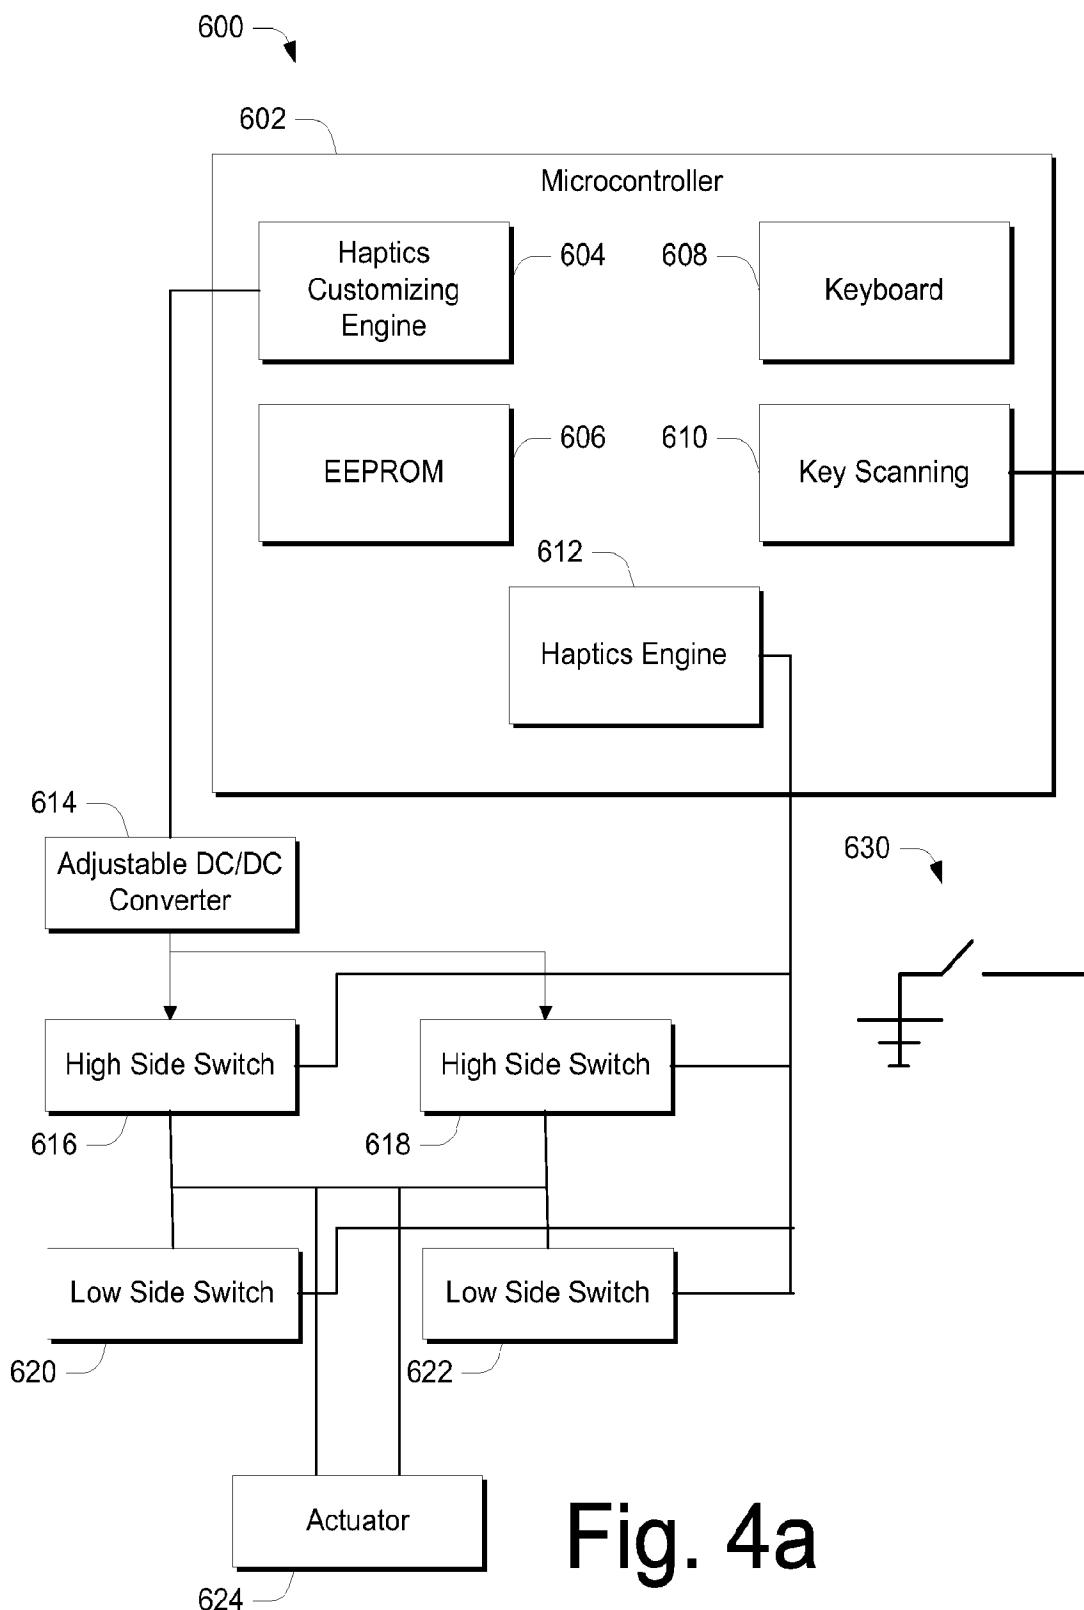


Fig. 4a


Fig. 4b

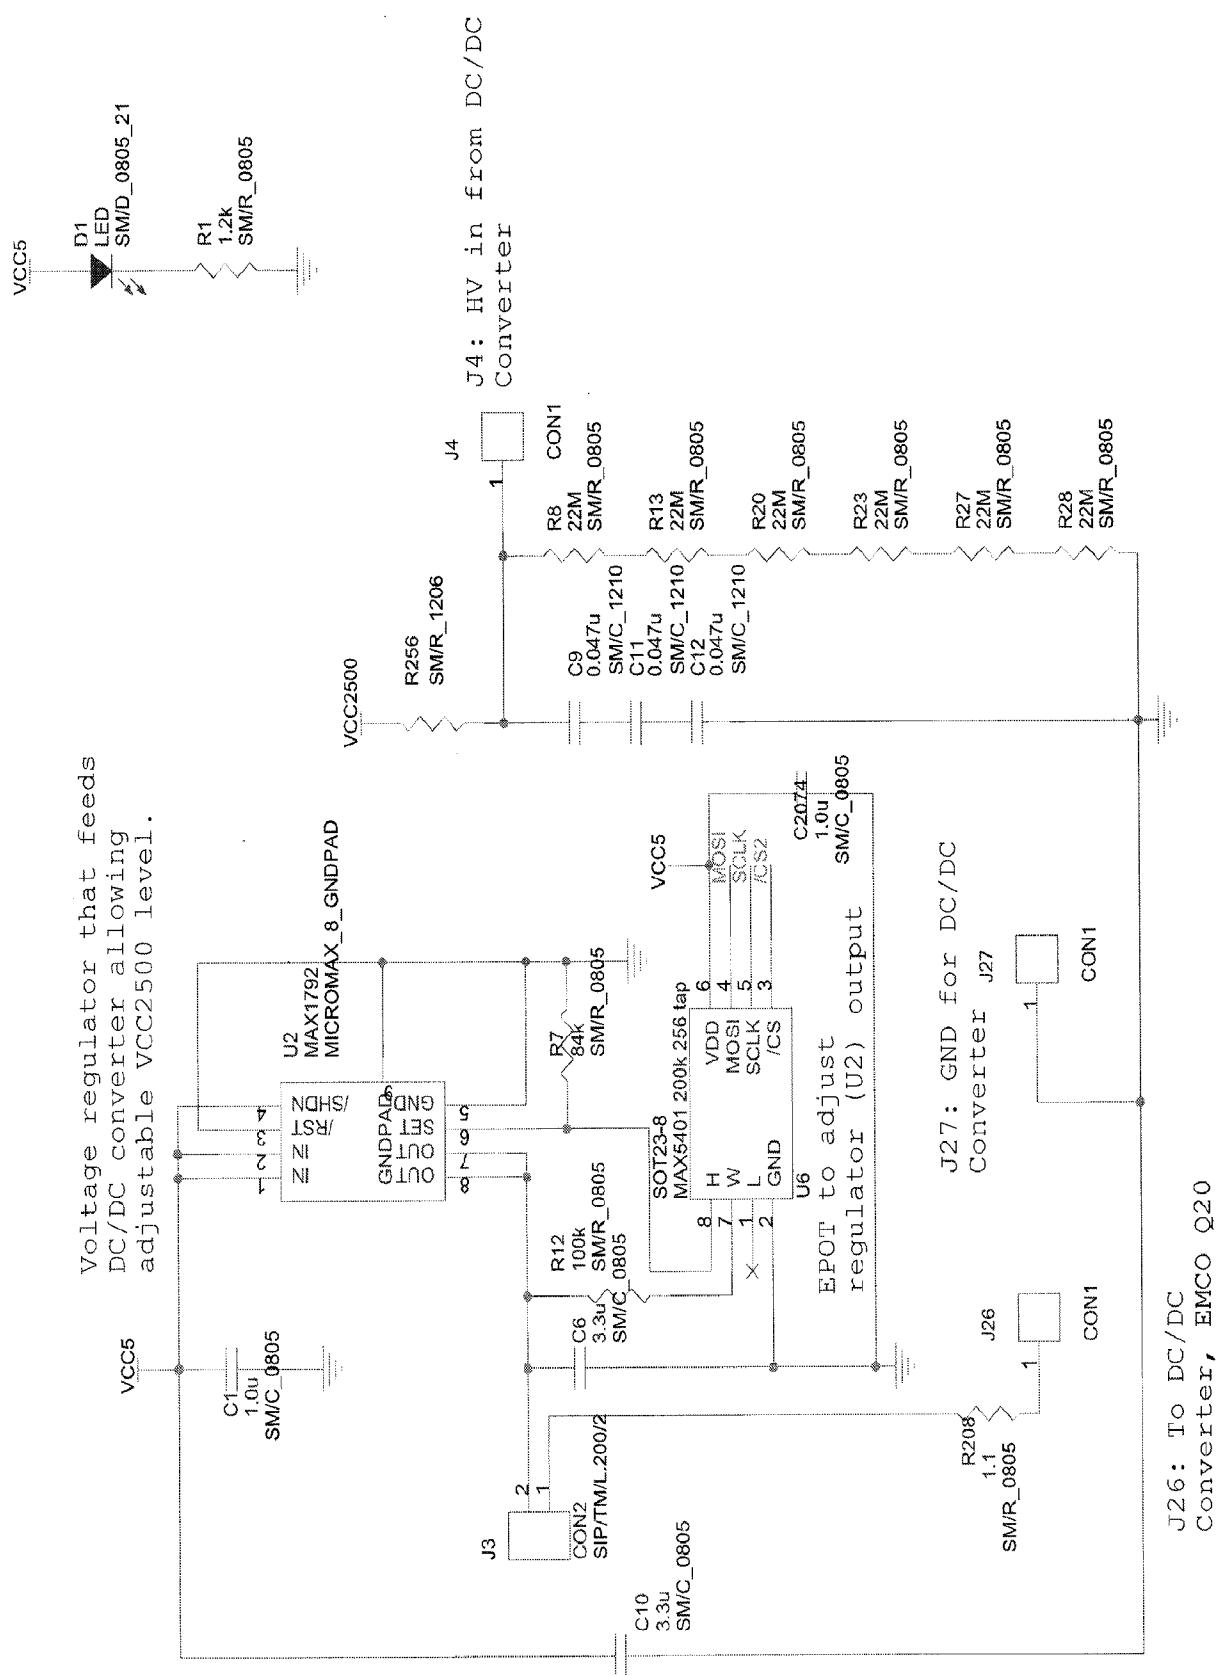

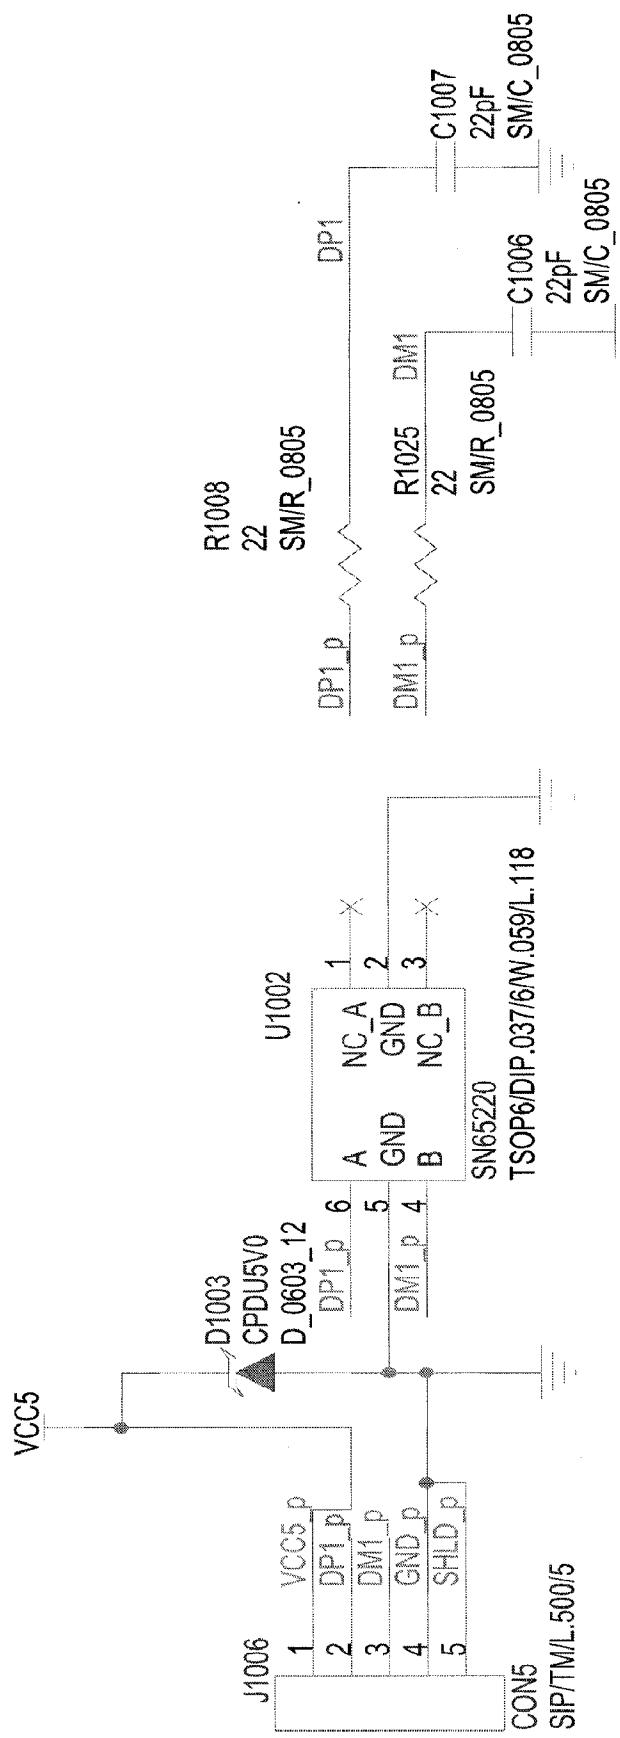

Optional USB interface allows realtime changes of haptic profiles, and can act as a HID compliant keyboard.

Fig. 4c

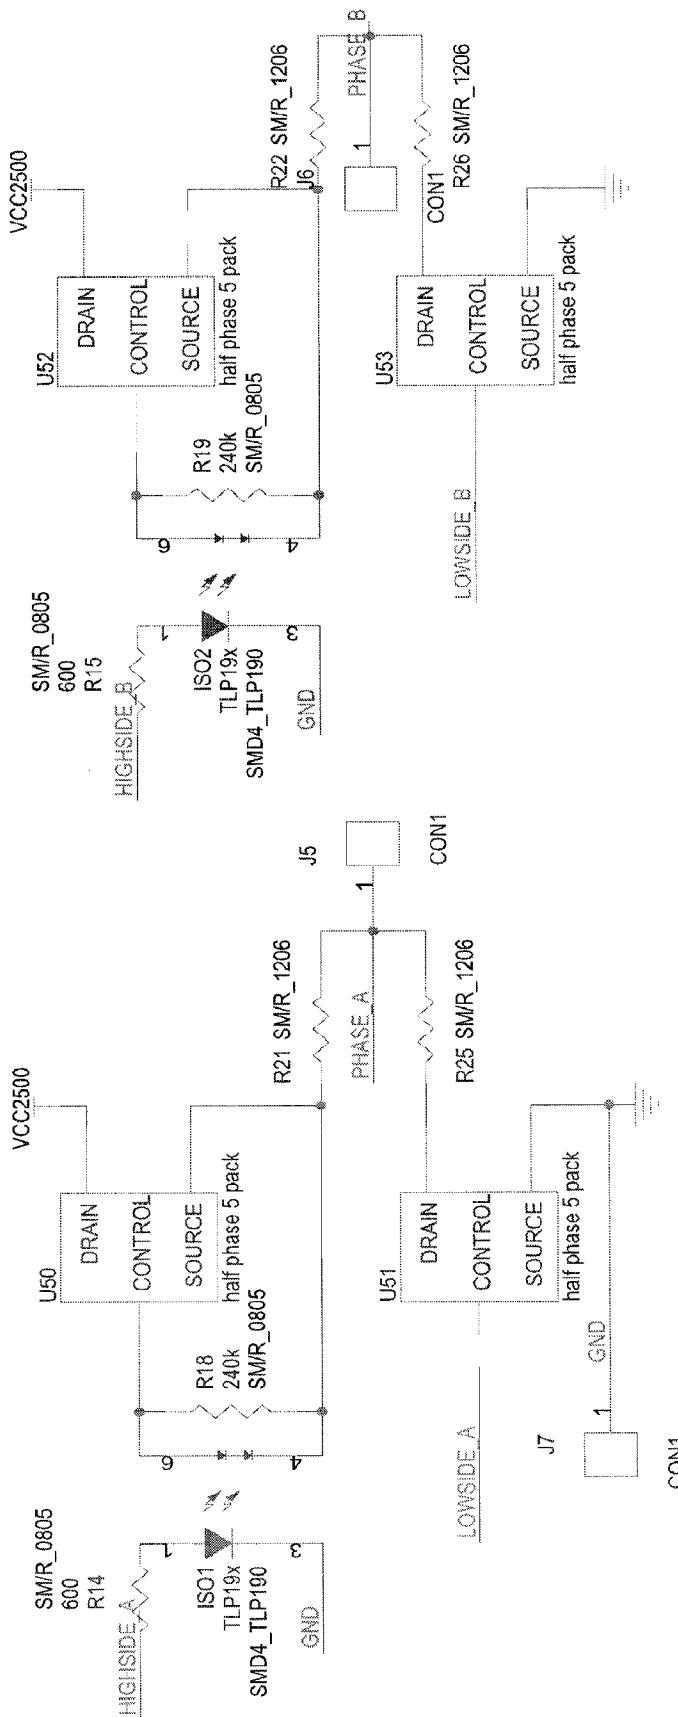

See next page for details of U50-U53.

R21, 22, 25, and 26 set the slew rate of the actuator.

ISO1+R18 and ISO2+R19 are used to easily drive the high-side n-channel FET stacks.

Fig. 4d

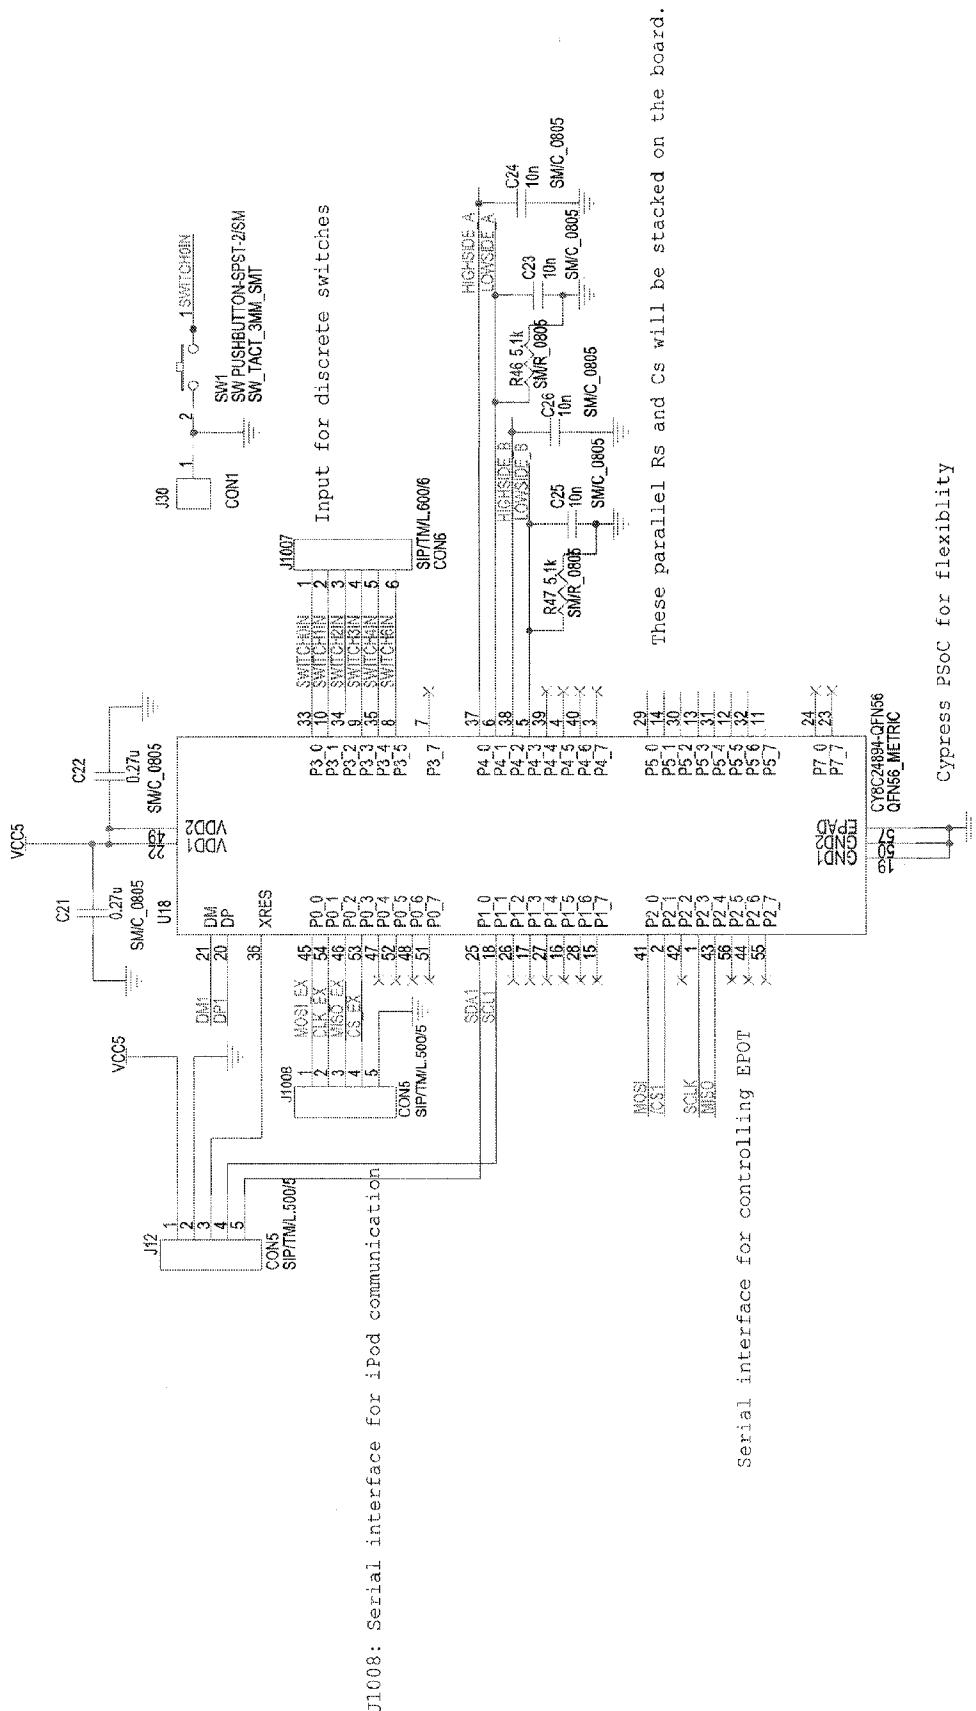


Fig. 4e

Replacement Sheet

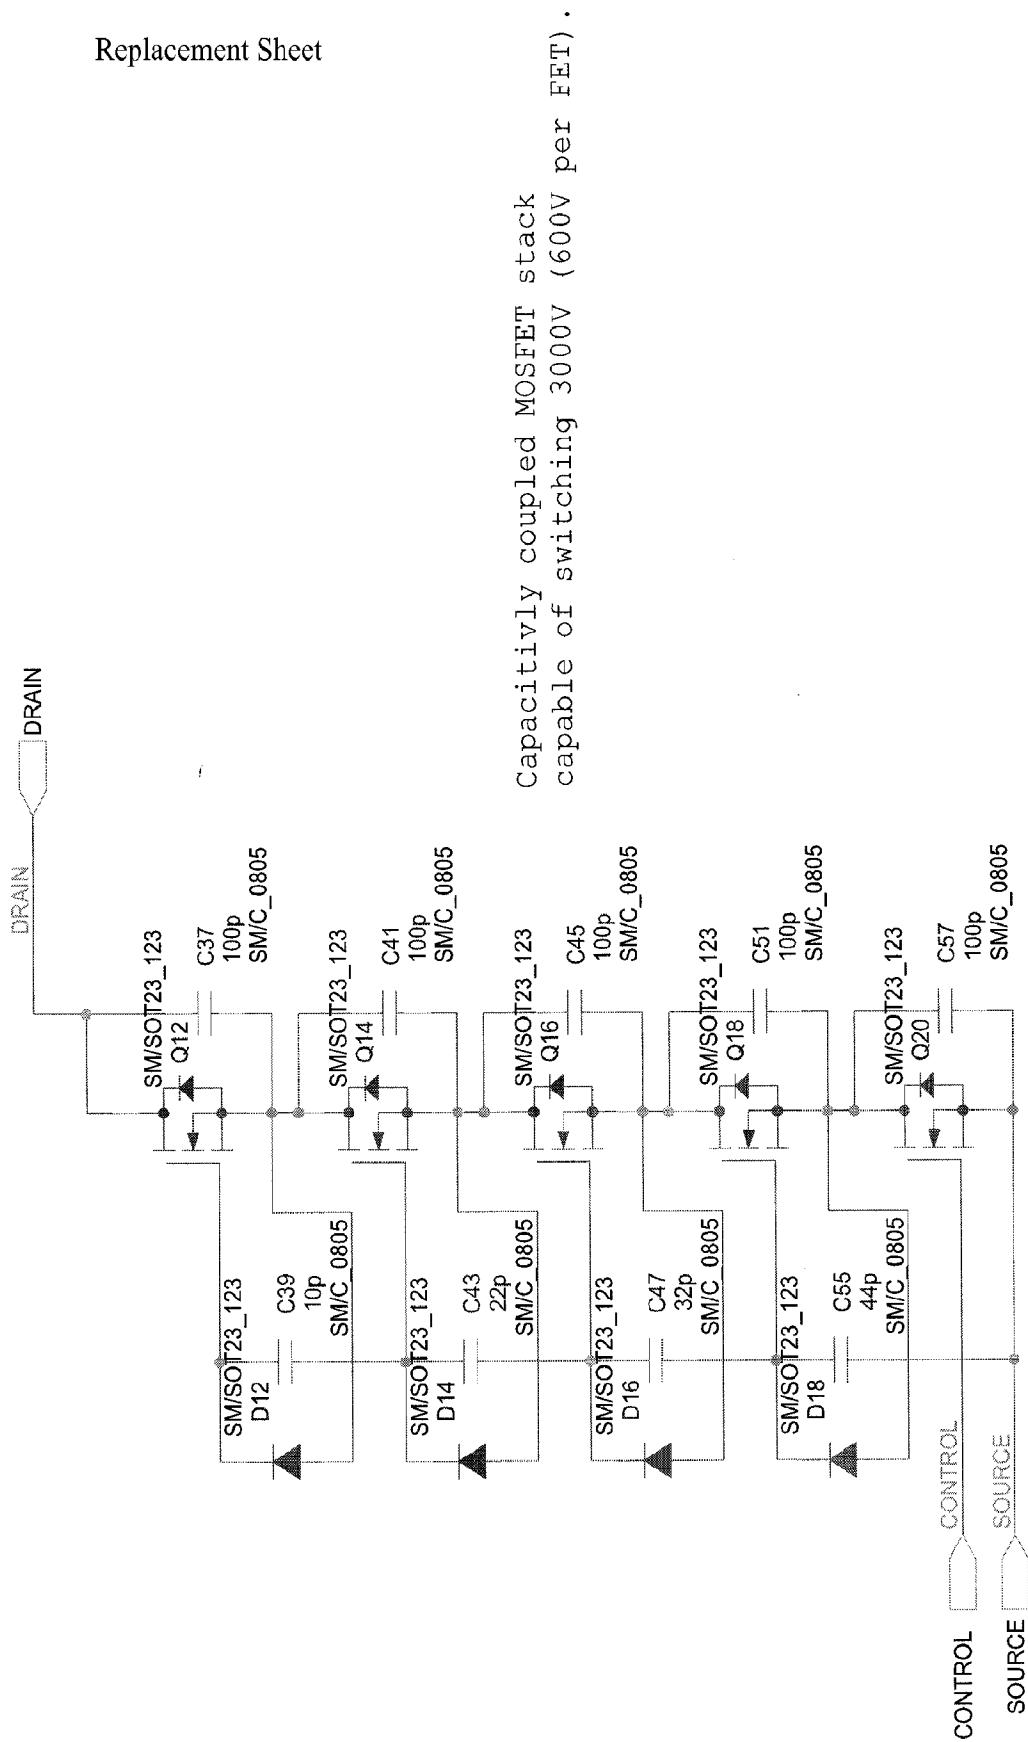


Fig. 4f

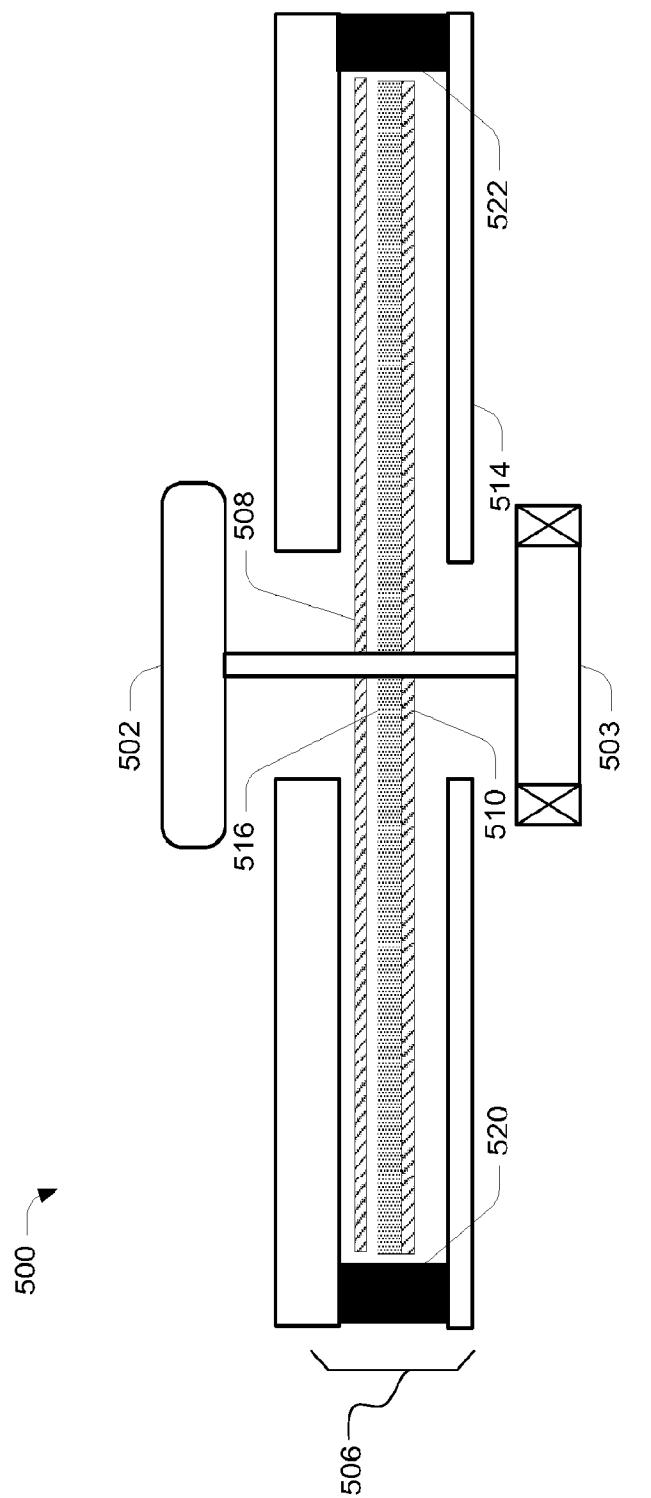


Fig. 5a

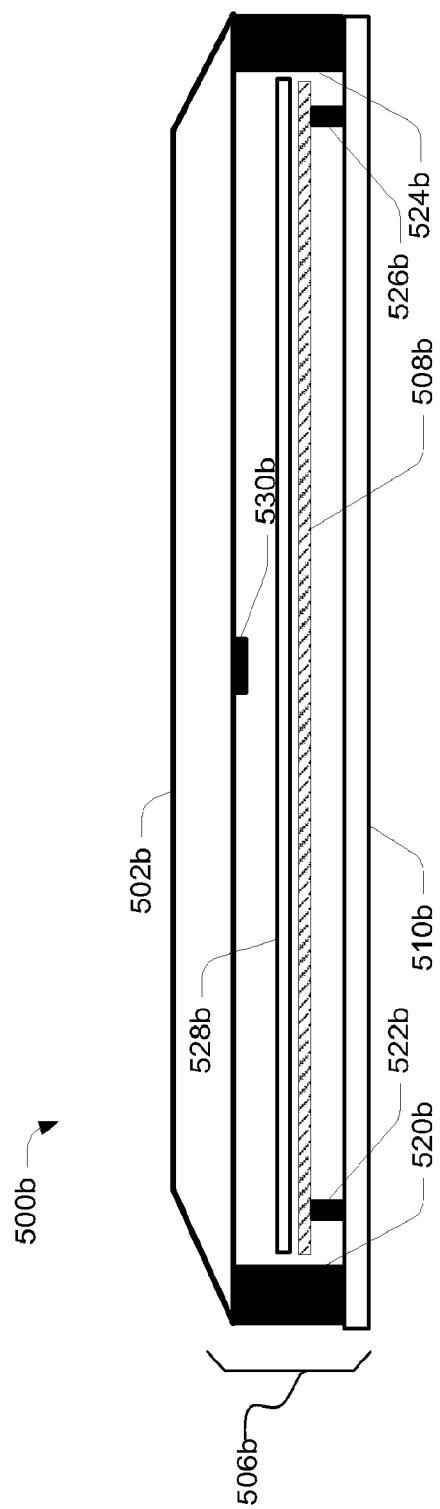


Fig. 5b

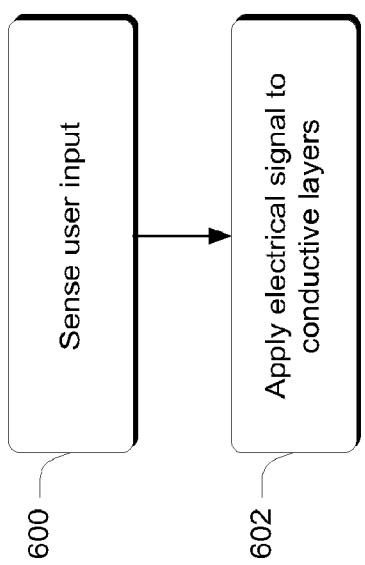


Fig. 6

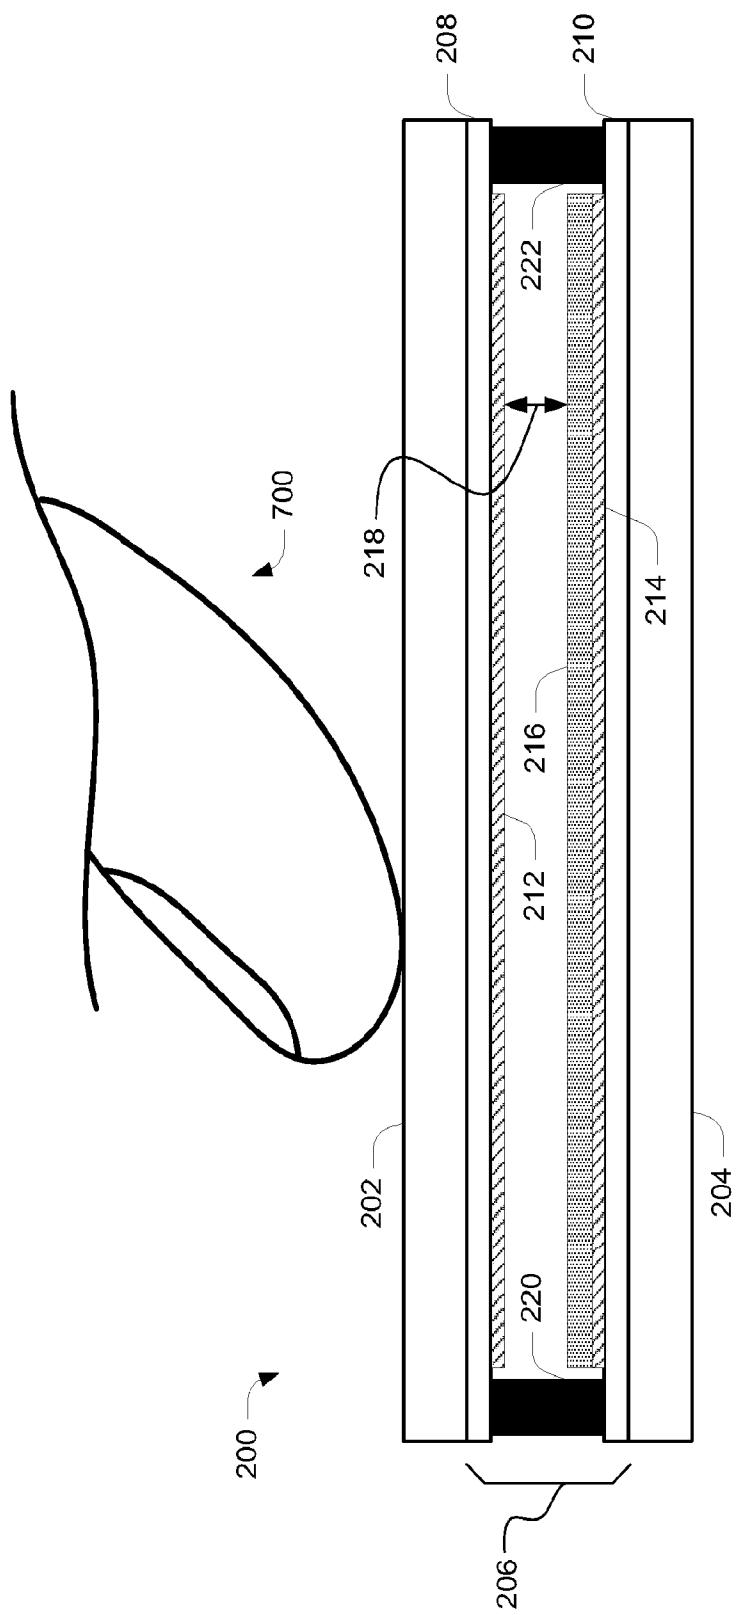


Fig. 7

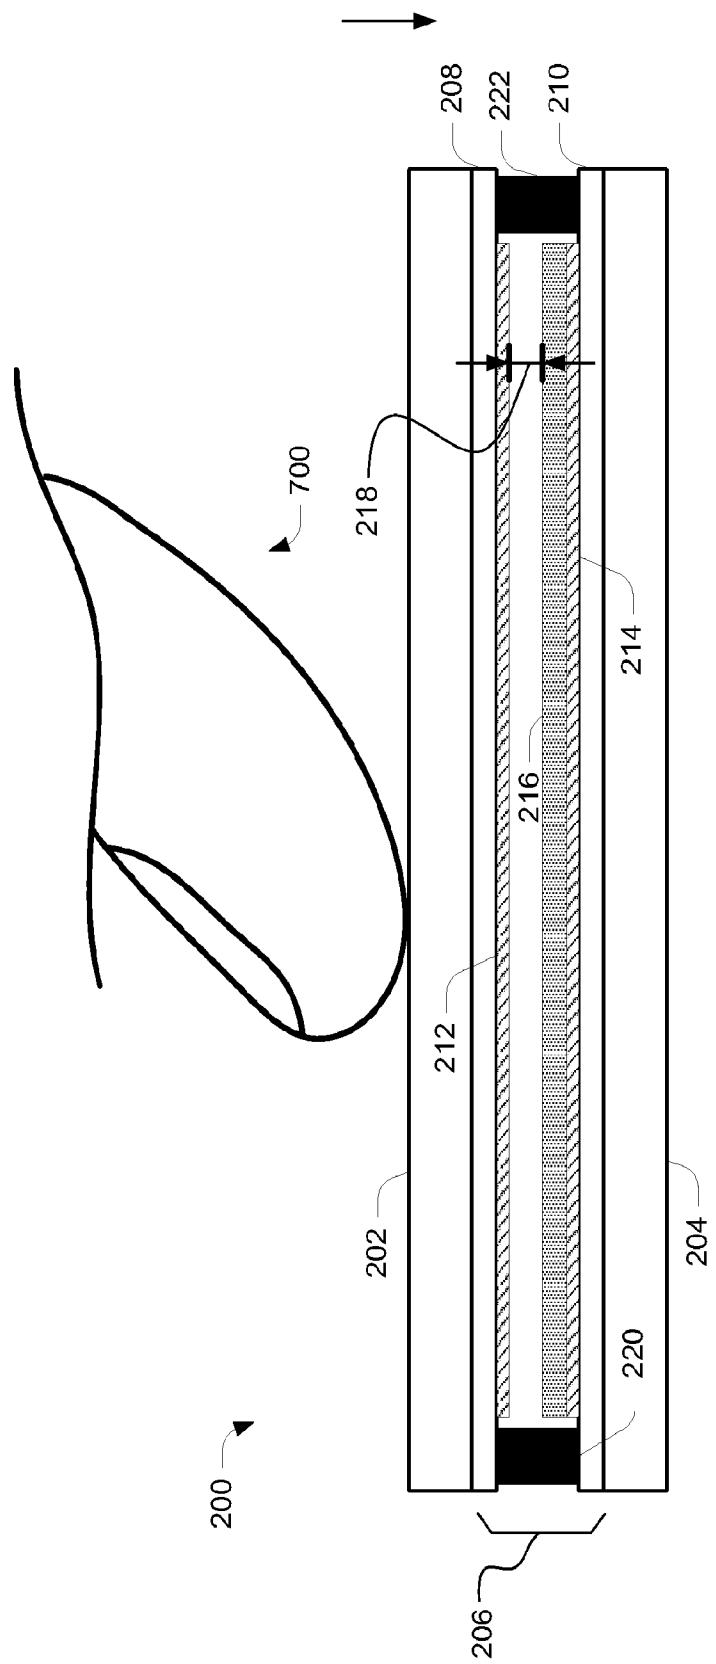
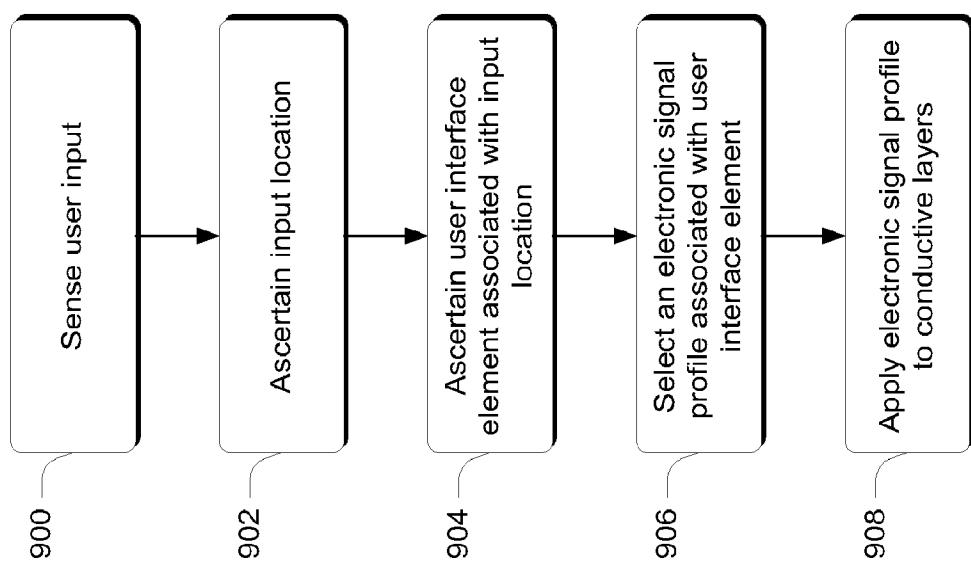


Fig. 8

Fig. 9



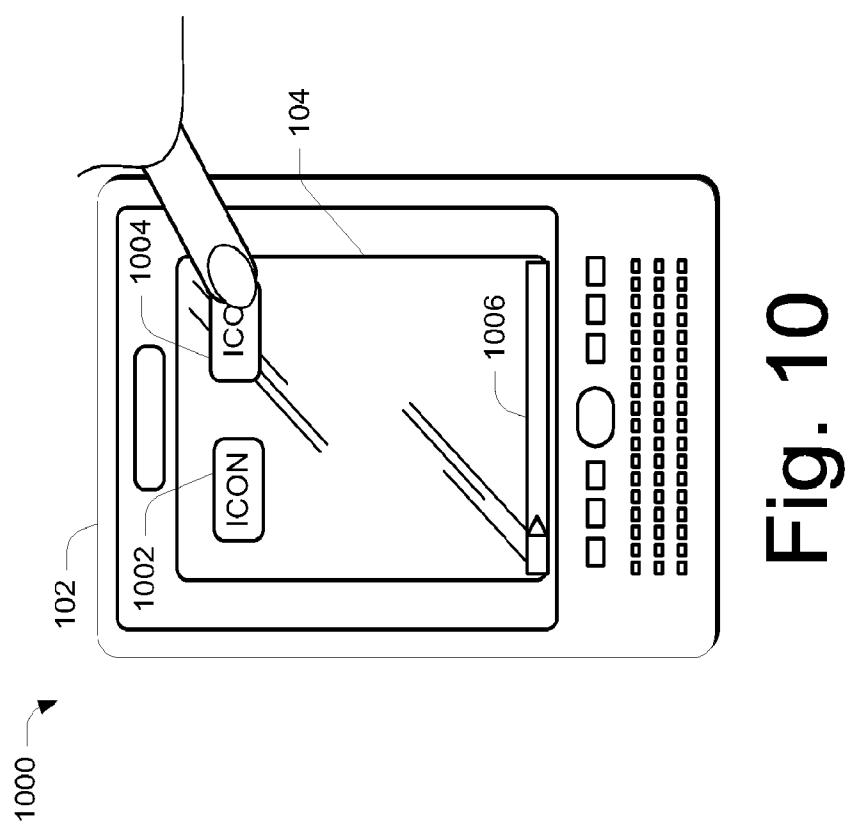


Fig. 10

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/020380

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06F3/02 H01H13/85 G06F3/01 G06F3/033
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06F H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|--|
| X | EP 1 310 860 A1 (NTT DOCOMO INC [JP]) 14 May 2003 (2003-05-14) abstract; figures 1-85 paragraphs [0001], [0006], [0067], [0069], [0081], [0082], [0089] – [0091], [0148] – [0155], [0162] – [0170], [0177] – [0182], [0284] paragraphs [0287] – [0289], [0291], [0293] – [0302] ----- US 2004/252104 A1 (NAKAMURA AKIO [JP] ET AL) 16 December 2004 (2004-12-16) abstract; figures 1-29b paragraphs [0002], [0085], [0087], [0089], [0091], [0095], [0138], [0154] ----- | 1-38 1,2,6, 9-28,31, 33,34,38 |
| | | |



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

| | |
|--|--|
| Date of the actual completion of the international search | Date of mailing of the international search report |
| 1 April 2010 | 12/04/2010 |
| Name and mailing address of the ISA/ European Patent Office, P.O. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016 | Authorized officer Köhn, Andreas |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/020380

| Patent document cited in search report | Publication date | Patent family member(s) | | Publication date |
|--|------------------|-------------------------|---------------|------------------|
| EP 1310860 | A1 14-05-2003 | AU | 770872 B2 | 04-03-2004 |
| | | AU | 7671901 A | 18-02-2002 |
| | | CN | 1392977 A | 22-01-2003 |
| | | WO | 0212991 A1 | 14-02-2002 |
| | | JP | 3949912 B2 | 25-07-2007 |
| | | JP | 2002149312 A | 24-05-2002 |
| | | US | 2002149561 A1 | 17-10-2002 |
| US 2004252104 | A1 16-12-2004 | JP | 4295559 B2 | 15-07-2009 |
| | | JP | 2005004365 A | 06-01-2005 |