

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 January 2009 (22.01.2009)

PCT

(10) International Publication Number
WO 2009/010912 A1

(51) International Patent Classification:
D06F 39/02 (2006.01)

(21) International Application Number:
PCT/IB2008/052810

(22) International Filing Date: 11 July 2008 (11.07.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07112436.6 13 July 2007 (13.07.2007) EP

(71) Applicant (for all designated States except US): **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DE WREE, Ann** [BE/BE]; Berrebroeckstraat 65, B-9406 Outer (BE). **VAN GEEL, Filip** [BE/BE]; Vinkenlaan 49, B-1800 Vilvoorde (BE).

(74) Common Representative: **THE PROCTER & GAMBLE COMPANY**; c/o Hughett, Eileen L., The Procter & Gamble Company, Winton Hill Business Center, 6250 Center Hill Avenue, Cincinnati, Ohio 45224 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: DOSING AND DISPENSING DEVICE

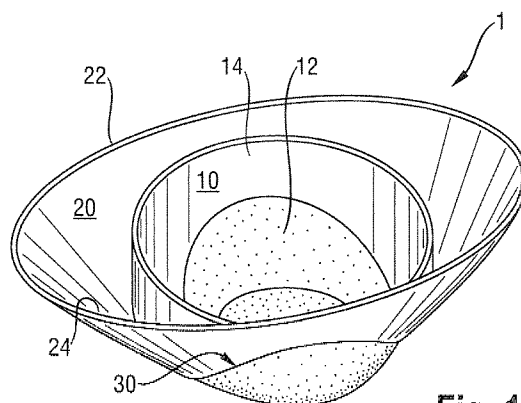


Fig. 1

(57) Abstract: The present invention relates to a dosing and dispensing device (1) comprising a double wall structure having an inner wall (10) and an outer wall (20), wherein the inner wall (10) defines a dosing chamber (12) with an opening (14) for filling and dispensing, and the outer wall (20) circumscribes the inner wall (10) at a line of intersection (30) so that an upper part of the dosing chamber lies on one side of the line of intersection (30), within the outer wall (20), and a lower part of the dosing chamber lies on the other side of the line of intersection (30), outside of the outer wall (20). The present invention further relates to a method dosing and dispensing a laundry product, preferably a liquid or gel detergent product, into a washing machine, comprising the steps of: a) providing the dosing and dispensing device (1); b) transferring a measured dose of a laundry product into the filling opening (14) of the dosing chamber (12) to fill, or partly fill, the dosing chamber (12); c) placing the dosing and dispensing device (1) containing the laundry product into the drum of an automatic laundry washing machine; d) running a washing cycle of the automatic laundry washing machine so that the laundry product is dispensed into the drum through the dispensing opening (14) of the dosing and dispensing device (1); e) recovering the empty dosing and dispensing device (1) for re-use after the end of the wash cycle.

WO 2009/010912 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

DOSING AND DISPENSING DEVICE

Technical Field

The present invention relates to a dosing and dispensing device, especially for use in a laundry washing machine. The present invention also relates to a method for dosing and dispensing a laundry product into a washing machine.

Background of the Invention

Dispensing devices which are useful for machine washing of clothes are described in, for example, FR-A-2 563 250, published on 25th October 1985.

It is known that, in order to obtain a good degree of cleanliness whilst minimizing wastage it is important to dose the right amount of product. This is commonly achieved by embossed dosing lines marks on the dispensing device but nevertheless accurate dosing can be difficult especially when measuring small quantities of liquid, less than 50ml, such as is the case for concentrated or “compact” liquid or gel laundry detergents. Moreover such small dosing devices are difficult to hold in the hand whilst dosing, and are difficult to find amongst the wash load after the end of the wash cycle. Furthermore accidental spillage of product during dosing can easily occur.

The aim of the present invention is to provide a dosing and dispensing device which overcomes these problems.

Summary of the Invention

The present invention relates to a dosing and dispensing device comprising a double wall structure having an inner wall and an outer wall, wherein the inner wall defines a dosing chamber with an opening for filling and dispensing, and the outer wall circumscribes the inner wall at a line of intersection so that an upper part of the dosing chamber lies on one side

of the line of intersection, within the outer wall, and a lower part of the dosing chamber lies on the other side of the line of intersection, outside of the outer wall.

The present invention further relates to a method of dosing and dispensing a laundry product into a washing machine, comprising the steps of:

- a) providing a dosing and dispensing device comprising a double wall structure having an inner wall and an outer wall, wherein the inner wall defines the dosing chamber with an opening for filling and dispensing, and the outer wall circumscribes the inner wall at a line of intersection so that an upper part of the dosing chamber lies on one side of the line of intersection, within the outer wall, and a lower part of the dosing chamber lies on the other side of the line of intersection, outside of the outer wall;
- b) transferring a measured dose of a laundry product into the filling opening of the dosing chamber to fill, or partly fill the dosing chamber;
- c) placing the dosing and dispensing device containing the laundry product into the drum of an automatic laundry washing machine;
- d) running a washing cycle of the automatic laundry washing machine so that the laundry product is dispensed into the drum through the dispensing opening of the dosing and dispensing device;
- e) recovering the empty dosing and dispensing device for re-use after the end of the wash cycle.

Brief Description of the Drawings

Figure 1 illustrates a dosing and dispensing device according to the present invention.

Figure 2a shows a cross-section through the major axis of the dosing and dispensing device illustrated in Figure 1. Figure 2b shows a cross-section through the minor axis of the dosing and dispensing device illustrated in Figure 1.

Detailed Description of the Invention

The term “dosing and dispensing device”, or “dosing device” for short, herein should be understood generally as a means for providing measured quantities of fluid products into a

washing machine. By “fluid product” what is meant herein is any product which can flow under gravity. Fluid products may include granular or powdered products, but it is preferred herein that fluid products are liquid products or gels, more preferably liquid or gel detergent products. The present invention is particularly useful for dosing and dispensing of viscous liquid products or gels as defined in more detail below.

One of the advantages of the present invention is to reduce the incidence of accidental, messy spillages from the dosing device. This can be achieved by means of a spill chamber wherein the volume adjacent to the intersection line, between the outer wall and the dosing chamber, defines the spill chamber which retains any product overflow from the dosing chamber.

The volume of the dosing chamber can be advantageously designed to be equal to the recommended maximum dose of the fluid product. This means that the consumer fills the dosing chamber to the brim, promoting easy, accurate dosing. Even if a little fluid product might be spilt by filling the dosing chamber up to the brim, this spilt product would fall into the spill chamber without messiness. In this context, recommended maximum dose is the dose for highly soiled fabric loads and/or hard water. Smaller doses, e.g. 65% or 80% of the maximum recommended dose, may be recommended by the manufacturer for less soiled loads and/or softer water. Smaller recommended doses may be suitably indicated on the dosing chamber.

In a preferred embodiment of the invention at least a part of the lower part of the dosing chamber is flexible and resilient. This helps to reduce noise when the dosing and dispensing device is used in the rotating drum of a washing machine. In another preferred embodiment of the invention at least a part of the lower part of the dosing chamber is transparent or translucent. This helps with dosing accuracy.

Another advantage of the present invention is ease of handling of the dosing and dispensing device, especially during filling. Preferably the outer profile of the outer wall is ergonomically shaped for convenience and ease of handling. More preferably the free edge of the outer wall defines an elliptical or oval shape. The shape and profile of the outer wall make it easier to locate and recover the device after the wash cycle, and also help to prevent

the device getting trapped within the washing machine, for example in a small gap adjacent to the window of a front loading washing machine.

The free edge of the outer wall may be adapted to releasably connect over a closure of a product container, or alternatively, with a region of the product container which is spaced apart from the product closure.

“Liquid detergent”, as used herein, refers to any laundry treatment composition comprising a fluid capable of wetting and cleaning fabric e.g., clothing, in a domestic washing machine. The composition can include solids or gases in suitably subdivided form, for example suspended particles or bubbles. Compositions which are overall gases are excluded. The liquid detergent preferably have densities in the range from about 0.9 to about 1.3 grams, more preferably from about 1.00 to about 1.10 grams per cubic centimeter, excluding any suspended particles but including any bubbles, if present.

Preferably, the compositions and methods herein have a neat viscosity, V_n , of from about 1,000 cps (or equivalently, millipascal seconds, mPas) to about 10,000 cps as measured at 20 s^{-1} , more preferably from about 2,000 cps to about 5,000 cps as measured at 20 s^{-1} , and a diluted viscosity, V_d , that is less than or equal to about $0.5V_n$, as measured at 20 s^{-1} , preferably less than about $0.3V_n$, as measured at 20 s^{-1} . As used herein, “neat viscosity, V_n ” refers to the viscosity of the undiluted liquid detergent. As used herein, “diluted viscosity, V_d ” refers to the viscosity of a 50% by weight aqueous solution of a liquid detergent composition used in the methods of the present invention. In another more specific embodiment, when the liquid detergent composition is shear thinning, the composition may be characterized by a low-shear neat viscosity V_{ls} of from about 10,000 cps to about 500,000 cps as measured at 0.5 s^{-1} , more preferably from about 10,000 cps to about 100,000 cps as measured at 0.5 s^{-1} . The water used to prepare the aqueous solution for determining the diluted viscosity, V_d of a composition is deionized water. All viscosity measurements are made at 21°C .

The dilution procedure and the viscosity measurements are described hereinafter.

The viscosity of fluid detergents herein, namely V_n , and V_d , is measured using a TA AR550 Rheometer, manufactured by TA Instruments Ltd., Bilton Center, Cleeve Road, Letherhead, Surrey KT22 7UQ, United Kingdom. The software used is provided with the instrument and called "Rheology Advantage Instrument Control AR".

The instrument is set up before each measurement according to the instructions reported in the Manual "AR550 Rheometer Instrument and accessory manual" (Jan 2004, PN500034.001 rev F) pp. 25-29, 40-44, and the Manual "Rheology advantage Instrument Control Getting Started Guide" (Jan 2004, Revision E) pp. 9-14, 20, 25-28, 37-38. The settings and parameters used are described herein.

In the "Geometry" section of the software (see Rheology advantage Instrument Control Getting Started Guide" (Jan 2004, Revision E) p9), the gap between the rotating plate (40mm steel plate) and the sample platform (Peltier plate) is set at 500 microns. The procedure is a continuous ramp test, i.e. a procedure in which the rheology of the sample is measured versus increasing shear rate. The setting for the shear rate ranges from 0.04 s^{-1} to 30 s^{-1} with a total duration of 3 minutes for the continuous ramp test, and sampling of 20 points per each tenfold increase in shear rate (automatically done), providing in total 60 measurements. Temperature is set at 21°C .

A sample of liquid detergent loaded into the rheometer using a loading procedure as described herein. The sample loading procedure (as described in detail in the manual) is as follows:

1. The temperature is checked (see "instrument status" section) to see if it matches the set temperature. If the temperature is not correct, the settings need to be verified following the instructions in the manual.
2. The sample is loaded using a plastic pipette with a minimum diameter of 4mm at the tip (to minimize the impact of the stress carried out by the loading action on the rheology of the sample). A minimum amount of 5 ml needs to be applied in the center of the peltier plate to assure full product coverage of the rotating plate.
3. The rotating plate (plate connected to the measuring system) is brought to the set distance (as defined above).

4. The excess of sample (i.e. any sample that may be around the edges of the rotating plate) is removed with a spatula assuring correct loading of the sample according to the description in the manual.

The measurement steps are as follows:

5. After the sample is loaded, it needs to be left for 10 seconds at rest. The run is started, while making sure the equipment is not exposed to vibrations during the measurement, as this will affect the results. In the case that the measurement is influenced by vibrations, the experiment is repeated whilst excluding the source of vibration.
6. At the end of the run the program stops automatically. All viscosity data are automatically saved.
7. The plates are cleaned with water and ethanol and then dried with paper towel.

The viscosity data, V_n , quoted herein is determined at a shear rate of $20s^{-1}$. In case no measurement was taken at exactly $20s^{-1}$, the data are calculated based on interpolation of the data points which are closest to the $20s^{-1}$ point.

In case the lower part of the dosing chamber is flexible and resilient, this improves the dispensing of liquid products which are viscous at low shear rates, such as those liquid detergents described above. The flexible part of the dosing chamber acts in the washing machine cycle to pump out the liquid product. A further advantage is reduction of noise when the dosing and dispensing device moves around inside the rotating drum of the washing machines.

Preferably the outer wall is injection moulded in a polyolefin, most preferably in polypropylene. The flexible part of the dosing chamber is preferably injection moulded in a soft material which should be compatible both physically and chemically with the material forming the outer wall. The soft material is typically a thermoplastic elastomer (TPE) or a thermoplastic elastomer–vulcanized (TPV) e.g. Engage®, Santoprene®, Dynaflex®. At the line of intersection where the outer wall circumscribes the dosing chamber, the two materials can be welded together. A preferred method of manufacture is by bi-injection, but other techniques such as ultra sound welding are also possible.

The method of the present invention is directed towards dosing and dispensing a laundry product, preferably a liquid or gel detergent product, into a washing machine. The method comprises the steps of:

- a) providing a dosing and dispensing device according to the present invention;
- b) transferring a measured dose of a laundry product into the filling opening of the dosing chamber to fill, or partly fill, the dosing chamber;
- c) placing the dosing and dispensing device containing the laundry product into the drum of an automatic laundry washing machine;
- d) running a washing cycle of the automatic laundry washing machine so that the laundry product is dispensed into the drum through the dispensing opening of the dosing and dispensing device;
- e) recovering the empty dosing and dispensing device for re-use after the end of the wash cycle.

In step b) the dose can be transferred into the dosing chamber preferably by pouring from a container or bottle, or by squeezing a container or bottle in cases where the product is a viscous liquid or gel.

The invention will be further described below with reference to the drawings.

Figures 1 and 2 show a dosing and dispensing device 1 comprising a double wall structure having an inner wall 10 and an outer wall 20. The inner wall 10 defines a dosing chamber 12 with an opening 14 for filling and dispensing. The dosing and dispensing device further comprises an outer wall 20 which circumscribes the inner wall 10 at a line of intersection 30. The free edge 22 of the outer wall is elliptical.

The line of intersection 20 divides the dosing chamber 12 into a dosing chamber upper part and a dosing chamber lower part. The upper part of the dosing chamber lies within the outer wall 20 and the volume between the dosing chamber and the outer wall defines a spill chamber 24. In the illustrated example, the lower part of the dosing chamber is flexible, resilient and also translucent.

One example of a releaseable connection between the outer wall of the dosing device and the product container, or product container closure, is by means of so called “snap beads”. The position and geometry of the snap beads should be designed to obtain the right removal force which is from about 30N to about 100 N in the direction of the axis of the dosing device.

The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm”.

What is claimed is :

1. A dosing and dispensing device (1) comprising a double wall structure having an inner wall (10) and an outer wall (20), wherein the inner wall (10) defines a dosing chamber (12) with an opening (14) for filling and dispensing, and the outer wall (20) circumscribes the inner wall (10) at a line of intersection (30) so that an upper part of the dosing chamber lies on one side of the line of intersection (30), within the outer wall (20), and a lower part of the dosing chamber lies on the other side of the line of intersection (30), outside of the outer wall (20).
2. A dosing and dispensing device (1) according to claim 1 wherein the volume between the outer wall (20) and the upper part of the dosing chamber (12), defines a spill chamber (24) which retains any product overflow from the dosing chamber (12).
3. A dosing and dispensing device (1) according to either of claims 1 or 2 wherein at least part of the lower part of the dosing chamber is flexible and resilient.
4. A dosing and dispensing device (1) according to any of claims 1 to 3 wherein at least part of the lower part of the dosing chamber is transparent or translucent.
5. A dosing and dispensing device (1) according to any of claims 1 to 4 wherein the outer profile of the outer wall (20) is ergonomically shaped for convenience and ease of handling.
6. A dosing and dispensing device (1) according to any of claims 1 to 5 wherein the free edge (22) of the outer wall (24) defines an elliptical or oval shape.
7. A dosing and dispensing device (1) according to any of claims 1 to 6 wherein the free edge (22) of the outer wall (24) is adapted to releasably connect with a product container.
8. A dosing and dispensing device (1) according to claim 7 wherein the free edge (22) of the outer wall (24) is adapted to releasably connect at a region of the product container which is spaced apart from the product closure.

9. A dosing and dispensing device (1) according to any of claims 1 to 6 wherein the free edge (22) of the outer wall (24) is adapted to releasably connect over the closure of the product container.

10. A method of dosing and dispensing a laundry product, preferably a liquid or gel detergent product, into a washing machine, comprising the steps of:

- a) providing a dosing and dispensing device (1) comprising a double wall structure having an inner wall (10) and an outer wall (20), wherein the inner wall (10) defines the dosing chamber (12) with an opening (14) for filling and dispensing, and the outer wall (20) circumscribes the inner wall (10) at a line of intersection (30) so that an upper part of the dosing chamber lies on one side of the line of intersection (30), within the outer wall (20), and a lower part of the dosing chamber lies on the other side of the line of intersection (30), outside of the outer wall;
- b) transferring a measured dose of a laundry product into the filling opening (14) of the dosing chamber (12) to fill, or partly fill, the dosing chamber (12);
- c) placing the dosing and dispensing device (1) containing the laundry product into the drum of an automatic laundry washing machine;
- d) running a washing cycle of the automatic laundry washing machine so that the laundry product is dispensed into the drum through the dispensing opening (14) of the dosing and dispensing device (1);
- e) recovering the empty dosing and dispensing device (1) for re-use after the end of the wash cycle.

1 / 1

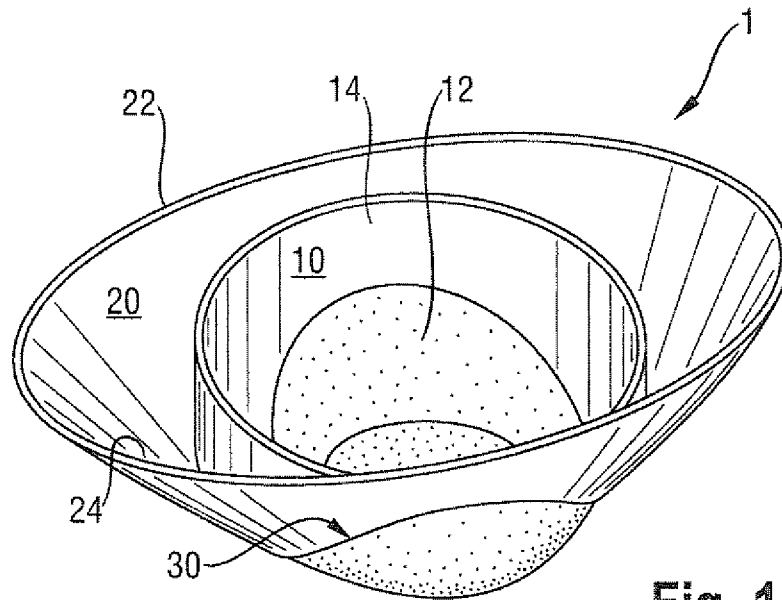


Fig. 1

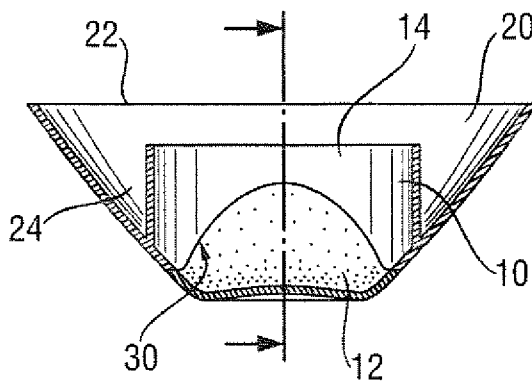


Fig. 2a

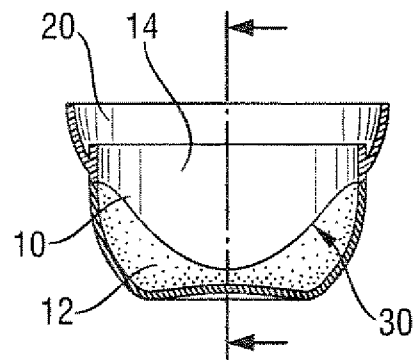


Fig. 2b

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2008/052810

A. CLASSIFICATION OF SUBJECT MATTER

INV. D06F39/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

D06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 93/21372 A (UNILEVER PLC [GB]; UNILEVER NV [NL]) 28 October 1993 (1993-10-28) claims 1,10,11; figure 1	1-5,7,10
X	WO 92/09736 A (PROCTER & GAMBLE [US]) 11 June 1992 (1992-06-11) the whole document	1
A	EP 0 216 415 A (PROCTER & GAMBLE [US]) 1 April 1987 (1987-04-01) claim 1; figures 3,4	7-9
A	WO 00/24957 A (PROCTER & GAMBLE [US]) 4 May 2000 (2000-05-04) the whole document	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

31 October 2008

Date of mailing of the international search report

17/11/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040.
Fax: (+31-70) 340-3016

Authorized officer

Diaz y Diaz-Caneja

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2008/052810

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9321372	A	28-10-1993	BR 9306273 A	23-06-1998
			DE 69312064 D1	14-08-1997
			DE 69312064 T2	15-01-1998
			EP 0637346 A1	08-02-1995
			ES 2105249 T3	16-10-1997
			IT 1254893 B	11-10-1995
			ZA 9302799 A	15-09-1994
WO 9209736	A	11-06-1992	AT 133726 T	15-02-1996
			AU 9152691 A	25-06-1992
			CA 2097333 A1	31-05-1992
			CN 1064116 A	02-09-1992
			DE 69116893 D1	14-03-1996
			DE 69116893 T2	25-07-1996
			DK 559829 T3	04-03-1996
			EP 0559829 A1	15-09-1993
			ES 2040196 T1	16-10-1993
			FI 932451 A	28-05-1993
			FR 2669944 A1	05-06-1992
			GB 2263484 A	28-07-1993
			GR 3018861 T3	31-05-1996
			HK 1006187 A1	12-02-1999
			IE 914167 A1	03-06-1992
			JP 6503494 T	21-04-1994
			MX 9102315 A1	01-10-1992
			NO 931963 A	27-07-1993
			PT 99663 A	31-01-1994
			SG 54290 A1	16-11-1998
			TR 25508 A	01-05-1993
EP 0216415	A	01-04-1987	DE 3676142 D1	24-01-1991
			DK 429086 A	12-03-1987
			ES 2002481 A6	16-08-1988
			FI 863654 A	12-03-1987
			FR 2587001 A1	13-03-1987
			GR 862305 A1	26-11-1986
			IE 59052 B1	15-12-1993
WO 0024957	A	04-05-2000	AT 246743 T	15-08-2003
			AU 1707000 A	15-05-2000
			DE 69910238 D1	11-09-2003
			EP 1125014 A1	22-08-2001
			JP 2002528708 T	03-09-2002
			US 6095380 A	01-08-2000