

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 February 2003 (27.02.2003)

PCT

(10) International Publication Number
WO 03/016046 A1

(51) International Patent Classification⁷: B32B 15/08, B63B 59/04, C09J 7/02

(21) International Application Number: PCT/GB02/03472

(22) International Filing Date: 29 July 2002 (29.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0119853.0 15 August 2001 (15.08.2001) GB

(71) Applicant (for all designated States except US): **ECOSEA LIMITED** [GB/GB]; 19 Maybrook Road, Walsall WS8 7DG (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KELLY, James, William** [GB/GB]; 419 Weston Road, Stoke-on-Trent, Staffordshire ST3 6PZ (GB).

(74) Agent: **TRUEMAN, Lucy, Petra**; Barker Brettell, 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 03/016046 A1

(54) Title: HULL COVERINGS

(57) **Abstract:** A product (1, 5) for the treatment of an area of an article residing underwater. The product (1, 5) comprises a plurality of shapes (3, 7) formed from copper or a copper nickel alloy and a carrier film (2, 6). The product (1, 5) is adapted in use to be secured to the area of the article residing underwater such that the shapes (3, 7) contact or substantially contact each other. The shapes (3, 7) can be releasably secured to the carrier film (2, 6) or permanently secured to the carrier film (2, 6). Suitable methods of applying the product (1, 5) to the area of the article are also disclosed.

HULL COVERINGS

The present invention relates to a treatment for areas of articles residing underwater, particularly the hulls of ships, to provide protection from 5 aquatic growths and borers.

Historically ships were built of wood, however there are aquatic organisms and borers, such as Toredo worm and Gribble, that feed on the wood from which the ship hulls were built thus rendering the lives of the 10 hulls short.

In the late 1700s copper sheathing was used to prevent infestation of wooden hulled ships by borers and it was soon realised that copper sheathing also prevented aquatic growths. However, copper sheathing 15 could not be used on iron clad ships that were being developed around this time as the copper accelerated the corrosion process of the iron and steel through galvanic action.

The development of antifouling paints for application to areas of articles 20 residing underwater soon followed. Early antifouling paints only contained Cuprous-Oxide as the effective ingredient and their performance was poor. Later antifouling paints contained Cuprous-Oxide, Tin and Tri-Butyl-Tin compounds (TBTs) as the effective ingredients which provided an improved performance but lead to damage 25 of aquatic life such as shellfish stocks. The use of TBTs has now been banned on all craft under 25 metres.

In spite of the variety of antifouling paints available each has associated 30 disadvantages in either its performance or effect on the environment. Furthermore to treat a ship hull, or any other article, with antifouling paint the ship must be removed from the water, the aquatic growth must

be removed and the area to be painted must be scrubbed clean before the antifouling paint, which is both toxic to humans and the environment, can be applied. This task is ideally carried out every year and is time consuming and unpleasant and is also stressful for articles such as ships
5 as well as being expensive.

There remains a need for a treatment for areas of ships and other articles spending considerable time underwater that is effective, lasts for more than one year and is generally environmentally friendly.

10

The present invention therefore provides a product for the treatment of an area of an article residing underwater comprising a plurality of shapes formed from copper or a copper nickel alloy and a carrier film and adapted in use to be secured to the area of the article residing underwater
15 such that the shapes contact or substantially contact each other.

The copper or copper nickel alloy shapes protect wooden articles from rot and borers, protect steel from rusting, aid osmosis protection in glass reinforced polyester articles and provide a highly durable oxidised surface
20 that inhibits aquatic growth.

Preferably the shapes are made from a copper nickel alloy.

The copper nickel alloy oxide does not leach into the sea like cuprous oxide causing damage to the environment but is generally only removed by erosion, which can occur if the article is moving at high speeds. The copper nickel alloy oxide remains effective on the surface of the alloy for a considerable time and the alloy itself therefore wears away very slowly leading to a treatment having a long lifetime, in excess of six years.

30

The copper nickel alloy is preferably Cupronickel 90/10. The copper nickel alloy is the effective ingredient of the product and Cupronickel 90/10 is most effective in the prevention of aquatic growth without adverse effects on the environment. Other copper nickel alloys, such as

5 Cupronickel 70/30, can be useful if increased durability, or other properties, are required, for example for articles moving quickly through the water where erosion of Cupronickel 90/10 occurs at an unacceptable level.

10 The shapes are preferably interfacing shapes. The interfacing shapes are preferably adapted in use to be secured to the area of the article residing underwater such that the shapes substantially interface.

15 The interfacing shapes preferably have a thickness of 150 microns to 500 microns, most preferably 150 microns. The thickness of the interfacing shapes allows moulding around the shape of the article to which the interfacing shapes are being secured. The largest diameter of the shapes is preferably from 4mm to 30mm depending on the end application.

20 When in position on the area of the article there are preferably gaps between the interfacing shapes, the gaps are preferably less than 0.4mm wide. The gap size is a compromise between a desired small size that limits the attachment area for aquatic growth and entry area for borers and the limitations of the processes for creating the gaps between the

25 shapes. The gaps between the interfacing shapes are advantageous as they allow the interfacing shapes to be readily fitted to the shape of the area of the article being covered. Foil material used previously had to be pressed and rolled to the shape of the area of the article to be covered.

30 The interfacing shapes preferably have three or more sides. The most preferable interfacing shapes are hexagons and squares. Sharp corners

are not desirable as they may interrupt the laminar flow of water creating drag and will be susceptible to damage; hexagons and squares are therefore ideal in shape.

- 5 Alternatively the shapes may be particulate, for example substantially spherical. The particles are preferably adapted in use to be secured to the area of the article residing underwater such that each of the particles contacts or substantially contacts adjacent particles.
- 10 The particles preferably have a diameter of less than 150 microns, more preferably less than 100 microns and most preferably less than 50 microns.

15 In a first aspect the shapes are releasably secured to the carrier film. The shapes are preferably releasably secured to the carrier film by an appropriate adhesive. The carrier film is preferably a plastics material capable of adopting concave and convex profiles without creasing.

20 The interfacing shapes are preferably secured to the carrier film to give rise to a regular pattern of shapes each preferably surrounded by small regular gaps forming a border. The border is preferably no less than 0.150mm and no greater than 0.4mm wide. The gaps between the interfacing shapes allow the carrier material bearing the interfacing shapes to be manipulated to fit the area of the article being covered.

25

Where particles are used, the particles are preferably releasably secured to the carrier film to give an even coverage of particles on the film.

The product may be provided in sheet or in strip form.

30

The carrier film holds the shapes together during manufacture and installation and provides protection for the installed product until it is ready for use.

5 The carrier film is preferably standard low density polyethylene most preferably at 60 microns. The adhesive releasably securing the shapes to the carrier film is preferably an acrylic adhesive.

10 In a second aspect the shapes are permanently secured to one surface of the carrier film. The shapes are preferably permanently secured to the surface of the carrier film by an appropriate adhesive, preferably a solvent modified acrylic adhesive.

15 The carrier film is preferably a plastics material, more preferably a waterproof plastics material, capable of adopting concave and convex profiles without creasing. Most preferably, the carrier film is a waterproof polyester membrane.

20 Alternatively the carrier film may be acrylic foam adhesive. The shapes adhere permanently to the acrylic foam adhesive by the nature of the acrylic foam adhesive. Acrylic foam adhesive is particularly useful in deep-sea applications.

25 The interfacing shapes are preferably secured to the carrier film to give rise to a regular pattern of shapes each preferably surrounded by small regular gaps forming a border. The border is preferably no less than 0.150mm and no greater than 0.4mm wide. The gaps between the interfacing shapes allow the carrier material bearing the interfacing shapes to be manipulated to fit the area of the article being covered.

Where particles are used, the particles are preferably secured to the carrier film to give an even coverage of particles on the film.

The product may be provided in sheet or in strip form.

5

The carrier material is most preferably provided with an adhesive on the surface not bearing the interfacing shapes. The adhesive is preferably a solvent modified acrylic adhesive. The surface bearing the adhesive is preferably covered by a removable backing strip, which protects the 10 adhesive until it is ready for use.

The provision of a carrier material to which the shapes are permanently secured and which is preferably provided with an adhesive surface allows easy application of the product to an article.

15

In the second aspect a protective film may be releasably secured, preferably by an appropriate adhesive, to the surface of the product bearing the shapes to protect the shapes during manufacture and installation. The protective film is preferably standard low density 20 polyethylene most preferably at 60 microns. The adhesive releasably securing the protective film to the shapes is preferably acrylic adhesive.

The carrier film bearing interfacing shapes is preferably made from an appropriate carrier film material having a continuous film of copper or a 25 copper nickel alloy secured thereto by a suitable adhesive, depending on whether the shapes are secured releasably or permanently to the carrier film. The interfacing shape pattern is preferably created by chemically etching the un-required copper nickel material with a Hydrochloric Acid based etching solution, (etchant), most preferably using either an acid 30 resistant ink mask or dry film photo-resist. The acid resistant ink mask or dry film photo-resist has the desired pattern developed into it, and is

employed to cover the copper or copper nickel alloy to remain secured to the carrier film whilst the Hydrochloric Acid based chemically dissolves the un-protected metallic materials.

- 5 Alternatively the interfacing shape pattern may be created by acid etching, most preferably using an epoxy acid resist to cover the copper or copper nickel alloy to remain secured to the carrier film and an acid to remove the unwanted material.
- 10 It may also be possible to make the product by processes such as pressing, stamping, rolling, grinding, electrical-laser processes or milling.

15 The product comprising a carrier material bearing particles of copper or copper nickel alloy is preferably made by applying the particles to a surface of the carrier film coated with appropriate adhesive, depending on whether the particles are releasably or permanently secured to the film. Excess non-adhered particles are preferably removed from the carrier film by vibration of the film. The particles are most preferably applied to the 20 carrier film as it is unrolled from a first roller and re-rolled onto a second roller.

25 The carrier material is extremely flexible and the product can therefore readily be used to treat areas of the article having sharp edges or tight contours.

Also provided by the present invention is a method of treating an area of an article residing underwater comprising applying a plurality of shapes formed from copper or a copper nickel alloy secured to a carrier film to 30 the area of the article residing underwater such that the shapes contact or substantially contact each other.

In a first aspect the shapes are applied to the area of the article in sheet form, releasably secured to a carrier film, most preferably by an adhesive. The use of sheet material makes the shapes easier to install.

5

The sheets of shapes may be applied directly to the area of the article to be covered. Preferably the area of the article to be covered is coated with a suitable adhesive system, for example an epoxy primer followed by an epoxy adhesive using a brush, roller or spraying means. The epoxy

10 adhesive is preferably based on a bisphenol A epoxy resin reacted with an adducted polyamine to give a flexible cure. The adhesive system provides additional protection against rot, rust, borers and osmosis in addition to securing the shapes to the area of the article to be covered.

15 The sheets of shapes are preferably pressed into the adhesive system with the shapes contacting the adhesive system. A roller may be used to apply pressure to the sheets to ensure adhesion.

Once the adhesive system has cured the carrier film may be peeled off
20 leaving the area of the article covered with a plurality of shapes that contact or substantially contact each other.

The shapes may alternatively be applied to areas of articles being made by moulding. Preferably the sheets of shapes are positioned within the
25 mould with the shapes facing into the mould. The sheets of shapes may be held in position by an adhesive, preferably a heat or pressure activated adhesive. The use of a heat or pressure activated adhesive allows any necessary repositioning of the sheets before the adhesive is activated.

30 The shapes facing into the mould are preferably coated with a suitable adhesive system before the moulding process takes place for example

using a brush, a roller or a spray means. Once the moulding process is complete the mould is removed leaving the sheets of shapes adhered to the moulded article, the carrier film is preferably then peeled off leaving the area of the article covered with shapes.

5

The area of the article may be treated with the product comprising the carrier film bearing the interfacing shapes or with the product comprising the carrier film bearing the particles or a combination of both types of product. Most preferably the product comprising the carrier film bearing the particles is used on areas of the article having sharp edges or tight contours and the product comprising the carrier film bearing the interfacing shapes is used on the remaining areas of the article to be covered.

10

15 In the second aspect the shapes are applied to the area of the article in sheet form, permanently secured to a surface of a carrier film, most preferably by an adhesive. The surface of the carrier film not bearing the shapes is preferably provided with an adhesive, preferably covered by a protective film. The use of sheet material, preferably having an adhesive surface makes the product easier to install.

20

The sheets of shapes may be applied directly to the area of the article to be covered. Preferably the area of the article to be covered is cleaned thoroughly to leave a good surface to which the product can be applied.

25

The adhesive surface of the carrier film is preferably pressed onto the article with the shapes facing away from the article. A roller may be used to apply pressure to the sheets to ensure adhesion.

Any protective film covering the product may be peeled off leaving the area of the article covered with a plurality of shapes that contact or substantially contact each other.

5 The shapes may alternatively be applied to areas of articles being made by moulding. Preferably the sheets of shapes are positioned within the mould with the shapes facing into the mould. The sheets of shapes may be held in position by an adhesive, preferably a heat or pressure activated adhesive. The use of a heat or pressure activated adhesive allows any
10 necessary repositioning of the sheets before the adhesive is activated.

Any protective film covering the adhesive surface of the carrier film is removed. Once the moulding process is complete the mould is removed leaving the sheets of shapes adhered to the moulded article, any protective
15 film covering the shapes is preferably then peeled off leaving the area of the article covered with shapes.

The area of the article may be treated with the product comprising the carrier film bearing the interfacing shapes or with the product comprising
20 the carrier film bearing the particles or a combination of both types of product.

In each aspect of the invention the gaps between the shapes are preferably grouted, most preferably an epoxy grout is used.

25 The present invention further provides an article having an area residing underwater wherein the area is coated with a plurality of shapes formed from copper or a copper nickel alloy and wherein the shapes are arranged on the area of the article such that they contact or substantially contact
30 each other.

The material of the present invention and the way in which it is used will now be described by means of example only with reference to the drawings in which:

5 **Figure 1** shows a plan view of a product of the present invention;

Figure 2 shows a plan view of an alternative product of the present invention;

10 **Figure 3** shows a cross section through a product of the first aspect of the invention; and

Figure 4 shows a cross section through a product of the second aspect of the invention.

15

Figure 1 shows a plan view of the product 1 of the present invention. The product 1 comprises a carrier film 2 and a plurality of hexagons 3 of Cupronickel 90/10 alloy secured to the carrier film 2.

20

Cupronickel 90/10 alloy has the composition:

	Carbon	0.05 maximum
	Cobalt	0.1 maximum
25	Iron	1.0-2.0
	Manganese	0.5-1.0
	Nickel	9.0-10.0
	Phosphorus	0.02 maximum
	Lead	0.02 maximum
30	Sulphur	0.05 maximum
	Tin	0.03 maximum

12

Zinc	0.5 maximum
Impurities	0.2 maximum
Copper	remainder

5 The hexagons 3 are laid out in rows on the carrier film 2 with each row being displaced by half a hexagon when compared with the adjacent row. The hexagons 3 are spaced apart from each other by a maximum of 0.4mm in any direction which gives rise to a border 4 around each hexagon 3. The hexagons 3 have a width (w) of 5mm from one side to
10 the opposing side and a thickness of 0.150mm.

Figure 2 shows a plan view of an alternative product 5 of the present invention. The product 5 comprises a carrier film 2 and a plurality of spherical particles 7 of Cupronickel 90/10 alloy (composition given
15 above) secured to the carrier film 2. The particles 7 are secured to the carrier film 2 by means of an appropriate adhesive.

The particles 7 are laid out in randomly on the carrier film 2 with each particle contacting or substantially contacting adjacent particles. The
20 particles 7 are spaced apart from each other by a maximum of 0.4mm in any direction. The particles 7 have a diameter (d) of 0.150mm.

The product 1 is made from a carrier film 2 having a continuous film of Cupronickel 90/10 secured thereto as described below. The interfacing
25 shape pattern is created by chemically etching the un-required copper nickel material with a Hydrochloric Acid based etching solution (etchant) using either an acid resistant ink mask or dry film photo-resist which has the desired pattern developed into it. The etchant masks used are compatible with the epoxy resins and adhesives used to secure the
30 material 1 of the invention to an article, in the present example the article is the hull of a ship.

The product 5 is made by unrolling the carrier film 2 from a roll and exposing the side of the carrier film 2 bearing the adhesive to secure the shapes to the carrier film to particles 7 of Cupronickel 90/10. The 5 particles 7 are sprinkled on the side of the carrier film 6 bearing the adhesive under the influence of gravity alone. Excess non-adhered particles 7 are removed from the carrier film 2 by vibration of the film 6. The film coated with particles 7 is then re-rolled and stored ready for use

10 In the remainder of the description of Figures 3 and 4 the reference to hexagons 3 should be construed to include particles 7.

In the first aspect of the invention, shown in Figure 3, the carrier film 2 is formed from standard low density polyethylene at 60 microns and has 15 an acrylic adhesive on one surface 2a which is formulated to hold the hexagons 3 on the film 2 during the manufacturing and installation processes.

20 In the second aspect of the invention, shown in Figure 4, the carrier film 2 is formed from a waterproof polyester membrane and has a solvent modified acrylic adhesive on one surface 2a, which is formulated to hold the hexagons 3 on the film 2. The other surface 2b of the film 2 is provided with a solvent modified acrylic adhesive to secure the product to an article. A protective film 10 manufactured from standard low density 25 polyethylene is provided and releasably secured to the hexagons 3 by acrylic adhesive. A protective film 11 is provided and releasably secured to the surface 2b provided with adhesive to protect the adhesive until the product is to be used.

The products of the present invention can be applied to existing ship hulls to prevent the need for future antifouling and can also be fitted to new ship hulls as they are manufactured.

- 5 To apply the products 1, 5 to an existing hull of a ship the same method is used with each product.

In the first aspect the hull is first prepared by cleaning to remove all existing aquatic growth. An epoxy primer is applied to the hull by brush

- 10 to a level of 60mm above the loaded water line. When the primer has cured an epoxy adhesive is applied to the primed hull by brush. The product 1, 5 is then applied to the hull in sheet form with the Cupronickel 90/10 shapes 3, 7 contacting the adhesive on the hull. Pressure is applied by roller to ensure that the shapes 3, 7 are forced onto the adhesive on
- 15 the hull. Once the adhesive has cured the carrier film 2 can be removed by peeling it away from the shapes 3, 7 to leave the hull of the ship covered in shapes 3, 7 of Cupronickel 90/10 that contact or substantially contact each other.

- 20 When applying the products 1, 5 to new build ships having moulded hulls the moulds are prepared as normal. A marine architect can be used to provide plans showing how the sheets of product 1, 5 must be cut and positioned in the mould to give total coverage of the hull.

- 25 The prepared mould is coated with a low tack heat sensitive adhesive, which allows the sheets of product 1, 5 to be positioned, repositioned if necessary and held in position within the mould with the carrier film 2 contacting the adhesive. Once the sheets of product 1, 5 are correctly positioned a low heat source is applied and the sheets of product 1, 5 are
- 30 pressed into the mould using a roller.

An epoxy primer is then applied to the exposed face of the product 1, 5, i.e. the Cupronickel 90/10 shapes 3, 7, by brush and allowed to cure following which an epoxy adhesive is applied. The hull is then prepared by moulding in a typical fashion.

5

When the hull moulding is finished it is withdrawn from the mould. Water can be used to facilitate removal of the hull from the mould. The carrier film 2 can then be peeled off to leave a new moulded hull coated with shapes 3,7 of Cupronickel 90/10 alloy that contact or substantially 10 contact each other.

In treating existing or new ship hulls the product 5 bearing the particles 7 of Cupronickel 90/10 alloy is generally applied to areas of the hull having sharp edges or tight contours. The use of the particles 7 adhered to the 15 carrier film 6 allows the product 5 to be flexible and more easily used in these areas. The product 1 bearing the interfacing hexagons 3 adhered to the carrier film 2 is generally applied to larger and more easily accessible areas of the ship hull.

20 In the second aspect the hull is first prepared by cleaning to remove all existing aquatic growth. The product 1, 5 is then applied to the hull in sheet form by removing the protective film 11 to expose the solvent modified acrylic adhesive on the surface 2b and applying the product to the hull with adhesive surface 2b contacting the hull. Pressure is applied 25 by roller to ensure that the sheets of shapes 3, 7 are secured by adhesive to the hull. The protective film 10 can then be removed by peeling it away from the shapes 3, 7 to leave the hull of the ship covered in shapes 3, 7 of Cupronickel 90/10 that contact or substantially contact each other.

30 When applying the products 1, 5 to new build ships having moulded hulls the moulds are prepared as normal. A marine architect can be used to

provide plans showing how the sheets of product 1, 5 must be cut and positioned in the mould to give total coverage of the hull.

The prepared mould is coated with a low tack heat sensitive adhesive, 5 which allows the sheets of product 1, 5 to be positioned, repositioned if necessary and held in position within the mould with the carrier film 2, 6 contacting the adhesive. Once the sheets of product 1, 5 are correctly positioned a low heat source is applied and the sheets of product 1, 5 are pressed into the mould using a roller.

10

The protective sheet 11 is removed from the surface 2b of the carrier film to expose the solvent modified adhesive. The hull is then prepared by moulding in a typical fashion.

15 When the hull moulding is finished it is withdrawn from the mould. Water can be used to facilitate removal of the hull from the mould. The protective film 10 can then be peeled off to expose shapes 3, 7 and leave a new moulded hull coated with shapes 3, 7 of Cupronickel 90/10 alloy that contact or substantially contact each other.

CLAIMS

1. A product for the treatment of an area of an article residing underwater comprising a plurality of shapes formed from copper or a 5 copper nickel alloy and a carrier film and adapted in use to be secured to the area of the article residing underwater such that the shapes contact or substantially contact each other.
2. A product according to Claim 1 wherein the shapes are copper nickel 10 alloy shapes.
3. A product according to Claim 2 wherein the copper nickel alloy is Cupronickel 90/10.
- 15 4. A product according to any preceding claim wherein the shapes have a thickness of 150 microns to 500 microns.
5. A product according to Claim 4 wherein the shapes have a thickness of 150 microns.
- 20 6. A product according to any preceding claim wherein the largest diameter of the shapes is from 4mm to 30mm.
7. A product according to any preceding claim wherein, when in position 25 on the area of the article, there are gaps between the interfacing shapes, less than 0.4mm wide.
8. A product according to any preceding claims wherein the shapes are interfacing shapes.

9. A product according to any of Claims 1 to 3 wherein the shapes are particulate.
10. A product according to Claim 9 wherein the particles have a diameter 5 of less than 150 microns.
11. A product according to any preceding claim wherein the shapes are releasably secured to the carrier film.
- 10 12. A product according to Claim 11 wherein the carrier film is a plastics material capable of adopting concave and convex profiles without creasing.
- 15 13. A product according to Claim 11 or Claim 12 wherein the carrier film is standard low density polyethylene.
14. A product according to any of Claims 11 to 13 wherein the shapes are secured to the carrier film by an acrylic adhesive.
- 20 15. A product according to any of Claims 1 to 10 wherein the shapes are permanently secured to one surface of the carrier film.
16. A product according to Claim 15 wherein the shapes are permanently 25 secured to the surface of the carrier film by a solvent modified acrylic adhesive.
17. A product according to Claim 15 or Claim 16 wherein the carrier film is a waterproof plastics material capable of adopting concave and convex profiles without creasing.

18. A product according to Claim 17 wherein the carrier film is a waterproof polyester membrane.
19. A product according to any of Claims 15 to 18 wherein the carrier material is adhesive on the surface not bearing the interfacing shapes.
20. A product according to Claim 19 wherein the adhesive is a solvent modified acrylic adhesive.
- 10 21. A product according to any of Claims 15 to 20 wherein a protective film is releasably secured to the surface of the product bearing the shapes to protect the shapes during manufacture and installation.
- 15 22. A product according to Claim 15 wherein the carrier film is acrylic foam adhesive.
23. A product according to any preceding claim wherein the product is provided in sheet or strip form.
- 20 24. A method of making the product of claim 1 comprising providing a carrier film material having a continuous film of copper or a copper nickel alloy secured thereto, creating a plurality of contacting or substantially contacting shapes by chemically etching the un-required copper nickel material with an acid based etching solution.
- 25 25. A method of treating an area of an article residing underwater comprising applying a plurality of shapes formed from copper or a copper nickel alloy secured to a carrier film to the area of the article residing underwater such that the shapes contact or substantially contact each other.

26. A method according to Claim 25 wherein the shapes are releasably secured to a carrier film.

27. A method according to Claim 26 wherein the area of the article to be 5 covered is coated with a suitable adhesive system, sheets of shapes are pressed into the adhesive system with the shapes contacting the adhesive system and the carrier film is peeled off leaving the area of the article covered with a plurality of shapes that contact or substantially contact each other.

10

28. A method according to Claim 26 wherein the sheets of shapes are positioned within a mould with the shapes facing into the mould, the shapes facing into the mould are coated with a suitable adhesive system, the moulding process takes place and the mould is removed leaving the 15 sheets of shapes adhered to the moulded article, the carrier film is then peeled off leaving the area of the article covered with shapes.

29. A method according to Claim 25 wherein the shapes are permanently secured to a surface of a carrier film and the surface of the carrier film 20 not bearing the shapes is adhesive.

30. A method according to Claim 29 wherein the adhesive surface of the carrier film is pressed onto the article with the shapes facing away from the article leaving the area of the article covered with a plurality of 25 shapes that contact or substantially contact each other.

31. A method according to Claim 29 wherein the sheets of shapes are positioned within a mould with the adhesive surface of the carrier film facing into the mould, the moulding process takes place and the mould is 30 removed leaving the area of the article covered with shapes that contact or substantially contact each other.

32. The method of any of Claims 25 to 31 wherein grout is applied to the gaps between the shapes.

5 33. An article having an area residing underwater wherein the area is coated with a plurality of shapes formed from copper or a copper nickel alloy and wherein the shapes are arranged on the area of the article such that they contact or substantially contact each other.

1/3

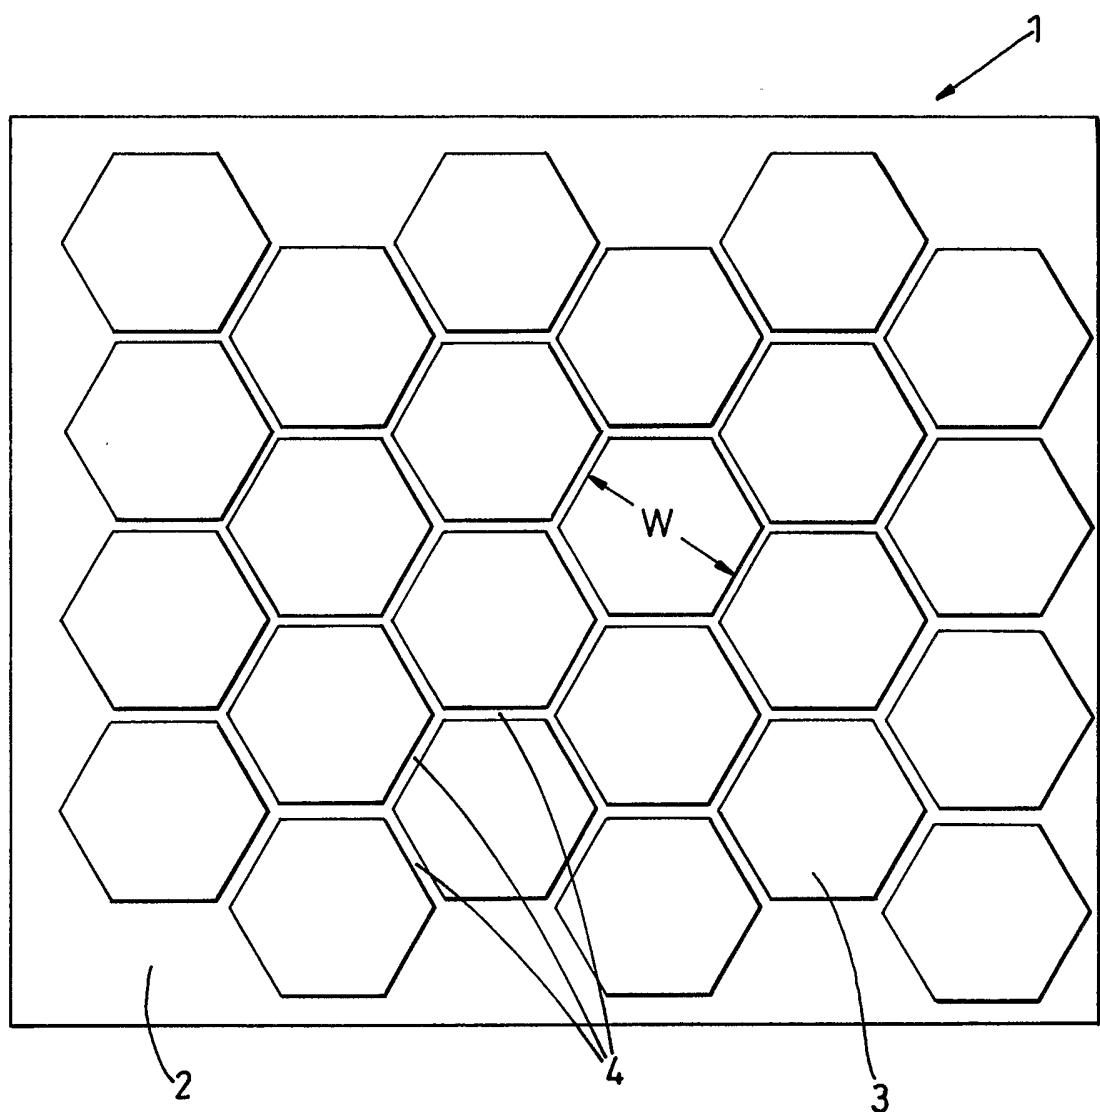
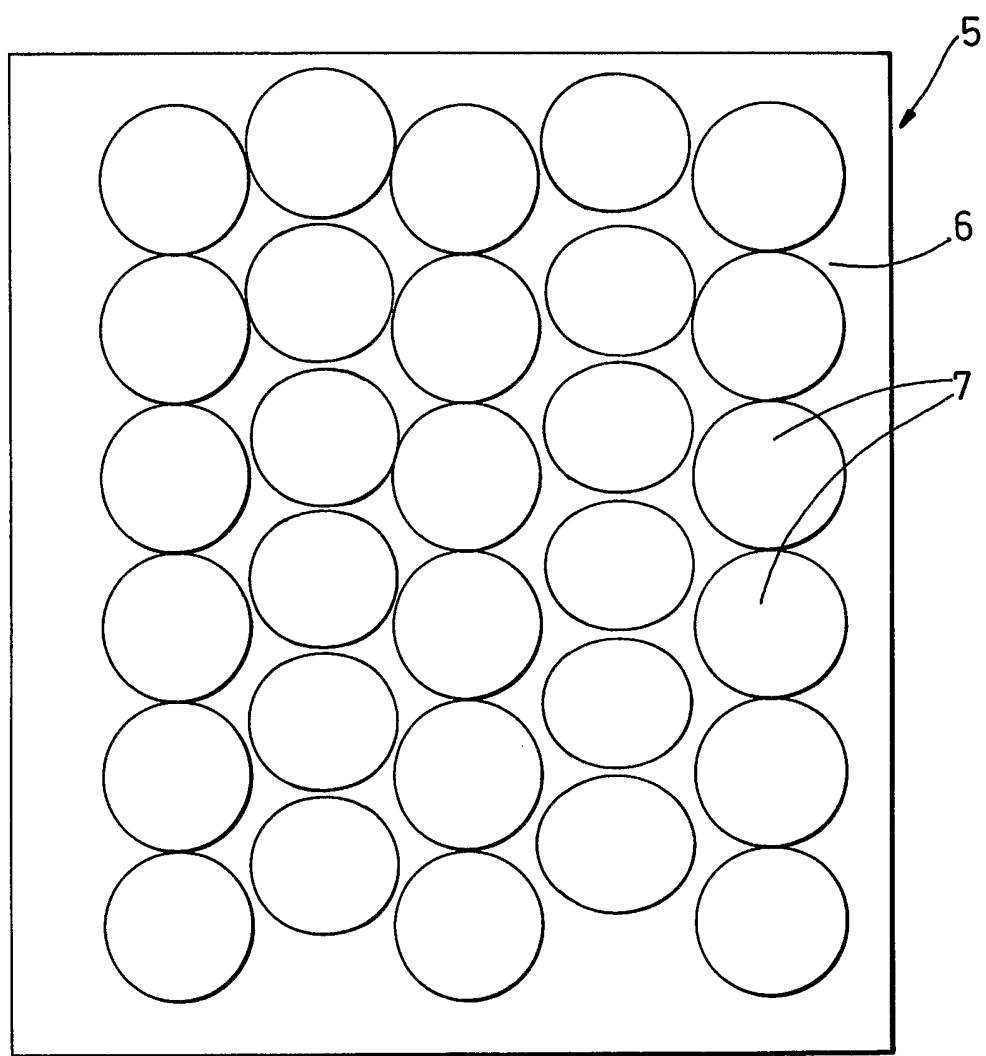
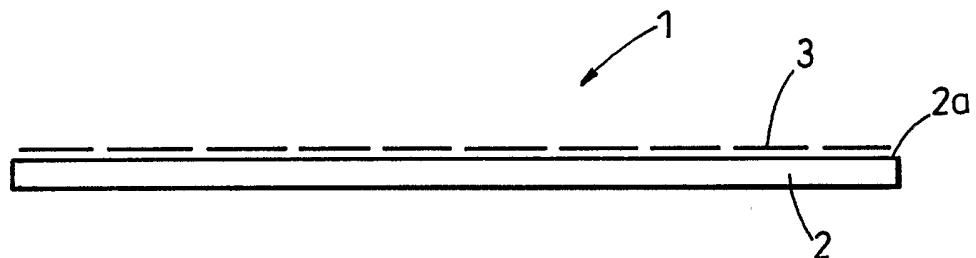
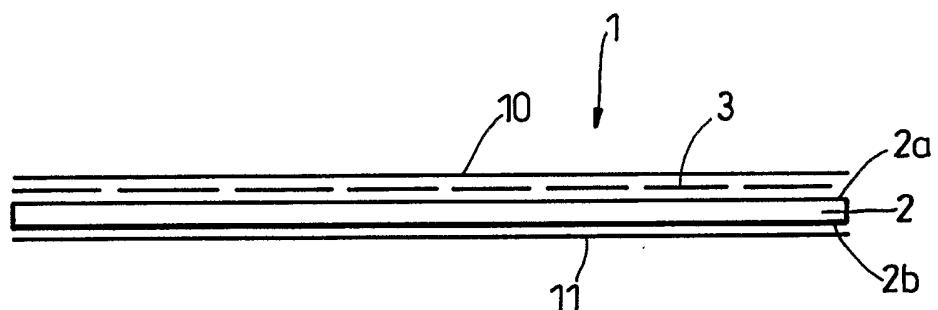


Fig. 1

2/3

*Fig. 2*

3/3

*Fig. 3**Fig. 4*

INTERNATIONAL SEARCH REPORT

Int	ional Application No
PCT/GB 02/03472	

A. CLASSIFICATION OF SUBJECT MATTER			
IPC 7	B32B15/08	B63B59/04	C09J7/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7	B32B	E02B	B63B	C09J
-------	------	------	------	------

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category ^o	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>EP 0 562 441 A (NGK INSULATORS LTD) 29 September 1993 (1993-09-29) claims 1,2 column 6, line 56 -column 7, line 18 column 9, line 16 - line 26 figures 3,5,7,13</p> <p>---</p> <p>WO 89 12144 A (SEAMARK SYSTEMS) 14 December 1989 (1989-12-14)</p> <p>claims 1,5 page 4, line 12 - line 17 page 9, line 21 - line 34</p> <p>---</p> <p>---</p>	1,2,11, 12,25,33
X		1,2,4,6, 12,15, 23,25,33

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
17 January 2003	30/01/2003
Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Hillebrand, G

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 02/03472

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DATABASE WPI Section Ch, Week 200225 Derwent Publications Ltd., London, GB; Class A97, AN 2002-191445 XP002227543 & JP 2001 322905 A (DAIICHI KOSHUHA KOGYO KK), 20 November 2001 (2001-11-20) abstract</p> <p>-----</p>	1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/03472

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 0562441	A 29-09-1993	JP 2509414 B2		19-06-1996
		JP 5271025 A		19-10-1993
		JP 2073163 C		25-07-1996
		JP 5271020 A		19-10-1993
		JP 7112964 B		06-12-1995
		JP 2073164 C		25-07-1996
		JP 5271026 A		19-10-1993
		JP 7112965 B		06-12-1995
		JP 2509415 B2		19-06-1996
		JP 5279214 A		26-10-1993
		CA 2092269 A1		25-09-1993
		DE 69302941 D1		11-07-1996
		DE 69302941 T2		28-11-1996
		EP 0562441 A2		29-09-1993
		KR 9703994 B1		24-03-1997
		US 5423631 A		13-06-1995
WO 8912144	A 14-12-1989	AU 3692689 A		05-01-1990
		EP 0371115 A1		06-06-1990
		WO 8912144 A1		14-12-1989
		NO 900481 A ,B,		30-03-1990
		US 4987036 A		22-01-1991
JP 2001322905	A 20-11-2001	NONE		